


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.3V I:0.1430A P:34.1W PF:0.9908 Freq:49.99Hz		
UTHDi:0.21% ITHDi:51.67% KDisp:0.9918 Lamp Flux:3420.68x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 100.44 lm/W
MODEL		Imax (cd)	16252	S/MH(C0/180)	0.42	
NOMINAL POWER(W)	35	LOR(%)	100.0	S/MH(C90/270)	0.36	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3420.7	η UP,DN(C0-180)	0.0,51.6	
NOMINAL FLUX(lm)	3420.68	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,48.4	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	240.36	η down (%)	100.0	CIBSE SHR MAX	0.30	

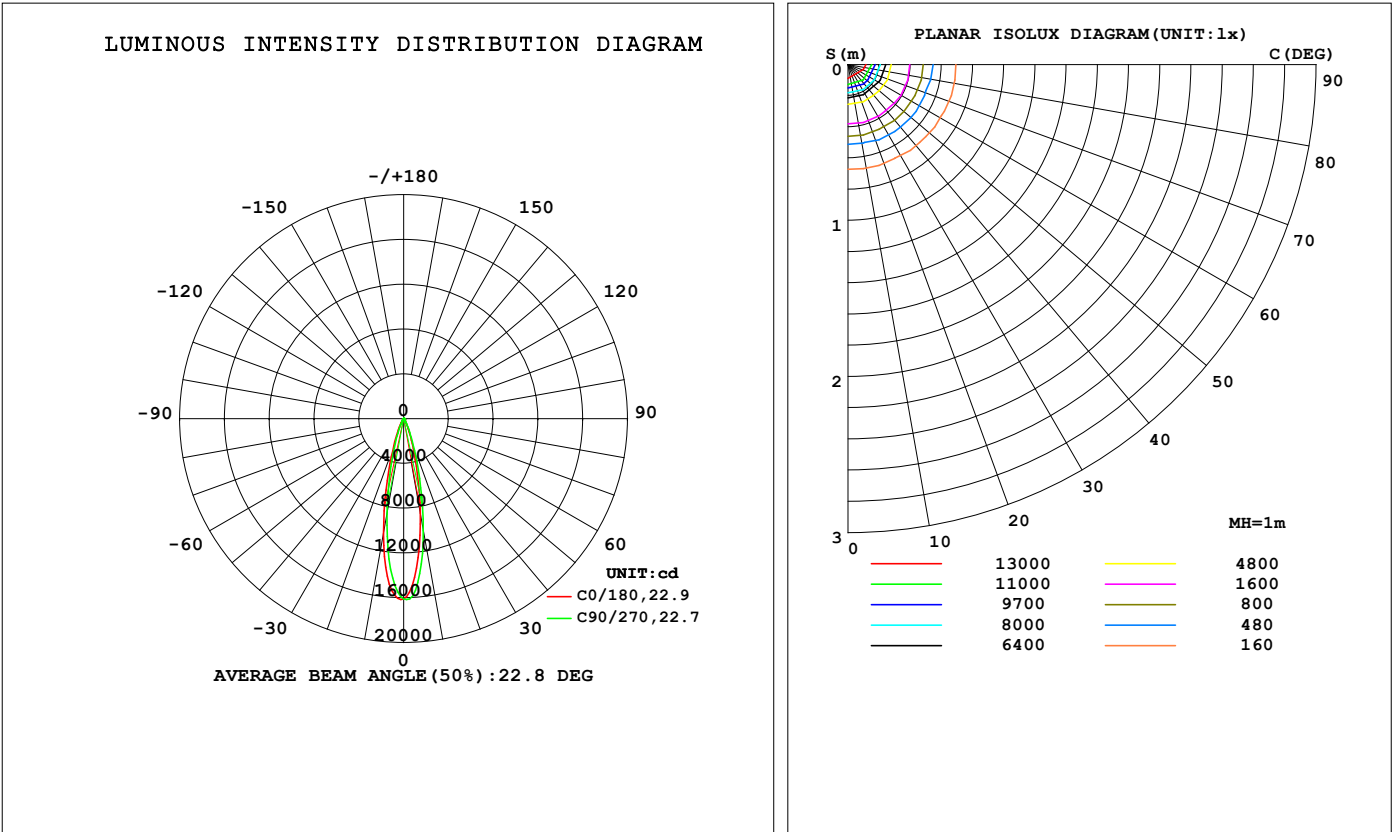

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	856.5	932.4	1016	1079	1045	953.6	865.4	823.8	0- 10	1193	1193	34.9,34.9
20	204.4	227.7	257.3	275.1	261.5	224.9	201.6	185.7	10- 20	1401	2594	75.8,75.8
30	42.82	47.61	51.91	53.29	51.67	43.84	39.14	37.40	20- 30	500.4	3095	90.5,90.5
40	14.32	15.46	16.11	16.70	17.16	15.46	13.96	12.97	30- 40	164.0	3259	95.3,95.3
50	7.196	7.579	7.580	7.951	8.293	7.928	7.115	6.537	40- 50	82.41	3341	97.7,97.7
60	3.768	4.054	3.979	4.134	4.305	4.194	3.793	3.471	50- 60	49.98	3391	99.1,99.1
70	0.7687	0.9215	1.140	1.300	1.297	1.069	0.8529	0.7466	60- 70	24.53	3416	99.8,99.8
80	0.1436	0.1561	0.1774	0.1838	0.1875	0.1714	0.1993	0.1352	70- 80	4.360	3420	100,100
90	0.0115	0.0071	0.0132	0.0100	0.0079	0.0075	0.0257	0.0074	80- 90	0.7994	3421	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 3305.2 lm

%lum = 96.6%

%lamp = 96.6%

Conical surface Flux(120deg): 3391 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.3V I:0.1430A P:34.1W PF:0.9908 Freq:49.99Hz		
UTHDi:0.21% ITHDi:51.67% KDisp:0.9918 Lamp Flux:3420.68x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

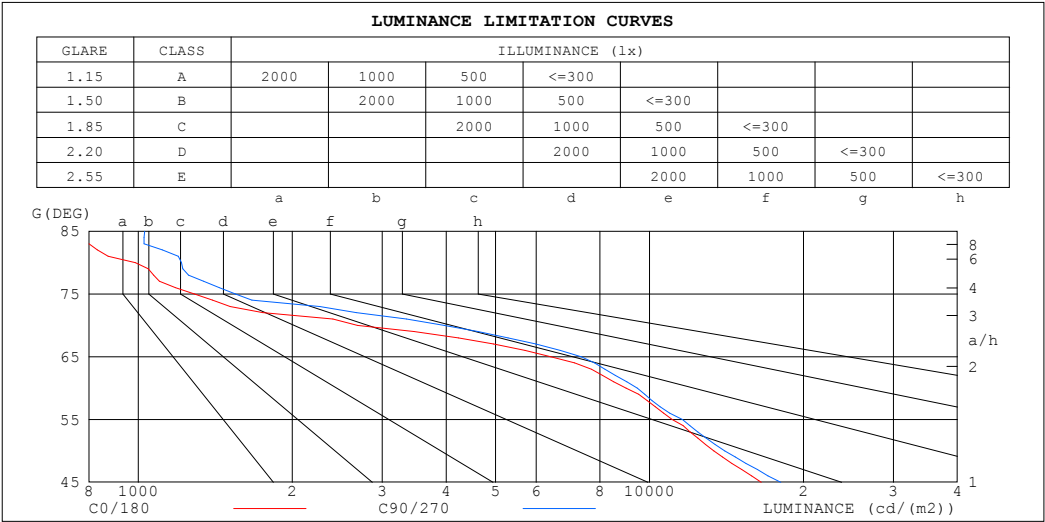

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	730	1028
80	987	1215
75	1289	1550
70	2683	3965
65	6411	7351
60	8995	9462
55	11071	11606
50	13362	14022
45	16527	18053


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.3V I:0.1430A P:34.1W PF:0.9908 Freq:49.99Hz		
UTHDi:0.21% ITHDi:51.67% KDisp:0.9918		Lamp Flux:3420.68x1 lm
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.13	1.11	1.09	1.10	1.09	1.07	1.06	1.05	1.04	1.03	1.02	1.01	.99	.99	.98	.96
2.0	1.07	1.04	1.01	1.05	1.02	.00	1.02	.00	.98	.99	.97	.96	.96	.95	.94	.92
3.0	1.02	.98	.95	1.01	.97	.94	.98	.95	.93	.96	.93	.91	.94	.92	.90	.89
4.0	.98	.93	.90	.97	.93	.90	.95	.91	.89	.93	.90	.88	.91	.89	.87	.85
5.0	.94	.89	.86	.93	.89	.86	.91	.88	.85	.90	.87	.84	.88	.86	.84	.83
6.0	.90	.86	.83	.90	.85	.82	.88	.85	.82	.87	.84	.81	.86	.83	.81	.80
7.0	.87	.83	.80	.87	.82	.80	.85	.82	.79	.84	.81	.79	.83	.81	.78	.77
8.0	.84	.80	.77	.84	.80	.77	.83	.79	.77	.82	.79	.76	.81	.78	.76	.75
9.0	.82	.78	.75	.81	.77	.75	.81	.77	.74	.80	.76	.74	.79	.76	.74	.73
10.0	.79	.75	.72	.79	.75	.72	.78	.75	.72	.78	.74	.72	.77	.74	.72	.71

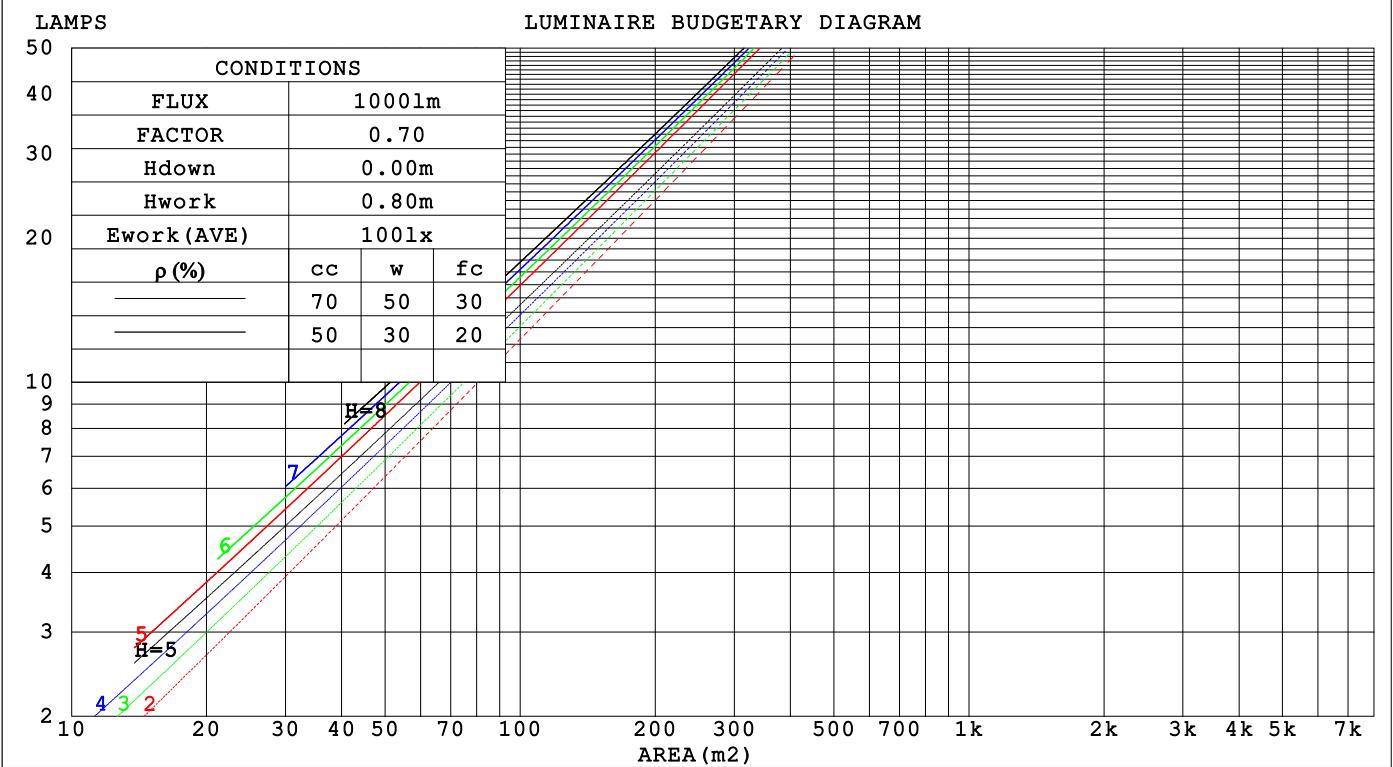

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.3V I:0.1430A P:34.1W PF:0.9908 Freq:49.99Hz		
UTHDi:0.21% ITHDi:51.67% KDisp:0.9918 Lamp Flux:3420.68x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.144	.082	.026	.137	.078	.025	.125	.072	.023	.113	.065	.021	.103	.060	.019															
2.0	.134	.074	.023	.129	.071	.022	.119	.066	.020	.109	.061	.019	.100	.057	.018															
3.0	.126	.067	.020	.121	.065	.019	.112	.061	.019	.104	.057	.018	.097	.054	.017															
4.0	.118	.061	.018	.114	.060	.018	.107	.057	.017	.100	.054	.016	.094	.051	.015															
5.0	.111	.056	.016	.108	.055	.016	.101	.053	.016	.095	.050	.015	.090	.048	.014															
6.0	.105	.052	.015	.102	.051	.015	.097	.049	.014	.091	.048	.014	.087	.046	.014															
7.0	.099	.049	.014	.097	.048	.014	.092	.047	.013	.088	.045	.013	.084	.043	.013															
8.0	.094	.046	.013	.092	.045	.013	.088	.044	.013	.084	.043	.012	.081	.041	.012															
9.0	.090	.044	.012	.088	.043	.012	.085	.042	.012	.081	.041	.012	.078	.040	.011															
10.0	.086	.041	.011	.084	.041	.011	.081	.040	.011	.078	.039	.011	.075	.038	.011															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.147	.144	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017	
2.0	.151	.133	.117	.130	.114	.101	.089	.079	.071	.051	.046	.041	.016	.015	.013	
3.0	.137	.113	.095	.117	.098	.082	.080	.068	.058	.046	.040	.034	.015	.013	.011	
4.0	.124	.098	.078	.107	.085	.068	.073	.059	.048	.042	.035	.028	.014	.011	.009	
5.0	.114	.086	.065	.098	.074	.057	.068	.052	.040	.039	.030	.024	.013	.010	.008	
6.0	.105	.076	.055	.091	.066	.048	.062	.046	.034	.036	.027	.020	.012	.009	.007	
7.0	.098	.068	.047	.084	.059	.041	.058	.041	.029	.034	.024	.017	.011	.008	.006	
8.0	.091	.061	.040	.079	.053	.035	.054	.037	.025	.032	.022	.015	.010	.007	.005	
9.0	.086	.055	.035	.074	.048	.031	.051	.034	.022	.030	.020	.013	.010	.007	.004	
10.0	.081	.051	.031	.070	.044	.027	.048	.031	.019	.028	.018	.011	.009	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.3V I:0.1430A P:34.1W PF:0.9908 Freq:49.99Hz										
UTHDi:0.21% ITHDi:51.67% KDisp:0.9918					Lamp Flux:3420.68x1 lm					
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 35W					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: Norming lighting					SUR.: 104mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.3	15.0	14.5	15.1	15.3	14.6	15.3	14.8	15.5	15.6
3H	14.4	15.1	14.6	15.2	15.4	14.8	15.5	15.1	15.7	15.9
4H	14.3	15.0	14.6	15.2	15.4	14.8	15.4	15.0	15.6	15.8
6H	14.3	14.9	14.6	15.1	15.3	14.7	15.3	15.0	15.5	15.8
8H	14.2	14.8	14.5	15.0	15.3	14.7	15.2	15.0	15.5	15.7
12H	14.2	14.7	14.5	15.0	15.3	14.6	15.2	14.9	15.4	15.7
4H 2H	14.4	15.0	14.7	15.3	15.5	14.8	15.4	15.0	15.6	15.8
3H	14.6	15.1	14.9	15.4	15.6	15.0	15.5	15.3	15.8	16.0
4H	14.5	15.0	14.8	15.3	15.6	14.9	15.4	15.2	15.7	16.0
6H	14.4	14.9	14.8	15.2	15.5	14.8	15.3	15.2	15.6	15.9
8H	14.4	14.8	14.8	15.1	15.5	14.8	15.2	15.2	15.5	15.9
12H	14.3	14.7	14.7	15.1	15.4	14.7	15.1	15.1	15.5	15.9
8H 4H	14.4	14.8	14.8	15.1	15.5	14.8	15.2	15.2	15.5	15.9
6H	14.3	14.6	14.7	15.0	15.4	14.7	15.0	15.1	15.4	15.8
8H	14.2	14.5	14.7	14.9	15.4	14.6	14.9	15.1	15.4	15.8
12H	14.2	14.4	14.6	14.9	15.3	14.6	14.8	15.0	15.3	15.7
12H 4H	14.3	14.7	14.7	15.1	15.4	14.7	15.1	15.1	15.5	15.8
6H	14.2	14.5	14.7	14.9	15.4	14.6	14.9	15.1	15.3	15.8
8H	14.2	14.4	14.6	14.9	15.3	14.6	14.8	15.0	15.3	15.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.2 / - 1.8					+ 1.4 / - 1.9				
1.5H	+ 1.6 / - 0.9					+ 2.1 / - 1.0				
2.0H	+ 1.6 / - 1.5					+ 1.8 / - 1.4				

CIE Pub.117, 3421 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.3$)
Area: 0.0084 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.3V I:0.1430A P:34.1W PF:0.9908 Freq:49.99Hz		
UTHDi:0.21% ITHDi:51.67% KDisp:0.9918 Lamp Flux:3420.68x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	82	79	88	82	79	87	82	79	75
0.80	96	90	87	95	90	86	94	89	86	83
1.00	100	95	91	99	94	91	98	94	90	87
1.25	104	99	96	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 γ Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.3V I:0.1430A P:34.1W PF:0.9908 Freq:49.99Hz		
UTHDi:0.21% ITHDi:51.67% KDisp:0.9918 Lamp Flux:3420.68x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

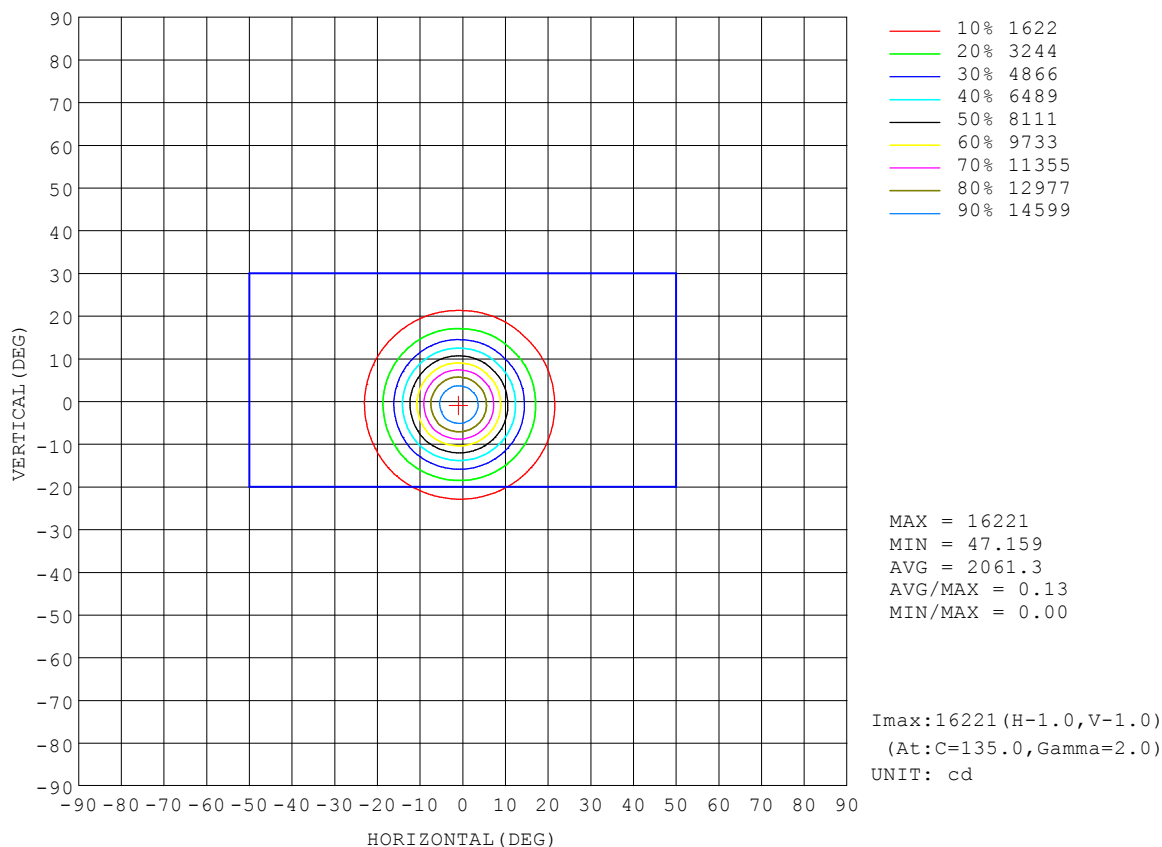


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.3V I:0.1430A P:34.1W PF:0.9908 Freq:49.99Hz		
UTHDi:0.21% ITHDi:51.67% KDisp:0.9918 Lamp Flux:3420.68x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

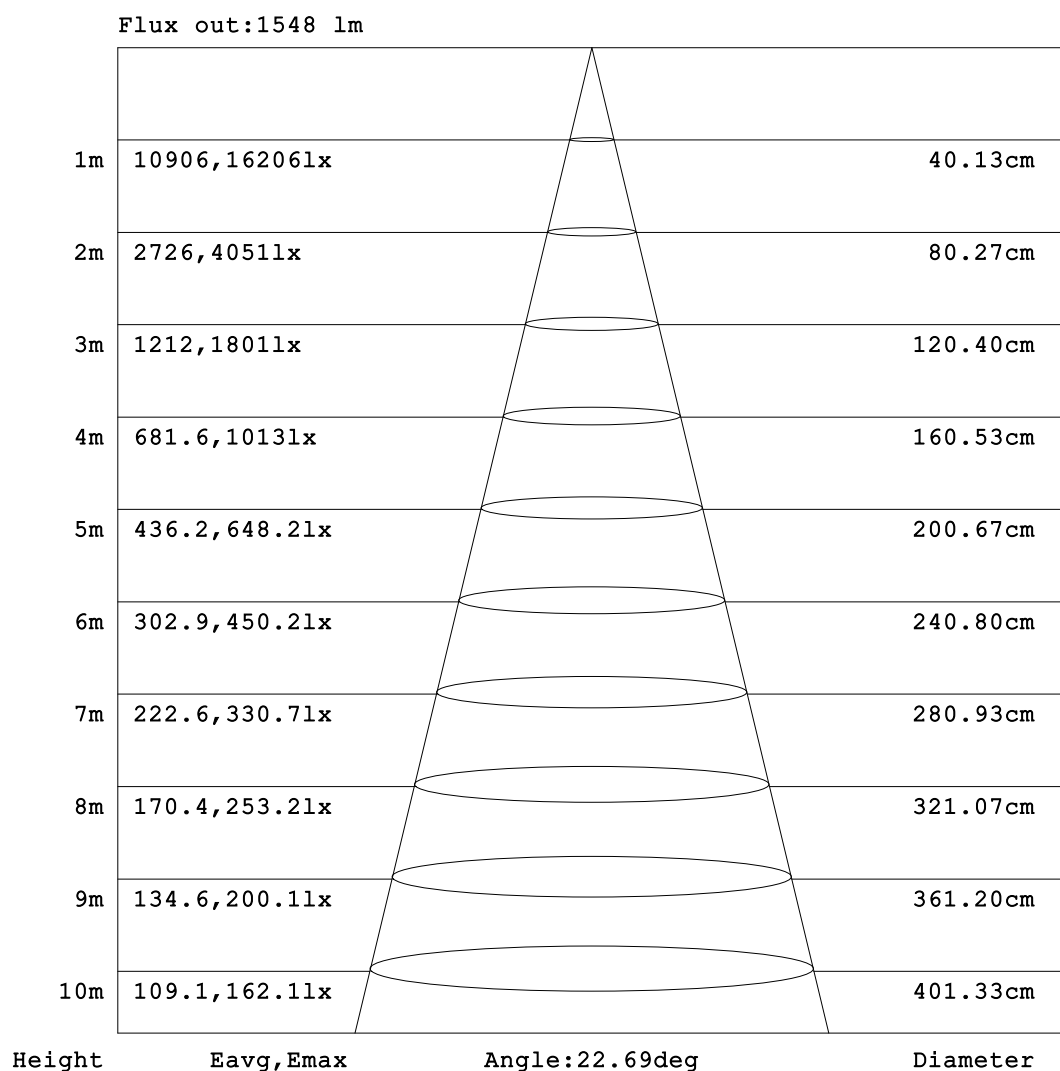


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.3V I:0.1430A P:34.1W PF:0.9908 Freq:49.99Hz		
UTHDi:0.21% ITHDi:51.67% KDisp:0.9918		Lamp Flux:3420.68x1 lm
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

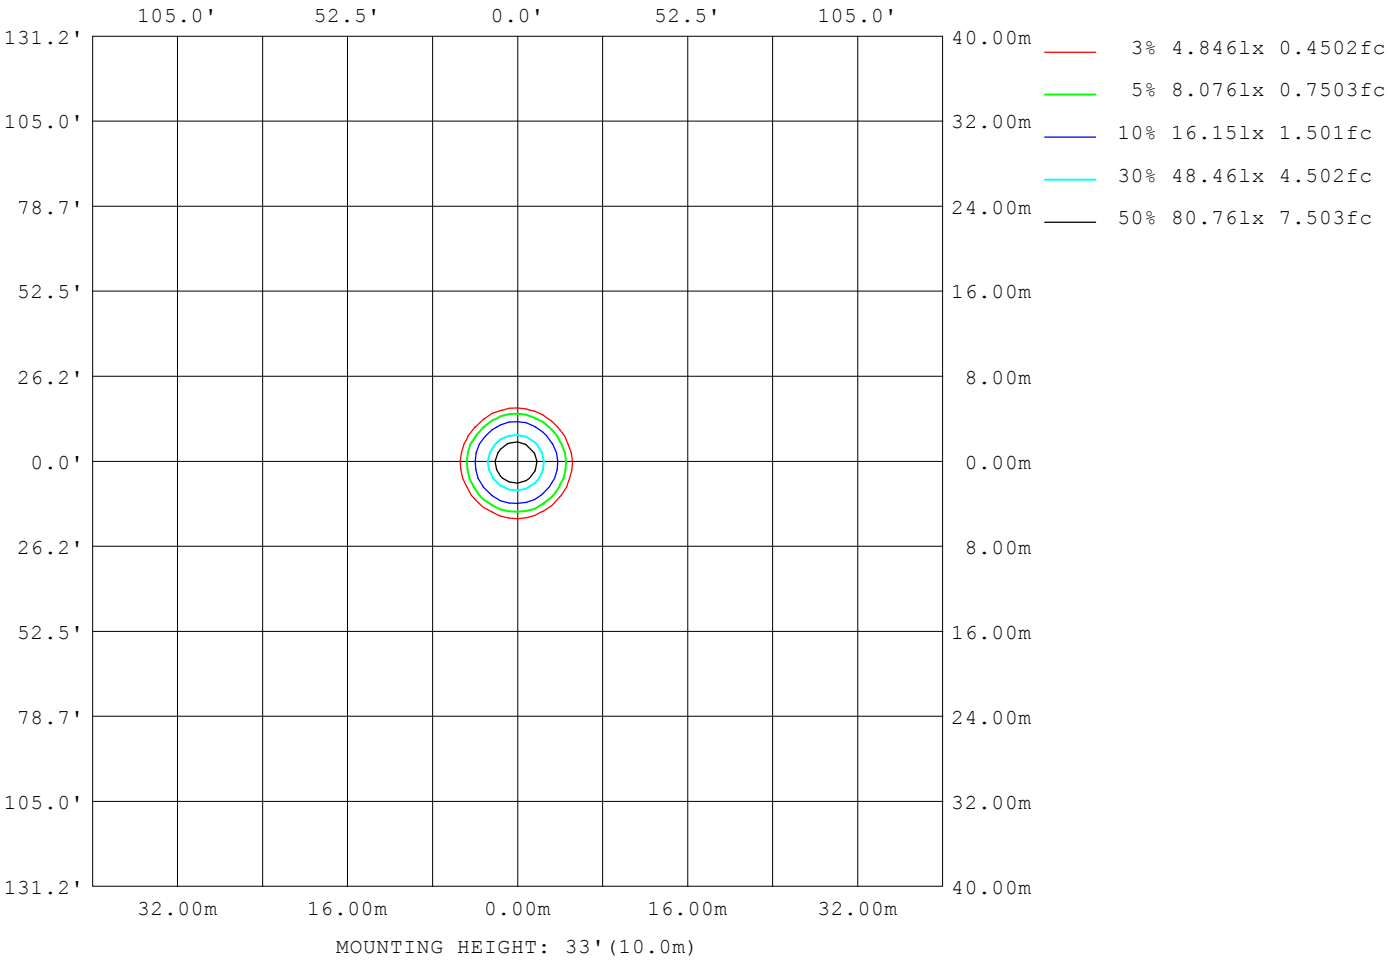

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 45.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Temperature:25.3DEG	Humidity:65.0%
Operators:DAMIN	Test Distance:3.090m [K=1.0000]
Test Date:2024-09-14	Remarks:

LED Avg.L Report

Test:U:240.3V I:0.1430A P:34.1W PF:0.9908 Freq:49.99Hz UTHDi:0.21% ITHDi:51.67% KDisp:0.9918 Lamp Flux:3420.68x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 24D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7210
L_0~180 (75) av	1479
L_0~180 (85) av	914
L_90~270 (65) av	7014
L_90~270 (75) av	1580
L_90~270 (85) av	1126
L_45 (65) av	7090
L_45 (75) av	1457
L_45 (85) av	834

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

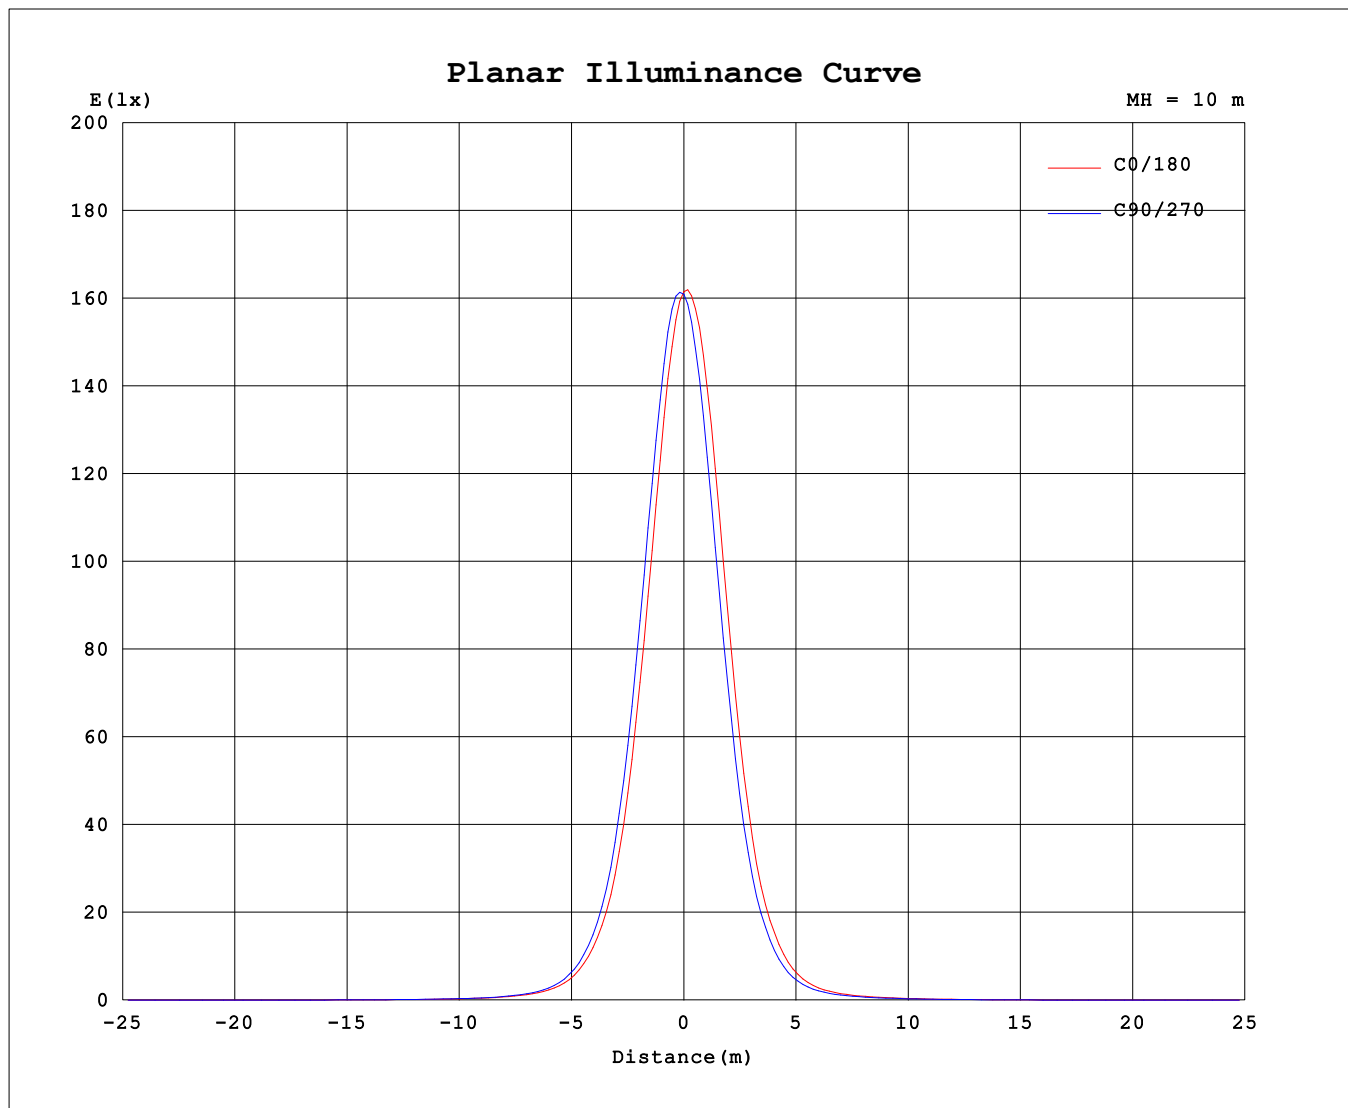

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	16110	16110	16110	16110	16110	16110	16110	16110
3.0	14919	15338	15841	16074	15790	15375	14939	14749
6.0	12474	13192	13928	14418	14138	13408	12596	12212
9.0	9537	10326	11188	11793	11465	10553	9641	9219
12.0	6751	7420	8178	8725	8432	7582	6821	6433
15.0	4441	4969	5556	5973	5730	5022	4434	4161
18.0	2789	3126	3527	3809	3607	3116	2753	2581
21.0	1755	1973	2199	2339	2234	1903	1689	1572
24.0	1089	1220	1365	1422	1372	1136	1009	961.7
27.0	668.5	751.1	843.4	859.5	827.9	685.8	609.4	578.3
30.0	428.2	476.1	519.1	532.9	516.7	438.4	391.4	374.0
33.0	292.5	321.9	346.1	352.4	347.3	301.7	270.6	257.8
36.0	209.5	229.2	243.4	247.7	249.1	221.2	198.3	187.1
39.0	156.3	169.8	177.5	183.1	187.9	168.5	151.3	141.1
42.0	122.0	130.4	135.3	140.4	145.4	132.9	120.4	111.3
45.0	97.91	104.3	107.3	112.4	116.7	108.2	97.82	90.17
48.0	81.17	85.49	86.89	90.97	94.82	89.84	80.34	73.98
51.0	67.89	71.48	71.14	74.37	77.75	74.73	67.22	61.64
54.0	57.25	60.50	59.31	61.67	64.62	62.84	56.98	51.91
57.0	46.85	49.55	48.03	49.80	52.23	50.92	46.21	42.75
60.0	37.68	40.54	39.79	41.34	43.05	41.94	37.93	34.71
63.0	29.28	31.51	31.24	32.38	33.58	32.52	29.64	27.25
66.0	19.44	21.90	22.86	24.47	25.28	23.56	20.66	18.08
69.0	10.38	12.27	13.91	15.52	15.84	13.95	11.81	10.09
72.0	4.535	6.004	6.936	7.574	7.462	6.681	5.626	4.301
75.0	2.795	2.978	3.372	3.640	3.637	3.283	3.497	2.766
78.0	1.866	1.948	2.191	2.376	2.386	2.135	2.614	1.834
81.0	1.145	1.299	1.576	1.639	1.674	1.484	1.590	1.046
84.0	0.6729	0.7254	0.9018	0.9253	0.9622	0.8145	1.042	0.5795
87.0	0.2696	0.2986	0.4751	0.4823	0.4883	0.3748	0.4970	0.1793
90.0	0.1148	0.0713	0.1322	0.1001	0.0795	0.0749	0.2573	0.0737

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks: