


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.4V I:0.1430A P:34.0W PF:0.9907 Freq:49.99Hz		
UTHDi:0.21% ITHDi:50.40% KDisp:0.9920 Lamp Flux:3558.62x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 104.53 lm/W
MODEL		I _{max} (cd)	9101	S/MH(C0/180)	0.54	
NOMINAL POWER(W)	35	LOR(%)	100.0	S/MH(C90/270)	0.56	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3558.6	η UP,DN(C0-180)	0.0,51.0	
NOMINAL FLUX(lm)	3558.62	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.0	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	240.38	η down(%)	100.0	CIBSE SHR MAX	0.60	

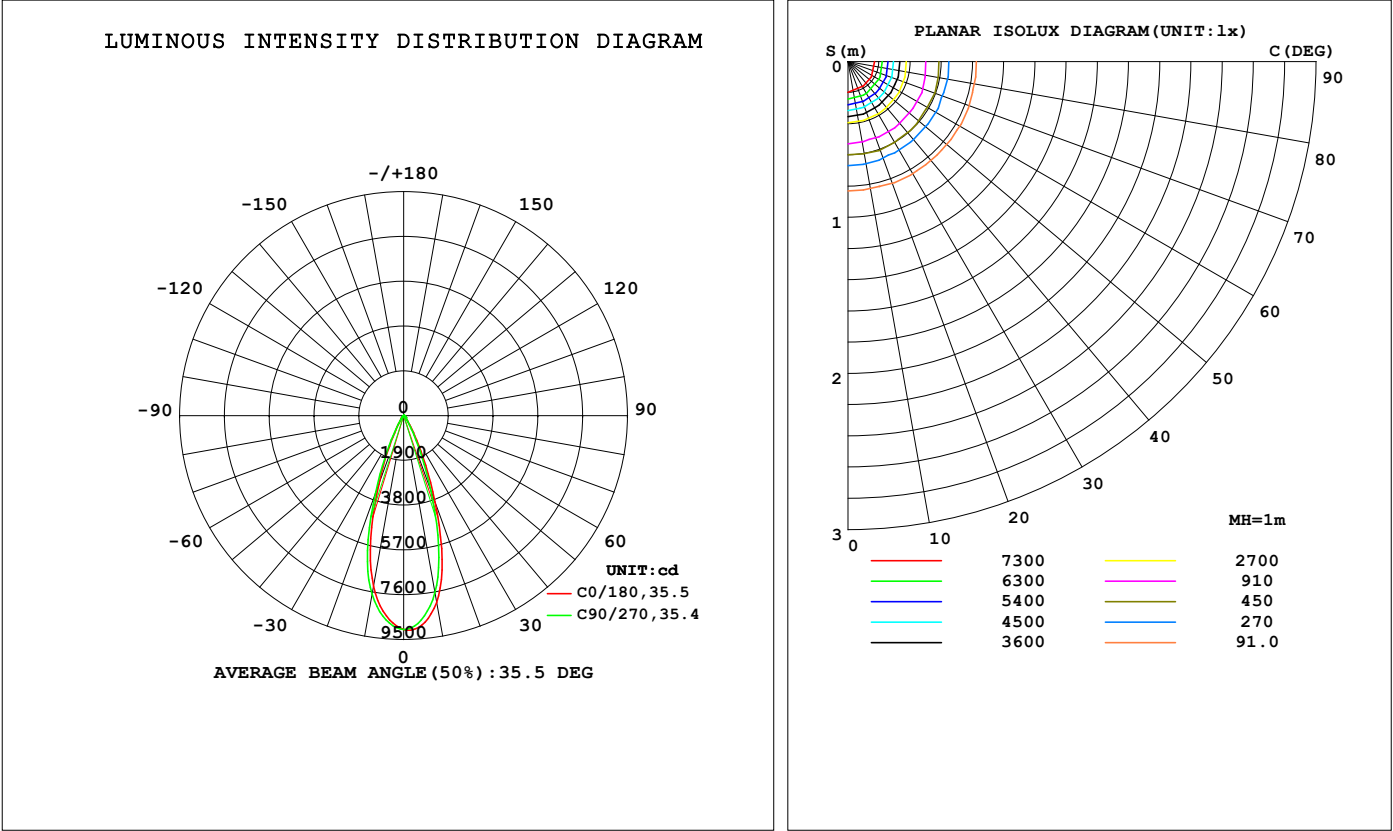

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	8050	7897	7639	7418	7348	7457	7707	7952	0- 10	799.1	799.1	22.5,22.5
20	3917	3720	3386	3154	3094	3252	3522	3791	10- 20	1565	2365	66.4,66.4
30	842.9	776.6	670.6	597.9	579.4	586.8	664.4	749.3	20- 30	801.1	3166	89,89
40	186.0	189.3	184.2	180.7	169.0	157.0	161.1	169.9	30- 40	210.5	3376	94.9,94.9
50	88.44	94.40	92.40	89.54	88.03	81.45	78.30	80.01	40- 50	94.10	3470	97.5,97.5
60	45.81	47.36	42.48	40.27	39.84	40.77	41.01	42.03	50- 60	55.91	3526	99.1,99.1
70	15.09	15.09	13.60	12.51	12.05	12.58	13.89	14.33	60- 70	26.62	3553	99.8,99.8
80	2.095	1.969	1.905	1.791	1.785	1.828	2.194	2.039	70- 80	5.023	3558	100,100
90	0.1042	0.0718	0.1244	0.0824	0.0837	0.0828	0.1385	0.0712	80- 90	0.8581	3559	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3429.1 lm

%lum = 96.4%

%lamp = 96.4%

Conical surface Flux(120deg): 3526.1 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.1430A P:34.0W PF:0.9907 Freq:49.99Hz		
UTHDi:0.21% ITHDi:50.40% KDisp:0.9920Lamp Flux:3558.62x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

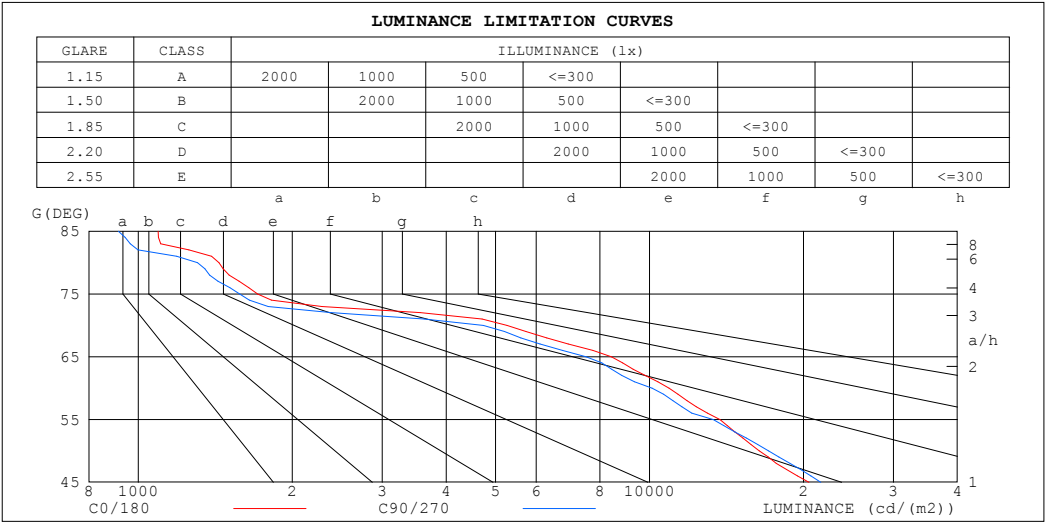

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1092	915
80	1439	1306
75	1712	1578
70	5262	4731
65	8421	7519
60	10926	10111
55	13726	13327
50	16408	17108
45	20488	21640


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.1430A P:34.0W PF:0.9907 Freq:49.99Hz		
UTHDi:0.21% ITHDi:50.40% KDisp:0.9920		
Lamp Flux:3558.62x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.90	.94	.91	.89	.92	.90	.88	.86
4.0	.95	.91	.87	.94	.90	.87	.92	.88	.86	.90	.87	.85	.88	.86	.84	.82
5.0	.91	.86	.82	.90	.85	.82	.88	.84	.81	.87	.83	.81	.85	.82	.80	.79
6.0	.87	.82	.78	.86	.81	.78	.85	.81	.78	.83	.80	.77	.82	.79	.77	.75
7.0	.83	.78	.75	.82	.78	.75	.81	.77	.74	.80	.77	.74	.79	.76	.73	.72
8.0	.80	.75	.72	.79	.75	.71	.78	.74	.71	.77	.74	.71	.76	.73	.71	.69
9.0	.77	.72	.69	.76	.72	.69	.75	.71	.68	.75	.71	.68	.74	.70	.68	.67
10.0	.74	.69	.66	.74	.69	.66	.73	.69	.66	.72	.68	.66	.71	.68	.66	.64

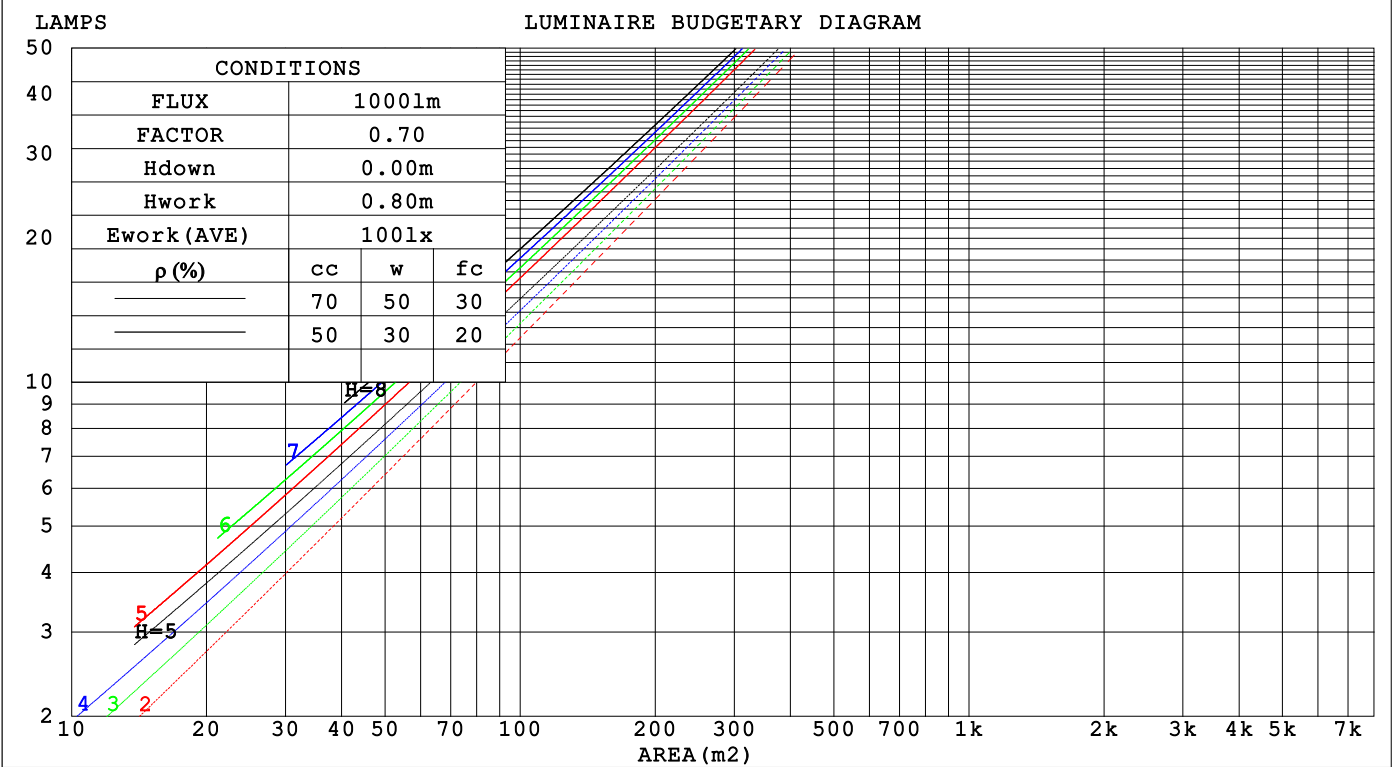

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.1430A P:34.0W PF:0.9907 Freq:49.99Hz		
UTHDi:0.21% ITHDi:50.40% KDisp:0.9920 Lamp Flux:3558.62x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.155	.088	.028	.148	.085	.027	.136	.078	.025	.124	.072	.023	.114	.066	.021															
2.0	.146	.080	.024	.140	.077	.024	.130	.072	.022	.120	.067	.021	.111	.063	.020															
3.0	.137	.073	.022	.132	.071	.021	.124	.067	.020	.116	.063	.019	.108	.060	.019															
4.0	.129	.067	.020	.125	.066	.019	.118	.063	.019	.111	.060	.018	.105	.057	.017															
5.0	.122	.062	.018	.119	.061	.018	.113	.059	.017	.107	.056	.017	.101	.054	.016															
6.0	.116	.058	.017	.113	.057	.016	.108	.055	.016	.102	.053	.016	.098	.051	.015															
7.0	.111	.055	.015	.108	.054	.015	.103	.052	.015	.099	.051	.015	.094	.049	.014															
8.0	.106	.052	.014	.103	.051	.014	.099	.049	.014	.095	.048	.014	.091	.047	.014															
9.0	.101	.049	.014	.099	.048	.014	.095	.047	.013	.092	.046	.013	.088	.045	.013															
10.0	.097	.046	.013	.095	.046	.013	.092	.045	.013	.088	.044	.012	.085	.043	.012															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.153	.133	.116	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013	
3.0	.139	.113	.093	.119	.098	.081	.082	.068	.057	.047	.040	.033	.015	.013	.011	
4.0	.127	.098	.076	.109	.085	.066	.075	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.118	.086	.063	.101	.075	.055	.070	.052	.039	.040	.031	.023	.013	.010	.008	
6.0	.109	.077	.053	.094	.066	.046	.065	.046	.033	.038	.027	.019	.012	.009	.006	
7.0	.102	.069	.045	.088	.060	.039	.061	.042	.028	.035	.025	.017	.011	.008	.006	
8.0	.096	.062	.039	.083	.054	.034	.057	.038	.024	.033	.022	.014	.011	.007	.005	
9.0	.090	.057	.034	.078	.049	.030	.054	.035	.021	.031	.020	.012	.010	.007	.004	
10.0	.086	.052	.030	.074	.045	.026	.051	.032	.018	.030	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.1430A P:34.0W PF:0.9907 Freq:49.99Hz											
UTHDi:0.21% ITHDi:50.40% KDisp:0.9920					Lamp Flux:3558.62x1 lm						
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 36D 35W					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: Norming lighting					SUR.: 104mm			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		16.0	16.8	16.2	16.9	17.1	15.7	16.5	15.9	16.6	16.8
	3H	16.2	16.9	16.4	17.1	17.3	15.9	16.6	16.1	16.8	17.0
	4H	16.1	16.8	16.4	17.0	17.2	15.8	16.5	16.1	16.7	16.9
	6H	16.0	16.7	16.3	16.9	17.2	15.7	16.4	16.0	16.6	16.8
	8H	16.0	16.6	16.3	16.9	17.1	15.7	16.3	16.0	16.5	16.8
	12H	16.0	16.5	16.3	16.8	17.1	15.6	16.2	15.9	16.5	16.8
4H	2H	16.1	16.8	16.3	17.0	17.2	15.8	16.5	16.1	16.7	16.9
	3H	16.3	16.9	16.6	17.1	17.4	16.0	16.6	16.3	16.9	17.1
	4H	16.2	16.8	16.6	17.1	17.4	15.9	16.5	16.3	16.8	17.1
	6H	16.1	16.6	16.5	16.9	17.3	15.8	16.3	16.2	16.7	17.0
	8H	16.1	16.5	16.5	16.9	17.2	15.8	16.2	16.2	16.6	17.0
	12H	16.0	16.4	16.4	16.8	17.2	15.8	16.2	16.2	16.5	16.9
8H	4H	16.1	16.5	16.5	16.9	17.2	15.8	16.3	16.2	16.6	17.0
	6H	16.0	16.4	16.4	16.8	17.2	15.7	16.1	16.1	16.5	16.9
	8H	16.0	16.3	16.4	16.7	17.1	15.7	16.0	16.1	16.4	16.9
	12H	15.9	16.2	16.4	16.6	17.1	15.6	15.9	16.1	16.3	16.8
12H	4H	16.0	16.4	16.4	16.8	17.2	15.8	16.2	16.2	16.5	16.9
	6H	16.0	16.3	16.4	16.7	17.1	15.7	16.0	16.1	16.4	16.8
	8H	15.9	16.2	16.4	16.6	17.1	15.6	15.9	16.1	16.3	16.8
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 1.4 / - 1.9					+ 1.2 / - 2.0				
1.5H		+ 2.1 / - 1.1					+ 1.7 / - 1.1				
2.0H		+ 1.7 / - 1.6					+ 2.0 / - 1.8				

CIE Pub.117, 3559 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.4$)
Area: 0.0084 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.1430A P:34.0W PF:0.9907 Freq:49.99Hz		
UTHDi:0.21% ITHDi:50.40% KDisp:0.9920 Lamp Flux:3558.62x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	78	88	82	78	87	82	78	75
0.80	96	90	86	95	90	86	94	89	86	82
1.00	100	94	91	99	94	91	97	94	90	86
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	107	104	101	105	102	99	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 γ Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.1430A P:34.0W PF:0.9907 Freq:49.99Hz		
UTHDi:0.21% ITHDi:50.40% KDisp:0.9920 Lamp Flux:3558.62x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

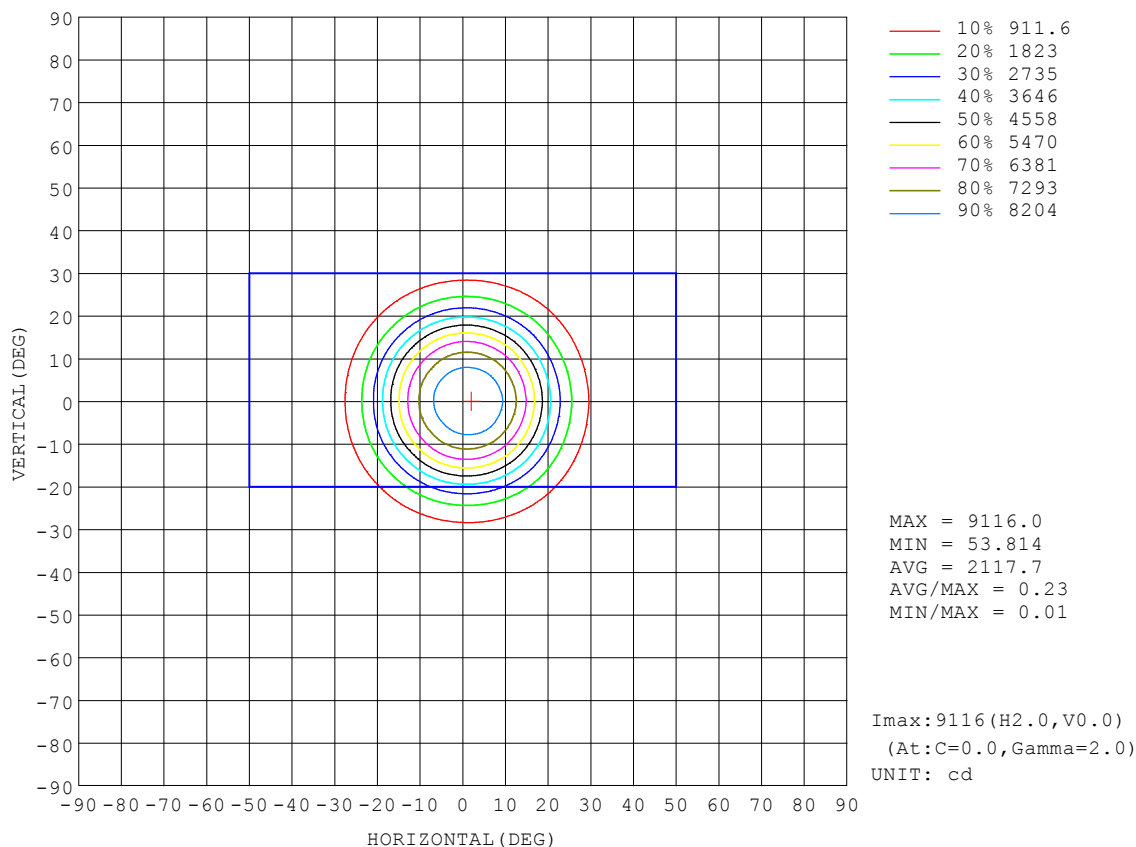


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.1430A P:34.0W PF:0.9907 Freq:49.99Hz		
UTHDi:0.21% ITHDi:50.40% KDisp:0.9920 Lamp Flux:3558.62x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

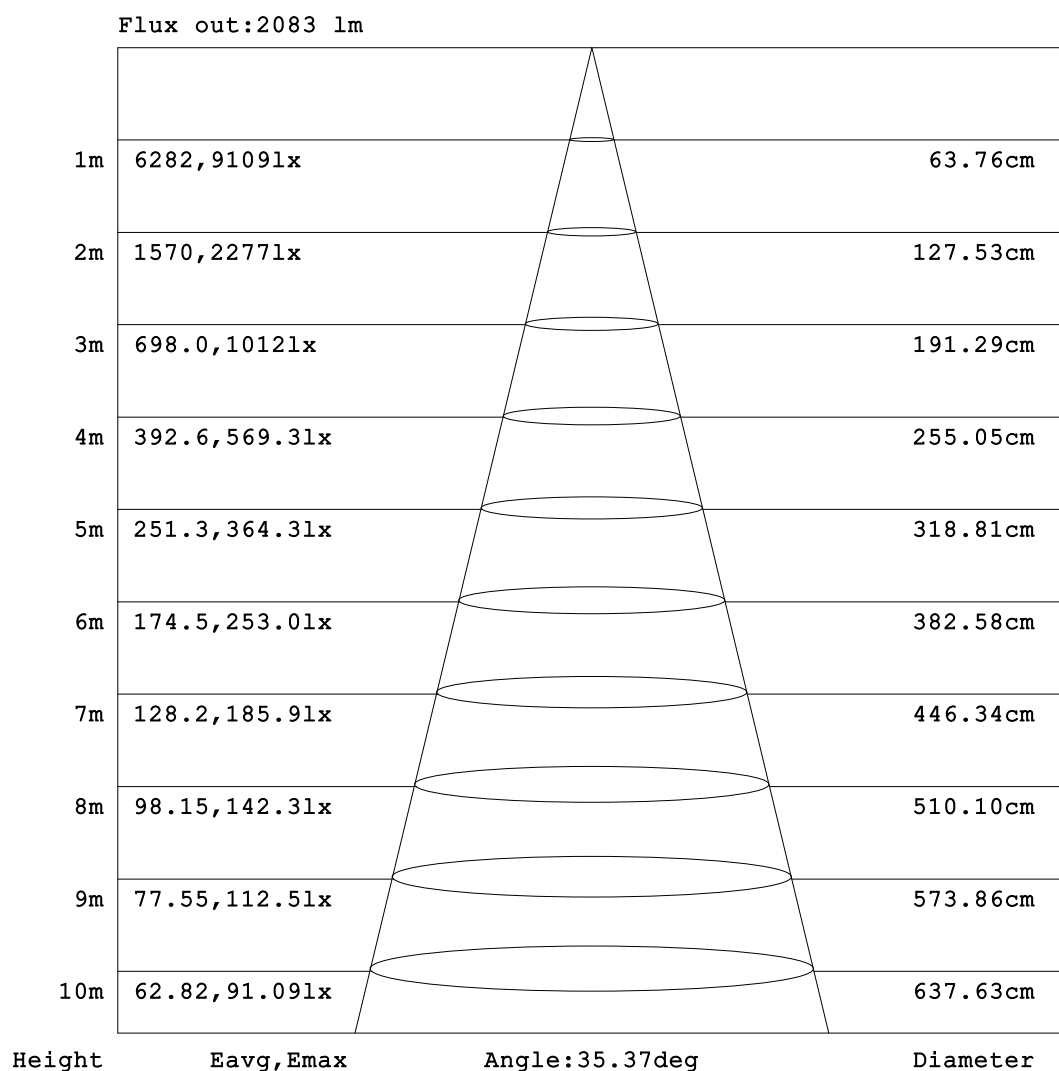


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.1430A P:34.0W PF:0.9907 Freq:49.99Hz		
UTHDi:0.21% ITHDi:50.40% KDisp:0.9920		Lamp Flux:3558.62x1 lm
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

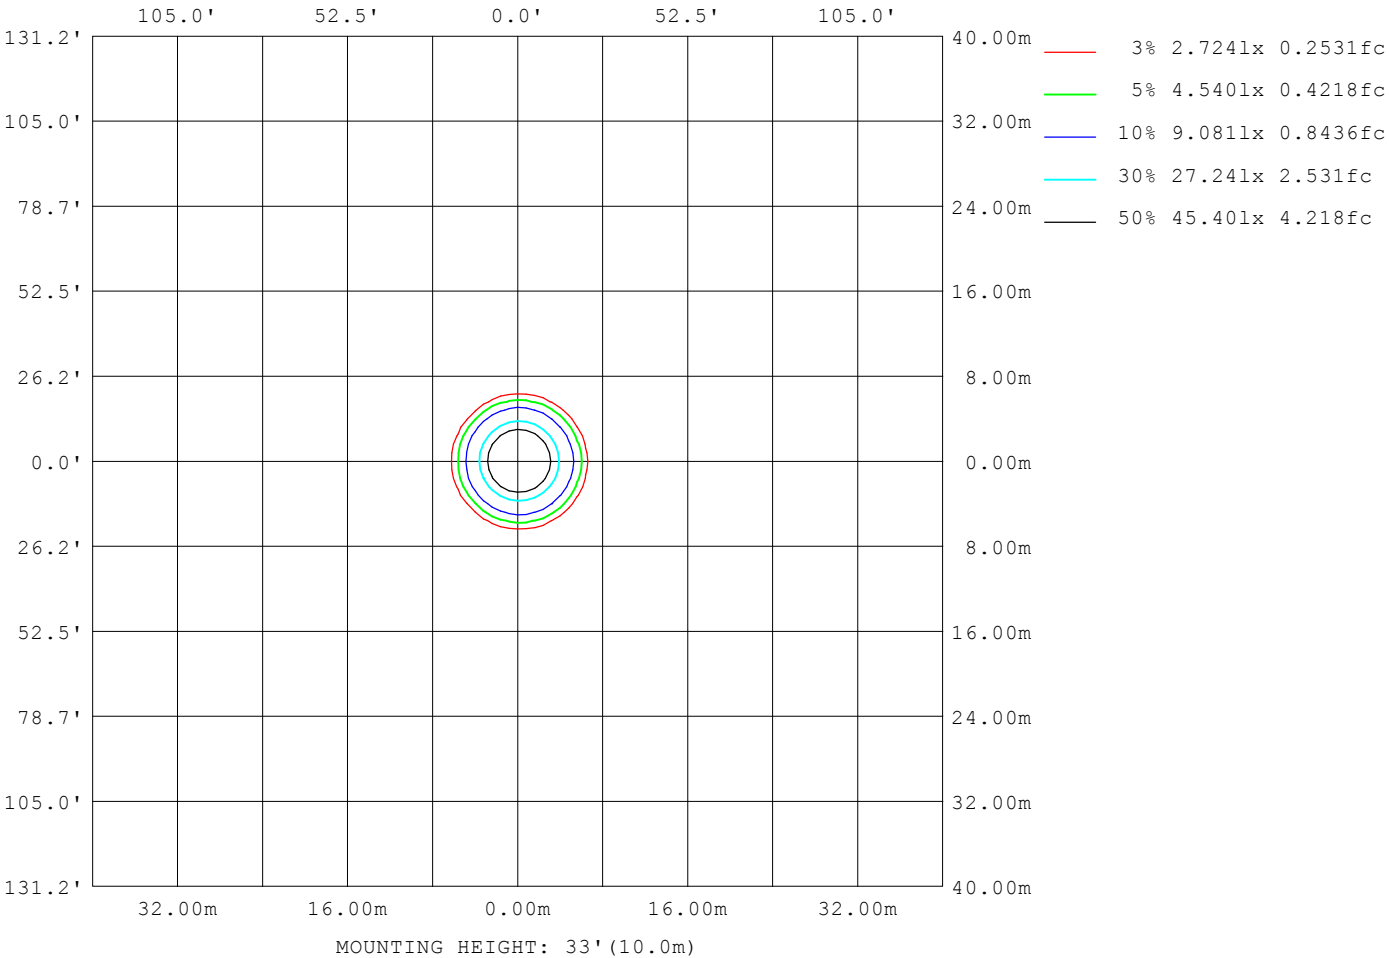

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 45.0DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Temperature:25.3DEG	Humidity:65.0%
Operators:DAMIN	Test Distance:3.090m [K=1.0000]
Test Date:2024-09-14	Remarks:

LED Avg.L Report

Test:U:240.4V I:0.1430A P:34.0W PF:0.9907 Freq:49.99Hz UTHDi:0.21% ITHDi:50.40% KDisp:0.9920 Lamp Flux:3558.62x1 lm		
NAME: TR11-35-XX-01+白色防眩环 2700K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7733
L_0~180 (75) av	1611
L_0~180 (85) av	975
L_90~270 (65) av	7526
L_90~270 (75) av	1658
L_90~270 (85) av	1042
L_45 (65) av	7667
L_45 (75) av	1607
L_45 (85) av	917

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

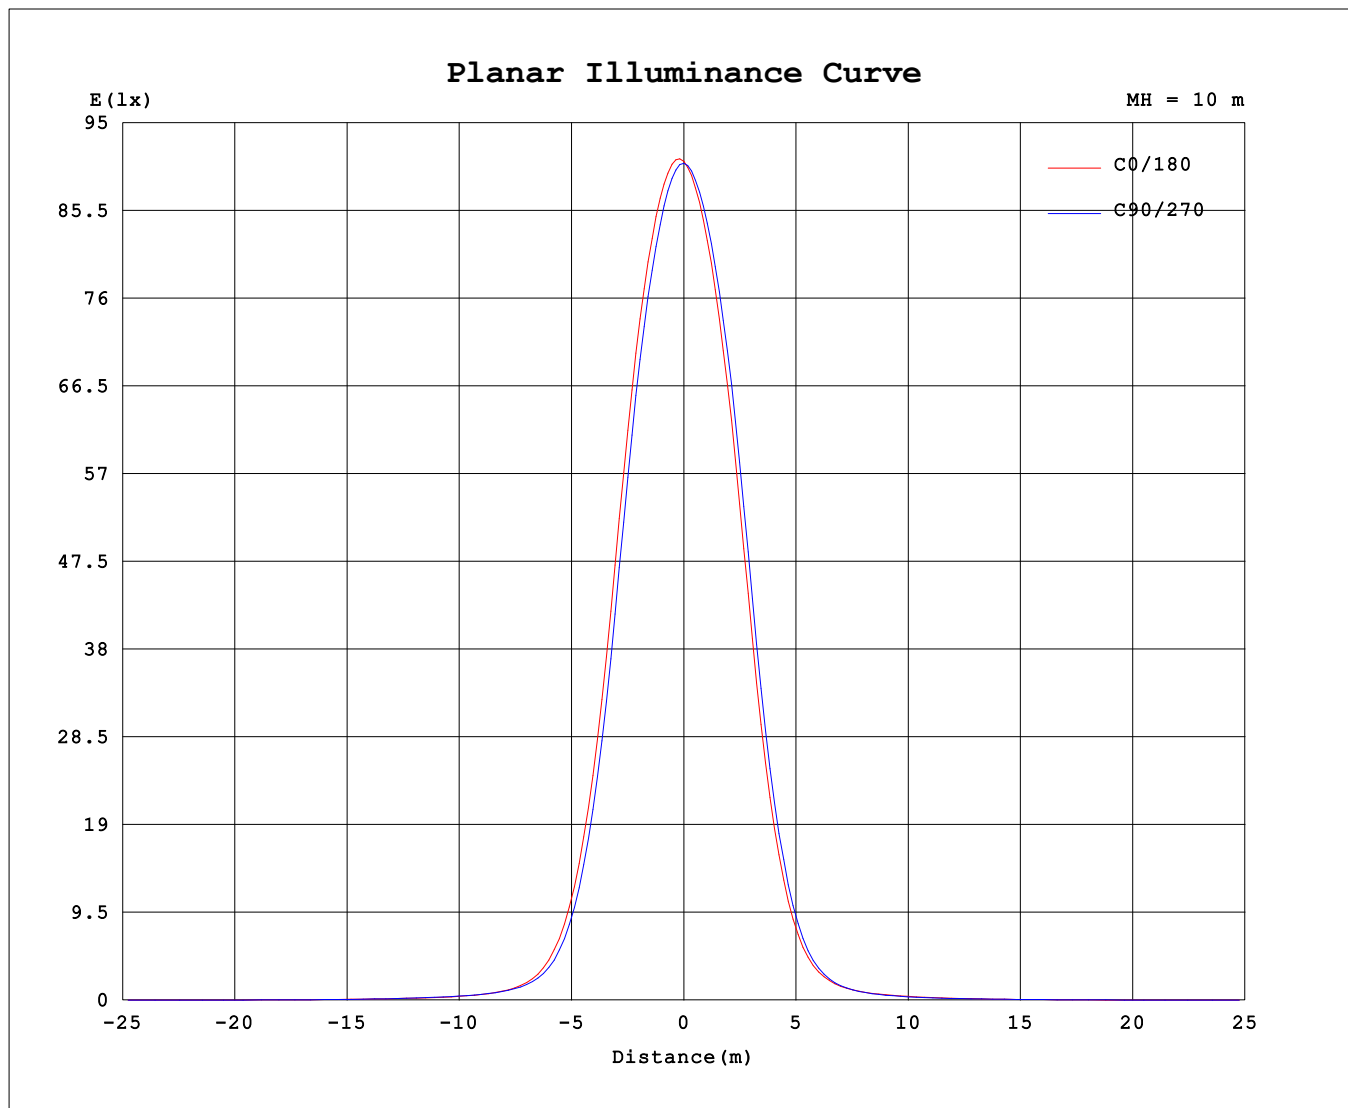

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	9066	9066	9066	9066	9066	9066	9066	9066
3.0	9074	9035	8938	8846	8817	8842	8918	9004
6.0	8812	8740	8539	8387	8349	8422	8555	8711
9.0	8282	8157	7912	7706	7641	7737	7961	8180
12.0	7474	7270	7001	6768	6697	6836	7130	7380
15.0	6320	6082	5746	5492	5415	5608	5933	6230
18.0	4891	4663	4298	4059	3987	4188	4484	4770
21.0	3469	3289	2977	2750	2695	2833	3084	3336
24.0	2315	2175	1927	1737	1704	1774	1996	2184
27.0	1427	1332	1158	1023	1005	1035	1172	1314
30.0	842.9	776.6	670.6	597.9	579.4	586.8	664.4	749.3
33.0	480.7	457.8	407.3	374.6	359.0	353.8	388.9	436.0
36.0	300.6	293.5	274.2	259.3	246.0	235.6	250.4	274.3
39.0	206.6	210.1	201.4	196.3	184.1	171.4	177.9	189.0
42.0	153.9	159.7	157.6	154.6	145.4	133.7	134.9	140.2
45.0	121.5	129.3	128.6	125.3	119.7	109.1	107.6	110.4
48.0	99.32	106.9	105.9	102.3	99.95	91.46	88.45	90.57
51.0	83.30	88.73	86.13	83.71	82.50	76.84	73.83	75.45
54.0	69.98	73.54	69.01	67.71	66.80	64.11	62.08	63.65
57.0	56.41	58.40	52.96	51.25	50.60	50.98	50.30	51.32
60.0	45.81	47.36	42.48	40.27	39.84	40.77	41.01	42.03
63.0	35.34	36.24	32.18	30.70	30.81	31.55	31.85	32.59
66.0	26.42	26.63	23.08	21.75	21.69	22.29	23.25	24.20
69.0	17.23	17.32	15.66	15.00	14.66	14.97	15.66	16.15
72.0	9.229	7.363	6.190	5.597	5.394	5.685	6.947	8.736
75.0	3.716	3.613	3.431	3.385	3.290	3.319	3.780	3.660
78.0	2.625	2.495	2.410	2.326	2.291	2.320	2.678	2.549
81.0	1.825	1.680	1.562	1.418	1.431	1.505	1.895	1.784
84.0	0.9590	0.8530	0.8272	0.7535	0.7902	0.8203	1.038	0.9209
87.0	0.4916	0.3853	0.3806	0.2972	0.3110	0.3428	0.5239	0.4394
90.0	0.1042	0.0718	0.1244	0.0824	0.0837	0.0828	0.1385	0.0712

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks: