


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.1422A P:33.9W PF:0.9907 Freq:49.99Hz		
UTHDi:15.56% ITHDi:28.88% KDisp:0.9946 Lamp Flux:3784.19x1 lm		
NAME: TR11-35-XX-01+白色防眩环 4000K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 111.76 lm/W			
MODEL		I _{max} (cd)	9611	S/MH(C0/180)	0.54
NOMINAL POWER(W)	35	LOR(%)	100.0	S/MH(C90/270)	0.55
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3784.2	η UP,DN(C0-180)	0.0,52.2
NOMINAL FLUX(lm)	3784.19	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,47.8
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	240.39	η down(%)	100.0	CIBSE SHR MAX	0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

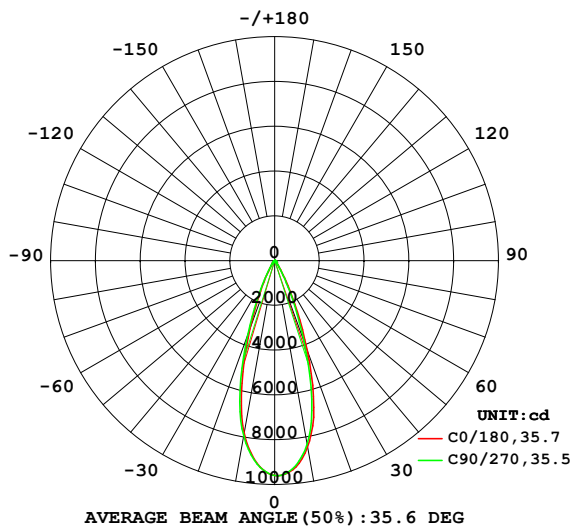

PLANAR ISOLUX DIAGRAM(UNIT:lx)

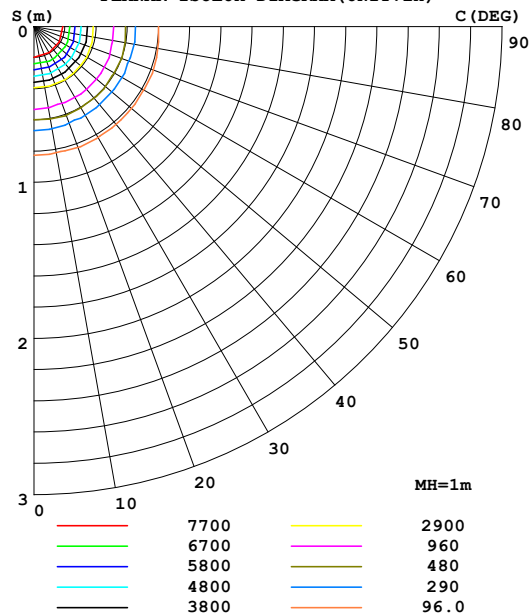

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	8468	8505	8336	8068	7831	7781	7959	8225	0- 10	846.4	846.4	22.4,22.4
20	4272	4230	3853	3482	3225	3233	3541	3967	10- 20	1665	2511	66.4,66.4
30	903.0	866.4	770.7	682.0	616.8	595.6	673.8	774.9	20- 30	859.7	3371	89.1,89.1
40	193.1	187.7	173.9	175.4	181.3	183.3	183.0	185.9	30- 40	223.9	3595	95,95
50	91.44	88.88	80.40	86.33	93.45	95.00	90.09	91.07	40- 50	98.00	3693	97.6,97.6
60	47.58	46.49	41.01	42.12	41.07	41.88	42.18	45.86	50- 60	57.72	3751	99.1,99.1
70	16.36	15.53	13.58	11.38	10.04	11.84	14.53	16.10	60- 70	27.37	3778	99.8,99.8
80	2.338	2.120	1.932	1.669	1.593	1.742	2.121	2.301	70- 80	5.194	3783	100,100
90	0.1482	0.0745	0.1347	0.0863	0.0917	0.0870	0.1048	0.0760	80- 90	0.8775	3784	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3650.5 lm

%lum = 96.5%

%lamp = 96.5%

Conical surface Flux(120deg): 3750.8 lm

%lum = 99.1%


%lamp = 99.1%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.1422A P:33.9W PF:0.9907 Freq:49.99Hz		
UTHDi:15.56% ITHDi:28.88% KDisp:0.9946 Lamp Flux:3784.19x1 lm		
NAME: TR11-35-XX-01+白色防眩环 4000K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

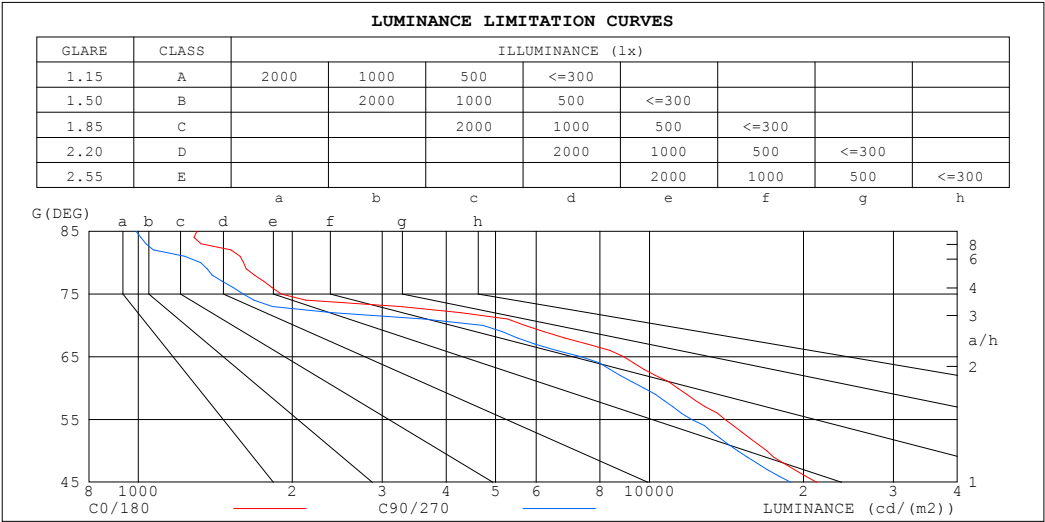

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1302	990
80	1606	1323
75	1903	1603
70	5706	4724
65	8907	7358
60	11351	9756
55	14056	12091
50	16967	14878
45	21212	18885


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.1422A P:33.9W PF:0.9907 Freq:49.99Hz		
UTHDi:15.56% ITHDi:28.88% KDisp:0.9946		
Lamp Flux:3784.19x1 lm		
NAME: TR11-35-XX-01+白色防眩环 4000K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95
2.0	1.06	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.94	.92	.91
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.90	.94	.91	.89	.92	.90	.88	.86
4.0	.95	.91	.87	.94	.90	.87	.92	.88	.86	.90	.87	.85	.88	.86	.84	.82
5.0	.91	.86	.82	.90	.85	.82	.88	.84	.81	.87	.83	.81	.85	.82	.80	.79
6.0	.87	.82	.78	.86	.81	.78	.85	.81	.78	.83	.80	.77	.82	.79	.77	.75
7.0	.83	.78	.75	.83	.78	.75	.81	.77	.74	.80	.77	.74	.79	.76	.74	.72
8.0	.80	.75	.72	.79	.75	.71	.78	.74	.71	.77	.74	.71	.76	.73	.71	.70
9.0	.77	.72	.69	.76	.72	.69	.75	.71	.68	.75	.71	.68	.74	.70	.68	.67
10.0	.74	.69	.66	.74	.69	.66	.73	.69	.66	.72	.68	.66	.71	.68	.66	.64

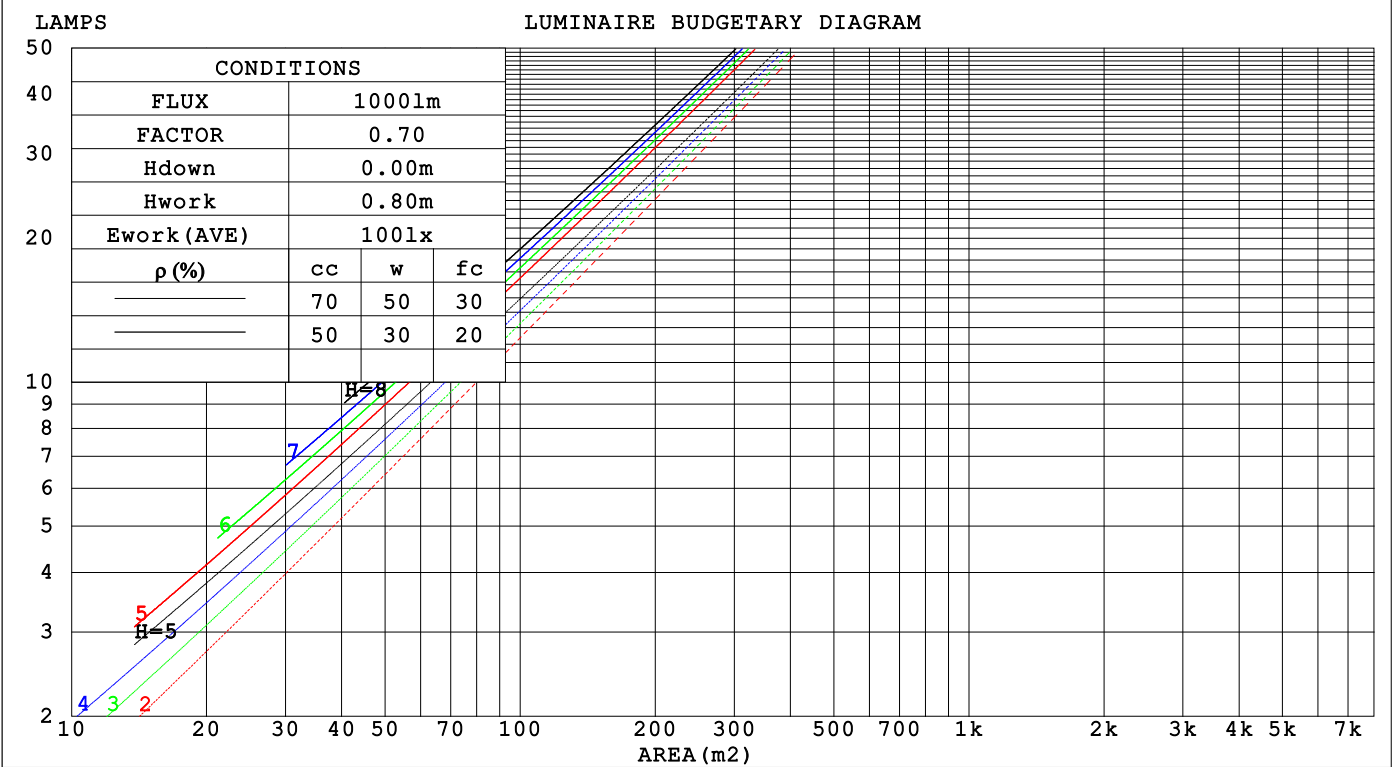

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.1422A P:33.9W PF:0.9907 Freq:49.99Hz		
UTHDi:15.56% ITHDi:28.88% KDisp:0.9946 Lamp Flux:3784.19x1 lm		
NAME: TR11-35-XX-01+白色防眩环 4000K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.155	.088	.028	.148	.084	.027	.136	.078	.025	.124	.072	.023	.114	.066	.021															
2.0	.146	.080	.024	.140	.077	.024	.130	.072	.022	.120	.067	.021	.111	.063	.020															
3.0	.137	.073	.022	.132	.071	.021	.124	.067	.020	.115	.063	.019	.108	.060	.019															
4.0	.129	.067	.020	.125	.066	.019	.118	.062	.019	.111	.060	.018	.104	.057	.017															
5.0	.122	.062	.018	.119	.061	.018	.112	.059	.017	.107	.056	.017	.101	.054	.016															
6.0	.116	.058	.017	.113	.057	.016	.108	.055	.016	.102	.053	.016	.097	.051	.015															
7.0	.111	.055	.015	.108	.054	.015	.103	.052	.015	.098	.050	.015	.094	.049	.014															
8.0	.105	.052	.014	.103	.051	.014	.099	.049	.014	.095	.048	.014	.091	.047	.014															
9.0	.101	.049	.014	.099	.048	.014	.095	.047	.013	.091	.046	.013	.088	.045	.013															
10.0	.097	.046	.013	.095	.046	.013	.092	.045	.013	.088	.044	.012	.085	.043	.012															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.170	.158	.147	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016	
2.0	.153	.133	.116	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013	
3.0	.139	.113	.093	.119	.098	.081	.082	.068	.057	.047	.040	.033	.015	.013	.011	
4.0	.127	.098	.076	.109	.085	.066	.075	.059	.047	.043	.035	.028	.014	.011	.009	
5.0	.118	.086	.063	.101	.075	.055	.070	.052	.039	.040	.031	.023	.013	.010	.008	
6.0	.109	.077	.053	.094	.066	.046	.065	.046	.033	.038	.027	.019	.012	.009	.006	
7.0	.102	.069	.045	.088	.060	.039	.061	.042	.028	.035	.025	.017	.011	.008	.006	
8.0	.096	.062	.039	.083	.054	.034	.057	.038	.024	.033	.022	.014	.011	.007	.005	
9.0	.090	.057	.034	.078	.049	.030	.054	.035	.021	.031	.020	.012	.010	.007	.004	
10.0	.086	.052	.030	.074	.045	.026	.051	.032	.018	.030	.019	.011	.010	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.1422A P:33.9W PF:0.9907 Freq:49.99Hz										
UTHDi:15.56% ITHDi:28.88% KDisp:0.9946 Lamp Flux:3784.19x1 lm										
NAME: TR11-35-XX-01+白色防眩环 4000K RA90 36D 35W					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: Norming lighting					SUR.: 104mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.9	16.7	16.1	16.9	17.0	15.4	16.2	15.6	16.3	16.5
3H	16.1	16.9	16.4	17.1	17.2	15.6	16.3	15.8	16.5	16.7
4H	16.1	16.8	16.4	17.0	17.2	15.5	16.2	15.8	16.4	16.6
6H	16.0	16.7	16.3	16.9	17.1	15.4	16.1	15.7	16.3	16.5
8H	16.0	16.6	16.3	16.8	17.1	15.4	16.0	15.7	16.2	16.5
12H	15.9	16.5	16.3	16.8	17.1	15.3	15.9	15.6	16.2	16.5
4H 2H	16.0	16.7	16.3	16.9	17.1	15.5	16.2	15.8	16.4	16.6
3H	16.2	16.8	16.6	17.1	17.4	15.7	16.3	16.0	16.6	16.8
4H	16.2	16.7	16.5	17.0	17.3	15.6	16.2	16.0	16.5	16.8
6H	16.1	16.6	16.5	16.9	17.3	15.6	16.0	15.9	16.4	16.7
8H	16.1	16.5	16.5	16.9	17.2	15.5	16.0	15.9	16.3	16.7
12H	16.0	16.4	16.4	16.8	17.2	15.5	15.9	15.9	16.2	16.6
8H 4H	16.1	16.5	16.5	16.9	17.2	15.5	16.0	15.9	16.3	16.7
6H	16.0	16.4	16.4	16.7	17.2	15.4	15.8	15.9	16.2	16.6
8H	15.9	16.3	16.4	16.7	17.1	15.4	15.7	15.8	16.1	16.6
12H	15.9	16.2	16.4	16.6	17.1	15.3	15.6	15.8	16.1	16.5
12H 4H	16.0	16.4	16.4	16.8	17.2	15.5	15.9	15.9	16.2	16.6
6H	15.9	16.3	16.4	16.7	17.1	15.4	15.7	15.8	16.1	16.6
8H	15.9	16.2	16.4	16.6	17.1	15.3	15.6	15.8	16.1	16.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.5 / - 1.9					+ 1.3 / - 2.0				
1.5H	+ 2.3 / - 1.0					+ 2.0 / - 1.3				
2.0H	+ 1.7 / - 1.6					+ 1.6 / - 1.5				

CIE Pub.117, 3784 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.6$)
Area: 0.0084 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.1422A P:33.9W PF:0.9907 Freq:49.99Hz		
UTHDi:15.56% ITHDi:28.88% KDisp:0.9946 Lamp Flux:3784.19x1 lm		
NAME: TR11-35-XX-01+白色防眩环 4000K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	79	88	82	78	87	82	78	75
0.80	96	90	86	95	90	86	94	89	86	82
1.00	100	95	91	99	94	91	98	94	90	86
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	99	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.1422A P:33.9W PF:0.9907 Freq:49.99Hz UTHDi:15.56% ITHDi:28.88% KDisp:0.9946 Lamp Flux:3784.19x1 lm		
NAME: TR11-35-XX-01+白色防眩环 4000K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

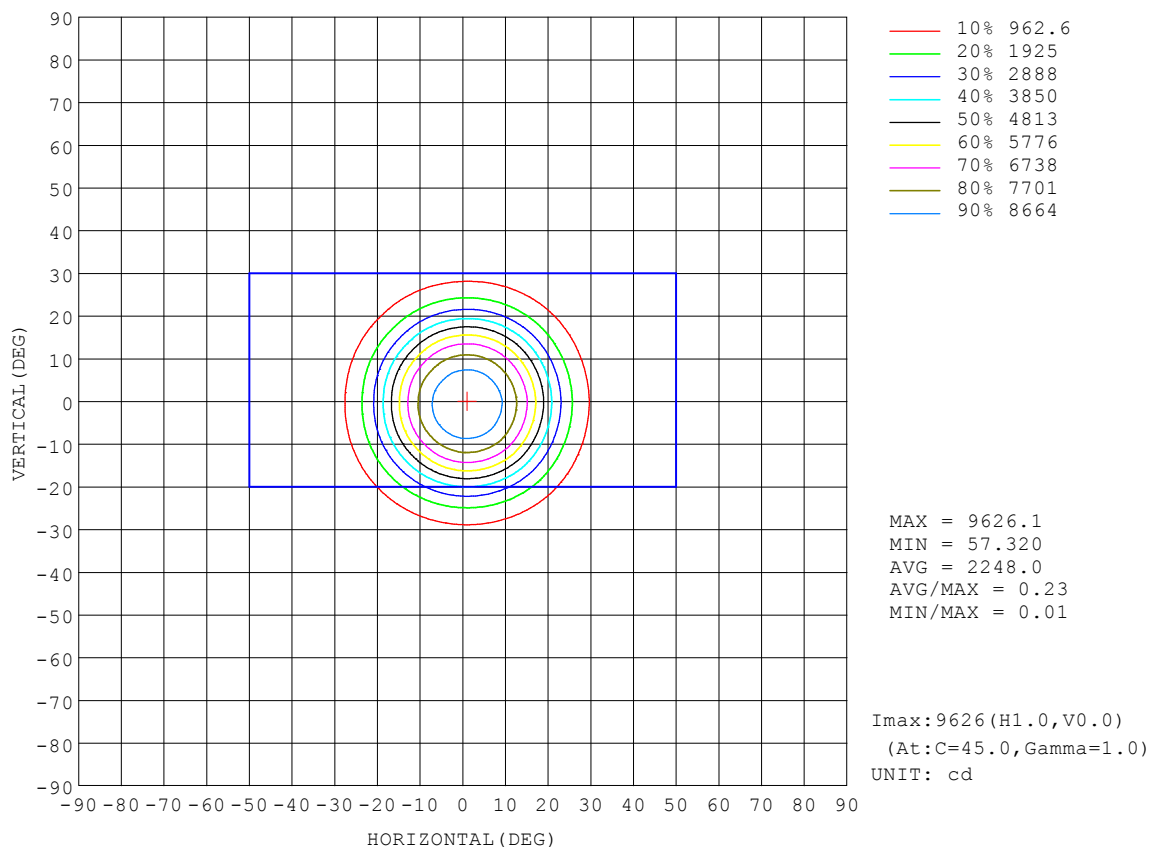


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.1422A P:33.9W PF:0.9907 Freq:49.99Hz		
UTHDi:15.56% ITHDi:28.88% KDisp:0.9946 Lamp Flux:3784.19x1 lm		
NAME: TR11-35-XX-01+白色防眩环 4000K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

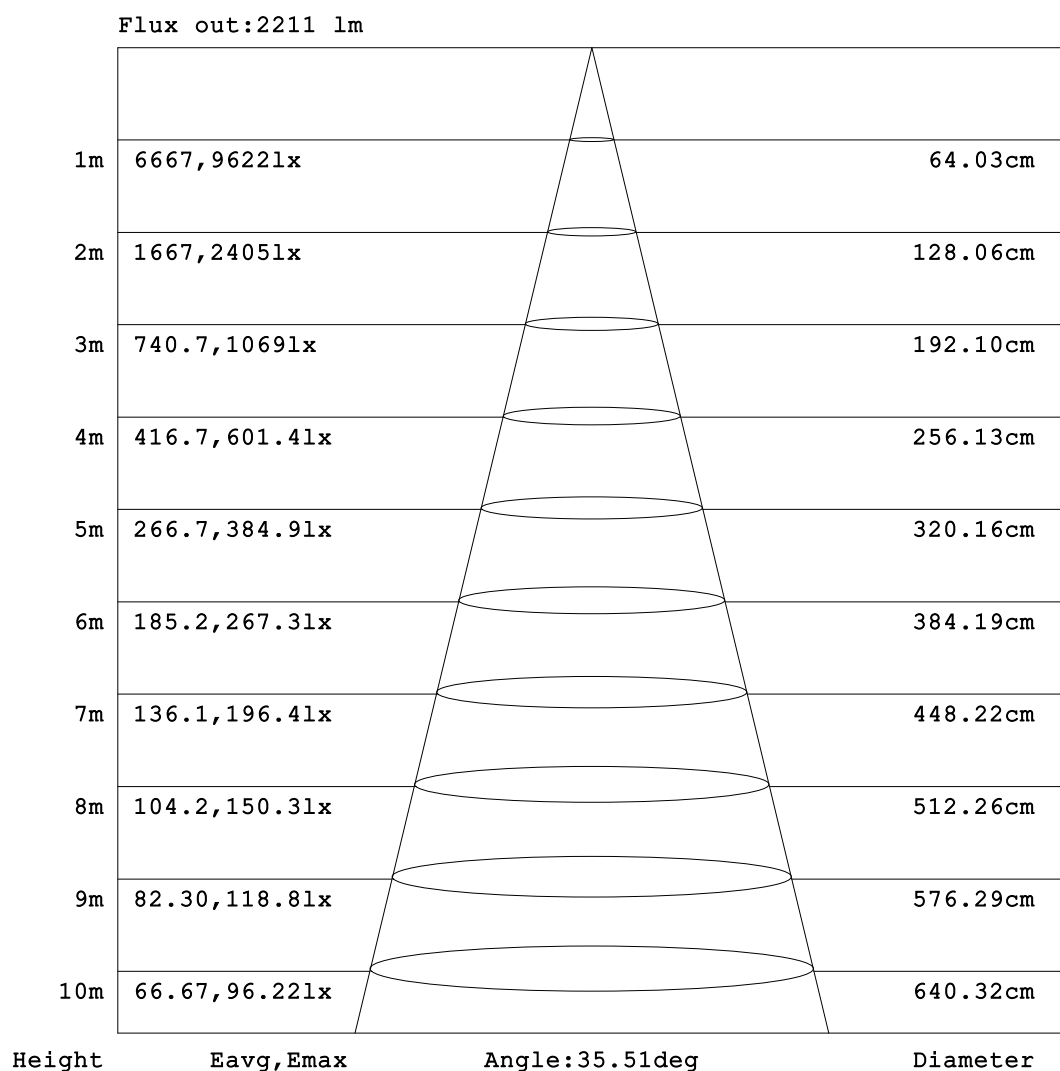


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.1422A P:33.9W PF:0.9907 Freq:49.99Hz UTHDi:15.56% ITHDi:28.88% KDisp:0.9946 Lamp Flux:3784.19x1 lm		
NAME: TR11-35-XX-01+白色防眩环 4000K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

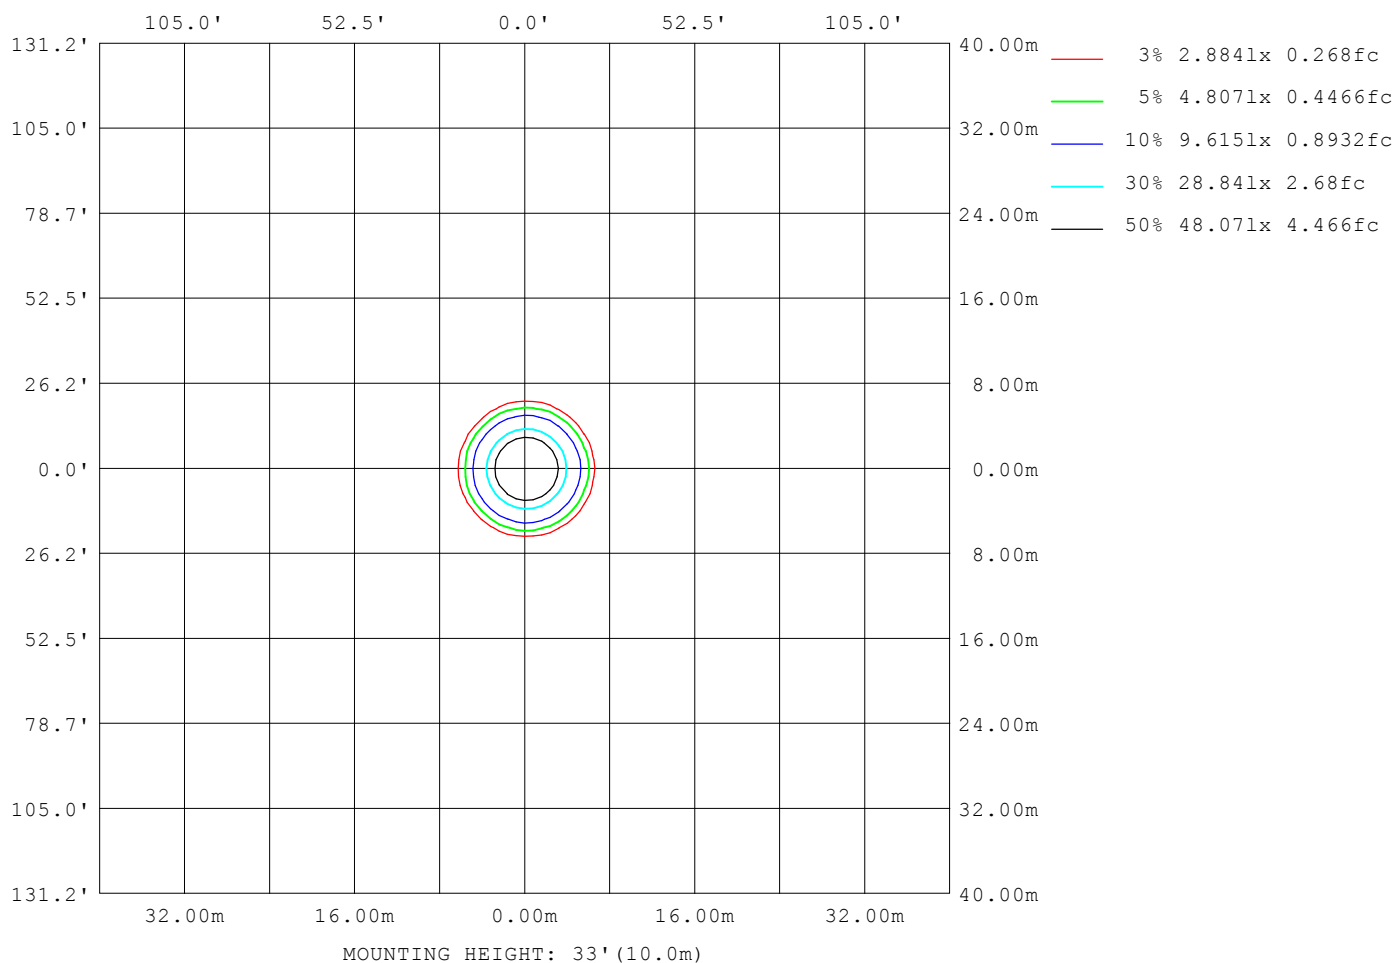

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.1422A P:33.9W PF:0.9907 Freq:49.99Hz UTHDi:15.56% ITHDi:28.88% KDisp:0.9946 Lamp Flux:3784.19x1 lm		
NAME: TR11-35-XX-01+白色防眩环 4000K RA90 36D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7933
L_0~180 (75) av	1662
L_0~180 (85) av	1018
L_90~270 (65) av	7503
L_90~270 (75) av	1678
L_90~270 (85) av	1008
L_45 (65) av	7890
L_45 (75) av	1665
L_45 (85) av	951

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-12

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

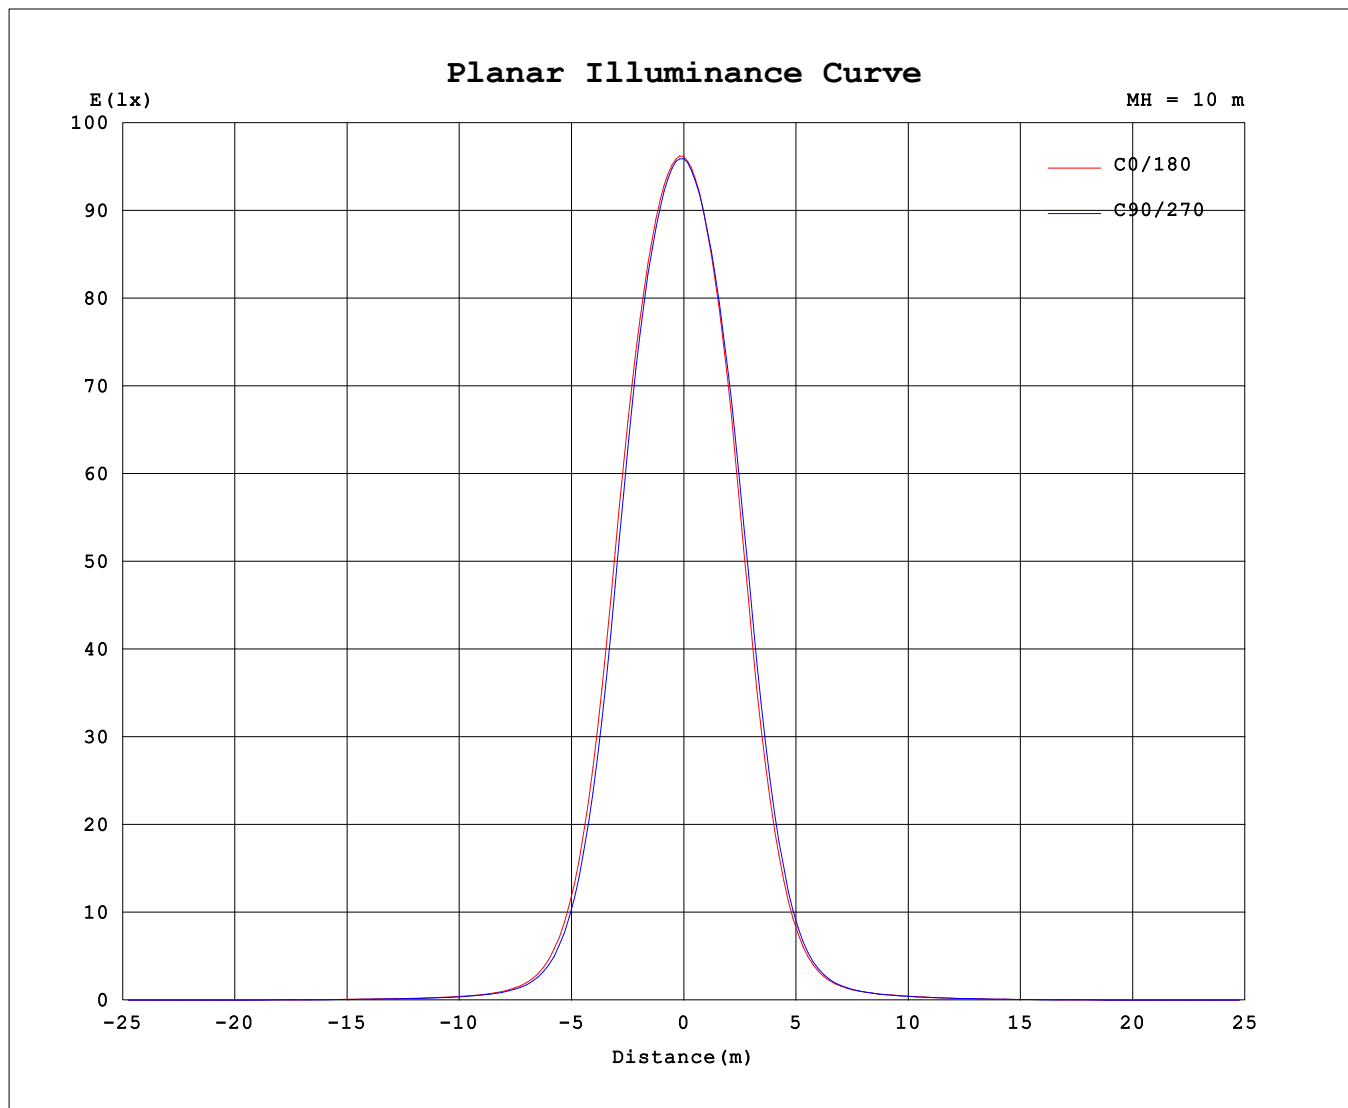

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	9596	9596	9596	9596	9596	9596	9596	9596
3.0	9539	9563	9527	9458	9381	9338	9382	9453
6.0	9257	9282	9190	9048	8887	8829	8931	9111
9.0	8704	8735	8604	8365	8147	8084	8250	8492
12.0	7888	7942	7697	7355	7091	7079	7302	7620
15.0	6781	6775	6415	5985	5678	5699	6016	6450
18.0	5315	5273	4864	4439	4138	4173	4513	4985
21.0	3781	3739	3400	3057	2818	2812	3096	3487
24.0	2503	2469	2228	1982	1789	1754	1993	2262
27.0	1539	1511	1343	1177	1066	1021	1170	1356
30.0	903.0	866.4	770.7	682.0	616.8	595.6	673.8	774.9
33.0	508.6	497.3	448.2	409.1	379.8	373.3	406.5	454.7
36.0	314.4	306.4	281.1	268.0	260.2	260.6	272.5	291.2
39.0	215.1	211.1	193.4	192.8	195.9	198.4	200.5	205.4
42.0	159.6	154.6	143.3	148.0	158.4	158.8	154.9	156.1
45.0	125.7	122.0	112.3	118.9	131.6	130.5	125.0	124.7
48.0	102.9	100.1	91.50	97.75	107.9	107.8	102.7	102.6
51.0	86.08	83.89	75.57	81.17	86.85	88.90	84.36	85.61
54.0	71.92	70.94	63.33	67.07	69.51	71.63	68.63	71.27
57.0	58.66	57.04	50.87	53.35	53.42	54.41	51.79	56.16
60.0	47.58	46.49	41.01	42.12	41.07	41.88	42.18	45.86
63.0	37.07	35.91	31.92	32.61	31.87	31.99	32.04	35.59
66.0	28.53	27.01	22.46	22.06	21.46	22.22	23.75	27.34
69.0	18.65	17.66	15.51	14.93	14.26	15.06	16.44	18.17
72.0	11.05	9.112	6.208	4.822	4.444	5.123	7.064	10.15
75.0	4.130	3.836	3.488	3.234	3.096	3.349	3.807	4.062
78.0	2.941	2.684	2.439	2.195	2.147	2.296	2.684	2.880
81.0	2.075	1.862	1.619	1.285	1.216	1.338	1.789	2.021
84.0	1.127	1.001	0.8889	0.7123	0.6959	0.7249	0.9243	1.020
87.0	0.6143	0.4940	0.4069	0.2503	0.2366	0.2684	0.4338	0.5069
90.0	0.1482	0.0745	0.1347	0.0863	0.0917	0.0870	0.1048	0.0760

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-12

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks: