


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.4V I:0.1426A P:34.0W PF:0.9908 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.34% KDisp:0.9929 Lamp Flux:3677.1lx1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 60D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 108.27 lm/W
MODEL		Imax (cd)	3810	S/MH(C0/180)	0.88	
NOMINAL POWER(W)	35	LOR(%)	100.0	S/MH(C90/270)	0.90	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3677.1	η UP,DN(C0-180)	0.0,49.8	
NOMINAL FLUX(lm)	3677.11	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.2	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	240.33	η down (%)	100.0	CIBSE SHR MAX	0.90	

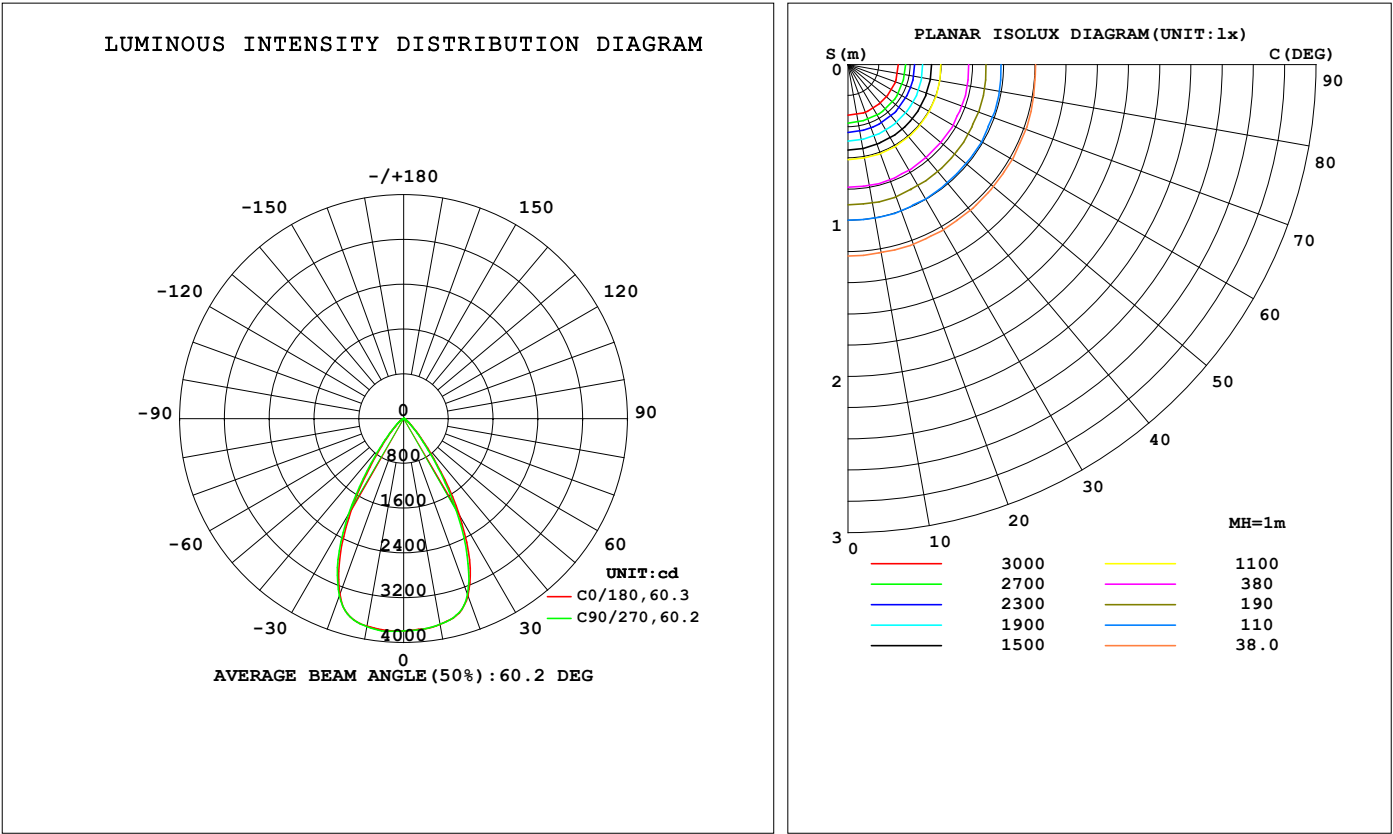

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	3731	3730	3729	3736	3764	3782	3776	3759	0- 10	360.5	360.5	9.8,9.8
20	3360	3350	3339	3327	3334	3353	3367	3376	10- 20	1021	1381	37.6,37.6
30	1990	1935	1871	1853	1853	1906	1971	1996	20- 30	1229	2610	71,71
40	597.6	576.7	541.2	535.8	546.7	563.5	581.0	592.5	30- 40	709.0	3319	90.3,90.3
50	162.1	158.6	149.0	146.4	152.5	155.5	159.5	160.7	40- 50	238.1	3557	96.7,96.7
60	56.78	52.63	46.57	42.93	44.28	45.21	46.86	50.62	50- 60	84.27	3641	99,99
70	17.41	16.95	15.12	12.10	11.02	12.71	15.92	17.18	60- 70	28.08	3669	99.8,99.8
80	3.787	3.554	3.089	2.506	2.361	2.649	3.201	3.601	70- 80	6.807	3676	100,100
90	0.1263	0.0777	0.1116	0.0863	0.0897	0.0861	0.1171	0.0869	80- 90	1.222	3677	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 3470.6 lm

%lum = 94.4%

%lamp = 94.4%

Conical surface Flux(120deg): 3641 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.1426A P:34.0W PF:0.9908 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.34% KDisp:0.9929 Lamp Flux:3677.11x1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 60D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

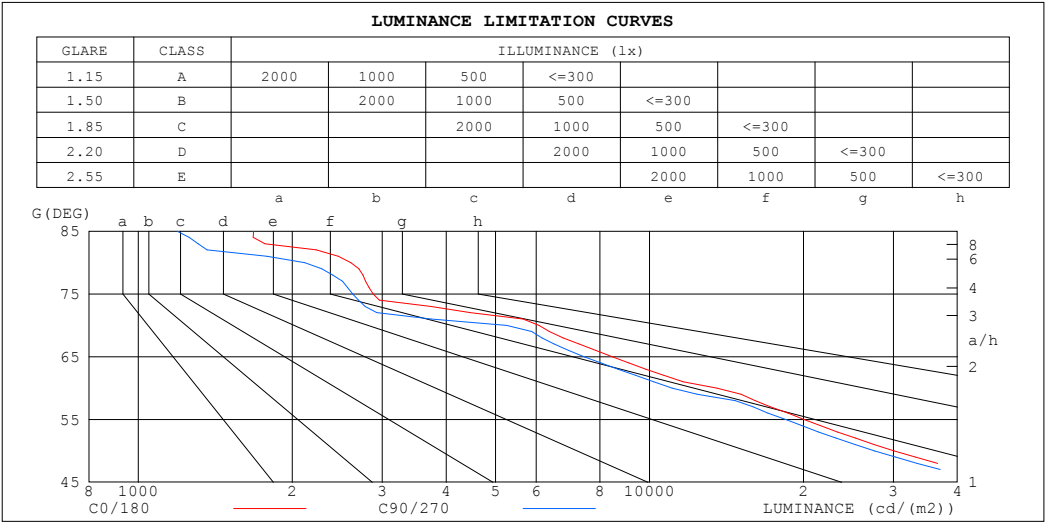

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1680	1193
80	2603	2116
75	2883	2628
70	6076	5259
65	8452	7454
60	13551	11078
55	20064	18492
50	30089	27572
45	51349	46192


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.1426A P:34.0W PF:0.9908 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.34% KDisp:0.9929		
Lamp Flux:3677.11x1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 60D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.08	1.06	1.08	1.06	1.04	1.04	1.03	1.01	1.01	.99	.98	.97	.96	.95	.93
2.0	1.03	.99	.95	1.01	.97	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.86
3.0	.96	.90	.86	.94	.89	.86	.92	.88	.84	.89	.86	.83	.87	.84	.82	.80
4.0	.89	.83	.79	.88	.83	.79	.86	.81	.78	.84	.80	.77	.82	.79	.76	.74
5.0	.83	.77	.73	.82	.77	.73	.81	.76	.72	.79	.75	.71	.77	.74	.71	.69
6.0	.78	.72	.68	.77	.72	.67	.76	.71	.67	.74	.70	.66	.73	.69	.66	.65
7.0	.73	.67	.63	.73	.67	.63	.71	.66	.62	.70	.66	.62	.69	.65	.62	.60
8.0	.69	.63	.59	.68	.63	.59	.67	.62	.58	.66	.62	.58	.65	.61	.58	.57
9.0	.65	.59	.55	.65	.59	.55	.64	.58	.55	.63	.58	.55	.62	.58	.54	.53
10.0	.62	.56	.52	.61	.55	.52	.60	.55	.52	.60	.55	.51	.59	.54	.51	.50

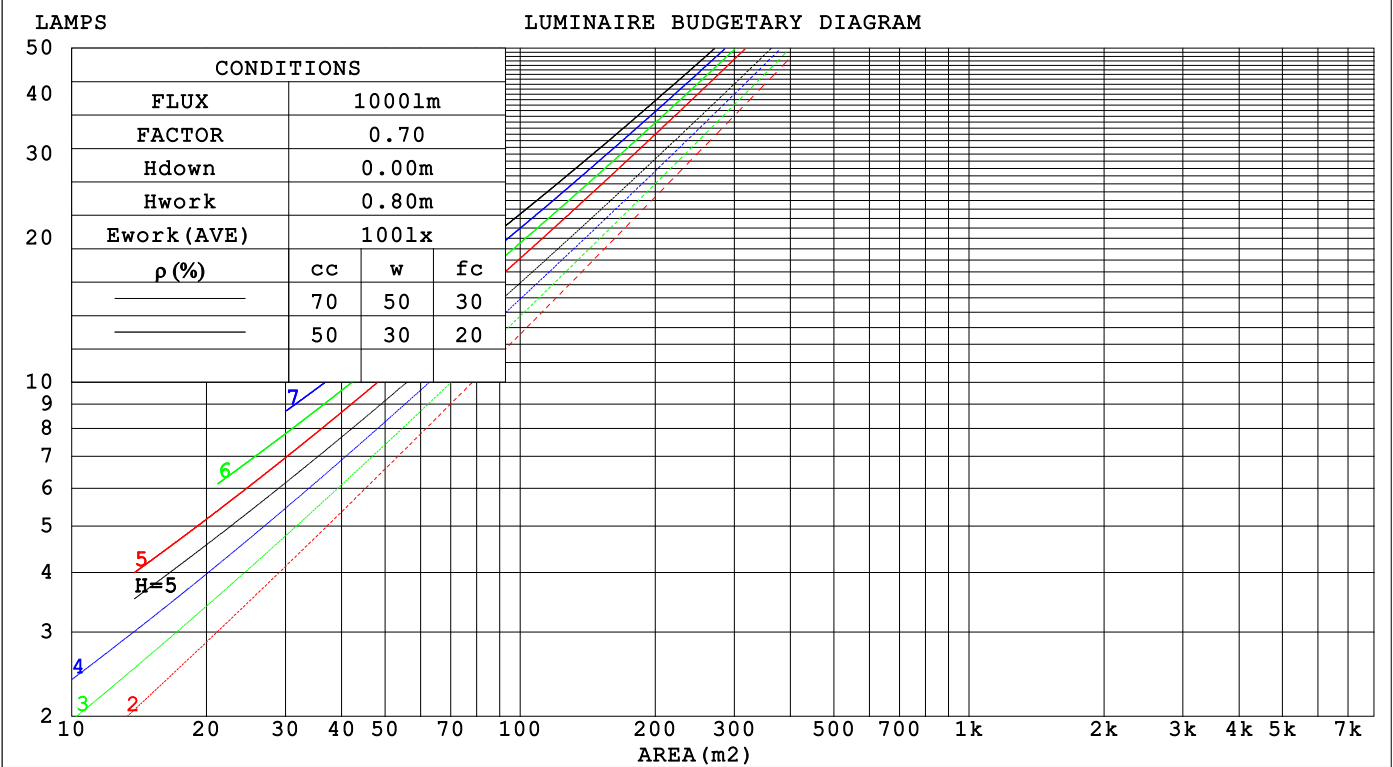

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.1426A P:34.0W PF:0.9908 Freq:49.99Hz			UTHDi:0.17% ITHDi:17.34% KDisp:0.9929			Lamp Flux:3677.11x1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 60D 35W			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: Norming lighting			SUR.: 104mm			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.182	.103	.033	.175	.100	.032	.162	.093	.030	.151	.087	.028	.140	.081	.026															
2.0	.174	.096	.029	.169	.093	.029	.158	.088	.027	.148	.083	.026	.139	.079	.025															
3.0	.166	.089	.027	.161	.086	.026	.152	.083	.025	.144	.079	.024	.136	.075	.023															
4.0	.158	.082	.024	.154	.081	.024	.146	.078	.023	.139	.075	.023	.132	.072	.022															
5.0	.151	.077	.022	.147	.076	.022	.140	.073	.022	.134	.071	.021	.128	.068	.021															
6.0	.144	.072	.021	.141	.071	.020	.135	.069	.020	.129	.067	.020	.124	.065	.019															
7.0	.138	.068	.019	.135	.067	.019	.129	.065	.019	.124	.064	.019	.120	.062	.018															
8.0	.132	.064	.018	.129	.064	.018	.124	.062	.018	.120	.061	.018	.116	.059	.017															
9.0	.126	.061	.017	.124	.060	.017	.119	.059	.017	.115	.058	.017	.112	.057	.016															
10.0	.121	.058	.016	.119	.057	.016	.115	.056	.016	.111	.055	.016	.108	.054	.016															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.147	.135	.124	.100	.093	.086	.058	.054	.050	.018	.017	.016	
2.0	.157	.132	.112	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013	
3.0	.145	.114	.089	.124	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.134	.099	.072	.115	.086	.062	.079	.060	.044	.046	.035	.026	.015	.011	.009	
5.0	.126	.087	.059	.108	.076	.051	.075	.053	.036	.043	.031	.021	.014	.010	.007	
6.0	.119	.078	.049	.102	.068	.043	.070	.047	.030	.041	.028	.018	.013	.009	.006	
7.0	.112	.071	.042	.097	.061	.036	.067	.043	.026	.039	.025	.015	.013	.008	.005	
8.0	.107	.065	.036	.092	.056	.031	.064	.039	.022	.037	.023	.013	.012	.008	.004	
9.0	.102	.059	.031	.088	.052	.027	.061	.036	.019	.035	.021	.011	.011	.007	.004	
10.0	.097	.055	.027	.084	.048	.024	.058	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.1426A P:34.0W PF:0.9908 Freq:49.99Hz											
UTHDi:0.17% ITHDi:17.34% KDisp:0.9929					Lamp Flux:3677.11x1 lm						
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 60D 35W					TYPE:			WEIGHT:			
SPEC.:					DIM.:			SERIAL No.:			
MFR.: Norming lighting					SUR.: 104mm			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	22.0	23.0	22.2	23.2	23.3	21.6	22.6	21.9	22.8	22.9
	3H	21.9	22.8	22.2	23.0	23.2	21.5	22.4	21.8	22.6	22.8
	4H	21.8	22.7	22.1	22.9	23.1	21.4	22.3	21.7	22.5	22.7
	6H	21.7	22.5	22.0	22.8	23.0	21.4	22.1	21.7	22.4	22.6
	8H	21.7	22.5	22.0	22.7	23.0	21.3	22.1	21.6	22.3	22.6
	12H	21.7	22.4	22.0	22.6	22.9	21.3	22.0	21.6	22.3	22.5
4H	2H	21.8	22.7	22.1	22.9	23.1	21.5	22.3	21.7	22.5	22.7
	3H	21.7	22.5	22.0	22.7	23.0	21.4	22.1	21.7	22.3	22.6
	4H	21.6	22.3	22.0	22.6	22.9	21.3	21.9	21.6	22.2	22.5
	6H	21.6	22.1	21.9	22.5	22.8	21.2	21.8	21.6	22.1	22.4
	8H	21.5	22.0	21.9	22.4	22.8	21.1	21.7	21.5	22.0	22.4
	12H	21.5	22.0	21.9	22.3	22.7	21.1	21.6	21.5	22.0	22.3
8H	4H	21.5	22.0	21.9	22.4	22.8	21.1	21.7	21.5	22.0	22.4
	6H	21.4	21.9	21.9	22.3	22.7	21.1	21.5	21.5	21.9	22.3
	8H	21.4	21.8	21.8	22.2	22.6	21.0	21.4	21.5	21.8	22.2
	12H	21.3	21.7	21.8	22.1	22.6	21.0	21.3	21.4	21.7	22.2
12H	4H	21.5	21.9	21.9	22.3	22.7	21.1	21.6	21.5	21.9	22.3
	6H	21.4	21.8	21.8	22.2	22.6	21.0	21.4	21.4	21.8	22.2
	8H	21.3	21.7	21.8	22.1	22.6	21.0	21.3	21.4	21.7	22.2
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 2.9 / - 5.9					+ 2.7 / - 5.9				
1.5H		+ 4.6 / - 4.3					+ 4.3 / - 4.2				
2.0H		+ 4.5 / - 4.5					+ 4.2 / - 4.4				

CIE Pub.117, 3677 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.5$)
Area: 0.0084 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.1426A P:34.0W PF:0.9908 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.34% KDisp:0.9929 Lamp Flux:3677.11x1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 60D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	85	79	75	85	78	75	84	78	74	71
0.80	93	87	83	92	87	83	91	86	82	79
1.00	98	92	88	97	92	88	96	92	88	83
1.25	102	97	93	101	96	93	99	95	92	88
1.50	105	100	97	104	99	96	102	98	95	91
2.00	108	104	100	107	103	100	104	101	98	93
2.50	110	106	103	108	105	102	105	102	100	94
3.00	111	108	105	110	106	104	106	104	102	95
4.00	113	111	108	111	109	107	108	106	104	97
5.00	115	112	110	113	111	109	109	107	106	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 γ Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.1426A P:34.0W PF:0.9908 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.34% KDisp:0.9929 Lamp Flux:3677.1lx1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 60D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

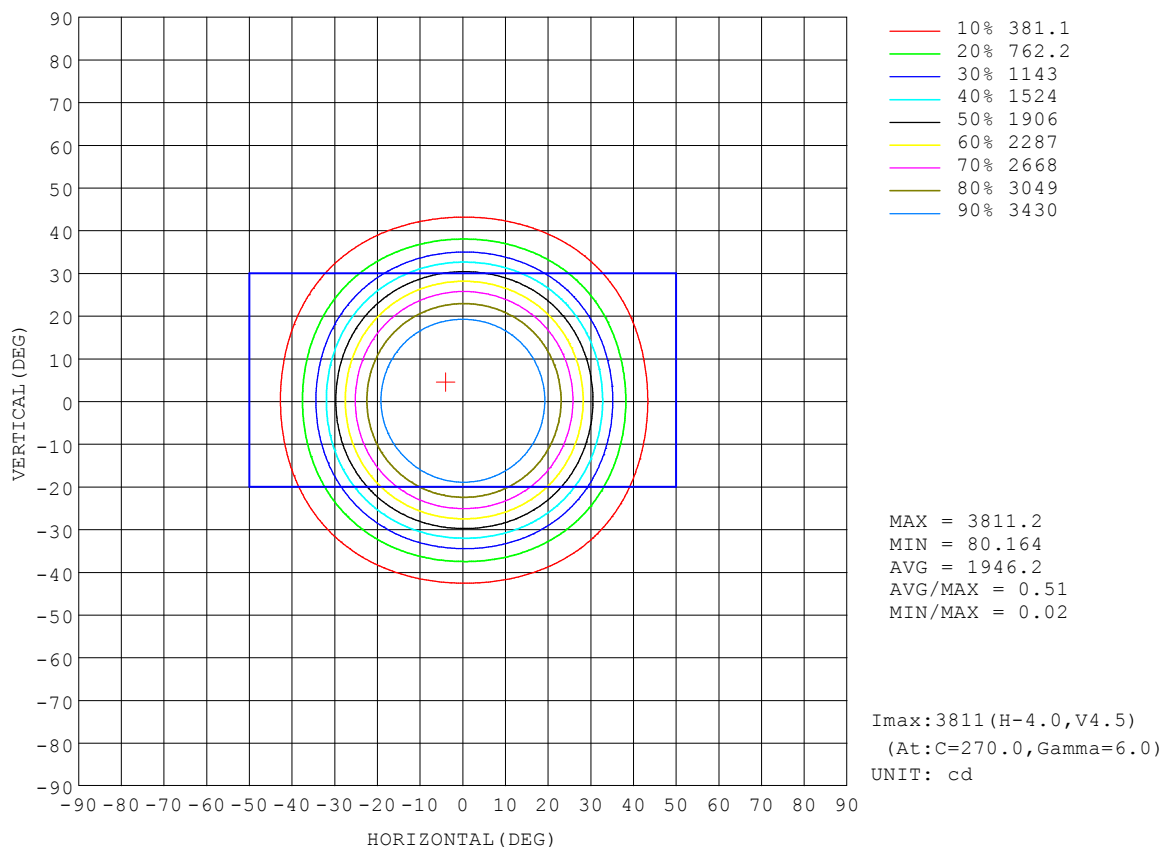


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.1426A P:34.0W PF:0.9908 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.34% KDisp:0.9929 Lamp Flux:3677.11x1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 60D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

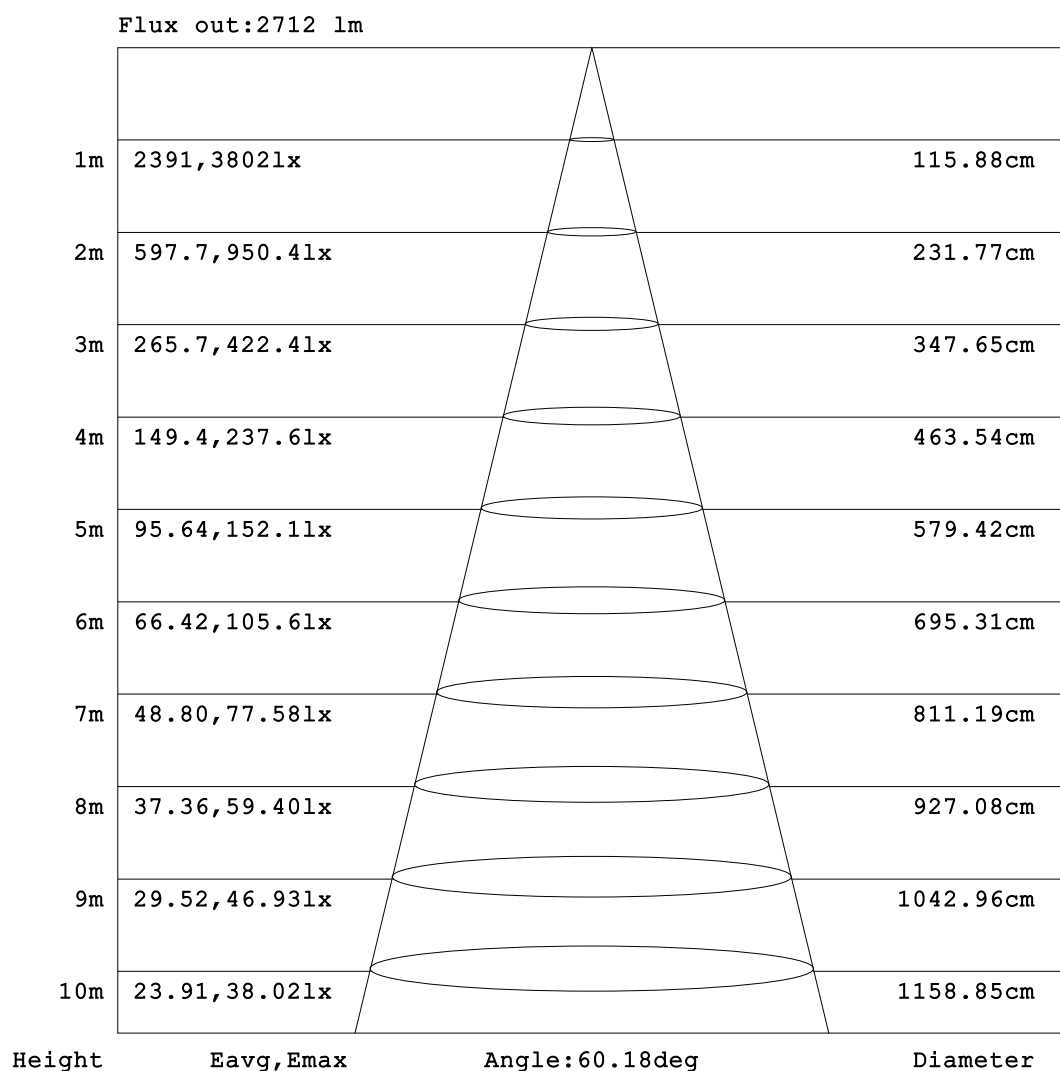


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.1426A P:34.0W PF:0.9908 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.34% KDisp:0.9929 Lamp Flux:3677.1lx1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 60D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:

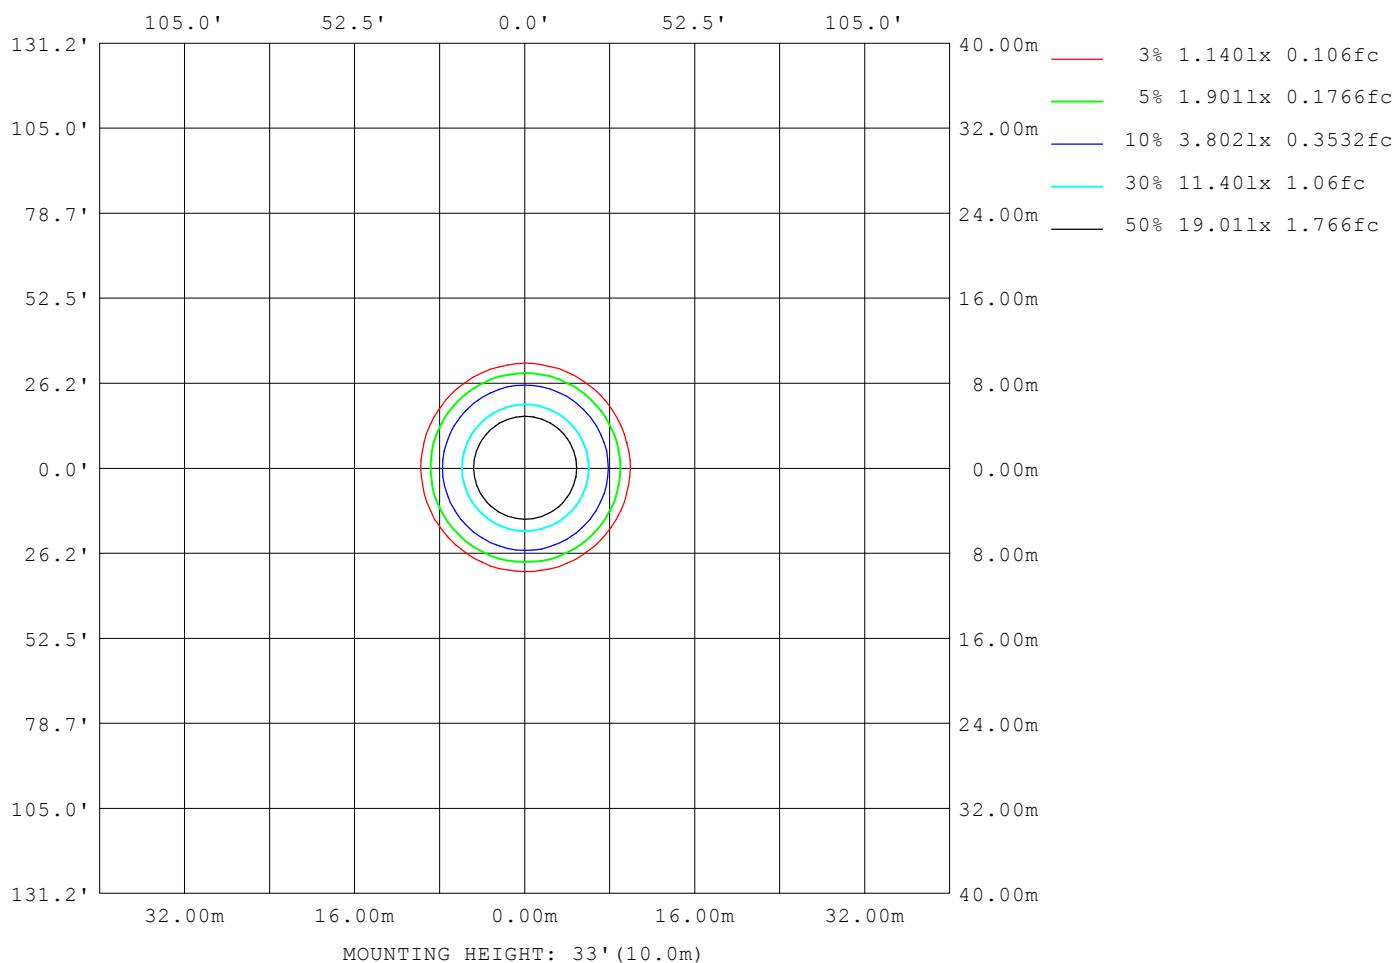

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.1426A P:34.0W PF:0.9908 Freq:49.99Hz UTHDi:0.17% ITHDi:17.34% KDisp:0.9929 Lamp Flux:3677.11x1 lm		
NAME: TR11-35-XX-01+白色防眩环 3000K RA90 60D 35W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 104mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7692
L_0~180 (75) av	2531
L_0~180 (85) av	1313
L_90~270 (65) av	7545
L_90~270 (75) av	2590
L_90~270 (85) av	1313
L_45 (65) av	7544
L_45 (75) av	2548
L_45 (85) av	1272

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-13

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

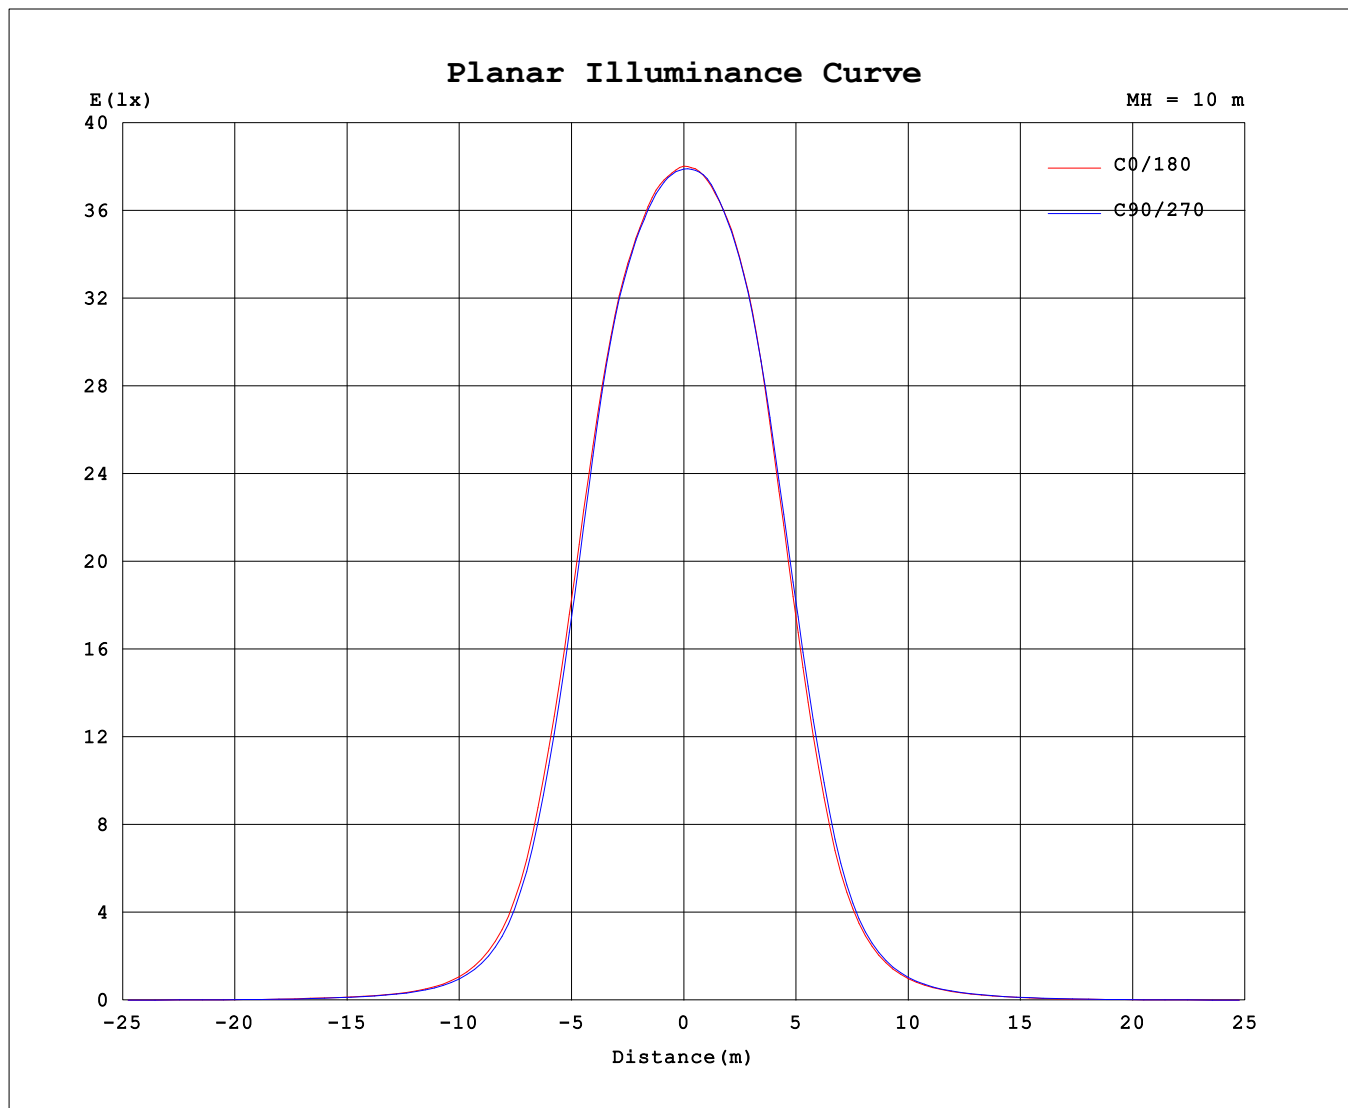

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	3793	3793	3793	3793	3793	3793	3793	3793
3.0	3778	3778	3784	3792	3797	3803	3802	3789
6.0	3772	3769	3770	3772	3791	3810	3810	3791
9.0	3747	3746	3744	3747	3770	3790	3787	3771
12.0	3703	3700	3704	3714	3743	3757	3746	3728
15.0	3643	3637	3637	3638	3668	3684	3673	3666
18.0	3509	3504	3502	3493	3521	3533	3522	3526
21.0	3268	3251	3236	3217	3221	3247	3267	3285
24.0	2924	2874	2838	2828	2832	2870	2910	2926
27.0	2481	2420	2371	2364	2365	2415	2472	2489
30.0	1990	1935	1871	1853	1853	1906	1971	1996
33.0	1485	1441	1373	1347	1349	1392	1456	1489
36.0	1019	986.7	943.3	919.2	928.3	951.4	995.3	1018
39.0	682.9	660.7	621.0	614.4	625.1	644.2	664.4	680.2
42.0	456.0	438.4	411.5	407.2	417.3	430.4	443.8	453.1
45.0	304.3	292.2	274.6	269.9	279.2	288.2	297.2	302.6
48.0	205.3	199.3	187.9	185.1	191.8	196.9	202.9	204.5
51.0	145.0	142.0	133.4	131.0	136.6	139.1	142.4	143.3
54.0	106.4	105.1	98.21	95.13	98.55	100.3	103.6	103.8
57.0	78.55	77.76	72.98	70.05	71.88	74.29	74.42	75.36
60.0	56.78	52.63	46.57	42.93	44.28	45.21	46.86	50.62
63.0	37.46	36.56	33.13	30.66	31.31	32.18	33.63	34.89
66.0	26.73	25.93	23.76	22.18	21.90	22.53	24.26	25.28
69.0	19.13	18.79	17.71	16.22	15.40	16.16	17.83	18.86
72.0	11.54	9.488	7.607	6.767	6.391	6.651	8.134	10.47
75.0	6.252	6.142	5.719	5.079	4.755	4.901	5.541	6.035
78.0	4.795	4.652	4.196	3.614	3.369	3.538	4.087	4.574
81.0	3.228	2.964	2.347	1.738	1.673	2.019	2.699	3.080
84.0	1.469	1.319	1.105	0.9205	0.9152	1.029	1.293	1.388
87.0	0.7550	0.6115	0.4545	0.3103	0.2978	0.3911	0.6029	0.6837
90.0	0.1263	0.0777	0.1116	0.0863	0.0897	0.0861	0.1171	0.0869

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-09-13

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks: