


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.1644A P:39.1W PF:0.9905 Freq:49.99Hz		
UTHDi:0.18% ITHDi:21.39% KDisp:0.9935 Lamp Flux:3727.83x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 15D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 95.22 lm/W
MODEL		Imax (cd)	52726	S/MH(C0/180)	0.20	
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)	0.21	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3727.8	η UP,DN(C0-180)	0.0,49.5	
NOMINAL FLUX(lm)	3727.83	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.5	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	240.27	η down (%)	100.0	CIBSE SHR MAX	0.20	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

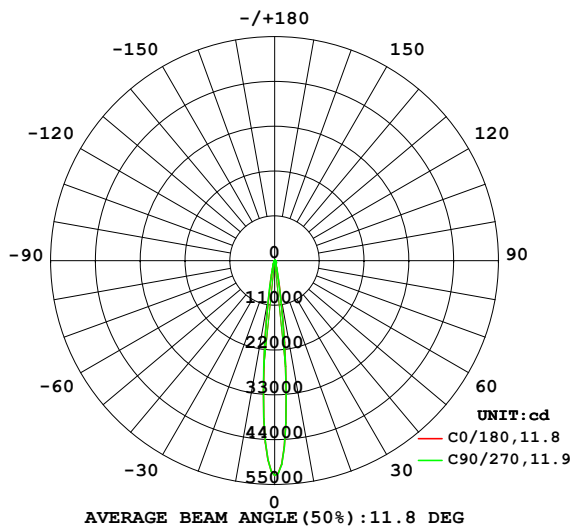

PLANAR ISOLUX DIAGRAM(UNIT:lx)

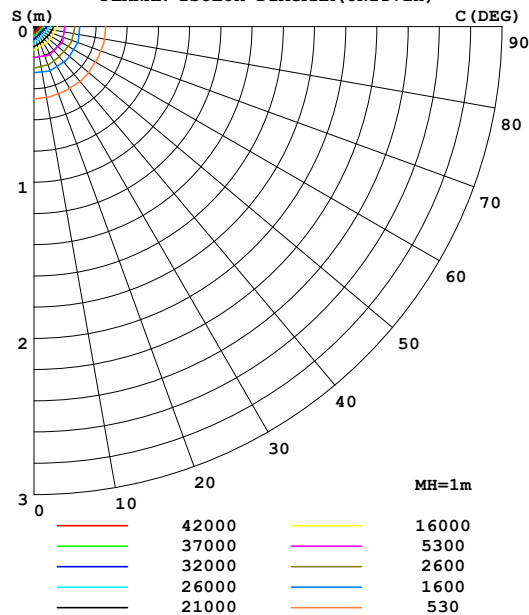

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	793.8	787.6	752.2	758.6	812.4	902.7	840.5	799.4	0- 10	2239	2239	60.1,60.1
20	106.7	109.5	105.1	103.4	106.8	112.0	109.8	107.8	10- 20	753.4	2992	80.3,80.3
30	44.07	43.60	43.08	42.91	44.74	45.82	45.35	45.00	20- 30	316.9	3309	88.8,88.8
40	20.99	20.78	20.53	21.04	21.68	22.01	21.77	21.60	30- 40	193.6	3503	94,94
50	10.31	10.25	10.23	10.32	10.77	11.03	10.86	10.66	40- 50	118.3	3621	97.1,97.1
60	4.616	4.574	4.628	4.543	4.742	4.907	4.796	4.773	50- 60	65.81	3687	98.9,98.9
70	1.662	1.655	1.722	1.639	1.655	1.656	1.655	1.705	60- 70	31.06	3718	99.7,99.7
80	0.2945	0.2982	0.2929	0.2689	0.2670	0.2543	0.2546	0.2624	70- 80	8.749	3727	100,100
90	0.0236	0.0190	0.0204	0.0120	0.0134	0.0115	0.0140	0.0119	80- 90	1.146	3728	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 3569.6 lm

%lum = 95.8%

%lamp = 95.8%

Conical surface Flux(120deg): 3686.9 lm

%lum = 98.9%


%lamp = 98.9%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.1644A P:39.1W PF:0.9905 Freq:49.99Hz		
UTHDi:0.18% ITHDi:21.39% KDisp:0.9935 Lamp Flux:3727.83x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 15D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

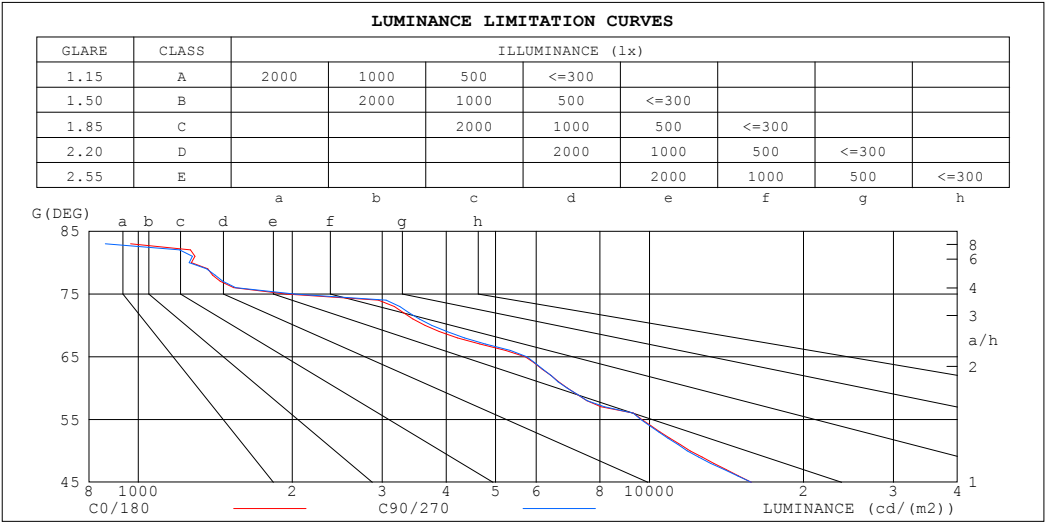

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	739	685
80	1269	1257
75	1949	2021
70	3637	3752
65	5718	5759
60	6911	6898
55	9655	9623
50	12001	11856
45	15808	15805


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.1644A P:39.1W PF:0.9905 Freq:49.99Hz		
UTHDi:0.18% ITHDi:21.39% KDisp:0.9935		
Lamp Flux:3727.83x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 15D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

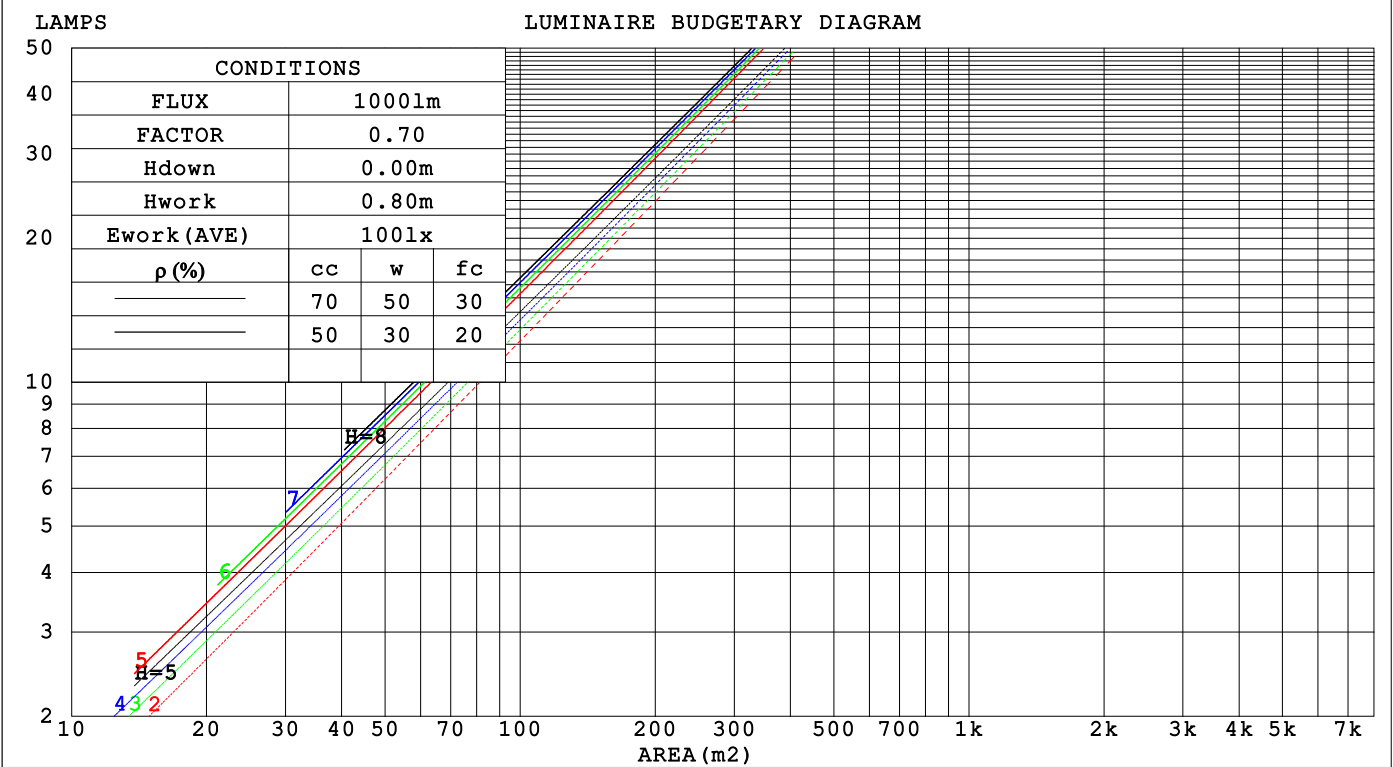

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.1644A P:39.1W PF:0.9905 Freq:49.99Hz			UTHDI:0.18% ITHDI:21.39% KDisp:0.9935			Lamp Flux:3727.83x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 15D 40W			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: Norming lighting			SUR.: 131mm			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.131	.074	.024	.124	.071	.023	.112	.064	.021	.101	.058	.019	.090	.052	.017															
2.0	.121	.066	.020	.116	.064	.020	.106	.059	.018	.096	.054	.017	.088	.050	.016															
3.0	.112	.060	.018	.108	.058	.017	.099	.054	.016	.091	.050	.015	.084	.047	.014															
4.0	.104	.054	.016	.100	.052	.016	.093	.049	.015	.087	.046	.014	.080	.044	.013															
5.0	.097	.049	.014	.094	.048	.014	.088	.046	.013	.082	.043	.013	.077	.041	.012															
6.0	.091	.045	.013	.088	.044	.013	.083	.042	.012	.078	.041	.012	.074	.039	.011															
7.0	.085	.042	.012	.083	.041	.012	.078	.040	.011	.074	.038	.011	.070	.037	.011															
8.0	.080	.039	.011	.078	.038	.011	.074	.037	.011	.071	.036	.010	.067	.035	.010															
9.0	.076	.037	.010	.074	.036	.010	.071	.035	.010	.068	.034	.010	.065	.033	.009															
10.0	.072	.034	.010	.070	.034	.009	.067	.033	.009	.065	.032	.009	.062	.031	.009															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.168	.158	.149	.144	.135	.128	.098	.093	.088	.057	.054	.051	.018	.017	.017	
2.0	.149	.133	.119	.128	.114	.103	.088	.079	.072	.051	.046	.042	.016	.015	.014	
3.0	.134	.113	.097	.115	.098	.084	.079	.068	.059	.046	.040	.035	.015	.013	.011	
4.0	.121	.098	.080	.104	.084	.069	.071	.059	.049	.041	.034	.029	.013	.011	.010	
5.0	.110	.085	.067	.094	.074	.058	.065	.052	.041	.038	.030	.024	.012	.010	.008	
6.0	.101	.075	.057	.086	.065	.050	.060	.046	.035	.035	.027	.021	.011	.009	.007	
7.0	.092	.067	.049	.080	.058	.042	.055	.041	.030	.032	.024	.018	.010	.008	.006	
8.0	.085	.060	.042	.074	.052	.037	.051	.036	.026	.030	.021	.016	.010	.007	.005	
9.0	.079	.054	.037	.068	.047	.032	.047	.033	.023	.028	.019	.014	.009	.006	.005	
10.0	.074	.049	.032	.064	.043	.028	.044	.030	.020	.026	.018	.012	.008	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.1644A P:39.1W PF:0.9905 Freq:49.99Hz										
UTHDi:0.18% ITHDi:21.39% KDisp:0.9935					Lamp Flux:3727.83x1 lm					
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 15D 40W					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: Norming lighting					SUR.: 131mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.2	14.8	14.4	15.0	15.1	14.2	14.8	14.4	14.9	15.0
3H	14.5	15.0	14.7	15.2	15.4	14.4	15.0	14.7	15.2	15.4
4H	14.5	15.0	14.7	15.2	15.4	14.5	15.0	14.7	15.2	15.4
6H	14.4	14.9	14.7	15.2	15.4	14.4	14.9	14.7	15.1	15.4
8H	14.4	14.9	14.7	15.1	15.4	14.4	14.9	14.7	15.1	15.4
12H	14.4	14.8	14.7	15.1	15.4	14.3	14.8	14.6	15.1	15.3
4H 2H	14.3	14.9	14.6	15.1	15.3	14.3	14.8	14.5	15.0	15.2
3H	14.7	15.1	15.0	15.4	15.7	14.6	15.1	14.9	15.4	15.6
4H	14.7	15.1	15.0	15.4	15.7	14.7	15.1	15.0	15.4	15.7
6H	14.6	15.0	15.0	15.3	15.7	14.6	15.0	15.0	15.3	15.7
8H	14.6	14.9	15.0	15.3	15.7	14.6	14.9	14.9	15.3	15.6
12H	14.5	14.9	14.9	15.2	15.6	14.5	14.8	14.9	15.2	15.6
8H 4H	14.6	14.9	15.0	15.3	15.7	14.6	14.9	14.9	15.3	15.6
6H	14.5	14.8	14.9	15.2	15.6	14.5	14.8	14.9	15.2	15.6
8H	14.5	14.8	14.9	15.2	15.6	14.5	14.7	14.9	15.1	15.6
12H	14.4	14.7	14.9	15.1	15.6	14.4	14.6	14.9	15.1	15.5
12H 4H	14.5	14.9	14.9	15.2	15.6	14.5	14.8	14.9	15.2	15.6
6H	14.5	14.7	14.9	15.2	15.6	14.4	14.7	14.9	15.1	15.6
8H	14.4	14.7	14.9	15.1	15.6	14.4	14.6	14.9	15.1	15.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.2 / - 1.9					+ 1.2 / - 1.7				
1.5H	+ 1.4 / - 0.9					+ 1.3 / - 0.8				
2.0H	+ 2.3 / - 2.0					+ 2.3 / - 2.0				

CIE Pub.117, 3728 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.6$)
Area: 0.0134 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.1644A P:39.1W PF:0.9905 Freq:49.99Hz		
UTHDi:0.18% ITHDi:21.39% KDisp:0.9935 Lamp Flux:3727.83x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 15D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	81	78	87	81	78	86	81	78	74
0.80	95	89	86	94	89	86	93	88	85	82
1.00	99	94	90	99	93	90	97	93	90	86
1.25	103	98	95	102	98	94	100	97	94	90
1.50	106	101	98	105	101	98	103	99	97	92
2.00	109	105	101	107	104	101	105	102	99	94
2.50	110	107	104	109	105	103	106	103	101	95
3.00	112	109	106	110	107	105	107	104	103	96
4.00	114	111	109	112	110	108	108	106	105	98
5.00	115	113	111	113	111	110	109	108	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 γ Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.1644A P:39.1W PF:0.9905 Freq:49.99Hz		
UTHDi:0.18% ITHDi:21.39% KDisp:0.9935 Lamp Flux:3727.83x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 15D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

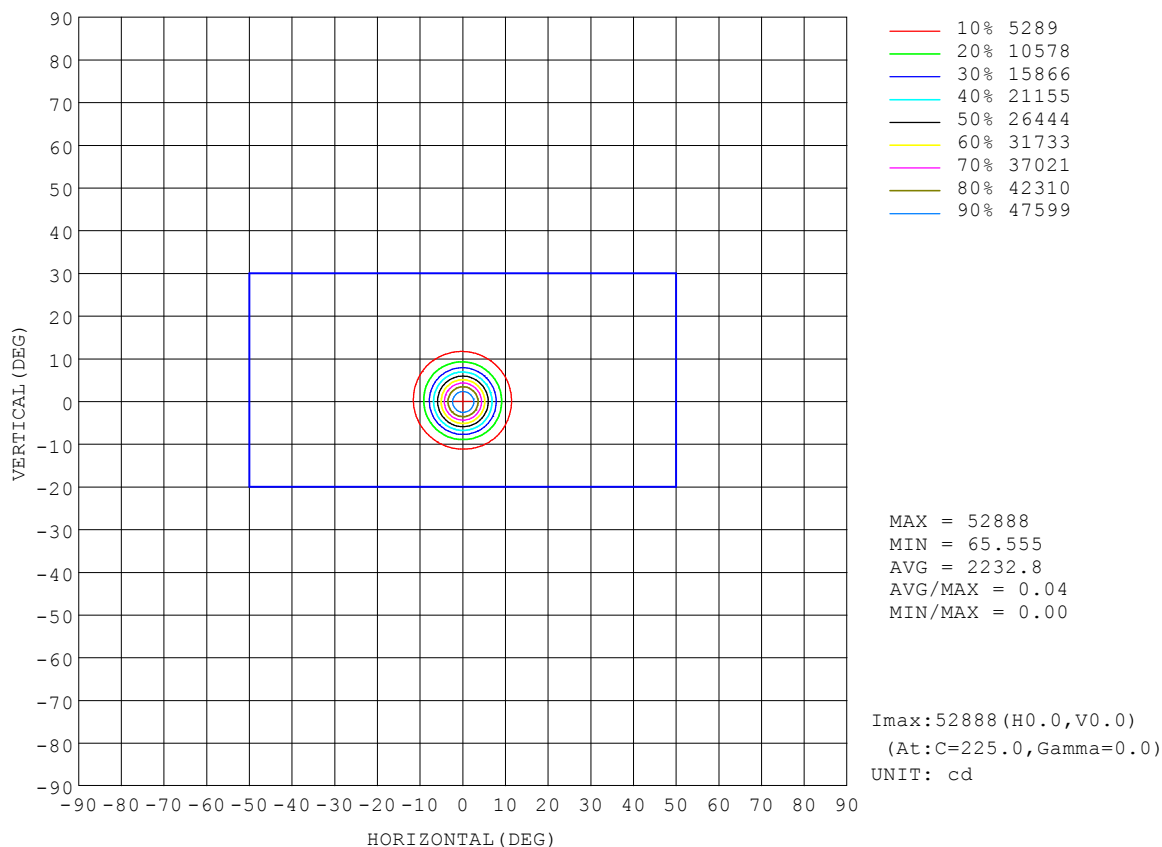


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.1644A P:39.1W PF:0.9905 Freq:49.99Hz		
UTHDi:0.18% ITHDi:21.39% KDisp:0.9935 Lamp Flux:3727.83x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 15D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

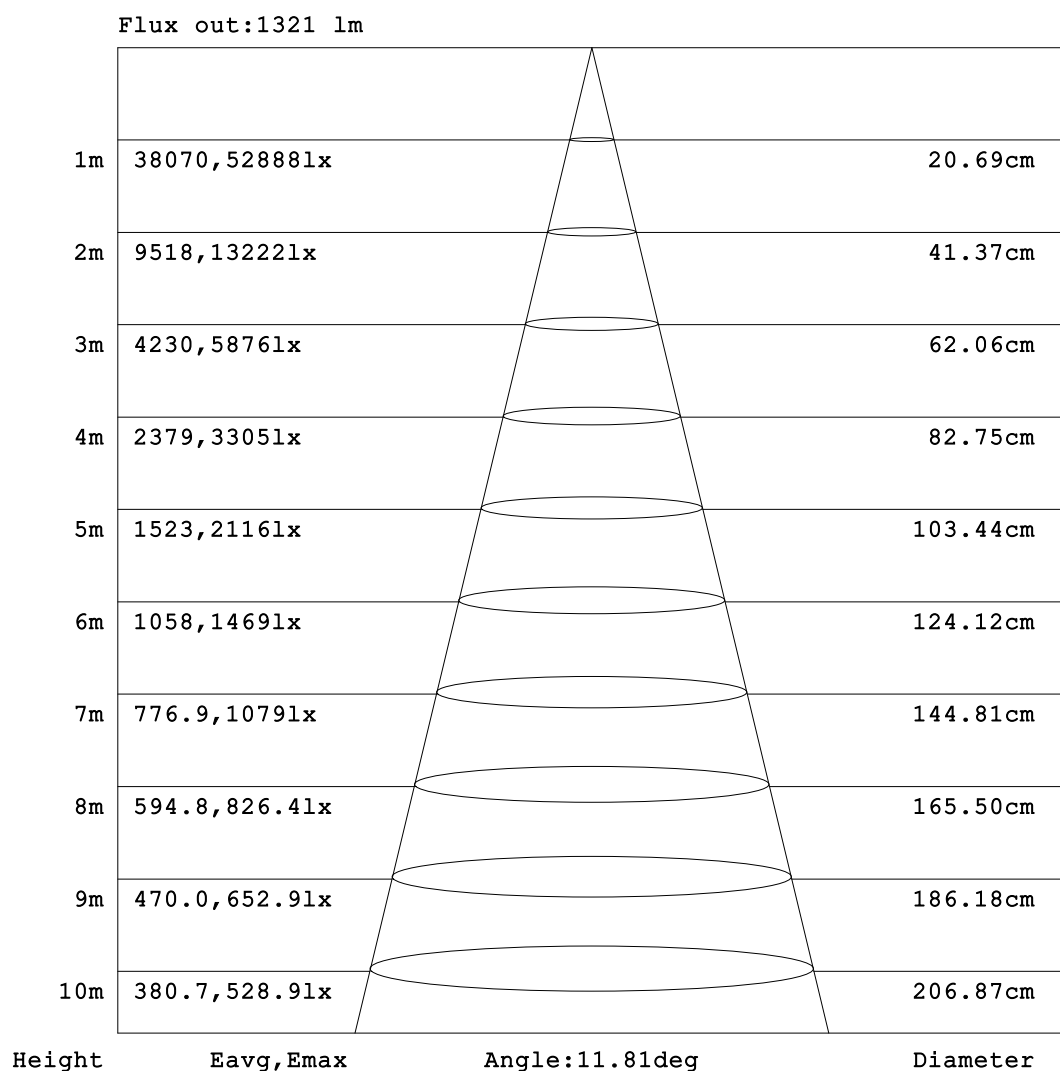


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.1644A P:39.1W PF:0.9905 Freq:49.99Hz		
UTHDi:0.18% ITHDi:21.39% KDisp:0.9935 Lamp Flux:3727.83x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 15D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

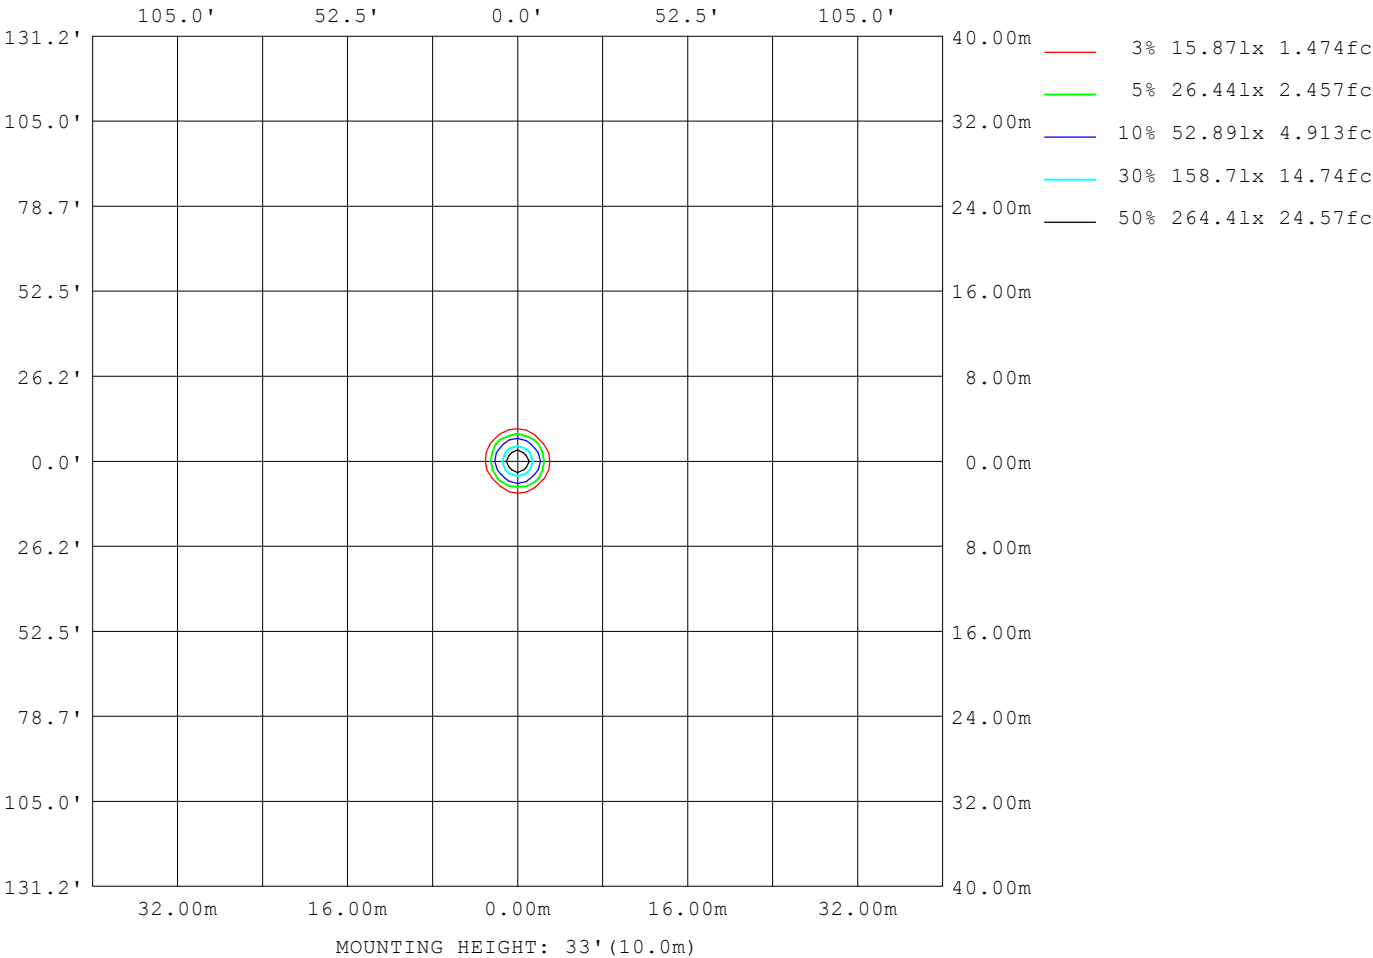

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.1644A P:39.1W PF:0.9905 Freq:49.99Hz UTHDi:0.18% ITHDi:21.39% KDisp:0.9935 Lamp Flux:3727.83x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 15D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5735
L_0~180 (75) av	1806
L_0~180 (85) av	687
L_90~270 (65) av	5810
L_90~270 (75) av	1863
L_90~270 (85) av	668
L_45 (65) av	5736
L_45 (75) av	1820
L_45 (85) av	606

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

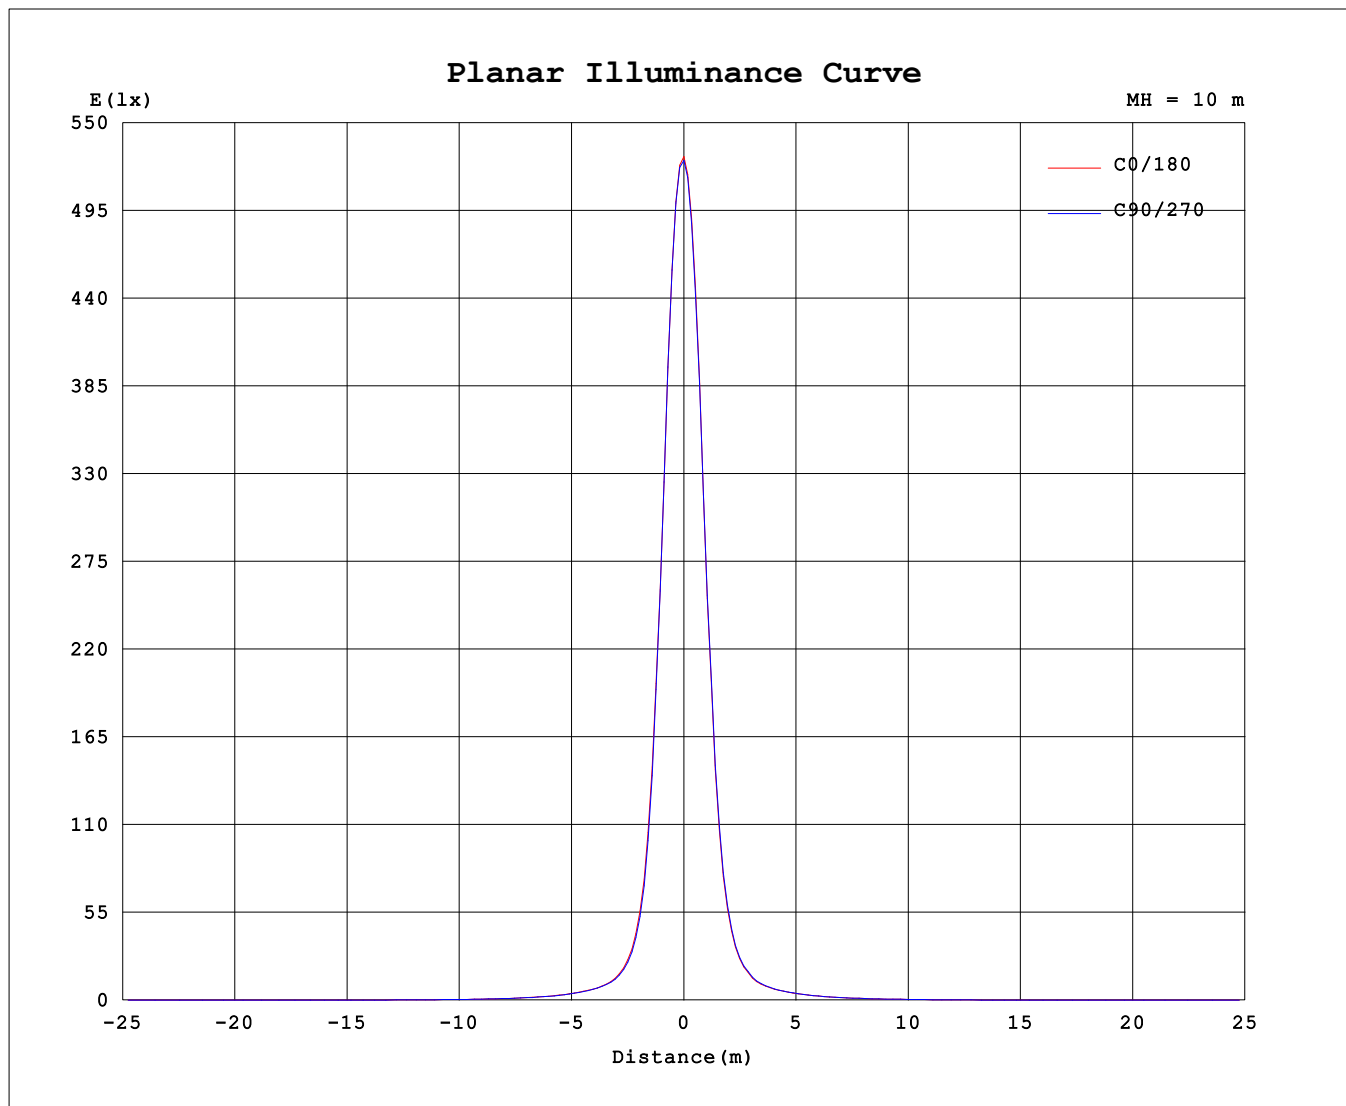

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	52726	52726	52726	52726	52726	52726	52726	52726
3.0	45868	46098	46026	45425	44789	44460	44568	45059
6.0	26092	26198	26115	25826	25540	25757	25844	25639
9.0	10889	10839	10401	10499	10965	11508	11309	10810
12.0	4457	4439	4207	4209	4632	4979	4797	4512
15.0	2258	2293	2142	2091	2316	2503	2404	2253
18.0	1359	1397	1322	1297	1369	1462	1419	1364
21.0	955.7	983.2	957.4	938.9	962.1	1002	988.4	973.8
24.0	736.1	738.8	724.0	715.0	734.8	757.6	751.4	749.0
27.0	569.1	567.4	560.0	555.1	572.4	588.6	584.9	581.3
30.0	440.7	436.0	430.8	429.1	447.4	458.2	453.5	450.0
33.0	351.0	345.4	341.5	343.3	359.4	366.6	362.4	359.1
36.0	283.7	279.0	273.4	277.4	289.0	295.1	291.6	289.6
39.0	225.1	222.2	218.3	223.5	231.4	236.2	233.3	231.1
42.0	182.5	180.7	179.6	183.1	189.6	191.9	191.1	188.2
45.0	149.3	149.9	150.0	150.4	153.9	156.1	154.6	152.7
48.0	119.5	118.5	118.3	119.5	126.1	128.8	126.8	124.8
51.0	96.55	95.34	95.99	95.98	99.56	102.4	100.7	98.60
54.0	78.94	77.89	78.89	78.45	80.67	84.06	82.09	80.51
57.0	58.47	58.64	59.66	57.33	58.84	61.42	60.46	59.82
60.0	46.16	45.74	46.28	45.43	47.42	49.07	47.96	47.73
63.0	37.38	36.87	37.70	36.89	38.64	39.62	38.77	38.47
66.0	28.41	28.20	29.14	27.65	27.86	28.27	28.56	28.91
69.0	18.56	18.54	19.31	18.25	18.48	18.54	18.51	19.05
72.0	13.62	13.49	14.02	13.45	13.61	13.53	13.50	13.94
75.0	6.741	6.836	7.019	6.210	5.787	5.764	5.904	6.435
78.0	3.880	3.951	3.940	3.703	3.572	3.450	3.496	3.566
81.0	2.698	2.731	2.676	2.470	2.457	2.348	2.349	2.421
84.0	1.048	0.9682	0.9862	0.8731	0.9240	0.8394	0.9320	0.8865
87.0	0.5109	0.4126	0.4590	0.3518	0.3700	0.3440	0.4350	0.3775
90.0	0.2364	0.1898	0.2043	0.1204	0.1336	0.1149	0.1397	0.1185

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks: