


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.4V I:0.1639A P:39.0W PF:0.9905 Freq:49.99Hz		
UTHDi:0.18% ITHDi:7.23% KDisp:0.9938 Lamp Flux:3834.07x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 24D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 98.23 lm/W
MODEL		Imax (cd)	20726	S/MH(C0/180)		0.35
NOMINAL POWER(W)	40	LOR(%)	100.0	S/MH(C90/270)		0.37
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	3834.1	η UP,DN(C0-180)		0.0,50.7
NOMINAL FLUX(lm)	3834.07	CIE CLASS	DIRECT	η UP,DN(C180-360)		0.0,49.3
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.00
TEST VOLTAGE(V)	240.32	η down (%)	100.0	CIBSE SHR MAX		0.30

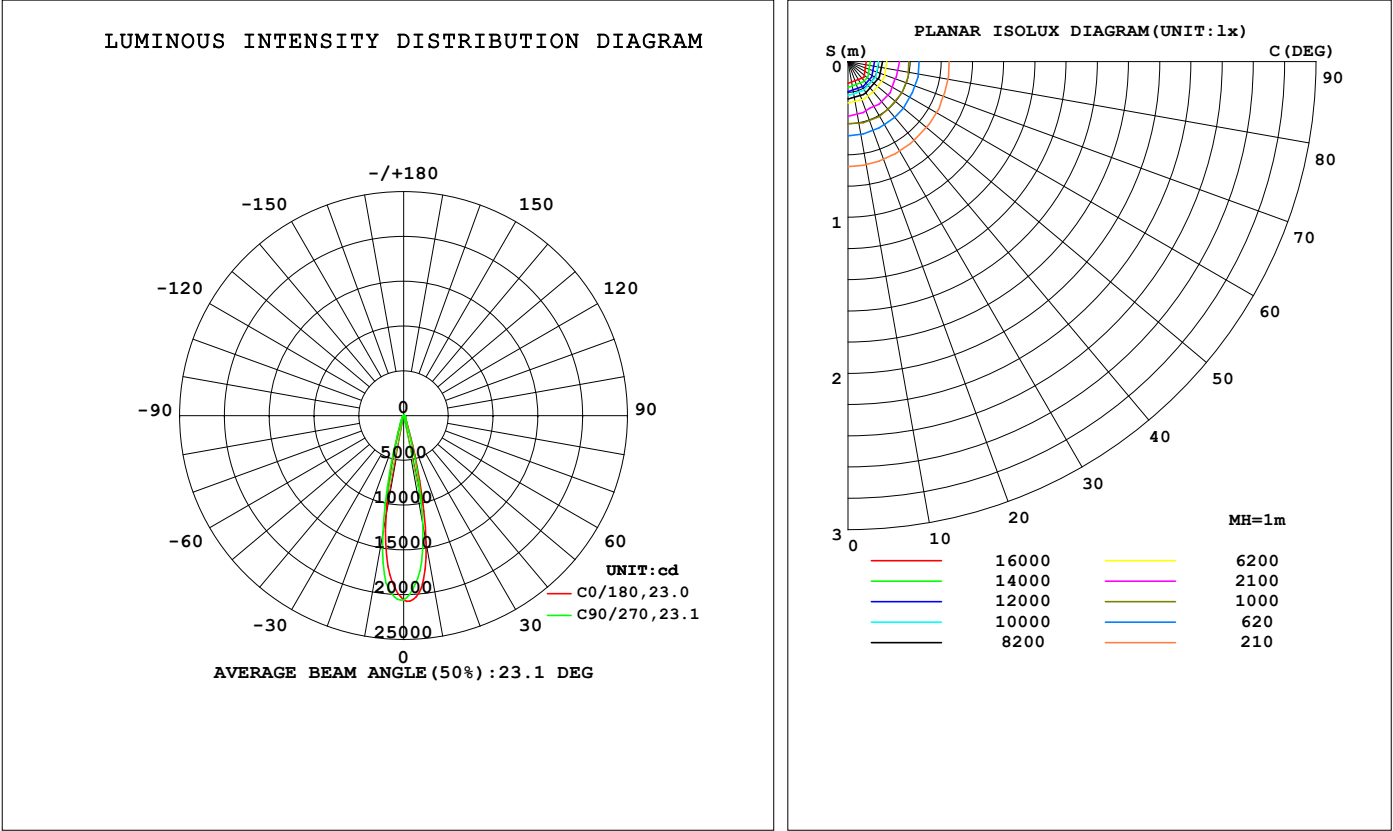

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1443	1386	1238	1179	1145	1224	1356	1370	0- 10	1614	1614	42.1,42.1
20	162.8	153.8	133.4	129.6	126.9	133.1	147.1	152.0	10- 20	1468	3082	80.4,80.4
30	50.67	48.66	44.37	42.22	41.53	44.45	48.65	49.28	20- 30	368.3	3450	90,90
40	20.87	19.89	18.88	18.40	18.38	18.64	19.96	20.25	30- 40	192.5	3642	95,95
50	9.365	8.869	8.435	8.215	8.100	8.352	8.830	9.076	40- 50	101.0	3743	97.6,97.6
60	4.337	4.196	3.957	3.832	3.747	3.911	4.107	4.193	50- 60	54.07	3798	99,99
70	1.752	1.732	1.617	1.520	1.468	1.491	1.569	1.623	60- 70	27.69	3825	99.8,99.8
80	0.2337	0.2823	0.2325	0.2190	0.2187	0.2137	0.2106	0.2161	70- 80	7.869	3833	100,100
90	0.0186	0.0258	0.0186	0.0112	0.0121	0.0108	0.0125	0.0107	80- 90	0.9969	3834	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:X10cd									UNIT:lm		

Conical surface Flux(90deg): 3700.8 lm

%lum = 96.5%

%lamp = 96.5%

Conical surface Flux(120deg): 3797.5 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.1639A P:39.0W PF:0.9905 Freq:49.99Hz		
UTHDi:0.18% ITHDi:7.23% KDisp:0.9938 Lamp Flux:3834.07x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 24D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

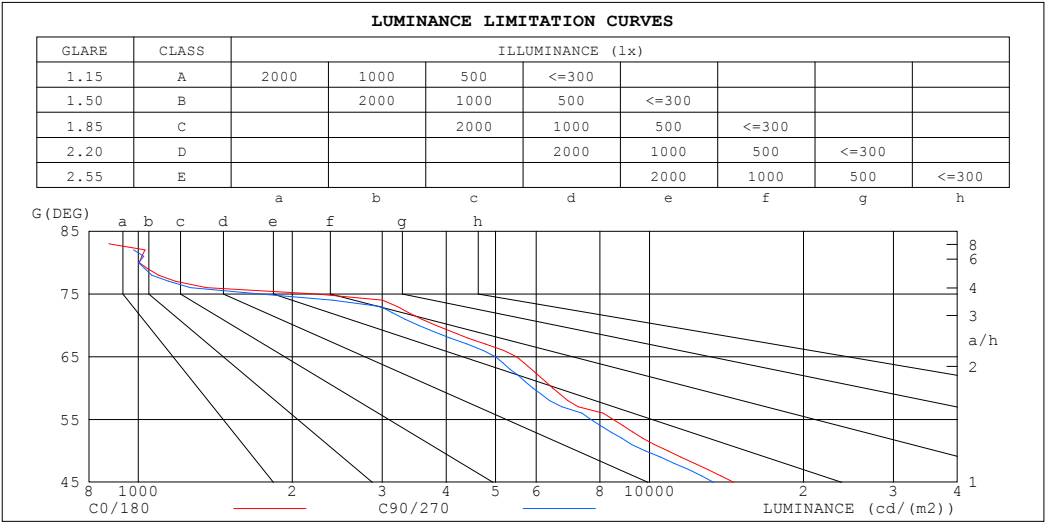

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	623	578
80	1003	1001
75	2238	1735
70	3820	3534
65	5494	4995
60	6468	5916
55	8493	7684
50	10864	9808
45	14605	13340


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.1639A P:39.0W PF:0.9905 Freq:49.99Hz		
UTHDi:0.18% ITHDi:7.23% KDisp:0.9938		
Lamp Flux:3834.07x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 24D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.13	1.11	1.09	1.11	1.09	1.07	1.07	1.05	1.04	1.03	1.02	1.01	.00	.99	.98	.96
2.0	1.07	1.04	1.02	1.06	1.03	1.01	1.03	1.00	.98	.00	.98	.96	.97	.96	.94	.93
3.0	1.03	.99	.96	1.01	.98	.95	.99	.96	.94	.97	.94	.92	.95	.93	.91	.90
4.0	.99	.95	.92	.98	.94	.91	.96	.93	.90	.94	.91	.89	.92	.90	.88	.87
5.0	.95	.91	.88	.94	.90	.88	.93	.89	.87	.91	.88	.86	.90	.87	.85	.84
6.0	.92	.88	.85	.91	.87	.85	.90	.87	.84	.89	.86	.83	.88	.85	.83	.82
7.0	.89	.85	.82	.89	.85	.82	.87	.84	.81	.86	.83	.81	.85	.83	.81	.80
8.0	.87	.82	.80	.86	.82	.80	.85	.82	.79	.84	.81	.79	.84	.81	.79	.78
9.0	.84	.80	.78	.84	.80	.77	.83	.80	.77	.82	.79	.77	.82	.79	.77	.76
10.0	.82	.78	.76	.82	.78	.76	.81	.78	.75	.80	.77	.75	.80	.77	.75	.74

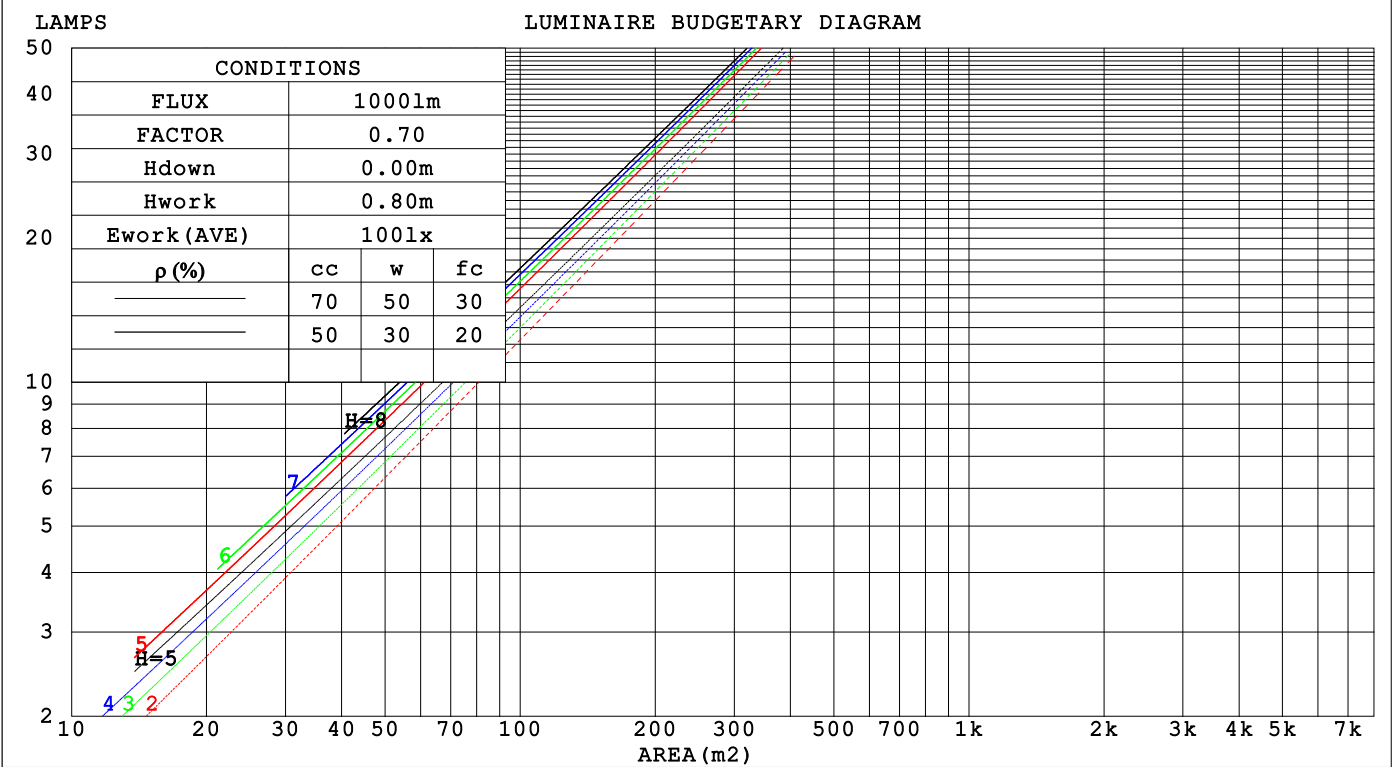

C Range: 0 - 360DEG

C Interval: 45.0DEG

Test Speed: HIGH

Temperature:25.3DEG

Operators:DAMIN

Test Date:2024-09-24

γ Range: 0 - 90DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453

Humidity:65.0%

Test Distance:3.090m [K=1.0000]

Remarks:

WEC AND CCEC

Test:U:240.4V I:0.1639A P:39.0W PF:0.9905 Freq:49.99Hz			UTHDi:0.18% ITHDi:7.23% KDisp:0.9938			Lamp Flux:3834.07x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 24D 40W			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: Norming lighting			SUR.: 131mm			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.139	.079	.025	.132	.076	.024	.120	.069	.022	.109	.063	.020	.098	.057	.018															
2.0	.129	.071	.022	.124	.068	.021	.114	.063	.020	.104	.058	.018	.095	.054	.017															
3.0	.120	.064	.019	.116	.062	.019	.107	.058	.018	.099	.054	.017	.092	.051	.016															
4.0	.112	.058	.017	.109	.057	.017	.101	.054	.016	.095	.051	.015	.088	.048	.015															
5.0	.105	.054	.016	.102	.052	.015	.096	.050	.015	.090	.048	.014	.085	.045	.014															
6.0	.099	.050	.014	.096	.049	.014	.091	.047	.014	.086	.045	.013	.082	.043	.013															
7.0	.094	.046	.013	.091	.046	.013	.087	.044	.013	.083	.042	.012	.079	.041	.012															
8.0	.089	.044	.012	.087	.043	.012	.083	.041	.012	.079	.040	.012	.076	.039	.011															
9.0	.085	.041	.011	.083	.040	.011	.079	.039	.011	.076	.038	.011	.073	.037	.011															
10.0	.081	.039	.011	.079	.038	.011	.076	.037	.010	.073	.036	.010	.070	.035	.010															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.168	.158	.148	.144	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017	
2.0	.151	.133	.118	.129	.114	.102	.088	.079	.071	.051	.046	.042	.016	.015	.014	
3.0	.136	.113	.095	.116	.098	.083	.080	.068	.058	.046	.040	.034	.015	.013	.011	
4.0	.123	.098	.079	.106	.085	.068	.073	.059	.048	.042	.035	.028	.014	.011	.009	
5.0	.113	.086	.066	.097	.074	.057	.067	.052	.040	.039	.030	.024	.012	.010	.008	
6.0	.104	.076	.056	.089	.065	.048	.061	.046	.034	.036	.027	.020	.011	.009	.007	
7.0	.096	.067	.048	.082	.058	.041	.057	.041	.029	.033	.024	.017	.011	.008	.006	
8.0	.089	.061	.041	.077	.053	.036	.053	.037	.025	.031	.022	.015	.010	.007	.005	
9.0	.083	.055	.036	.072	.048	.031	.050	.033	.022	.029	.020	.013	.009	.006	.004	
10.0	.078	.050	.031	.067	.044	.027	.047	.031	.019	.027	.018	.012	.009	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.1639A P:39.0W PF:0.9905 Freq:49.99Hz											
UTHDi:0.18% ITHDi:7.23% KDisp:0.9938 Lamp Flux:3834.07x1 lm											
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 24D 40W						TYPE:		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.: Norming lighting						SUR.: 131mm		Shielding Angle:			
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		13.8	14.4	14.0	14.6	14.7	13.4	14.0	13.6	14.2	14.3
	3H	14.1	14.7	14.3	14.9	15.0	13.7	14.3	13.9	14.5	14.6
	4H	14.1	14.7	14.3	14.9	15.1	13.7	14.3	13.9	14.5	14.7
	6H	14.0	14.6	14.3	14.8	15.0	13.6	14.2	13.9	14.4	14.6
	8H	14.0	14.5	14.3	14.8	15.0	13.6	14.1	13.9	14.4	14.6
	12H	13.9	14.5	14.3	14.7	15.0	13.5	14.1	13.8	14.3	14.6
4H	2H	13.9	14.4	14.1	14.7	14.9	13.5	14.1	13.8	14.3	14.5
	3H	14.2	14.8	14.5	15.0	15.3	13.9	14.4	14.2	14.7	14.9
	4H	14.3	14.8	14.6	15.0	15.3	13.9	14.4	14.2	14.7	15.0
	6H	14.2	14.6	14.6	15.0	15.3	13.8	14.3	14.2	14.6	14.9
	8H	14.2	14.6	14.6	14.9	15.3	13.8	14.2	14.2	14.5	14.9
	12H	14.1	14.5	14.5	14.8	15.2	13.7	14.1	14.2	14.5	14.9
8H	4H	14.2	14.6	14.6	14.9	15.3	13.8	14.2	14.2	14.6	14.9
	6H	14.1	14.4	14.5	14.8	15.2	13.8	14.1	14.2	14.5	14.9
	8H	14.1	14.4	14.5	14.8	15.2	13.7	14.0	14.2	14.4	14.9
	12H	14.0	14.3	14.5	14.7	15.2	13.7	13.9	14.1	14.4	14.8
12H	4H	14.1	14.5	14.5	14.9	15.2	13.8	14.1	14.2	14.5	14.9
	6H	14.1	14.4	14.5	14.8	15.2	13.7	14.0	14.2	14.4	14.8
	8H	14.0	14.3	14.5	14.7	15.2	13.7	13.9	14.1	14.4	14.8
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 1.4 / - 2.0					+ 1.3 / - 2.0				
1.5H		+ 2.2 / - 1.2					+ 1.8 / - 1.2				
2.0H		+ 2.3 / - 1.8					+ 2.3 / - 1.8				

CIE Pub.117, 3834 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 4.7$)
Area: 0.0134 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.1639A P:39.0W PF:0.9905 Freq:49.99Hz UTHDi:0.18% ITHDi:7.23% KDisp:0.9938 Lamp Flux:3834.07x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 24D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	79	88	82	78	87	82	78	75
0.80	96	90	86	95	90	86	94	89	86	82
1.00	100	94	91	99	94	91	98	94	90	86
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	99	105	101	98	103	100	97	93
2.00	109	105	102	107	104	101	105	102	99	94
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 γ Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.1639A P:39.0W PF:0.9905 Freq:49.99Hz UTHDi:0.18% ITHDi:7.23% KDisp:0.9938 Lamp Flux:3834.07x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 24D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

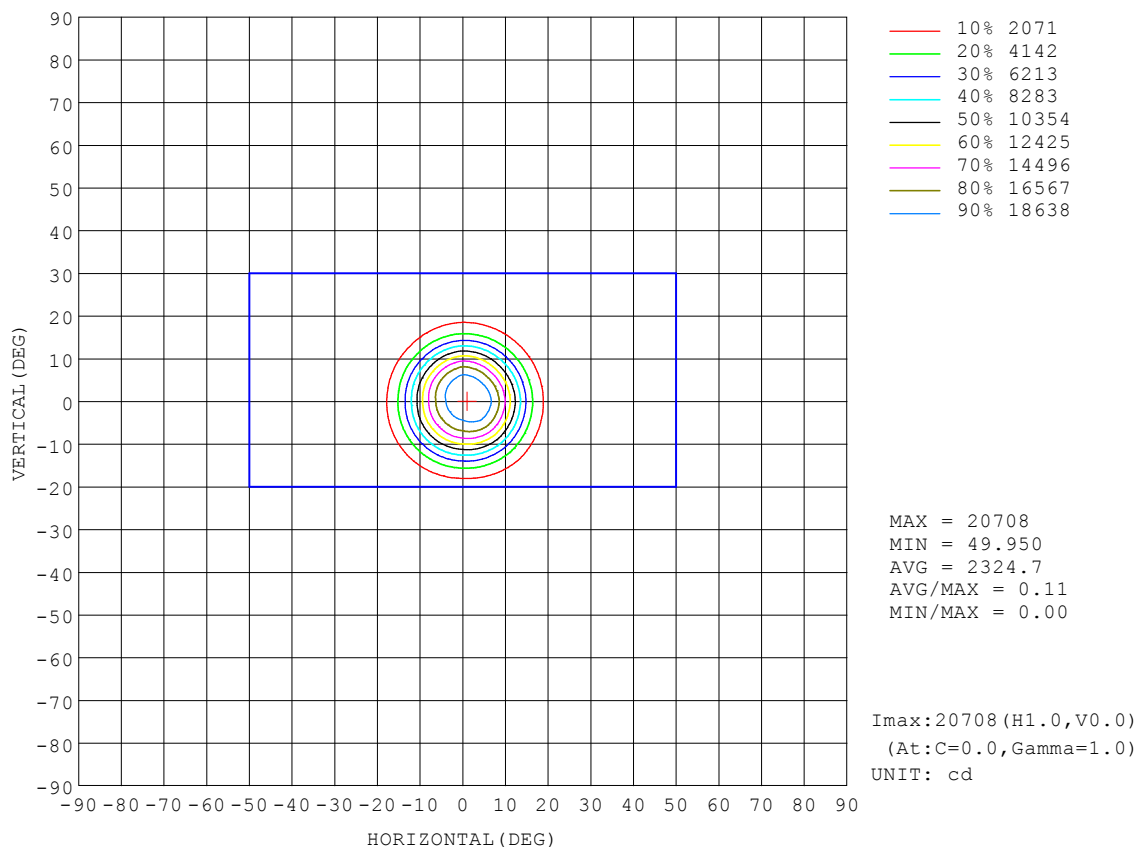


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.1639A P:39.0W PF:0.9905 Freq:49.99Hz		
UTHDi:0.18% ITHDi:7.23% KDisp:0.9938 Lamp Flux:3834.07x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 24D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

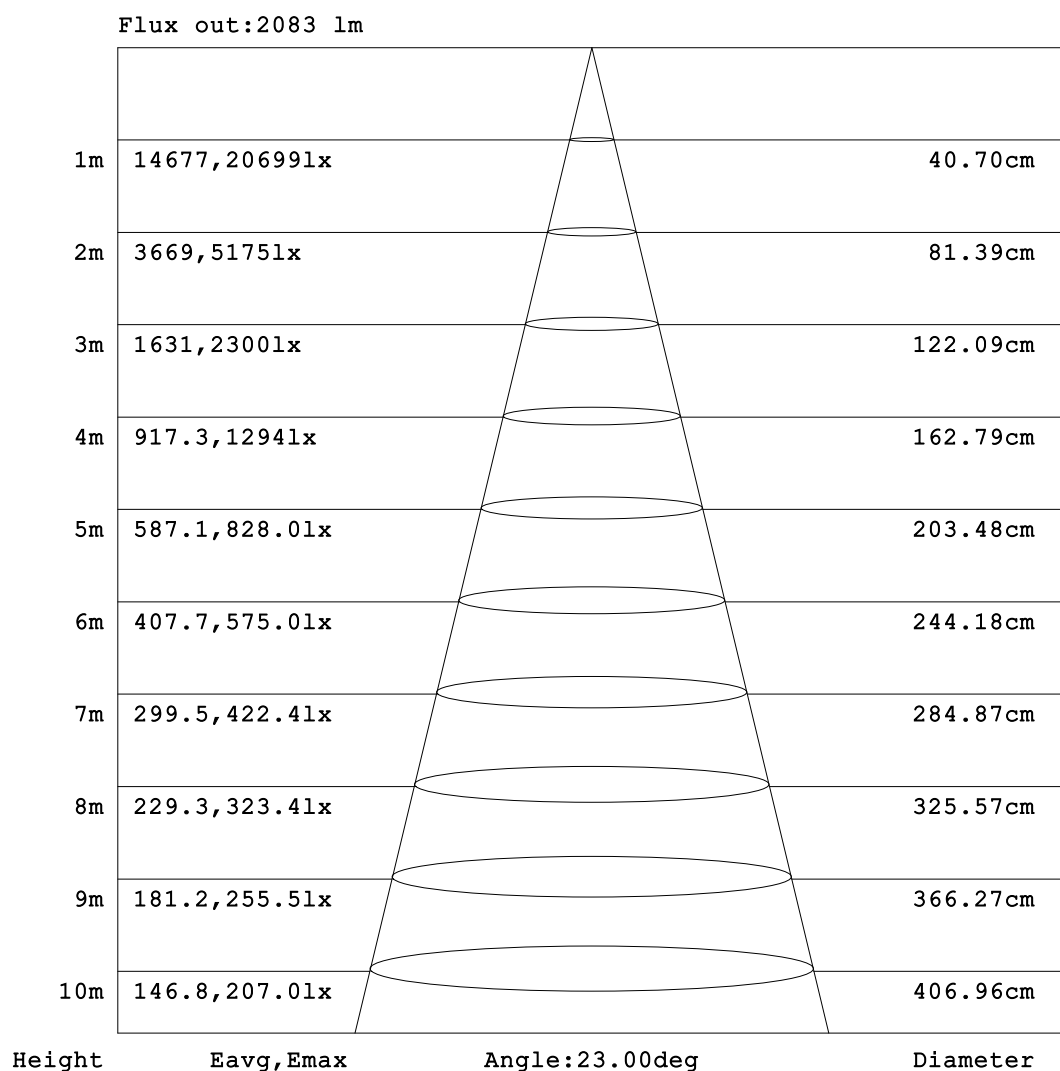


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.1639A P:39.0W PF:0.9905 Freq:49.99Hz UTHDi:0.18% ITHDi:7.23% KDisp:0.9938 Lamp Flux:3834.07x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 24D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:

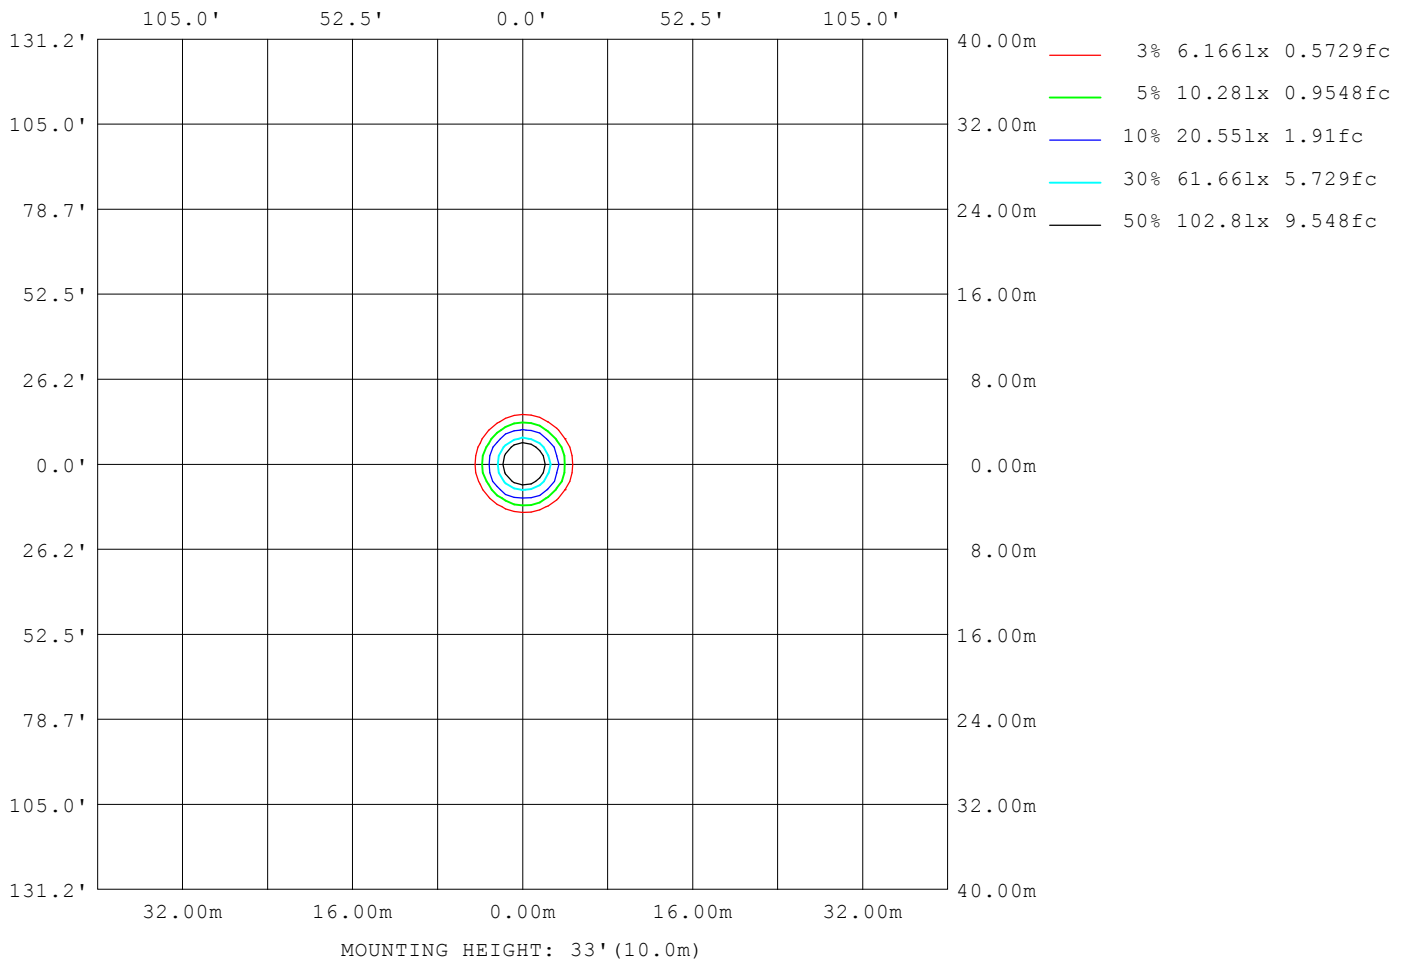

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.1639A P:39.0W PF:0.9905 Freq:49.99Hz UTHDi:0.18% ITHDi:7.23% KDisp:0.9938 Lamp Flux:3834.07x1 lm		
NAME: TR11-45-XX-01+白色防眩环 2700K RA90 24D 40W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 131mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	5063
L_0~180 (75) av	1764
L_0~180 (85) av	561
L_90~270 (65) av	5030
L_90~270 (75) av	1620
L_90~270 (85) av	552
L_45 (65) av	5034
L_45 (75) av	1636
L_45 (85) av	670

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

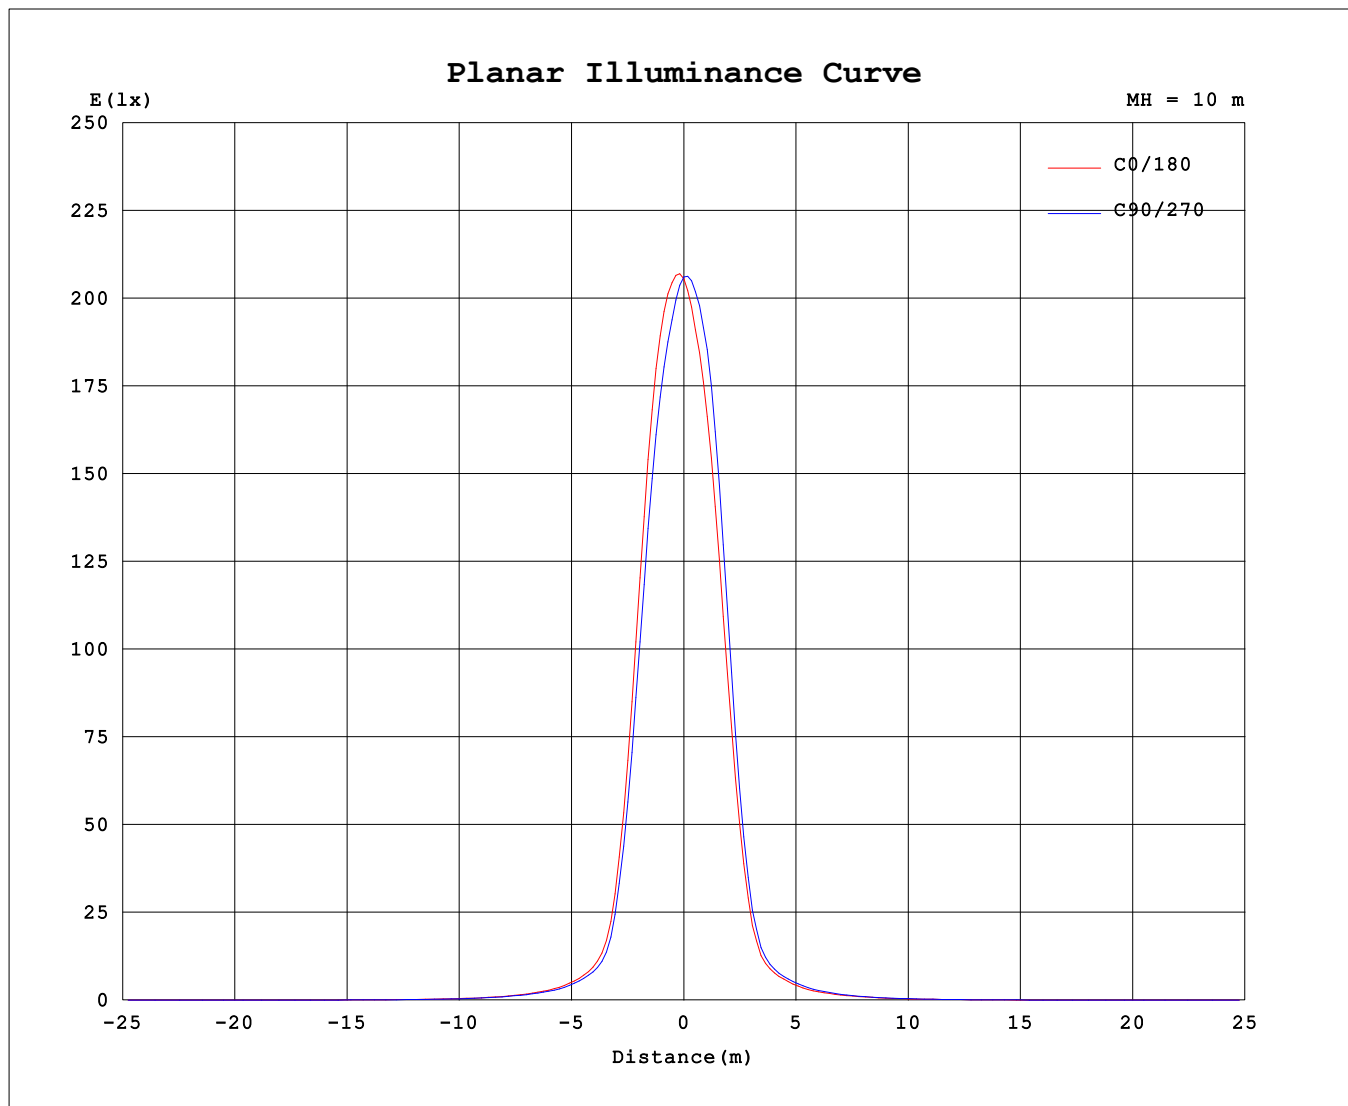

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	20572	20572	20572	20572	20572	20572	20572	20572
3.0	20546	20171	19438	19199	19200	19692	20243	20344
6.0	19261	18744	17447	16984	16922	17757	18813	18821
9.0	16007	15421	13924	13298	13029	13898	15204	15292
12.0	10921	10421	9201	8706	8306	8878	9958	10212
15.0	5933	5641	4861	4577	4317	4511	5155	5466
18.0	2615	2481	2091	2088	1971	1951	2349	2361
21.0	1371	1300	1153	1121	1105	1160	1263	1296
24.0	945.1	898.4	817.7	793.6	790.4	830.4	894.9	912.6
27.0	688.4	661.7	602.5	578.5	571.8	605.9	662.6	667.2
30.0	506.7	486.6	443.7	422.2	415.3	444.5	486.5	492.8
33.0	391.0	370.0	344.4	330.9	329.4	361.3	385.7	395.1
36.0	304.1	285.7	272.0	262.1	248.8	260.8	283.6	300.8
39.0	231.9	221.4	207.5	200.6	199.3	202.0	219.7	222.2
42.0	176.7	167.9	160.6	156.5	152.7	155.4	168.0	172.5
45.0	138.5	131.8	126.2	122.6	117.1	118.8	129.8	135.2
48.0	109.9	104.4	100.0	96.04	93.36	95.66	102.1	106.1
51.0	86.21	81.83	77.70	76.03	75.25	77.81	82.15	83.77
54.0	69.95	66.60	63.10	61.25	60.38	63.34	66.96	68.39
57.0	52.94	51.66	49.10	46.83	45.76	47.79	50.26	51.65
60.0	43.37	41.96	39.57	38.32	37.47	39.11	41.07	41.93
63.0	35.74	34.56	32.40	31.33	30.59	31.72	33.46	34.27
66.0	28.26	27.68	25.72	24.34	23.45	24.20	25.84	26.81
69.0	19.67	19.59	18.11	17.00	16.42	16.75	17.68	18.35
72.0	13.98	13.80	12.97	12.24	11.80	11.90	12.43	12.87
75.0	7.767	7.002	6.009	5.053	4.468	4.581	5.227	6.058
78.0	3.051	3.379	2.954	2.826	2.750	2.724	2.766	2.817
81.0	2.130	2.628	2.145	1.991	1.965	1.932	1.957	1.991
84.0	0.9147	1.368	0.8287	0.7068	0.7330	0.6660	0.7535	0.7540
87.0	0.4610	0.7773	0.3940	0.2753	0.2714	0.2613	0.3542	0.3403
90.0	0.1862	0.2579	0.1857	0.1119	0.1212	0.1083	0.1254	0.1071

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-09-24

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: