


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.2V I:0.0267A P:5.6W PF:0.8681 Freq:49.99Hz		
UTHDi:0.17% ITHDi:24.57% KDisp:0.8947 Lamp Flux:474.503x1 lm		
NAME: MD10-06-XX-16 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 26mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 85.32 lm/W
MODEL		I _{max} (cd)	1158	S/MH(C0/180)		0.57
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)		0.59
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	474.50	η UP,DN(C0-180)		0.0,48.8
NOMINAL FLUX(lm)	474.503	CIE CLASS	DIRECT	η UP,DN(C180-360)		0.0,51.2
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM		0.50
TEST VOLTAGE(V)	240.07	η down(%)	100.0	CIBSE SHR MAX		0.60

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

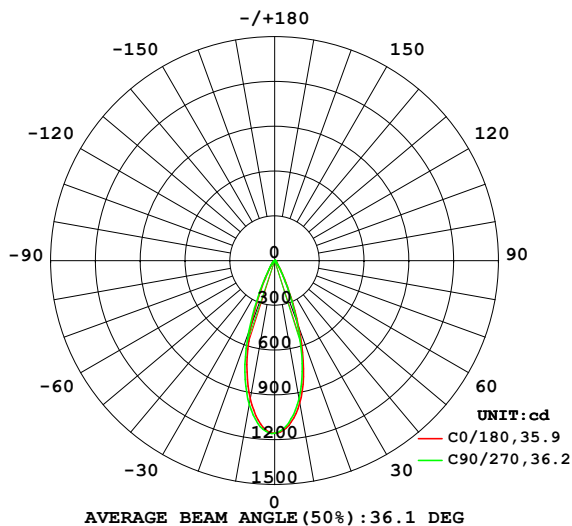

PLANAR ISOLUX DIAGRAM(UNIT:lx)

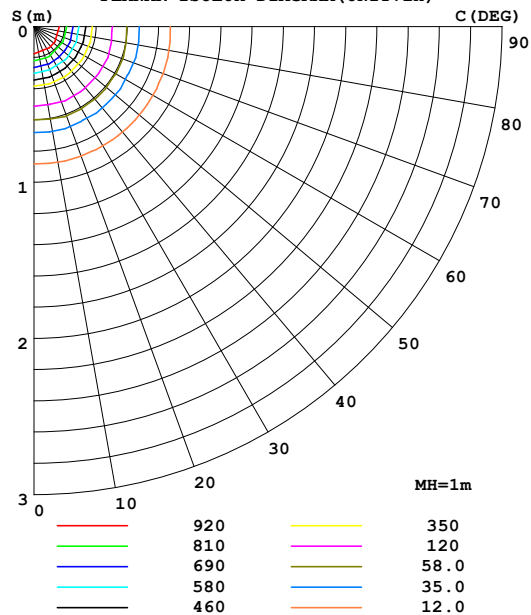

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	969.1	952.8	940.4	935.8	941.2	964.3	979.6	979.3	0- 10	100.6	100.6	21.2,21.2
20	469.8	452.6	442.6	446.6	460.1	497.7	507.7	493.5	10- 20	199.9	300.5	63.3,63.3
30	103.5	107.9	99.67	97.35	98.34	111.4	113.8	105.3	20- 30	112.1	412.6	87,87
40	31.48	32.62	30.87	30.06	31.23	34.33	35.79	32.27	30- 40	35.92	448.5	94.5,94.5
50	11.78	11.50	11.15	11.30	12.04	12.85	13.95	12.28	40- 50	15.91	464.4	97.9,97.9
60	3.892	3.831	3.651	3.811	3.984	3.953	4.246	4.012	50- 60	6.480	470.9	99.2,99.2
70	1.327	1.331	1.192	1.256	1.335	1.310	1.418	1.346	60- 70	2.413	473.3	99.8,99.8
80	0.6560	0.6503	0.5910	0.5383	0.5402	0.5138	0.5545	0.6085	70- 80	0.9080	474.2	99.9,99.9
90	0.0087	0.0051	0.0125	0.0071	0.0074	0.0048	0.0093	0.0032	80- 90	0.2622	474.5	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 458.05 lm

%lum = 96.5%

%lamp = 96.5%

Conical surface Flux(120deg): 470.92 lm

%lum = 99.2%


%lamp = 99.2%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.2V I:0.0267A P:5.6W PF:0.8681 Freq:49.99Hz		
UTHDi:0.17% ITHDi:24.57% KDisp:0.8947 Lamp Flux:474.503x1 lm		
NAME: MD10-06-XX-16 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 26mm	Shielding Angle:

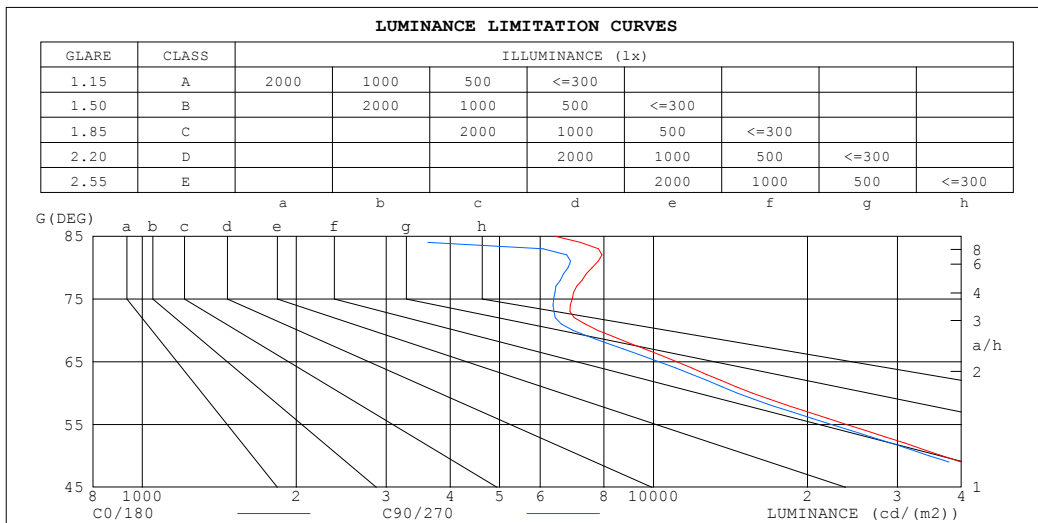

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	6421	270
80	7576	6803
75	6927	6375
70	7782	6963
65	11101	10243
60	15609	14595
55	23851	22281
50	36761	34659
45	55378	53412


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.2V I:0.0267A P:5.6W PF:0.8681 Freq:49.99Hz		
UTHDi:0.17% ITHDi:24.57% KDisp:0.8947		
Lamp Flux:474.503x1 lm		
NAME: MD10-06-XX-16 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 26mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95														
2.0	1.05	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.93	.92	.90														
3.0	.00	.95	.92	.98	.94	.91	.96	.93	.90	.93	.91	.88	.91	.89	.87	.86														
4.0	.95	.90	.86	.94	.89	.86	.91	.88	.85	.90	.86	.84	.88	.85	.83	.82														
5.0	.90	.85	.82	.89	.85	.81	.87	.83	.80	.86	.82	.80	.84	.81	.79	.78														
6.0	.86	.81	.77	.85	.80	.77	.84	.80	.77	.82	.79	.76	.81	.78	.76	.74														
7.0	.82	.77	.74	.82	.77	.73	.80	.76	.73	.79	.75	.73	.78	.75	.72	.71														
8.0	.79	.74	.70	.78	.73	.70	.77	.73	.70	.76	.72	.70	.75	.72	.69	.68														
9.0	.76	.71	.67	.75	.70	.67	.74	.70	.67	.73	.70	.67	.73	.69	.67	.66														
10.0	.73	.68	.65	.72	.68	.65	.72	.67	.64	.71	.67	.64	.70	.67	.64	.63														

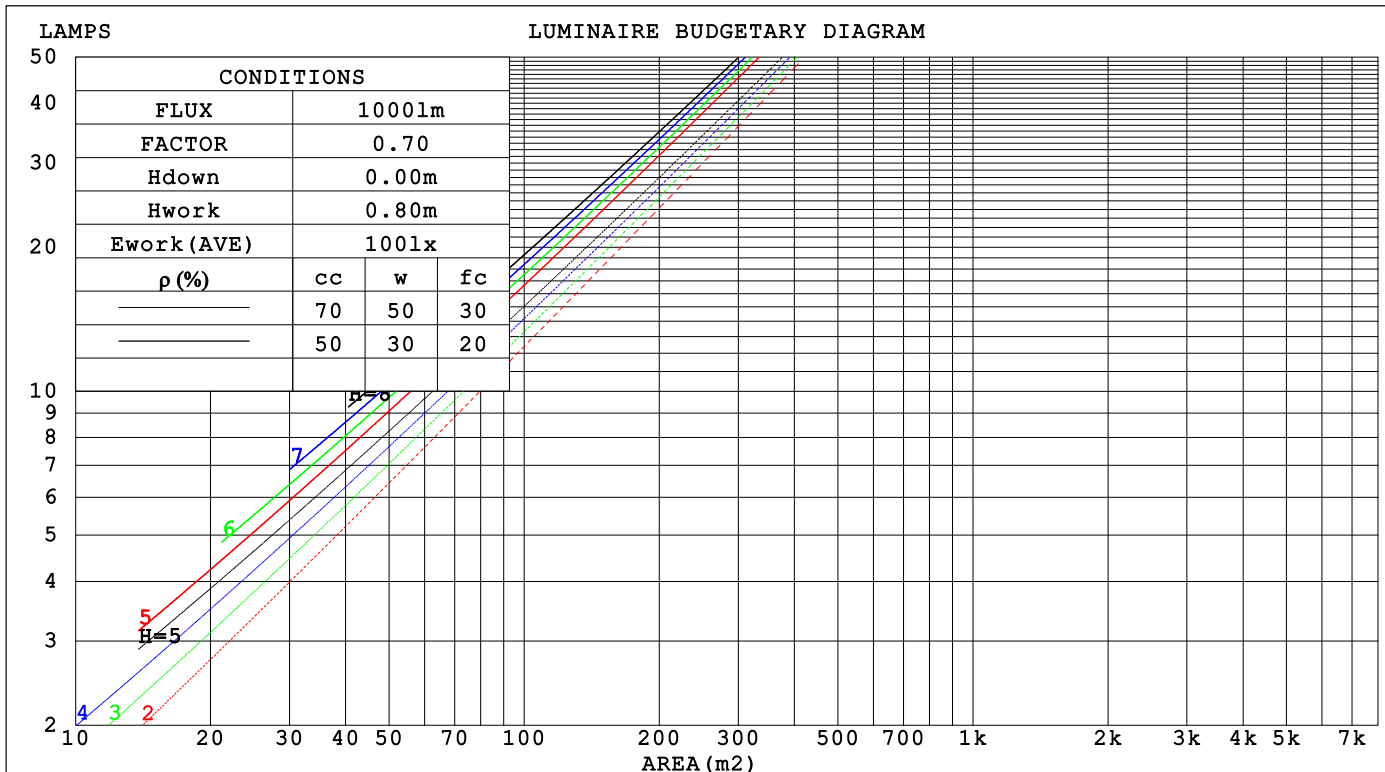

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.2V I:0.0267A P:5.6W PF:0.8681 Freq:49.99Hz			UTHDi:0.17% ITHDi:24.57% KDisp:0.8947			Lamp Flux:474.503x1 lm		
NAME: MD10-06-XX-16 2700K RA90 30D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: Norming Lighting			SUR.: 26mm			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.158	.090	.028	.151	.086	.027	.138	.079	.025	.127	.073	.023	.116	.067	.022		
2.0	.148	.081	.025	.143	.079	.024	.132	.074	.023	.123	.069	.022	.114	.064	.020		
3.0	.140	.074	.022	.135	.072	.022	.126	.068	.021	.118	.065	.020	.111	.061	.019		
4.0	.132	.069	.020	.128	.067	.020	.121	.064	.019	.114	.061	.018	.107	.058	.018		
5.0	.125	.064	.018	.122	.062	.018	.115	.060	.018	.109	.058	.017	.104	.055	.017		
6.0	.119	.060	.017	.116	.059	.017	.110	.056	.016	.105	.055	.016	.100	.053	.016		
7.0	.113	.056	.016	.111	.055	.016	.106	.053	.015	.101	.052	.015	.097	.050	.015		
8.0	.108	.053	.015	.106	.052	.015	.101	.051	.014	.097	.049	.014	.094	.048	.014		
9.0	.103	.050	.014	.101	.049	.014	.098	.048	.014	.094	.047	.013	.090	.046	.013		
10.0	.099	.048	.013	.097	.047	.013	.094	.046	.013	.091	.045	.013	.088	.044	.013		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.170	.157	.146	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016		
2.0	.153	.133	.115	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013		
3.0	.139	.113	.093	.120	.098	.080	.082	.068	.056	.047	.040	.033	.015	.013	.011		
4.0	.128	.098	.076	.110	.085	.066	.076	.059	.046	.044	.035	.027	.014	.011	.009		
5.0	.118	.086	.063	.102	.075	.055	.070	.052	.039	.041	.031	.023	.013	.010	.008		
6.0	.110	.077	.053	.095	.066	.046	.065	.047	.033	.038	.027	.019	.012	.009	.006		
7.0	.103	.069	.045	.089	.060	.039	.061	.042	.028	.036	.025	.016	.012	.008	.005		
8.0	.097	.062	.039	.083	.054	.034	.058	.038	.024	.034	.022	.014	.011	.007	.005		
9.0	.092	.057	.034	.079	.049	.029	.055	.035	.021	.032	.021	.012	.010	.007	.004		
10.0	.087	.052	.029	.075	.045	.026	.052	.032	.018	.030	.019	.011	.010	.006	.004		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.2V I:0.0267A P:5.6W PF:0.8681 Freq:49.99Hz UTHDi:0.17% ITHDi:24.57% KDisp:0.8947Lamp Flux:474.503x1 lm										
NAME: MD10-06-XX-16 2700K RA90 30D						TYPE:		WEIGHT:		
SPEC.:						DIM.:		SERIAL No.:		
MFR.: Norming Lighting						SUR.: 26mm		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.8	19.6	19.0	19.8	19.9	18.7	19.5	18.9	19.6	19.8
3H	18.8	19.5	19.0	19.7	19.9	18.6	19.4	18.9	19.6	19.8
4H	18.8	19.5	19.0	19.7	19.9	18.6	19.3	18.9	19.5	19.7
6H	18.7	19.4	19.0	19.6	19.9	18.6	19.2	18.9	19.5	19.7
8H	18.7	19.4	19.0	19.6	19.9	18.6	19.2	18.9	19.4	19.7
12H	18.7	19.3	19.0	19.6	19.8	18.5	19.1	18.8	19.4	19.7
4H 2H	18.7	19.4	19.0	19.6	19.8	18.6	19.3	18.8	19.5	19.7
3H	18.7	19.3	19.0	19.6	19.9	18.6	19.2	18.9	19.4	19.7
4H	18.7	19.3	19.0	19.5	19.9	18.5	19.1	18.9	19.4	19.7
6H	18.7	19.2	19.1	19.5	19.9	18.5	19.0	18.9	19.4	19.7
8H	18.7	19.2	19.1	19.5	19.9	18.5	19.0	18.9	19.3	19.7
12H	18.7	19.1	19.1	19.5	19.9	18.5	18.9	18.9	19.3	19.7
8H 4H	18.6	19.1	19.0	19.4	19.8	18.4	18.9	18.8	19.2	19.6
6H	18.6	19.0	19.1	19.4	19.8	18.5	18.8	18.9	19.2	19.7
8H	18.7	19.0	19.1	19.4	19.9	18.5	18.8	18.9	19.2	19.7
12H	18.7	19.0	19.1	19.4	19.9	18.5	18.7	18.9	19.2	19.6
12H 4H	18.6	19.0	19.0	19.3	19.7	18.4	18.8	18.8	19.2	19.6
6H	18.6	18.9	19.1	19.4	19.8	18.4	18.8	18.9	19.2	19.6
8H	18.6	18.9	19.1	19.4	19.8	18.5	18.8	18.9	19.2	19.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.8 / - 3.4					+ 1.8 / - 3.6				
1.5H	+ 2.9 / - 2.8					+ 2.9 / - 2.9				
2.0H	+ 3.6 / - 2.9					+ 3.6 / - 2.9				

CIE Pub.117, 474.5 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -2.6)
Area: 0.0005 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.2V I:0.0267A P:5.6W PF:0.8681 Freq:49.99Hz		
UTHDi:0.17% ITHDi:24.57% KDisp:0.8947 Lamp Flux:474.503x1 lm		
NAME: MD10-06-XX-16 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 26mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	78	88	82	78	87	81	78	74
0.80	95	90	86	95	89	86	94	89	86	82
1.00	100	94	91	99	94	90	97	94	90	86
1.25	104	99	95	103	98	95	101	97	94	90
1.50	106	102	98	105	101	98	103	99	97	92
2.00	109	105	102	107	104	101	105	102	99	94
2.50	110	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.2V I:0.0267A P:5.6W PF:0.8681 Freq:49.99Hz		
UTHDi:0.17% ITHDi:24.57% KDisp:0.8947 Lamp Flux:474.503x1 lm		
NAME: MD10-06-XX-16 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 26mm	Shielding Angle:

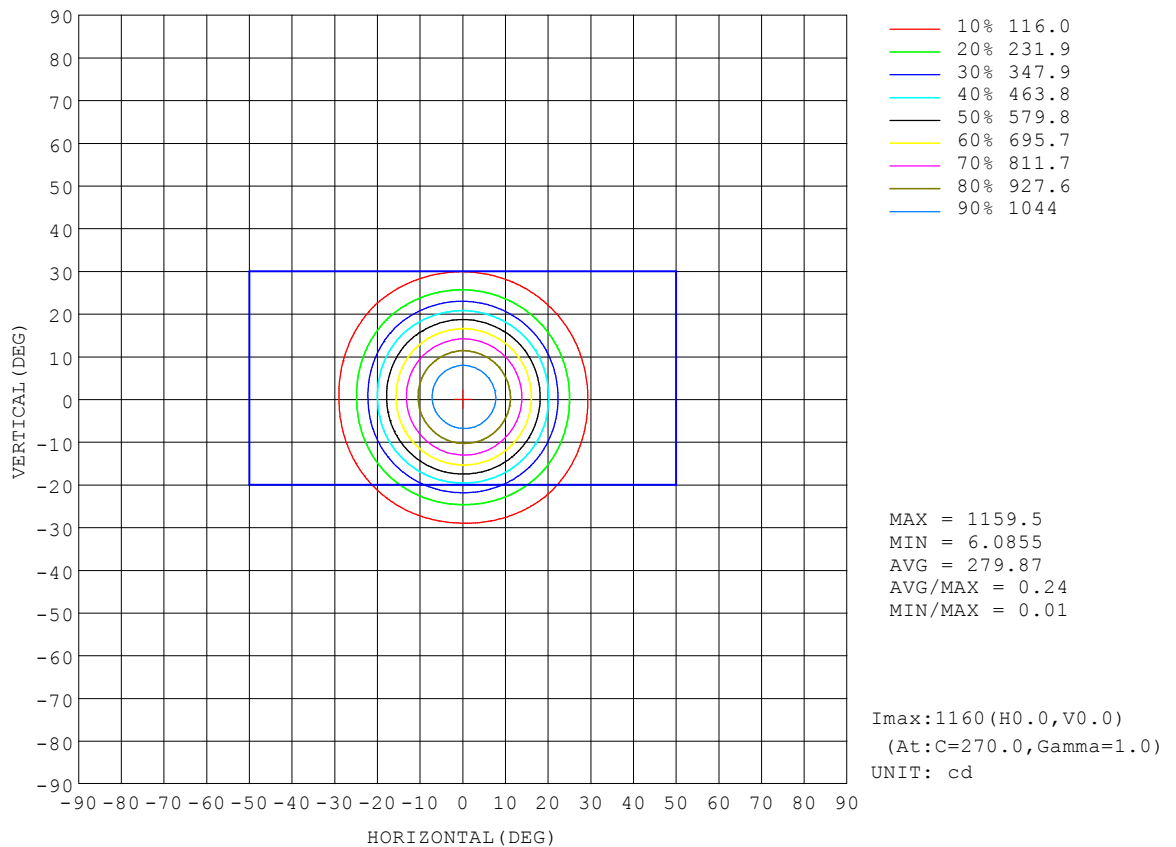


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.2V I:0.0267A P:5.6W PF:0.8681 Freq:49.99Hz		
UTHDi:0.17% ITHDi:24.57% KDisp:0.8947		Lamp Flux:474.503x1 lm
NAME: MD10-06-XX-16 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 26mm	Shielding Angle:

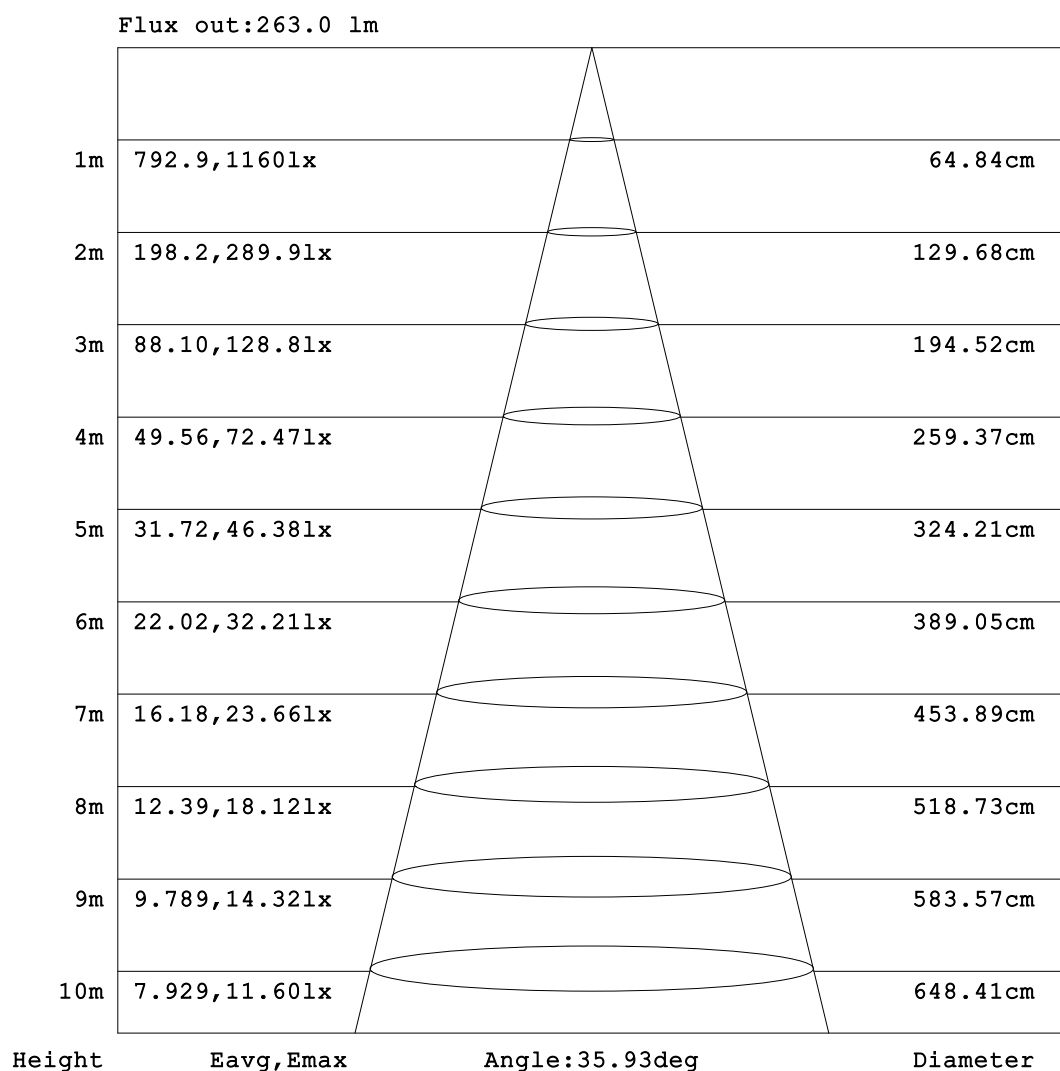


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-03-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.2V I:0.0267A P:5.6W PF:0.8681 Freq:49.99Hz		
UTHDi:0.17% ITHDi:24.57% KDisp:0.8947		Lamp Flux:474.503x1 lm
NAME: MD10-06-XX-16 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 26mm	Shielding Angle:

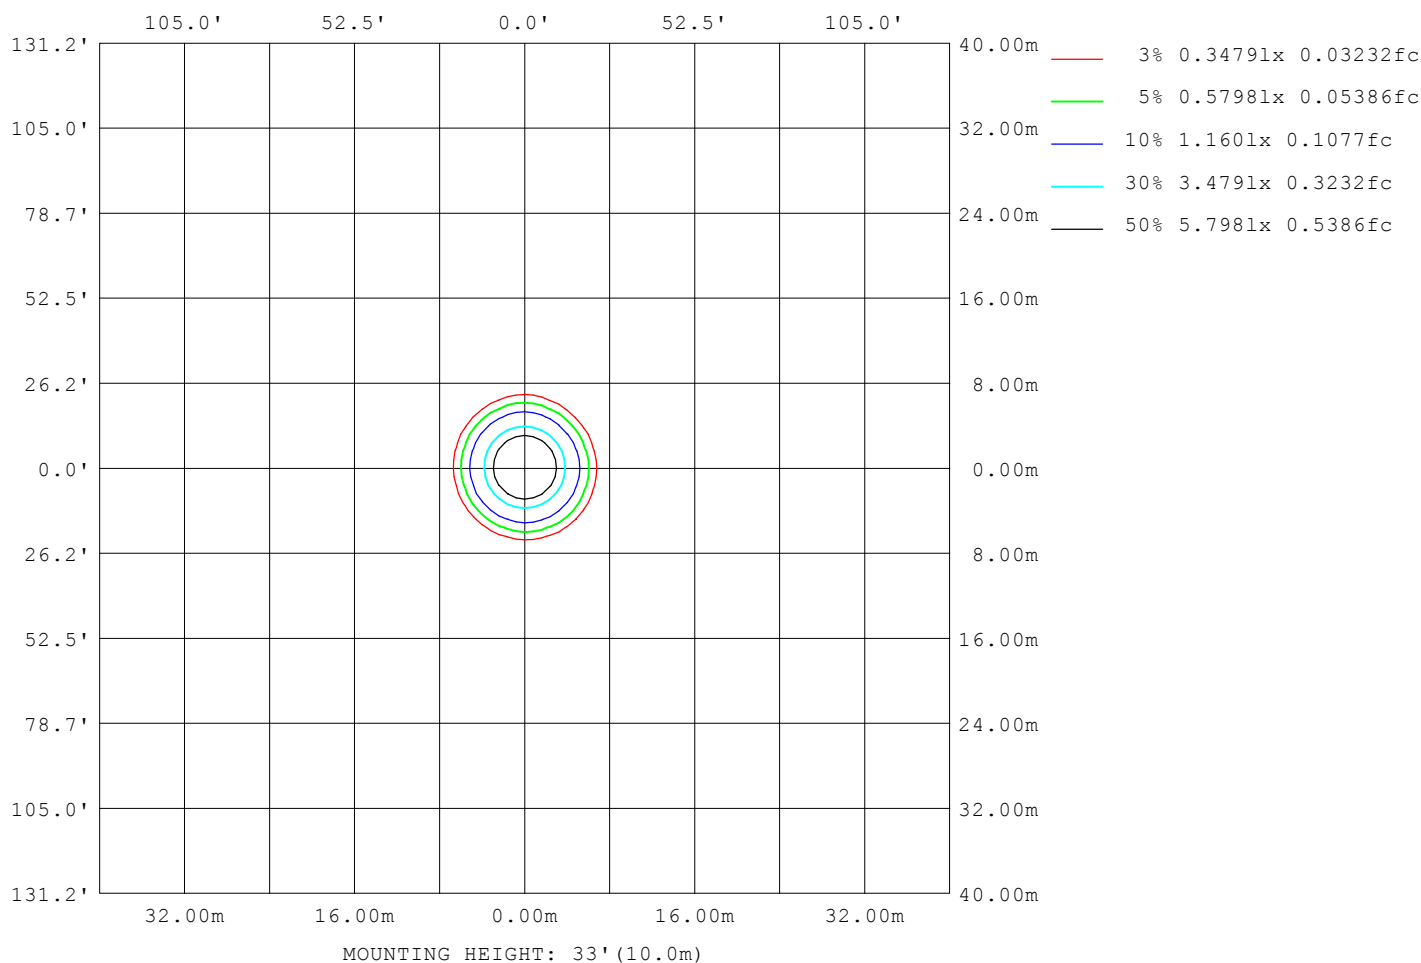

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.2V I:0.0267A P:5.6W PF:0.8681 Freq:49.99Hz		
UTHDi:0.17% ITHDi:24.57% KDisp:0.8947 Lamp Flux:474.503x1 lm		
NAME: MD10-06-XX-16 2700K RA90 30D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 26mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	11341
L_0~180 (75) av	6507
L_0~180 (85) av	5965
L_90~270 (65) av	11137
L_90~270 (75) av	6349
L_90~270 (85) av	3421
L_45 (65) av	11242
L_45 (75) av	6316
L_45 (85) av	4535

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

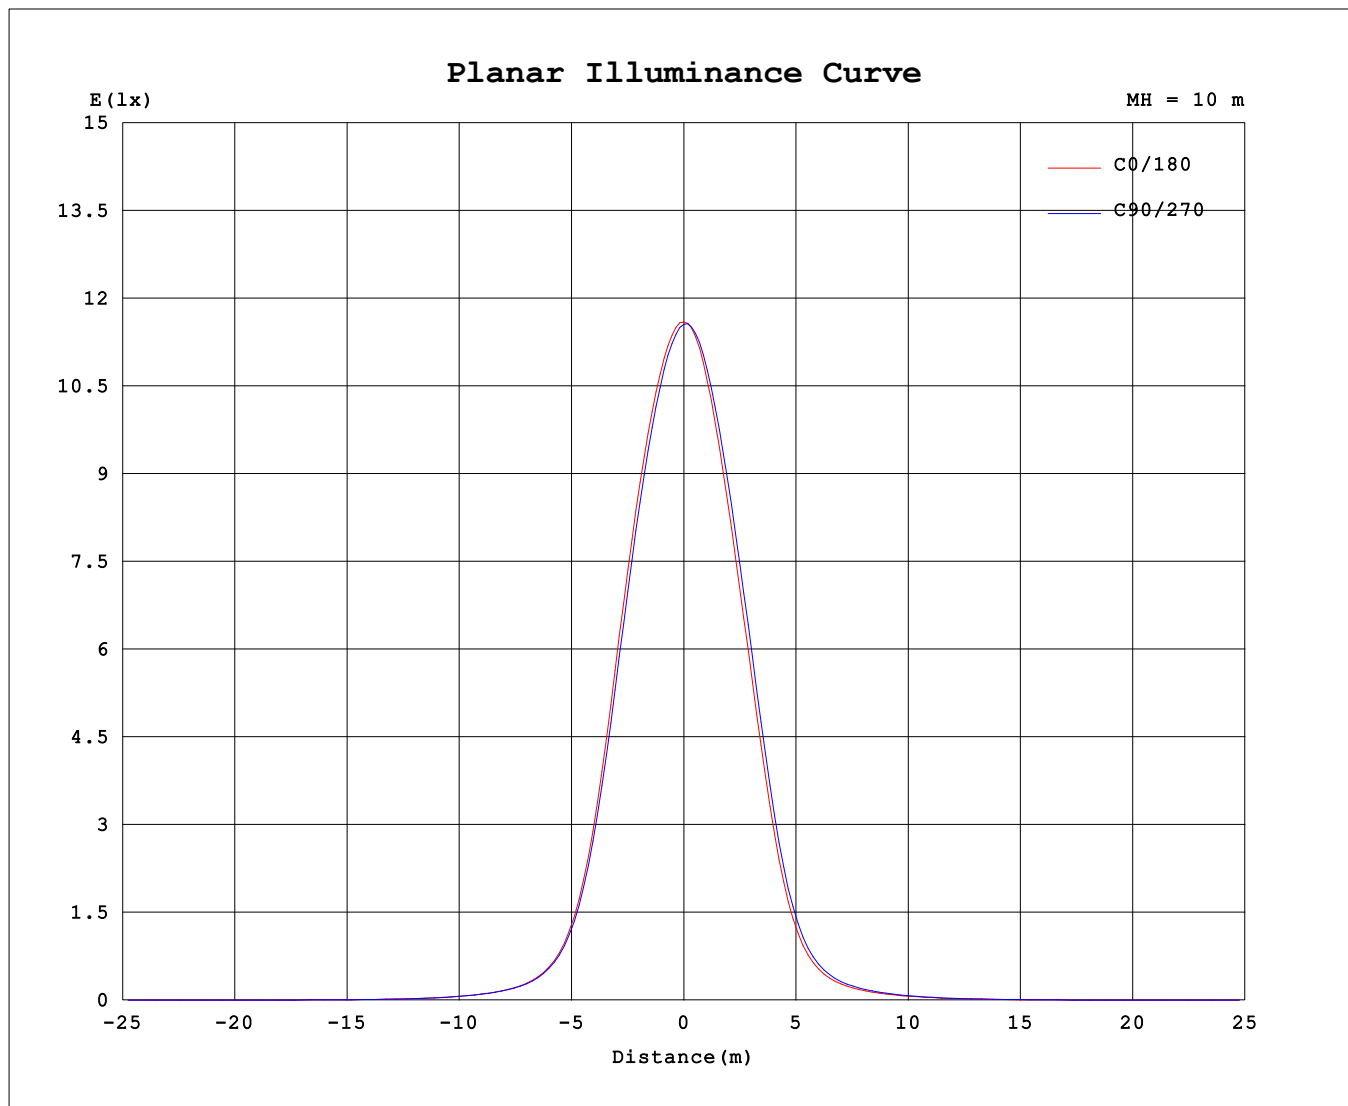

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: MEDIUM
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-03-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	1156	1156	1156	1156	1156	1156	1156	1156
3.0	1139	1131	1128	1131	1136	1143	1146	1143
6.0	1086	1074	1066	1068	1073	1088	1096	1094
9.0	1003	988.2	975.5	973.4	978.7	999.9	1013	1013
12.0	892.8	873.0	859.3	853.9	860.1	886.4	905.0	904.8
15.0	751.8	727.4	714.6	712.6	722.5	754.2	772.9	770.5
18.0	585.7	562.6	551.8	554.6	568.2	604.4	618.5	609.7
21.0	414.6	401.1	390.8	395.0	407.1	444.5	451.7	436.5
24.0	270.7	267.0	255.5	257.2	264.2	296.4	298.9	283.2
27.0	167.7	170.4	159.4	158.4	161.0	183.0	185.2	172.6
30.0	103.5	107.9	99.67	97.35	98.34	111.4	113.8	105.3
33.0	67.68	71.17	65.87	63.35	64.41	72.34	74.37	68.50
36.0	47.16	49.59	46.26	44.56	45.72	50.91	52.56	47.91
39.0	34.65	36.10	34.04	33.03	34.26	37.73	39.24	35.45
42.0	26.03	26.67	25.41	24.94	26.12	28.49	29.89	26.81
45.0	19.53	19.76	18.90	18.77	19.80	21.42	22.76	20.27
48.0	14.48	14.32	13.83	13.91	14.78	15.86	17.09	15.09
51.0	10.58	10.27	10.02	10.16	10.81	11.50	12.58	11.04
54.0	7.638	7.302	7.171	7.311	7.784	8.205	9.002	7.960
57.0	5.429	5.198	5.076	5.208	5.486	5.680	6.214	5.617
60.0	3.892	3.831	3.651	3.811	3.984	3.953	4.246	4.012
63.0	2.868	2.886	2.698	2.860	3.002	2.937	3.075	2.962
66.0	2.100	2.103	1.926	2.072	2.193	2.165	2.291	2.169
69.0	1.490	1.482	1.337	1.426	1.518	1.495	1.613	1.518
72.0	1.078	1.088	0.9936	0.9861	1.025	1.011	1.096	1.068
75.0	0.8940	0.8973	0.8255	0.7815	0.7901	0.7458	0.8176	0.8450
78.0	0.7513	0.7485	0.6836	0.6337	0.6311	0.5972	0.6528	0.6978
81.0	0.6080	0.5911	0.5385	0.4777	0.4952	0.4754	0.5081	0.5655
84.0	0.3750	0.3250	0.1892	0.0360	0.3215	0.3284	0.3566	0.3976
87.0	0.0594	0.0080	0.0096	0.0042	0.0657	0.1087	0.1432	0.1010
90.0	0.0087	0.0051	0.0125	0.0071	0.0074	0.0048	0.0093	0.0032

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: MEDIUM
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-03-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: