


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.2V I:0.0413A P:9.2W PF:0.9247 Freq:49.99Hz		
UTHDi:0.16% ITHDi:18.14% KDisp:0.9400 Lamp Flux:880.284x1 lm		
NAME: MD10-09-XX-04 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 41mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 95.96 lm/W
MODEL		Imax (cd)	3004	S/MH(C0/180)		0.48
NOMINAL POWER(W)	9	LOR(%)	100.0	S/MH(C90/270)		0.49
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	880.28	η UP,DN(C0-180)		0.0,50.2
NOMINAL FLUX(lm)	880.284	CIE CLASS	DIRECT	η UP,DN(C180-360)		0.0,49.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.50
TEST VOLTAGE(V)	240.23	η down (%)	100.0	CIBSE SHR MAX		0.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

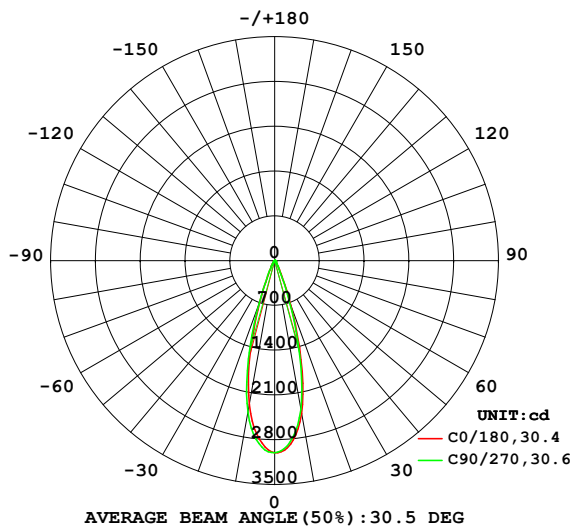

PLANAR ISOLUX DIAGRAM (UNIT: lx)

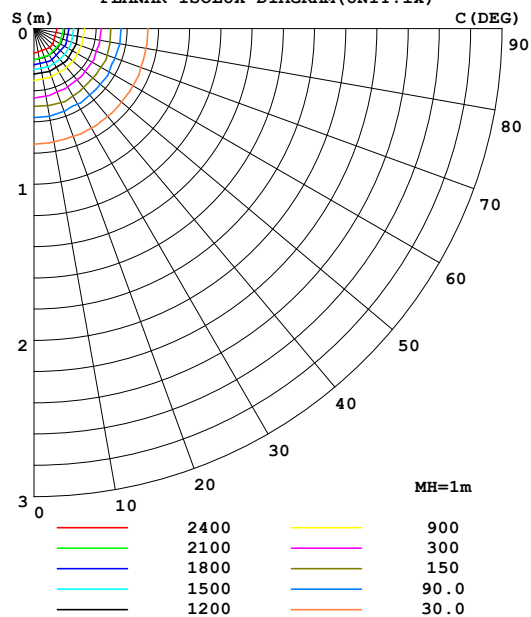

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2023-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2428	2416	2361	2311	2286	2331	2413	2442	0- 10	257.0	257.0	29.2,29.2
20	744.8	738.4	686.8	669.7	674.2	671.7	728.3	735.9	10- 20	411.6	668.6	76,76
30	120.1	116.2	108.3	111.3	111.2	107.8	111.9	114.5	20- 30	135.1	803.7	91.3,91.3
40	38.93	39.13	37.88	37.52	37.22	37.84	38.56	38.12	30- 40	41.51	845.2	96,96
50	15.97	15.90	16.03	15.79	15.69	15.55	15.92	15.49	40- 50	19.13	864.3	98.2,98.2
60	6.464	6.459	6.525	6.639	6.591	6.489	6.389	6.284	50- 60	9.328	873.6	99.2,99.2
70	2.909	2.922	3.048	3.146	3.113	3.015	2.980	2.875	60- 70	4.563	878.2	99.8,99.8
80	0.7881	0.7317	0.6734	0.8211	0.8698	0.7066	0.5937	0.6932	70- 80	1.879	880.1	100,100
90	0.0369	0.0218	0.0383	0.0248	0.0240	0.0260	0.0283	0.0238	80- 90	0.2086	880.3	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 856.4 lm

%lum = 97.3%

%lamp = 97.3%

Conical surface Flux(120deg): 873.63 lm

%lum = 99.2%


%lamp = 99.2%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2023-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.2V I:0.0413A P:9.2W PF:0.9247 Freq:49.99Hz		
UTHDi:0.16% ITHDi:18.14% KDisp:0.9400 Lamp Flux:880.284x1 lm		
NAME: MD10-09-XX-04 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 41mm	Shielding Angle:

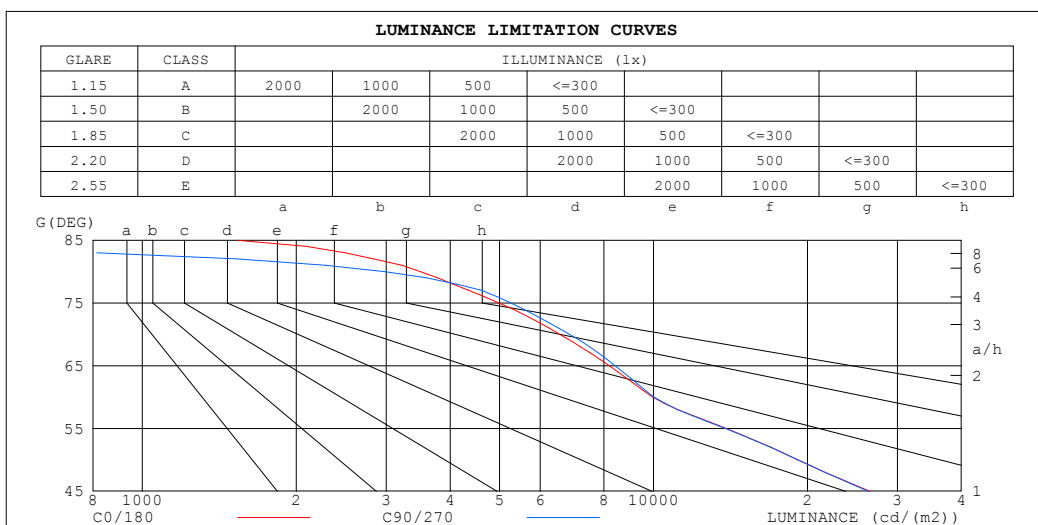


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2023-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.2V I:0.0413A P:9.2W PF:0.9247 Freq:49.99Hz		
UTHDi:0.16% ITHDi:18.14% KDisp:0.9400		
Lamp Flux:880.284x1 lm		
NAME: MD10-09-XX-04 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 41mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.12	1.10	1.09	1.10	1.08	1.07	1.06	1.05	1.04	1.03	1.02	1.01	.99	.98	.98	.96
2.0	1.07	1.03	1.01	1.05	1.02	.00	1.02	.99	.97	.99	.97	.95	.96	.95	.93	.92
3.0	1.02	.98	.95	1.00	.97	.94	.98	.95	.92	.95	.93	.91	.93	.91	.90	.88
4.0	.97	.93	.90	.96	.92	.89	.94	.91	.88	.92	.89	.87	.90	.88	.86	.85
5.0	.93	.89	.85	.92	.88	.85	.91	.87	.84	.89	.86	.84	.88	.85	.83	.82
6.0	.90	.85	.82	.89	.85	.82	.88	.84	.81	.86	.83	.81	.85	.82	.80	.79
7.0	.86	.82	.79	.86	.82	.79	.85	.81	.78	.84	.80	.78	.83	.80	.77	.76
8.0	.83	.79	.76	.83	.79	.76	.82	.78	.75	.81	.78	.75	.80	.77	.75	.74
9.0	.81	.76	.73	.80	.76	.73	.79	.76	.73	.79	.75	.73	.78	.75	.73	.72
10.0	.78	.74	.71	.78	.74	.71	.77	.73	.71	.76	.73	.71	.76	.73	.70	.69

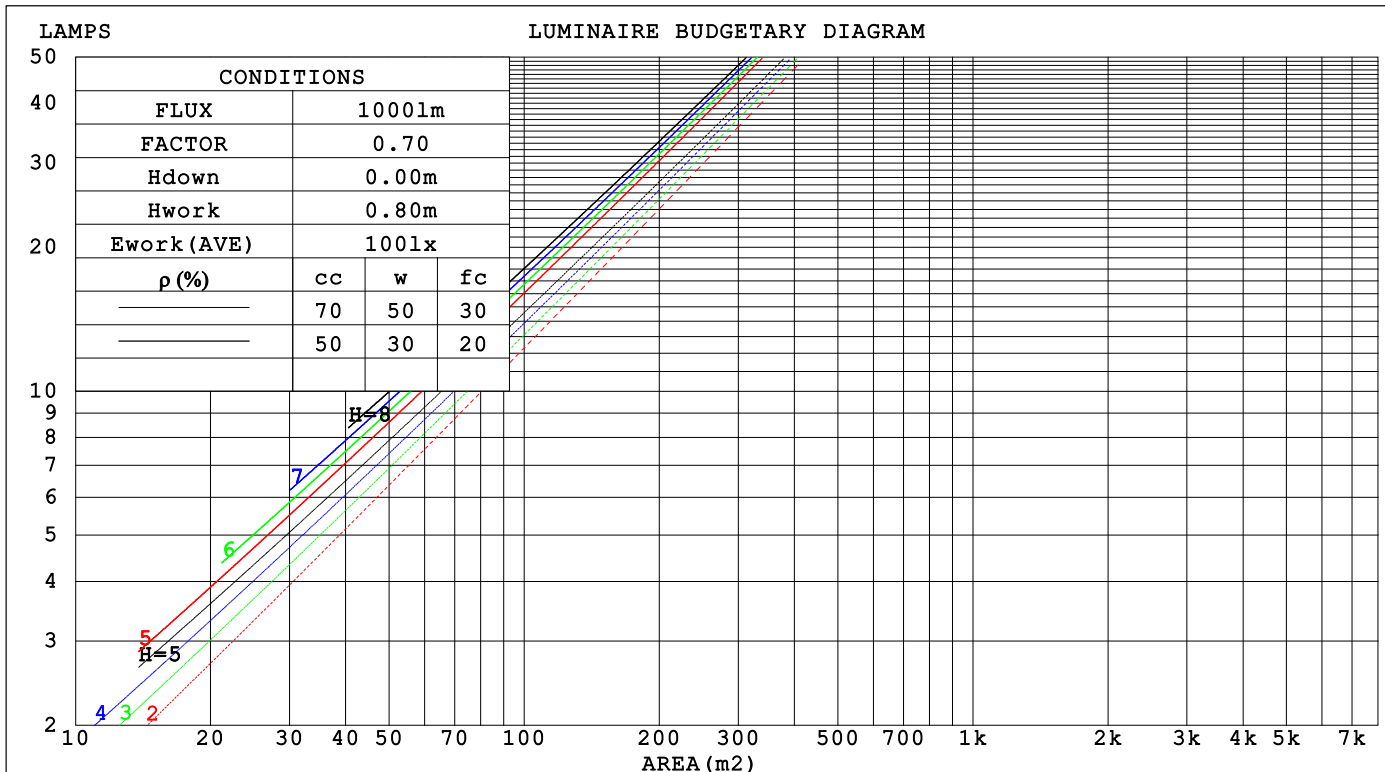

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-21

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.2V I:0.0413A P:9.2W PF:0.9247 Freq:49.99Hz			UTHDi:0.16% ITHDi:18.14% KDisp:0.9400			Lamp Flux:880.284x1 lm		
NAME: MD10-09-XX-04 4000K RA90 36D			TYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: Norming Lighting			SUR.: 41mm			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.146	.083	.026	.139	.080	.025	.127	.073	.023	.116	.067	.021	.105	.061	.020		
2.0	.136	.075	.023	.131	.072	.022	.121	.067	.021	.111	.062	.019	.102	.058	.018		
3.0	.127	.068	.020	.123	.066	.020	.114	.062	.019	.106	.058	.018	.099	.055	.017		
4.0	.120	.062	.018	.116	.061	.018	.109	.058	.017	.102	.055	.016	.095	.052	.016		
5.0	.113	.058	.017	.110	.056	.016	.103	.054	.016	.098	.051	.015	.092	.049	.015		
6.0	.107	.054	.015	.104	.053	.015	.099	.051	.015	.094	.049	.014	.089	.047	.014		
7.0	.102	.050	.014	.099	.049	.014	.094	.048	.014	.090	.046	.013	.086	.045	.013		
8.0	.097	.047	.013	.095	.047	.013	.090	.045	.013	.087	.044	.013	.083	.043	.012		
9.0	.093	.045	.012	.091	.044	.012	.087	.043	.012	.083	.042	.012	.080	.041	.012		
10.0	.089	.042	.012	.087	.042	.012	.084	.041	.012	.081	.040	.011	.078	.039	.011		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.169	.158	.147	.145	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.016		
2.0	.152	.133	.117	.130	.114	.101	.089	.079	.070	.051	.046	.041	.016	.015	.013		
3.0	.137	.113	.094	.117	.098	.082	.081	.068	.057	.047	.040	.034	.015	.013	.011		
4.0	.125	.098	.078	.107	.085	.067	.074	.059	.047	.043	.035	.028	.014	.011	.009		
5.0	.115	.086	.065	.099	.074	.056	.068	.052	.040	.039	.030	.024	.013	.010	.008		
6.0	.106	.076	.055	.091	.066	.047	.063	.046	.034	.037	.027	.020	.012	.009	.007		
7.0	.099	.068	.046	.085	.059	.041	.059	.041	.029	.034	.024	.017	.011	.008	.006		
8.0	.092	.061	.040	.079	.053	.035	.055	.037	.025	.032	.022	.015	.010	.007	.005		
9.0	.087	.056	.035	.075	.048	.030	.052	.034	.022	.030	.020	.013	.010	.007	.004		
10.0	.082	.051	.031	.071	.044	.027	.049	.031	.019	.029	.018	.011	.009	.006	.004		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-21

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.2V I:0.0413A P:9.2W PF:0.9247 Freq:49.99Hz UTHDi:0.16% ITHDi:18.14% KDisp:0.9400Lamp Flux:880.284x1 lm										
NAME: MD10-09-XX-04 4000K RA90 36D						TYPE:		WEIGHT:		
SPEC.:						DIM.:		SERIAL No.:		
MFR.: Norming Lighting						SUR.: 41mm		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.2	15.9	15.4	16.0	16.2	15.0	15.8	15.3	15.9	16.1
3H	15.4	16.0	15.6	16.2	16.4	15.3	15.9	15.5	16.1	16.3
4H	15.4	16.0	15.7	16.2	16.4	15.3	15.9	15.6	16.1	16.4
6H	15.4	16.0	15.7	16.2	16.4	15.3	15.9	15.6	16.1	16.4
8H	15.3	15.9	15.6	16.2	16.4	15.3	15.8	15.6	16.1	16.3
12H	15.3	15.9	15.6	16.1	16.4	15.2	15.8	15.5	16.0	16.3
4H 2H	15.2	15.8	15.4	16.0	16.2	15.1	15.7	15.3	15.9	16.1
3H	15.4	16.0	15.8	16.3	16.5	15.4	15.9	15.7	16.2	16.4
4H	15.5	16.0	15.9	16.3	16.6	15.5	16.0	15.8	16.2	16.5
6H	15.5	16.0	15.9	16.3	16.6	15.5	15.9	15.8	16.2	16.6
8H	15.5	15.9	15.9	16.3	16.6	15.4	15.8	15.8	16.2	16.5
12H	15.4	15.8	15.9	16.2	16.6	15.4	15.7	15.8	16.1	16.5
8H 4H	15.5	15.9	15.8	16.2	16.6	15.4	15.8	15.8	16.2	16.5
6H	15.5	15.8	15.9	16.2	16.6	15.4	15.8	15.8	16.1	16.6
8H	15.5	15.8	15.9	16.2	16.6	15.4	15.7	15.8	16.1	16.5
12H	15.4	15.7	15.9	16.1	16.6	15.3	15.6	15.8	16.0	16.5
12H 4H	15.4	15.8	15.8	16.2	16.5	15.3	15.7	15.7	16.1	16.5
6H	15.4	15.7	15.9	16.1	16.6	15.4	15.7	15.8	16.1	16.5
8H	15.4	15.7	15.9	16.1	16.6	15.3	15.6	15.8	16.0	16.5
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.6 / - 2.3					+ 1.4 / - 2.2				
1.5H	+ 2.4 / - 1.8					+ 2.2 / - 1.7				
2.0H	+ 2.6 / - 2.0					+ 2.6 / - 2.0				

CIE Pub.117, 880.3 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -0.4$)
Area: 0.0013 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.2V I:0.0413A P:9.2W PF:0.9247 Freq:49.99Hz		
UTHDi:0.16% ITHDi:18.14% KDisp:0.9400 Lamp Flux:880.284x1 lm		
NAME: MD10-09-XX-04 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 41mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	89	83	79	88	82	79	76
0.80	96	91	87	96	90	87	94	90	87	83
1.00	100	95	92	100	95	91	98	94	91	87
1.25	104	99	96	103	99	96	101	97	95	91
1.50	107	102	99	105	101	99	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	96
3.00	112	109	106	110	108	105	107	105	103	97
4.00	114	112	109	112	110	108	109	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2023-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.2V I:0.0413A P:9.2W PF:0.9247 Freq:49.99Hz		
UTHDi:0.16% ITHDi:18.14% KDisp:0.9400 Lamp Flux:880.284x1 lm		
NAME: MD10-09-XX-04 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 41mm	Shielding Angle:

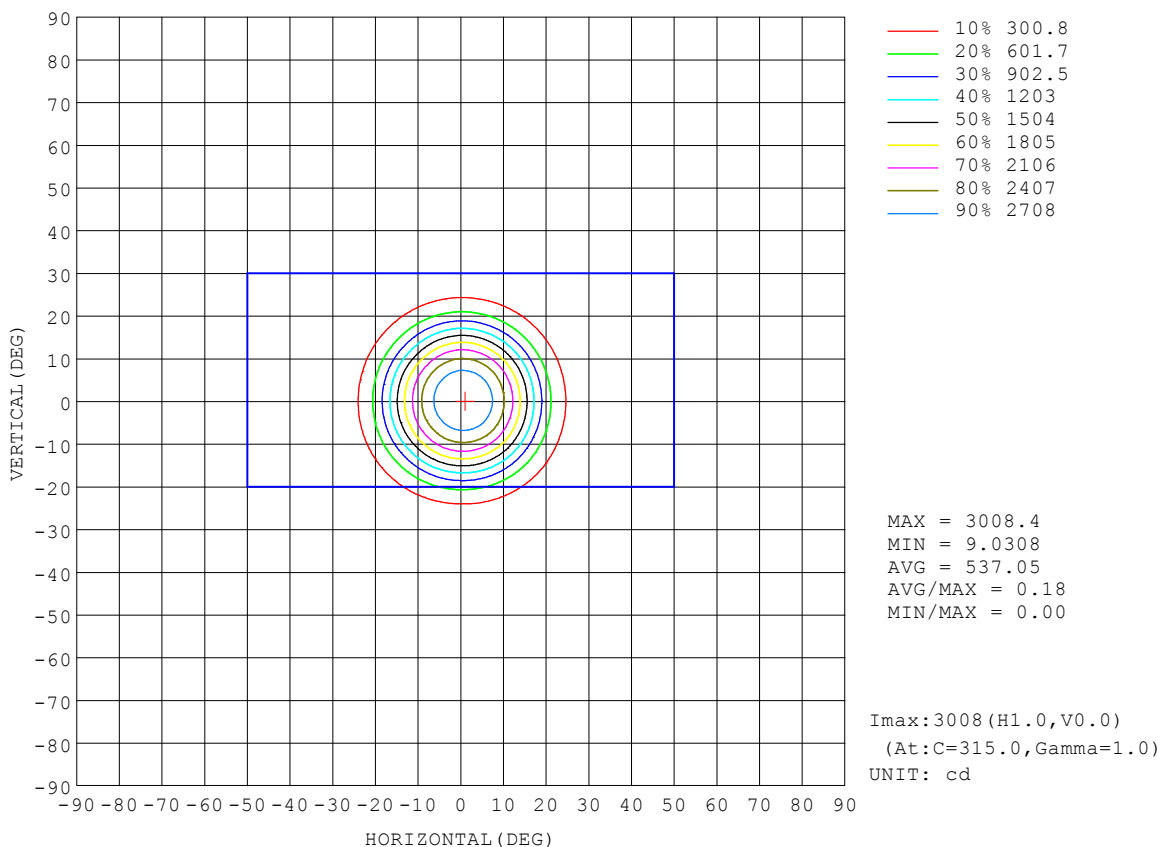


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-21

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.2V I:0.0413A P:9.2W PF:0.9247 Freq:49.99Hz		
UTHDi:0.16% ITHDi:18.14% KDisp:0.9400		Lamp Flux:880.284x1 lm
NAME: MD10-09-XX-04 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 41mm	Shielding Angle:

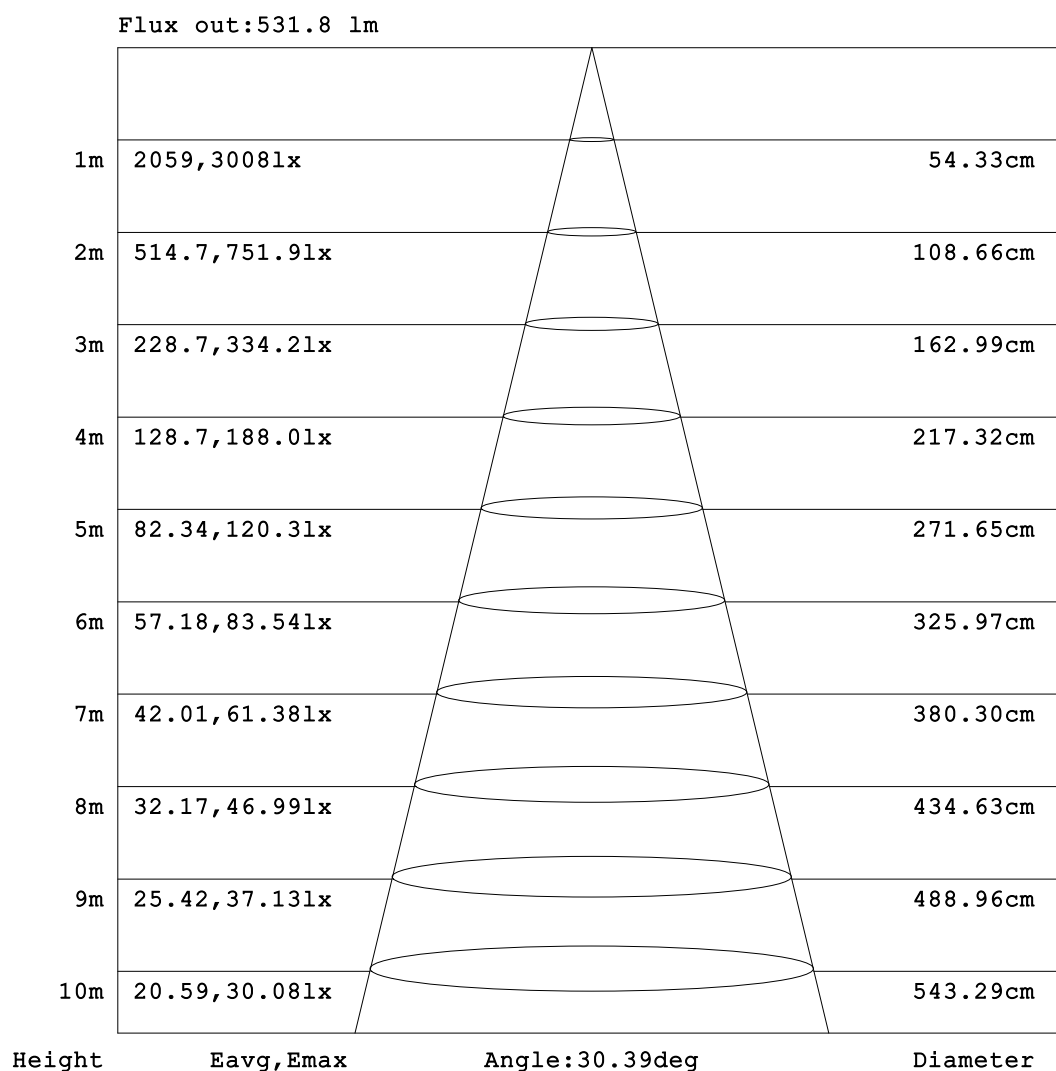


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-21

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.2V I:0.0413A P:9.2W PF:0.9247 Freq:49.99Hz		
UTHDi:0.16% ITHDi:18.14% KDisp:0.9400 Lamp Flux:880.284x1 lm		
NAME: MD10-09-XX-04 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 41mm	Shielding Angle:

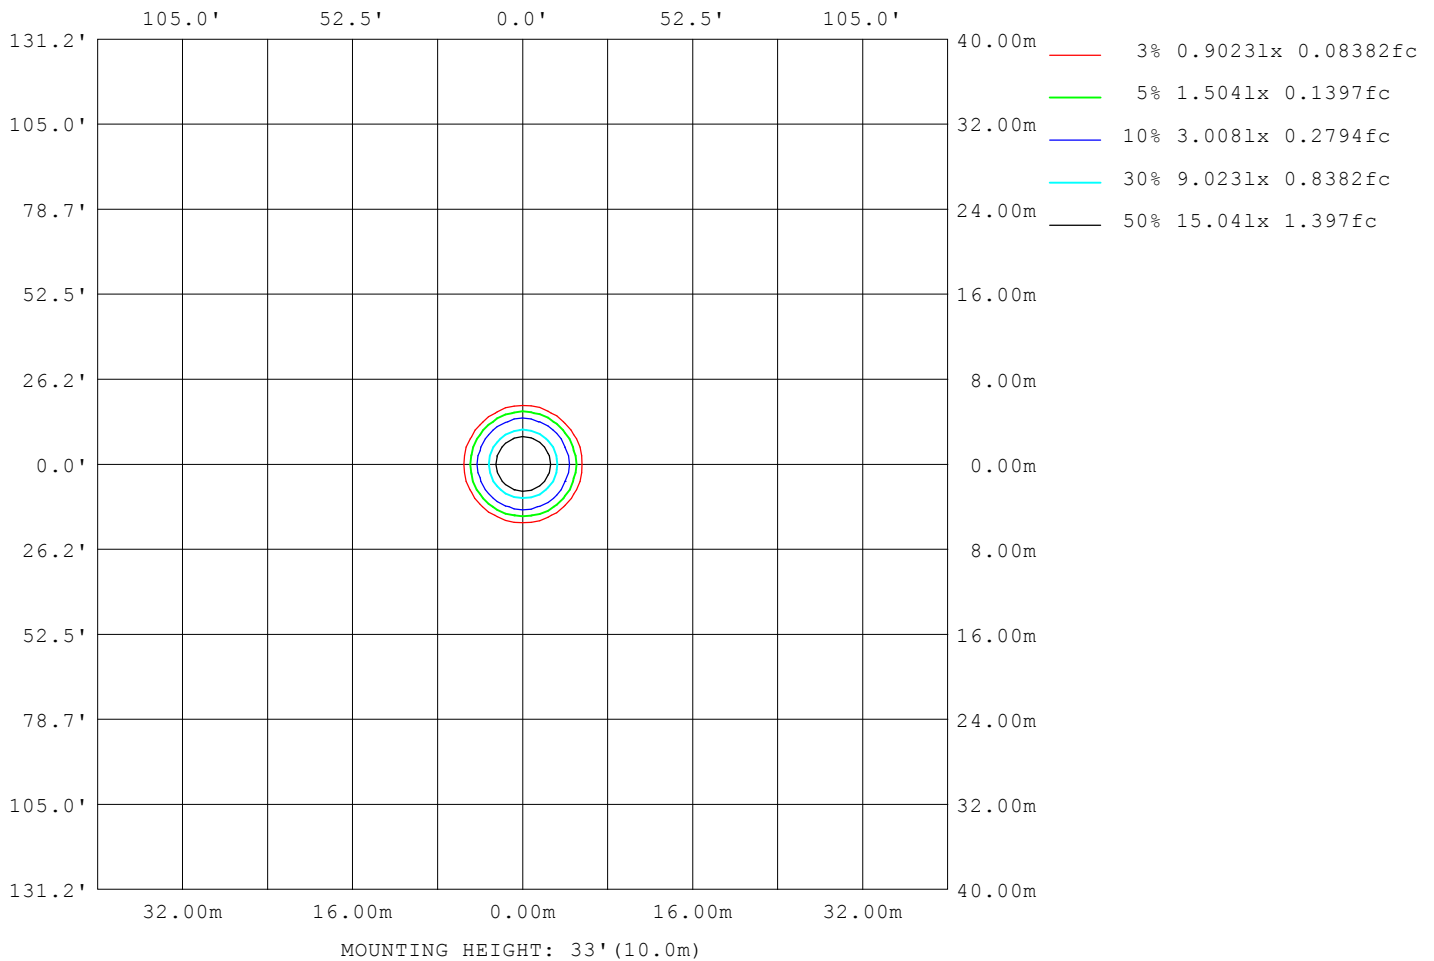

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2023-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.2V I:0.0413A P:9.2W PF:0.9247 Freq:49.99Hz		
UTHDi:0.16% ITHDi:18.14% KDisp:0.9400 Lamp Flux:880.284x1 lm		
NAME: MD10-09-XX-04 4000K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.: 41mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	8348
L_0~180 (75) av	5197
L_0~180 (85) av	1672
L_90~270 (65) av	8304
L_90~270 (75) av	5217
L_90~270 (85) av	345
L_45 (65) av	8283
L_45 (75) av	5157
L_45 (85) av	234

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2023-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

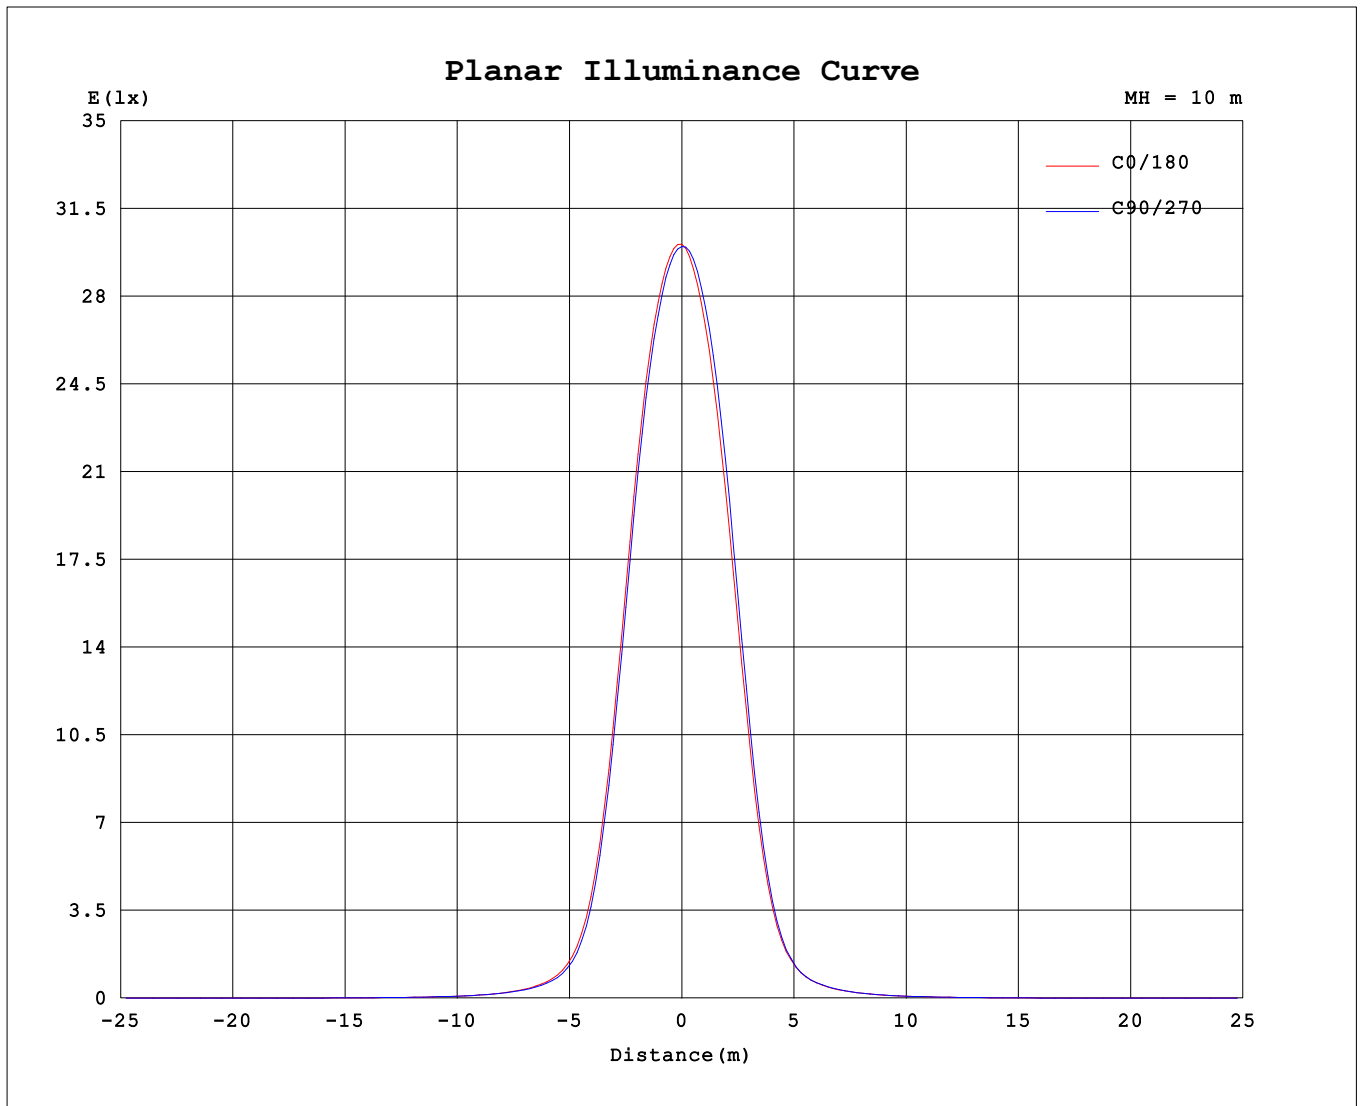

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2023-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	3002	3002	3002	3002	3002	3002	3002	3002
3.0	2966	2954	2942	2926	2915	2931	2962	2971
6.0	2817	2801	2772	2741	2723	2755	2809	2827
9.0	2550	2537	2489	2441	2416	2462	2536	2563
12.0	2135	2124	2059	2006	1986	2032	2124	2152
15.0	1601	1595	1522	1482	1478	1500	1590	1610
18.0	1057	1051	988.5	959.7	961.5	966.9	1044	1054
21.0	617.9	609.5	563.1	548.9	555.8	551.4	598.6	603.5
24.0	339.8	329.2	301.9	298.8	301.9	295.1	319.5	325.9
27.0	192.2	183.8	170.0	172.1	173.3	166.1	176.6	181.9
30.0	120.1	116.2	108.3	111.3	111.2	107.8	111.9	114.5
33.0	82.48	81.18	76.85	78.47	77.44	77.24	79.29	80.69
36.0	58.73	58.80	56.24	56.79	55.83	56.56	57.64	58.02
39.0	42.99	43.26	41.71	41.50	41.07	41.83	42.53	42.17
42.0	32.09	32.16	31.44	30.96	30.81	31.17	31.92	31.44
45.0	24.32	24.32	24.20	23.77	23.64	23.68	24.35	23.86
48.0	18.81	18.86	18.85	18.54	18.47	18.31	18.92	18.35
51.0	14.72	14.65	14.74	14.56	14.46	14.32	14.64	14.25
54.0	11.32	11.27	11.32	11.27	11.17	11.06	11.21	10.91
57.0	8.461	8.398	8.444	8.495	8.401	8.340	8.320	8.153
60.0	6.464	6.459	6.525	6.639	6.591	6.489	6.389	6.284
63.0	5.220	5.234	5.327	5.422	5.390	5.287	5.190	5.088
66.0	4.149	4.172	4.293	4.388	4.349	4.246	4.175	4.063
69.0	3.200	3.216	3.349	3.449	3.411	3.307	3.265	3.153
72.0	2.375	2.378	2.486	2.574	2.561	2.462	2.439	2.358
75.0	1.674	1.671	1.773	1.849	1.823	1.741	1.738	1.680
78.0	1.093	1.088	1.114	1.233	1.206	1.115	1.024	1.078
81.0	0.6537	0.5523	0.4642	0.6205	0.7163	0.5349	0.3907	0.5195
84.0	0.2842	0.1000	0.0485	0.1272	0.3215	0.1011	0.0395	0.0826
87.0	0.0450	0.0221	0.0412	0.0225	0.0429	0.0244	0.0354	0.0190
90.0	0.0369	0.0218	0.0383	0.0248	0.0240	0.0260	0.0283	0.0238

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-12-21

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: