


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.0448A P:10.0W PF:0.9322 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.76% KDisp:0.9501 Lamp Flux:873.519x1 lm		
NAME: MD10-10-XX-03 2700K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 86.98 lm/W
MODEL		I _{max} (cd)	2213	S/MH(C0/180)	0.53	
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.55	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	873.52	η UP,DN(C0-180)	0.0,50.5	
NOMINAL FLUX(lm)	873.519	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.5	
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	240.43	η down(%)	100.0	CIBSE SHR MAX	0.55	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

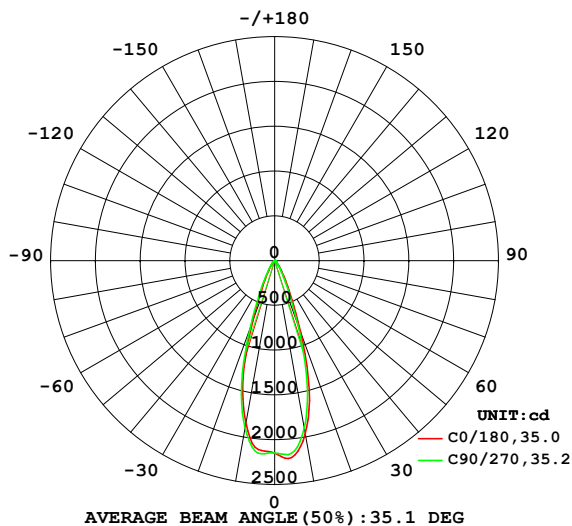

PLANAR ISOLUX DIAGRAM(UNIT:lx)

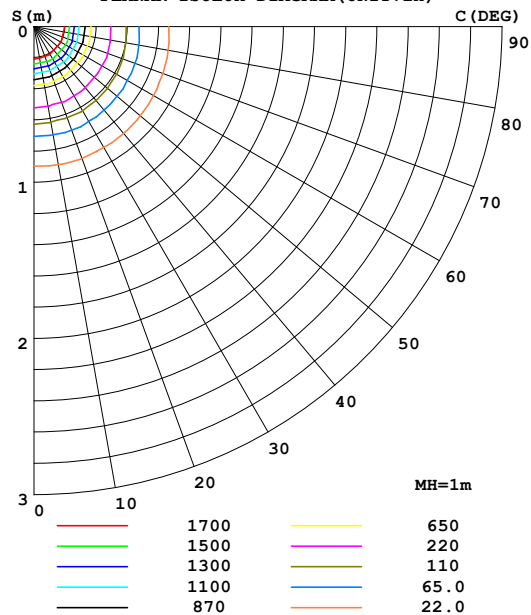

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1967	1950	1903	1883	1847	1852	1900	1969	0- 10	198.0	198.0	22.7,22.7
20	850.7	802.7	753.3	730.3	717.9	752.2	813.8	845.8	10- 20	377.7	575.6	65.9,65.9
30	224.9	216.2	180.4	166.9	156.6	174.7	196.8	221.2	20- 30	181.6	757.2	86.7,86.7
40	65.74	63.73	53.74	48.80	45.70	50.92	56.72	63.64	30- 40	67.09	824.3	94.4,94.4
50	22.61	23.06	20.52	19.13	17.56	19.67	20.75	22.13	40- 50	26.52	850.9	97.4,97.4
60	9.832	10.11	9.205	8.493	8.126	9.032	9.434	9.615	50- 60	12.47	863.3	98.8,98.8
70	4.983	5.026	4.650	4.432	4.240	4.625	4.841	4.994	60- 70	6.639	870.0	99.6,99.6
80	1.610	1.555	1.427	1.388	1.388	1.095	0.7230	1.027	70- 80	3.254	873.2	100,100
90	0.0125	0.0013	0.0145	0.0032	0.0064	0.0055	0.0077	0.0032	80- 90	0.3043	873.5	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 840.29 lm

%lum = 96.2%

%lamp = 96.2%

Conical surface Flux(130deg): 867.12 lm

%lum = 99.3%


%lamp = 99.3%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2023-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.0448A P:10.0W PF:0.9322 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.76% KDisp:0.9501 Lamp Flux:873.519x1 lm		
NAME: MD10-10-XX-03 2700K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.:	Shielding Angle:

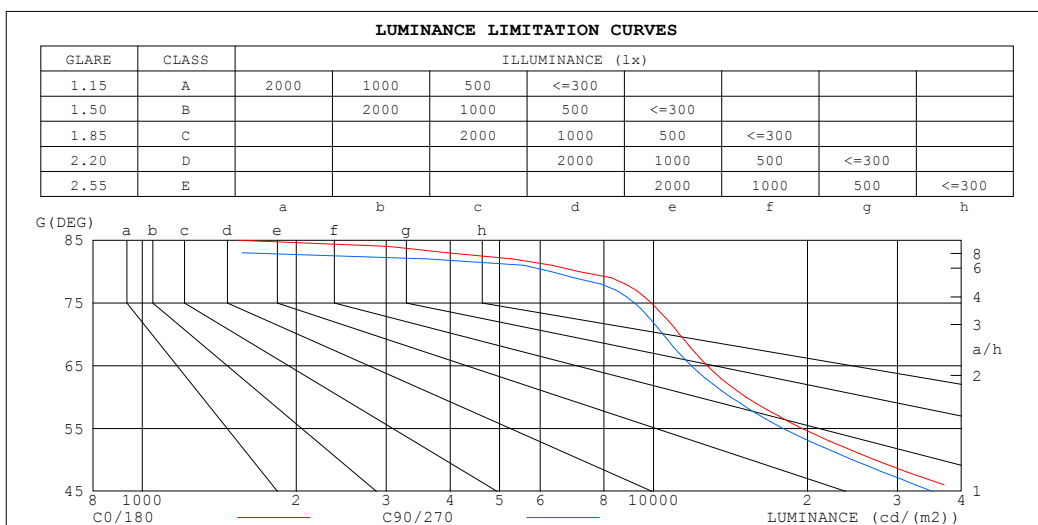

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1542	152
80	7153	6317
75	9901	9184
70	11241	10446
65	12741	11845
60	15170	14146
55	19529	17934
50	27138	24527
45	40412	35125


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2023-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.0448A P:10.0W PF:0.9322 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.76% KDisp:0.9501 Lamp Flux:873.519x1 lm		
NAME: MD10-10-XX-03 2700K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.06	1.04	1.03	1.02	1.01	.00	.99	.98	.97	.95														
2.0	1.05	1.02	.99	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.93	.92	.90														
3.0	.00	.96	.92	.98	.95	.91	.96	.93	.90	.94	.91	.89	.91	.89	.87	.86														
4.0	.95	.90	.87	.94	.89	.86	.92	.88	.85	.90	.87	.84	.88	.85	.83	.82														
5.0	.90	.85	.82	.89	.85	.82	.88	.84	.81	.86	.83	.80	.85	.82	.79	.78														
6.0	.86	.81	.78	.86	.81	.78	.84	.80	.77	.83	.79	.77	.82	.79	.76	.75														
7.0	.83	.78	.74	.82	.77	.74	.81	.77	.74	.80	.76	.73	.79	.75	.73	.72														
8.0	.79	.74	.71	.79	.74	.71	.78	.74	.71	.77	.73	.70	.76	.73	.70	.69														
9.0	.76	.71	.68	.76	.71	.68	.75	.71	.68	.74	.70	.68	.73	.70	.67	.66														
10.0	.73	.69	.66	.73	.69	.65	.72	.68	.65	.72	.68	.65	.71	.67	.65	.64														

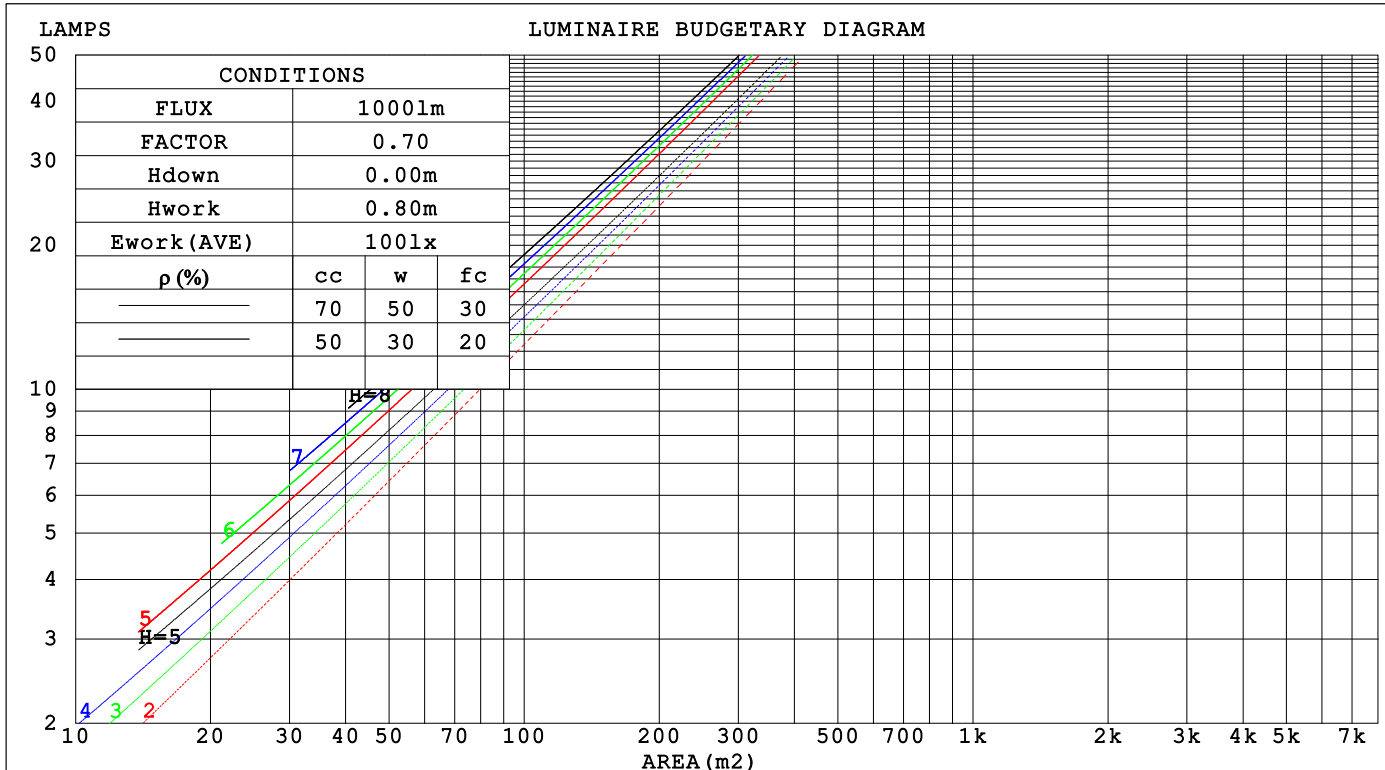

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.0448A P:10.0W PF:0.9322 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.76% KDisp:0.9501		Lamp Flux:873.519x1 lm
NAME: MD10-10-XX-03 2700K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.157	.089	.028	.150	.086	.027	.138	.079	.025	.126	.073	.023	.116	.067	.022		
2.0	.148	.081	.025	.142	.078	.024	.132	.073	.023	.122	.069	.021	.113	.064	.020		
3.0	.139	.074	.022	.134	.072	.022	.126	.068	.021	.117	.064	.020	.110	.061	.019		
4.0	.131	.068	.020	.127	.066	.020	.120	.063	.019	.113	.060	.018	.106	.058	.018		
5.0	.124	.063	.018	.120	.062	.018	.114	.059	.017	.108	.057	.017	.102	.055	.016		
6.0	.117	.059	.017	.115	.058	.017	.109	.056	.016	.104	.054	.016	.099	.052	.015		
7.0	.112	.055	.016	.109	.054	.016	.104	.053	.015	.100	.051	.015	.095	.050	.015		
8.0	.107	.052	.015	.104	.051	.015	.100	.050	.014	.096	.049	.014	.092	.047	.014		
9.0	.102	.049	.014	.100	.049	.014	.096	.048	.013	.092	.046	.013	.089	.045	.013		
10.0	.098	.047	.013	.096	.046	.013	.092	.045	.013	.089	.044	.013	.086	.043	.012		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.170	.157	.146	.145	.135	.126	.099	.093	.087	.057	.054	.051	.018	.017	.016		
2.0	.153	.133	.115	.131	.114	.100	.090	.079	.070	.052	.046	.041	.017	.015	.013		
3.0	.139	.113	.093	.119	.098	.080	.082	.068	.056	.047	.040	.033	.015	.013	.011		
4.0	.128	.098	.076	.110	.085	.066	.075	.059	.046	.044	.035	.027	.014	.011	.009		
5.0	.118	.086	.063	.101	.075	.055	.070	.052	.039	.040	.031	.023	.013	.010	.008		
6.0	.110	.077	.053	.094	.066	.046	.065	.046	.033	.038	.027	.019	.012	.009	.006		
7.0	.103	.069	.045	.088	.060	.039	.061	.042	.028	.035	.025	.017	.011	.008	.005		
8.0	.096	.062	.039	.083	.054	.034	.057	.038	.024	.033	.022	.014	.011	.007	.005		
9.0	.091	.057	.034	.078	.049	.029	.054	.035	.021	.032	.020	.012	.010	.007	.004		
10.0	.086	.052	.030	.074	.045	.026	.052	.032	.018	.030	.019	.011	.010	.006	.004		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.0448A P:10.0W PF:0.9322 Freq:49.99Hz UTHDi:0.20% ITHDi:19.76% KDisp:0.9501Lamp Flux:873.519x1 lm										
NAME: MD10-10-XX-03 2700K RA90 36D						TYPE:		WEIGHT:		
SPEC.:						DIM.:		SERIAL No.:		
MFR.: Norming Lighting						SUR.:		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.6	19.4	18.8	19.6	19.7	18.0	18.7	18.2	18.9	19.1
3H	18.8	19.5	19.1	19.7	19.9	18.2	18.9	18.4	19.1	19.3
4H	18.9	19.6	19.2	19.8	20.0	18.3	18.9	18.5	19.2	19.4
6H	18.9	19.6	19.2	19.8	20.0	18.3	18.9	18.6	19.2	19.4
8H	18.9	19.5	19.2	19.8	20.0	18.3	18.9	18.6	19.1	19.4
12H	18.9	19.5	19.2	19.7	20.0	18.2	18.8	18.5	19.1	19.3
4H 2H	18.6	19.3	18.9	19.5	19.7	18.0	18.7	18.3	18.9	19.1
3H	18.9	19.5	19.2	19.8	20.0	18.3	18.9	18.6	19.2	19.4
4H	19.0	19.6	19.4	19.9	20.2	18.5	19.0	18.8	19.3	19.6
6H	19.1	19.6	19.5	19.9	20.3	18.5	19.0	18.9	19.3	19.7
8H	19.1	19.5	19.5	19.9	20.2	18.5	19.0	18.9	19.3	19.7
12H	19.0	19.4	19.4	19.8	20.2	18.5	18.9	18.9	19.2	19.6
8H 4H	19.0	19.4	19.4	19.8	20.2	18.5	18.9	18.8	19.3	19.6
6H	19.1	19.5	19.5	19.9	20.3	18.6	18.9	19.0	19.3	19.7
8H	19.1	19.4	19.5	19.8	20.3	18.5	18.9	19.0	19.3	19.7
12H	19.0	19.3	19.5	19.8	20.2	18.5	18.8	18.9	19.2	19.7
12H 4H	19.0	19.4	19.4	19.7	20.1	18.4	18.8	18.8	19.2	19.6
6H	19.1	19.4	19.5	19.8	20.3	18.5	18.9	19.0	19.3	19.7
8H	19.1	19.3	19.5	19.8	20.2	18.5	18.8	19.0	19.2	19.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.8 / - 2.3					+ 1.4 / - 2.1				
1.5H	+ 3.1 / - 1.9					+ 2.3 / - 1.6				
2.0H	+ 2.5 / - 1.5					+ 2.2 / - 1.5				

CIE Pub.117, 873.5 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -0.5$)
Area: 0.0013 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.0448A P:10.0W PF:0.9322 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.76% KDisp:0.9501 Lamp Flux:873.519x1 lm		
NAME: MD10-10-XX-03 2700K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	88	82	78	88	82	78	87	81	78	74
0.80	95	90	86	95	89	86	94	89	85	82
1.00	100	94	91	99	94	90	97	94	90	86
1.25	104	98	95	102	98	95	101	97	94	90
1.50	106	102	98	105	101	98	103	99	97	92
2.00	109	105	102	107	104	101	105	102	99	94
2.50	110	107	104	109	105	103	106	103	101	95
3.00	112	109	106	110	107	105	107	104	103	96
4.00	114	111	109	112	110	108	108	106	105	98
5.00	115	113	111	113	111	110	109	108	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2023-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.0448A P:10.0W PF:0.9322 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.76% KDisp:0.9501 Lamp Flux:873.519x1 lm		
NAME: MD10-10-XX-03 2700K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.:	Shielding Angle:

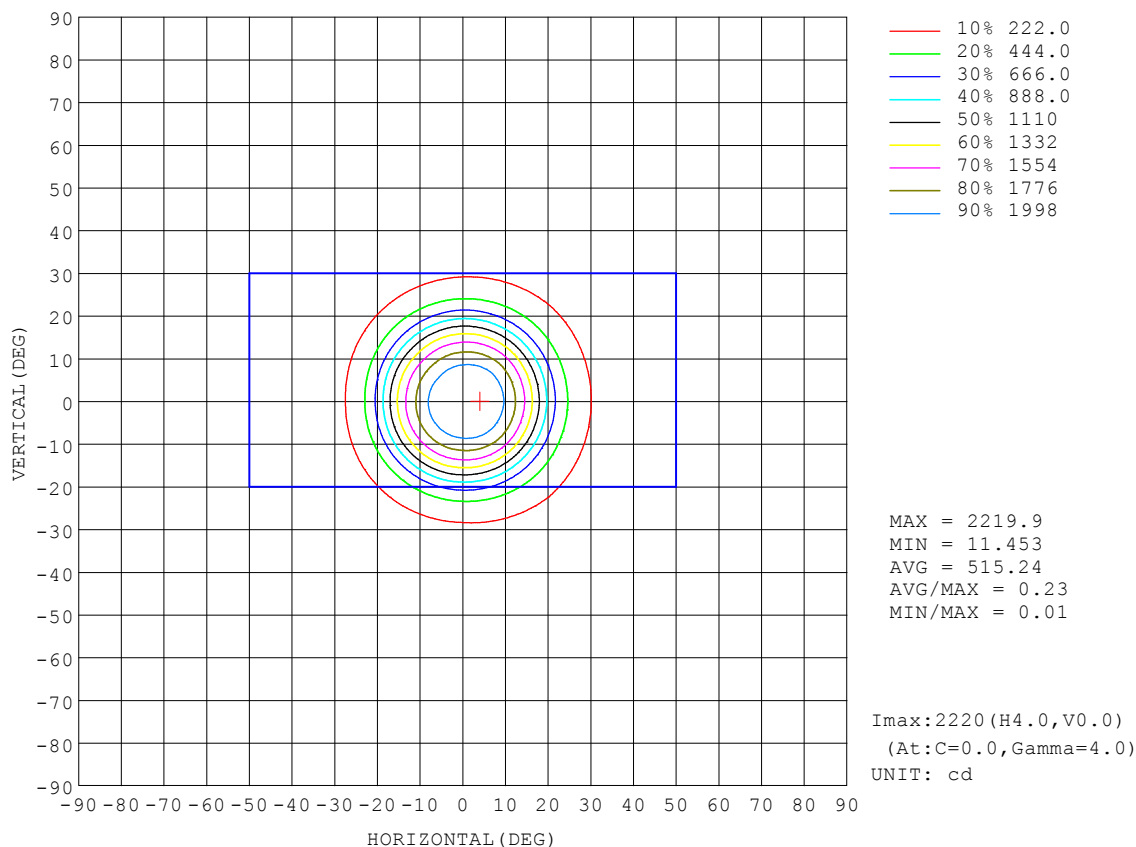


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.0448A P:10.0W PF:0.9322 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.76% KDisp:0.9501 Lamp Flux:873.519x1 lm		
NAME: MD10-10-XX-03 2700K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.:	Shielding Angle:

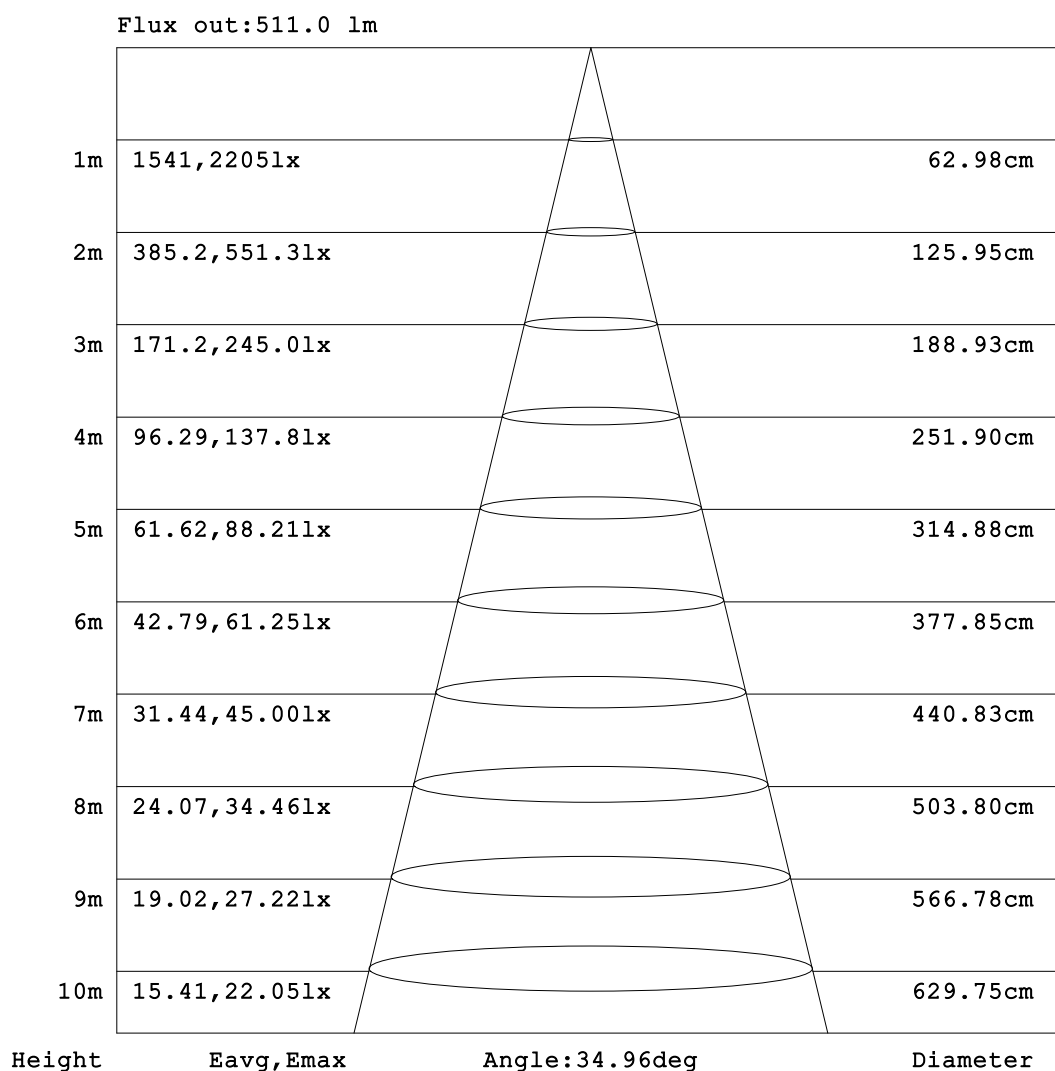


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.0448A P:10.0W PF:0.9322 Freq:49.99Hz		
UTHDi:0.20% ITHDi:19.76% KDisp:0.9501 Lamp Flux:873.519x1 lm		
NAME: MD10-10-XX-03 2700K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.:	Shielding Angle:

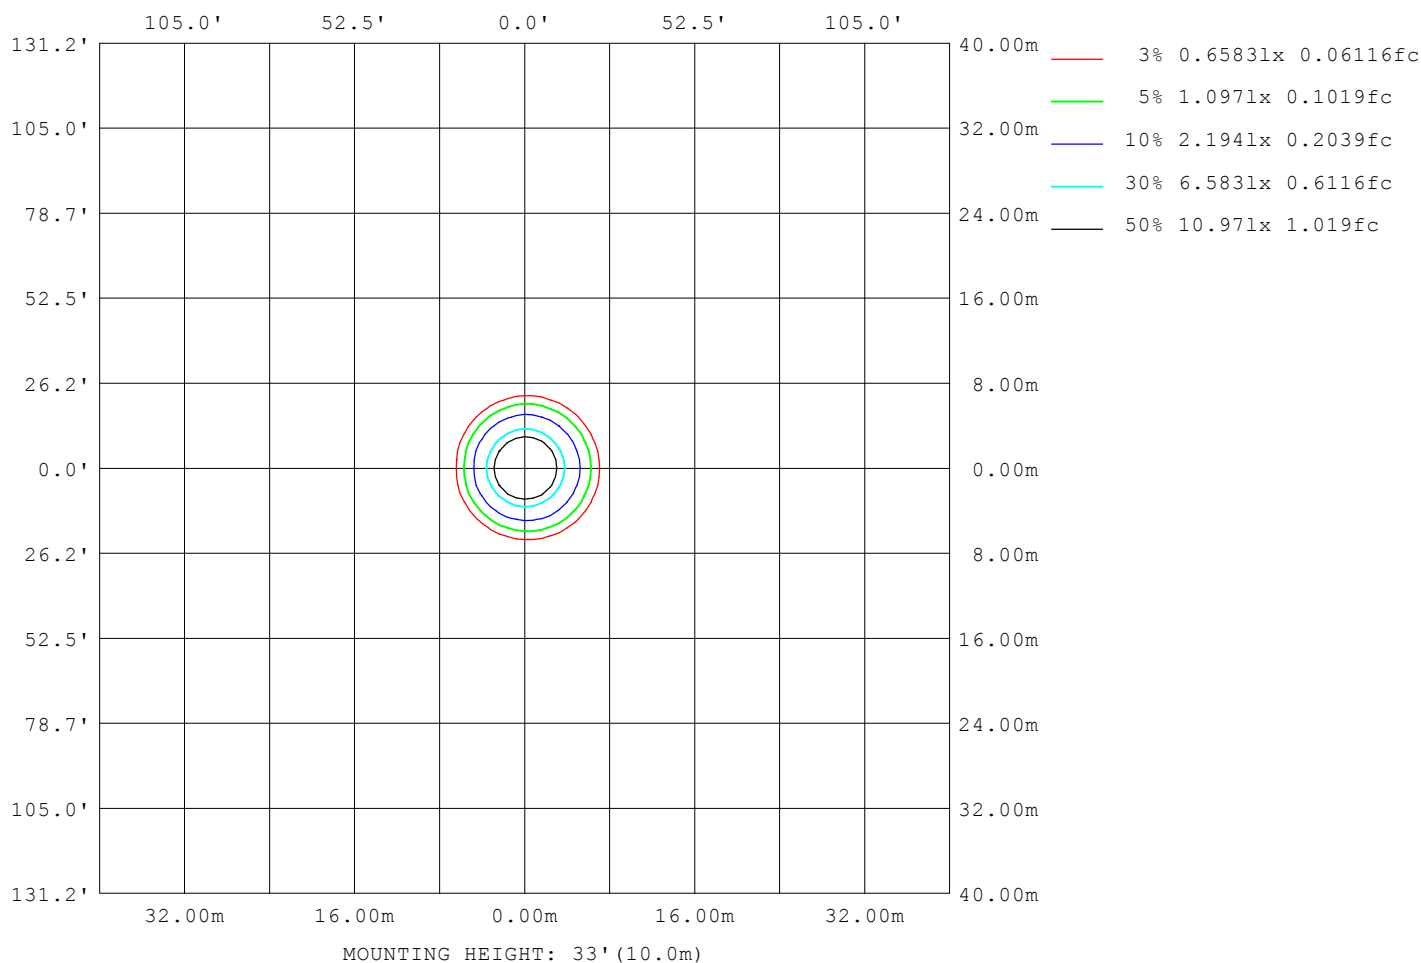

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.0448A P:10.0W PF:0.9322 Freq:49.99Hz UTHDi:0.20% ITHDi:19.76% KDisp:0.9501 Lamp Flux:873.519x1 lm		
NAME: MD10-10-XX-03 2700K RA90 36D	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming Lighting	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	11668
L_0~180 (75) av	9242
L_0~180 (85) av	1957
L_90~270 (65) av	12076
L_90~270 (75) av	9202
L_90~270 (85) av	127
L_45 (65) av	12118
L_45 (75) av	9474
L_45 (85) av	126

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2023-09-14

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

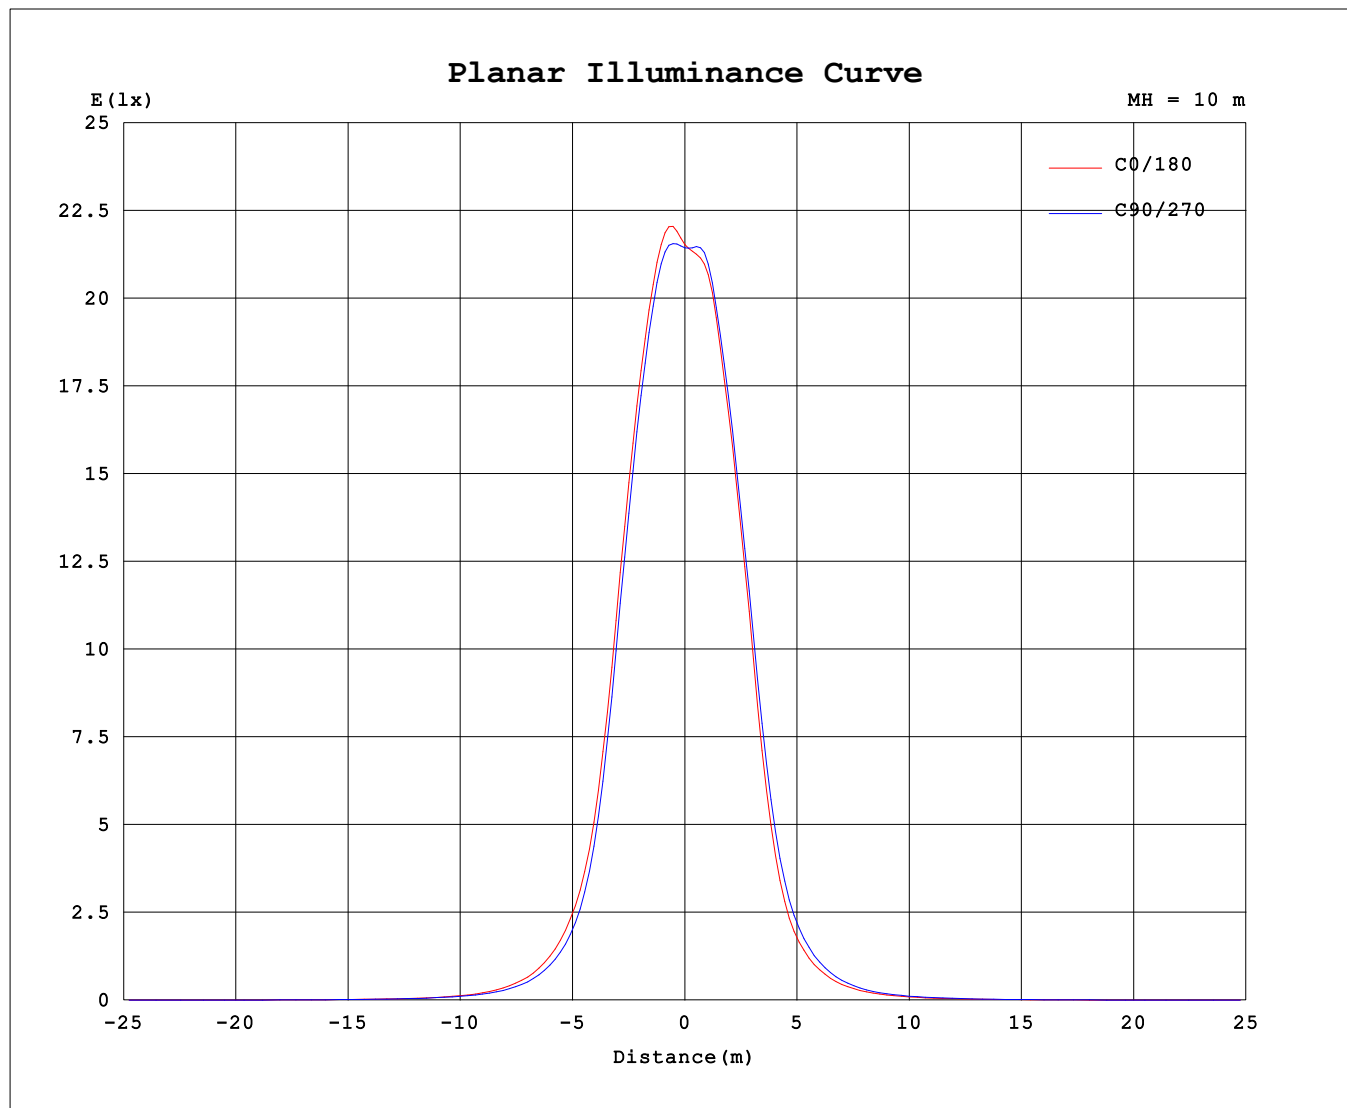

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2023-09-14

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```