


Indoor Luminaire Photometric Data

Description Information

Luminary Name: MD10-18-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Date: 2019/12/28
Manufacture: Shenzhen Norming Lighting Co., Ltd	Shld.Ang(°):	Test Machine:GON-2000
Test Lab: QUality peatment	Frequency (Hz):	Lamp CCT(K): Ra:
Lum. Size (W*L*H):0.550m*0.550m*0.850m	Lum. Area (m2):0.770	Lum. W(kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=1.0	Temp. (°C): 25
		Humidity(%):


Character Parameter

Lamp Speciality Parameter	Luminaire Speciality Parameter	
Rated Flux(lm): 1523.760	Luminary Flux(lm): 1532.762	Field Angle(10%Imax): 67.0(°)
Rated Power(W):	Luminary Efficiency: 100.59%	Down Lumens&Percent: 1528.962lm 99.75%
Rated Voltage(V):	Luminary EER(lm/W): 91.892	Up Lumens&Percent: 3.801lm 0.25%
Tested Power(W): 16.680	Max. Candela(cd): 3191.610	S/MH: C0_a180=0.597 C90_270=0.593
Lamps' Inside: 1	Max Cand@Ang. (°): C=0.0 γ=1.0	CIE Type: Semi-Direct
Tested Electrics (V, A, pf):240.3, 0.071	Beam Angle(50%Imax): 36.6(°)	ErP Φ use(90°): 1419.382lm
Lamp Size (W*L*H):0.550m*0.550m*0.850m	Left=-17.1°, Right=19.5°	IRF(%): 427.363

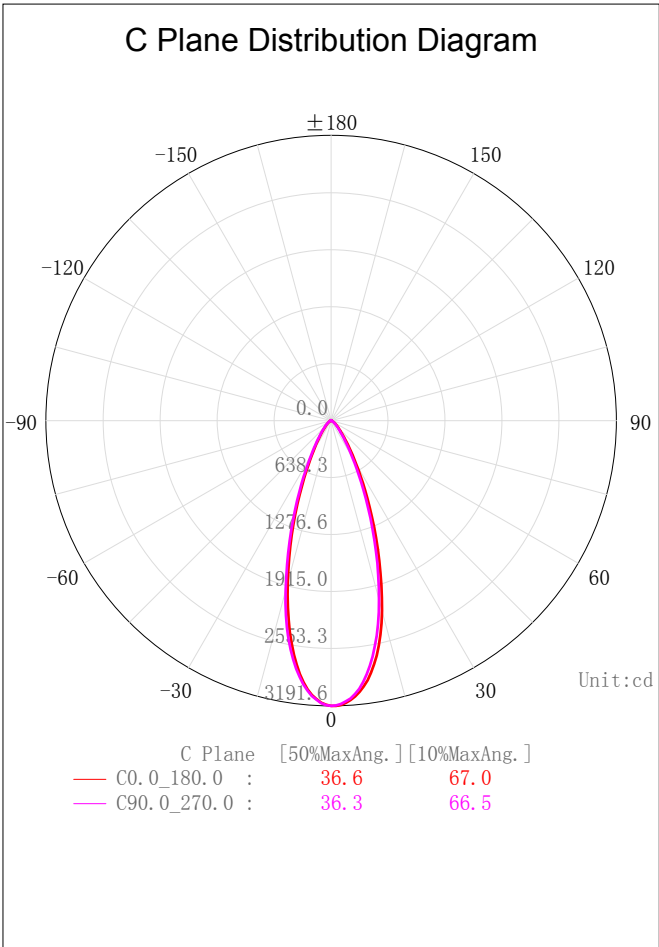

2D Plane Light Intensity Distribution Curve

Lum. Name: MD10-18-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality peatment
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2019/12/28

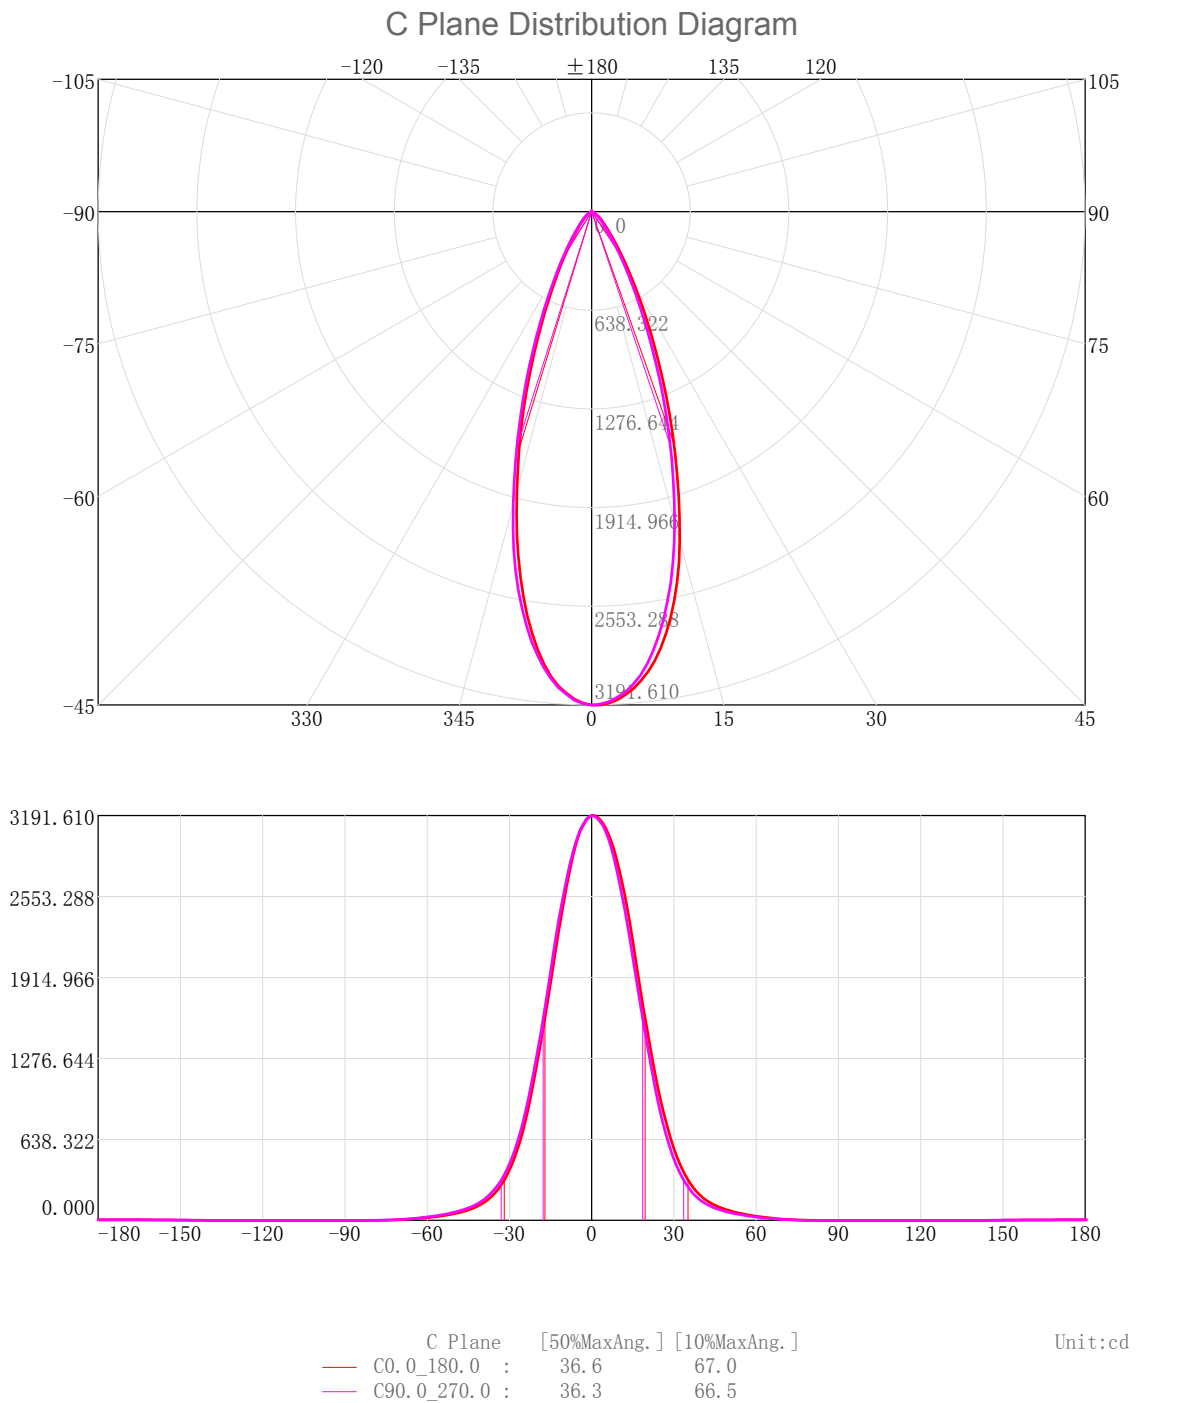


IES Indoor Report

Photometric Filename:MD10-18-XX-01 3000K RA90 36D.IES

3D Light Intensity Distribution Modal

Lum. Name: MD10-18-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality peatment
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2019/12/28

3D Light Intensity Distribution Modal

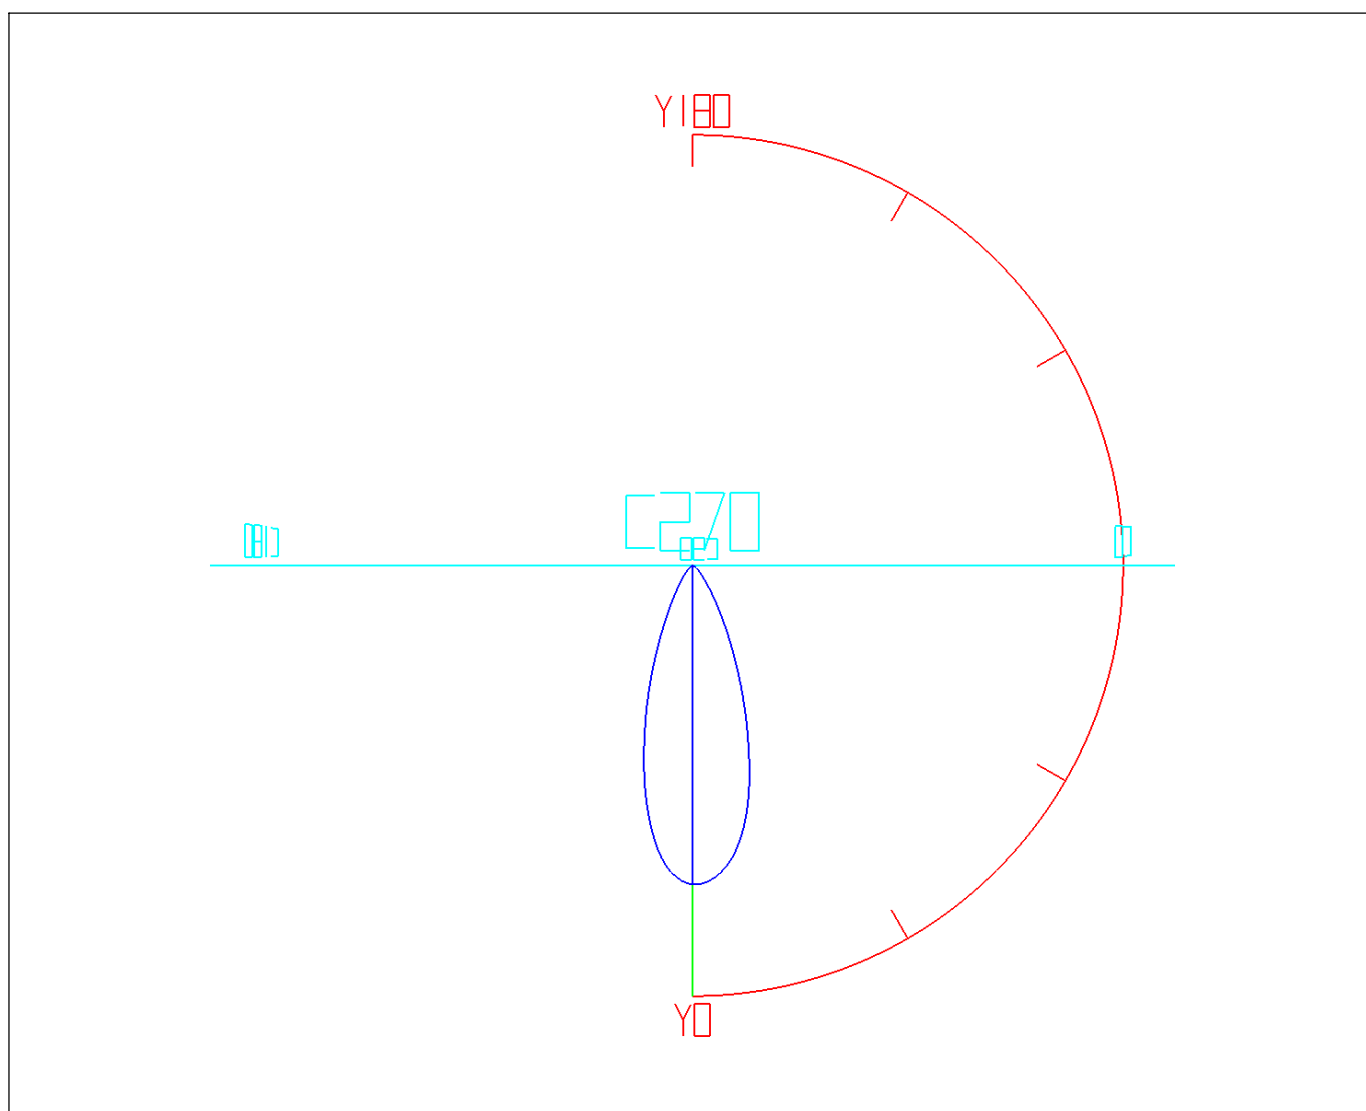

Curves: 3D Model — Fixture — Vert. HUD — Hori. HUD —
View Angles: Orient:0 Tilt:0 Roll:0 Spin:0

Zonal Flux Tabulation


Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	3.05	3.05	0.20	0.20	47.0-48.0	6.51	1458.23	0.43	95.70
1.0-2.0	9.12	12.17	0.60	0.80	48.0-49.0	6.09	1464.32	0.40	96.10
2.0-3.0	15.08	27.25	0.99	1.79	49.0-50.0	5.69	1470.01	0.37	96.47
3.0-4.0	20.89	48.14	1.37	3.16	50.0-51.0	5.32	1475.34	0.35	96.82
4.0-5.0	26.48	74.62	1.74	4.90	51.0-52.0	4.98	1480.31	0.33	97.15
5.0-6.0	31.78	106.40	2.09	6.98	52.0-53.0	4.65	1484.96	0.30	97.45
6.0-7.0	36.72	143.12	2.41	9.39	53.0-54.0	4.33	1489.29	0.28	97.74
7.0-8.0	41.24	184.36	2.71	12.10	54.0-55.0	4.03	1493.32	0.26	98.00
8.0-9.0	45.28	229.65	2.97	15.07	55.0-56.0	3.74	1497.06	0.25	98.25
9.0-10.0	48.81	278.45	3.20	18.27	56.0-57.0	3.47	1500.53	0.23	98.48
10.0-11.0	51.78	330.23	3.40	21.67	57.0-58.0	3.21	1503.74	0.21	98.69
11.0-12.0	54.17	384.39	3.55	25.23	58.0-59.0	2.96	1506.70	0.19	98.88
12.0-13.0	55.94	440.34	3.67	28.90	59.0-60.0	2.72	1509.42	0.18	99.06
13.0-14.0	57.06	497.39	3.74	32.64	60.0-61.0	2.49	1511.91	0.16	99.22
14.0-15.0	57.49	554.89	3.77	36.42	61.0-62.0	2.27	1514.18	0.15	99.37
15.0-16.0	57.33	612.22	3.76	40.18	62.0-63.0	2.06	1516.24	0.14	99.51
16.0-17.0	56.71	668.92	3.72	43.90	63.0-64.0	1.86	1518.10	0.12	99.63
17.0-18.0	55.67	724.59	3.65	47.55	64.0-65.0	1.66	1519.76	0.11	99.74
18.0-19.0	54.22	778.82	3.56	51.11	65.0-66.0	1.48	1521.24	0.10	99.83
19.0-20.0	52.42	831.23	3.44	54.55	66.0-67.0	1.30	1522.54	0.09	99.92
20.0-21.0	50.28	881.51	3.30	57.85	67.0-68.0	1.12	1523.67	0.07	99.99
21.0-22.0	47.87	929.38	3.14	60.99	68.0-69.0	0.95	1524.61	0.06	100.06
22.0-23.0	45.28	974.67	2.97	63.96	69.0-70.0	0.82	1525.43	0.05	100.11
23.0-24.0	42.55	1017.22	2.79	66.76	70.0-71.0	0.72	1526.15	0.05	100.16
24.0-25.0	39.80	1057.01	2.61	69.37	71.0-72.0	0.61	1526.76	0.04	100.20
25.0-26.0	37.08	1094.10	2.43	71.80	72.0-73.0	0.52	1527.28	0.03	100.23
26.0-27.0	34.42	1128.51	2.26	74.06	73.0-74.0	0.43	1527.72	0.03	100.26
27.0-28.0	31.82	1160.33	2.09	76.15	74.0-75.0	0.35	1528.07	0.02	100.28
28.0-29.0	29.36	1189.69	1.93	78.08	75.0-76.0	0.27	1528.34	0.02	100.30
29.0-30.0	27.04	1216.72	1.77	79.85	76.0-77.0	0.20	1528.54	0.01	100.31
30.0-31.0	24.87	1241.59	1.63	81.48	77.0-78.0	0.14	1528.69	0.01	100.32
31.0-32.0	22.87	1264.46	1.50	82.98	78.0-79.0	0.10	1528.78	0.01	100.33
32.0-33.0	21.00	1285.46	1.38	84.36	79.0-80.0	0.07	1528.85	0.00	100.33
33.0-34.0	19.25	1304.72	1.26	85.62	80.0-81.0	0.05	1528.90	0.00	100.34
34.0-35.0	17.64	1322.35	1.16	86.78	81.0-82.0	0.03	1528.94	0.00	100.34
35.0-36.0	16.16	1338.51	1.06	87.84	82.0-83.0	0.02	1528.95	0.00	100.34
36.0-37.0	14.82	1353.34	0.97	88.82	83.0-84.0	0.01	1528.96	0.00	100.34
37.0-38.0	13.61	1366.95	0.89	89.71	84.0-85.0	0.00	1528.96	0.00	100.34
38.0-39.0	12.52	1379.47	0.82	90.53	85.0-86.0	0.00	1528.96	0.00	100.34
39.0-40.0	11.56	1391.03	0.76	91.29	86.0-87.0	0.00	1528.96	0.00	100.34
40.0-41.0	10.68	1401.71	0.70	91.99	87.0-88.0	0.00	1528.96	0.00	100.34
41.0-42.0	9.89	1411.60	0.65	92.64	88.0-89.0	0.00	1528.96	0.00	100.34
42.0-43.0	9.19	1420.79	0.60	93.24	89.0-90.0	0.00	1528.96	0.00	100.34
43.0-44.0	8.55	1429.34	0.56	93.80	90.0-91.0	0.00	1528.96	0.00	100.34
44.0-45.0	7.97	1437.31	0.52	94.33	91.0-92.0	0.00	1528.96	0.00	100.34
45.0-46.0	7.45	1444.76	0.49	94.82	92.0-93.0	0.00	1528.96	0.00	100.34
46.0-47.0	6.97	1451.72	0.46	95.27	93.0-94.0	0.00	1528.96	0.00	100.34

Zonal Flux Tabulation - (Cont.)

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	1528.96	0.00	100.34	141.0-142.0	0.02	1529.01	0.00	100.34
95.0-96.0	0.00	1528.96	0.00	100.34	142.0-143.0	0.03	1529.04	0.00	100.35
96.0-97.0	0.00	1528.96	0.00	100.34	143.0-144.0	0.04	1529.08	0.00	100.35
97.0-98.0	0.00	1528.96	0.00	100.34	144.0-145.0	0.06	1529.14	0.00	100.35
98.0-99.0	0.00	1528.96	0.00	100.34	145.0-146.0	0.07	1529.21	0.00	100.36
99.0-100.0	0.00	1528.96	0.00	100.34	146.0-147.0	0.08	1529.30	0.01	100.36
100.0-101.0	0.00	1528.96	0.00	100.34	147.0-148.0	0.10	1529.40	0.01	100.37
101.0-102.0	0.00	1528.96	0.00	100.34	148.0-149.0	0.11	1529.51	0.01	100.38
102.0-103.0	0.00	1528.96	0.00	100.34	149.0-150.0	0.12	1529.63	0.01	100.39
103.0-104.0	0.00	1528.96	0.00	100.34	150.0-151.0	0.13	1529.76	0.01	100.39
104.0-105.0	0.00	1528.96	0.00	100.34	151.0-152.0	0.13	1529.89	0.01	100.40
105.0-106.0	0.00	1528.96	0.00	100.34	152.0-153.0	0.14	1530.03	0.01	100.41
106.0-107.0	0.00	1528.96	0.00	100.34	153.0-154.0	0.15	1530.18	0.01	100.42
107.0-108.0	0.00	1528.96	0.00	100.34	154.0-155.0	0.15	1530.33	0.01	100.43
108.0-109.0	0.00	1528.96	0.00	100.34	155.0-156.0	0.15	1530.48	0.01	100.44
109.0-110.0	0.00	1528.96	0.00	100.34	156.0-157.0	0.15	1530.63	0.01	100.45
110.0-111.0	0.00	1528.96	0.00	100.34	157.0-158.0	0.15	1530.79	0.01	100.46
111.0-112.0	0.00	1528.96	0.00	100.34	158.0-159.0	0.15	1530.94	0.01	100.47
112.0-113.0	0.00	1528.96	0.00	100.34	159.0-160.0	0.15	1531.09	0.01	100.48
113.0-114.0	0.00	1528.96	0.00	100.34	160.0-161.0	0.15	1531.23	0.01	100.49
114.0-115.0	0.00	1528.96	0.00	100.34	161.0-162.0	0.14	1531.38	0.01	100.50
115.0-116.0	0.00	1528.96	0.00	100.34	162.0-163.0	0.14	1531.51	0.01	100.51
116.0-117.0	0.00	1528.96	0.00	100.34	163.0-164.0	0.13	1531.65	0.01	100.52
117.0-118.0	0.00	1528.96	0.00	100.34	164.0-165.0	0.13	1531.78	0.01	100.53
118.0-119.0	0.00	1528.96	0.00	100.34	165.0-166.0	0.12	1531.90	0.01	100.53
119.0-120.0	0.00	1528.96	0.00	100.34	166.0-167.0	0.11	1532.01	0.01	100.54
120.0-121.0	0.00	1528.96	0.00	100.34	167.0-168.0	0.11	1532.12	0.01	100.55
121.0-122.0	0.00	1528.96	0.00	100.34	168.0-169.0	0.10	1532.22	0.01	100.56
122.0-123.0	0.00	1528.96	0.00	100.34	169.0-170.0	0.09	1532.31	0.01	100.56
123.0-124.0	0.00	1528.96	0.00	100.34	170.0-171.0	0.08	1532.39	0.01	100.57
124.0-125.0	0.00	1528.96	0.00	100.34	171.0-172.0	0.08	1532.47	0.00	100.57
125.0-126.0	0.00	1528.96	0.00	100.34	172.0-173.0	0.07	1532.54	0.00	100.58
126.0-127.0	0.00	1528.96	0.00	100.34	173.0-174.0	0.06	1532.59	0.00	100.58
127.0-128.0	0.00	1528.96	0.00	100.34	174.0-175.0	0.05	1532.65	0.00	100.58
128.0-129.0	0.00	1528.96	0.00	100.34	175.0-176.0	0.04	1532.69	0.00	100.59
129.0-130.0	0.00	1528.96	0.00	100.34	176.0-177.0	0.03	1532.72	0.00	100.59
130.0-131.0	0.00	1528.96	0.00	100.34	177.0-178.0	0.02	1532.74	0.00	100.59
131.0-132.0	0.00	1528.96	0.00	100.34	178.0-179.0	0.01	1532.76	0.00	100.59
132.0-133.0	0.00	1528.96	0.00	100.34	179.0-180.0	0.00	1532.76	0.00	100.59
133.0-134.0	0.00	1528.96	0.00	100.34					
134.0-135.0	0.00	1528.96	0.00	100.34					
135.0-136.0	0.00	1528.96	0.00	100.34					
136.0-137.0	0.00	1528.96	0.00	100.34					
137.0-138.0	0.00	1528.96	0.00	100.34					
138.0-139.0	0.00	1528.96	0.00	100.34					
139.0-140.0	0.01	1528.97	0.00	100.34					
140.0-141.0	0.01	1528.98	0.00	100.34					

Rectangle ISO Lighting Intensity Diagram


Lum. Name: MD10-18-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality peatment
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2019/12/28

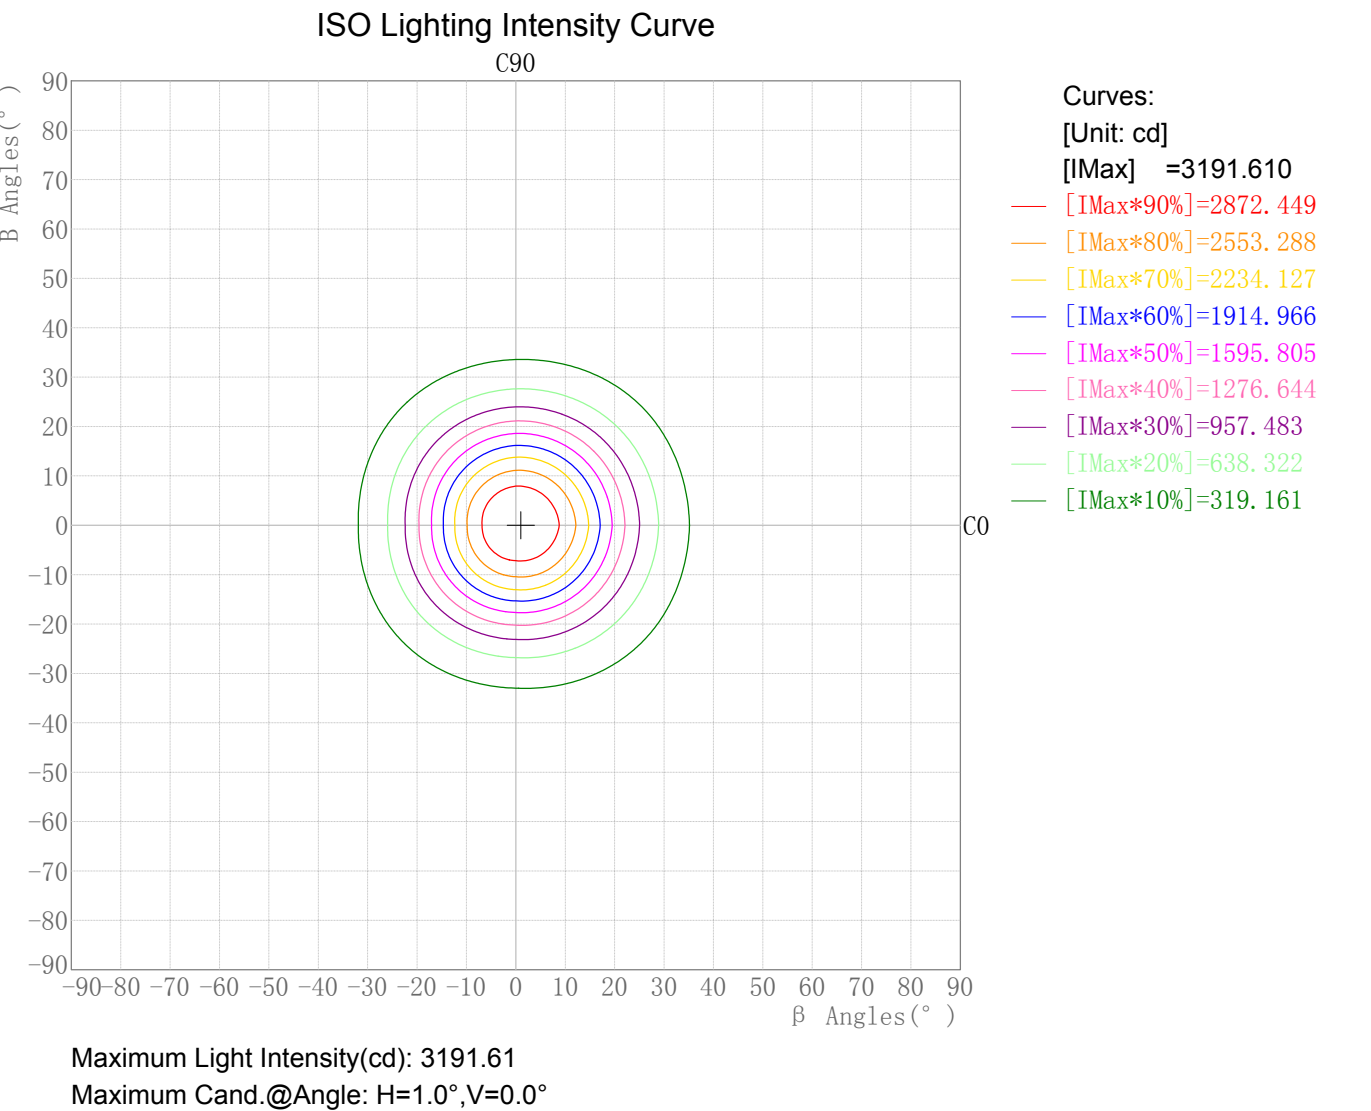

Plane ISO-Illuminance Diagram

Lum. Name: MD10-18-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality peatment
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2019/12/28


Plane ISO-Illuminance Curve

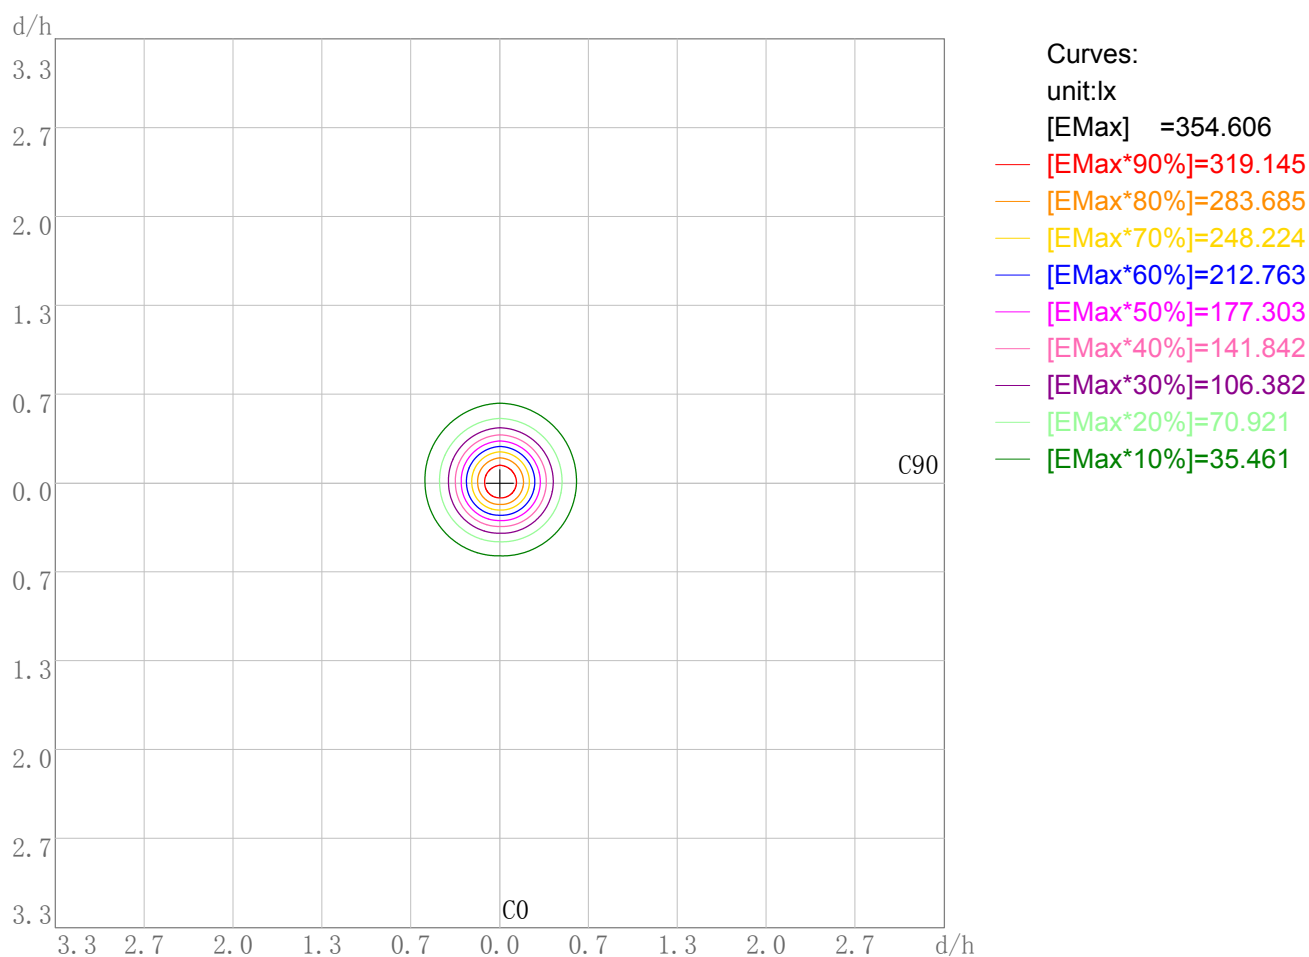

3D Plane ISO Illuminance Diagram

Lum. Name: MD10-18-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality peatment
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2019/12/28

3D Plane Illuminance Modal

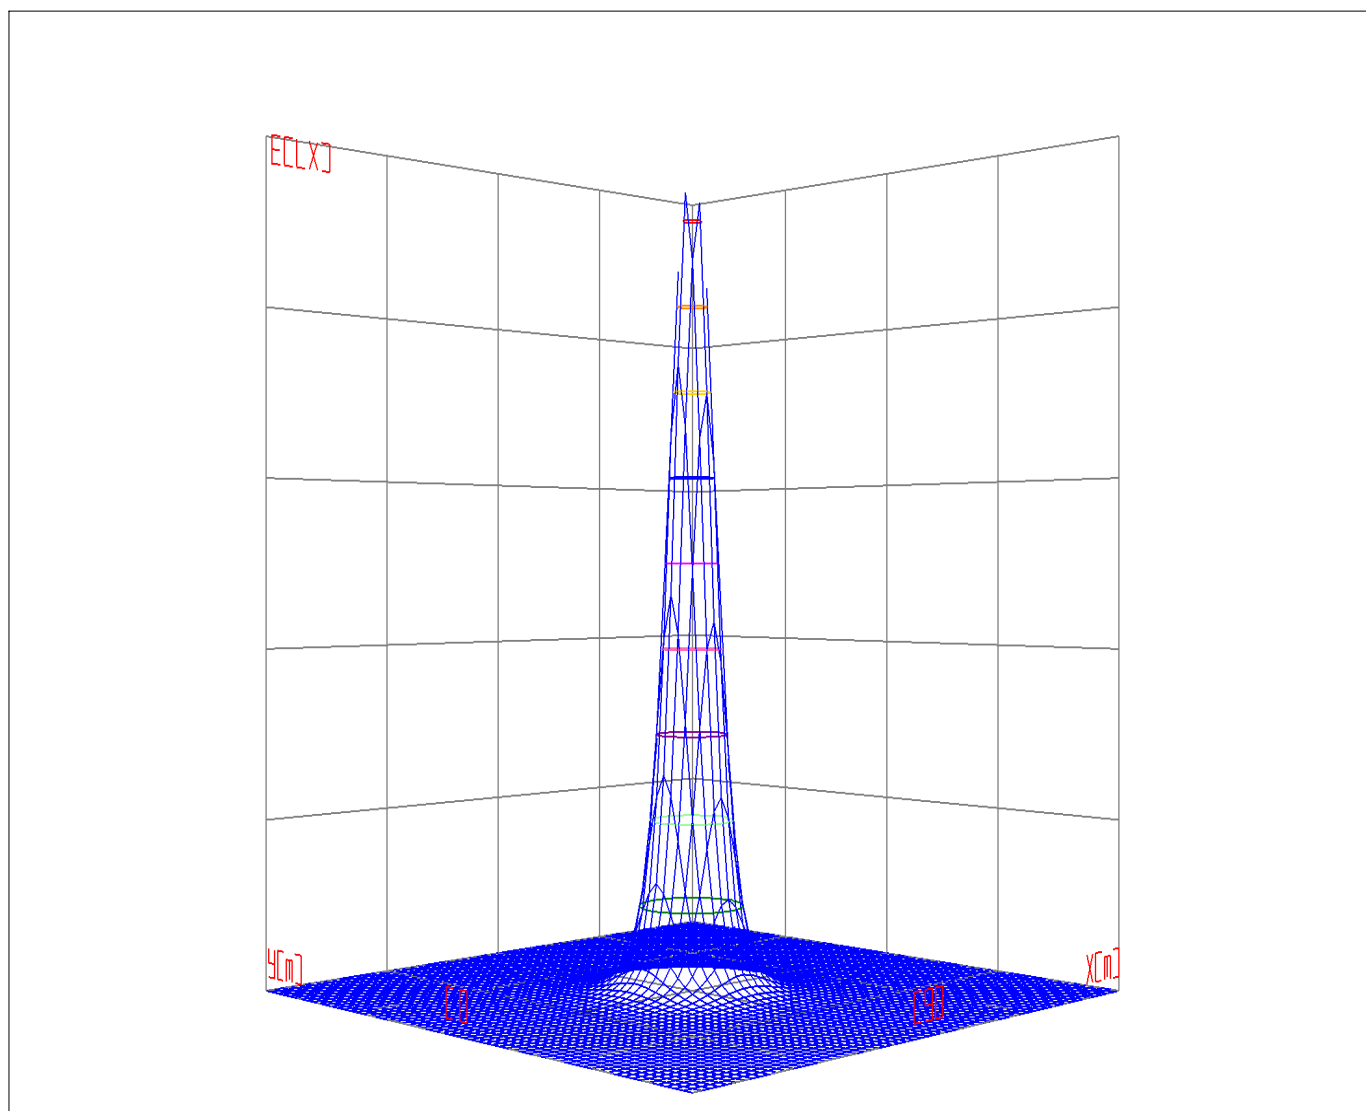


Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
 View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0

Space ISO Illuminance Diagram

Lum. Name:MD10-18-XX-01 3000K RA90 36D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality peatment
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2019/12/28

Space ISO Illuminance Curve

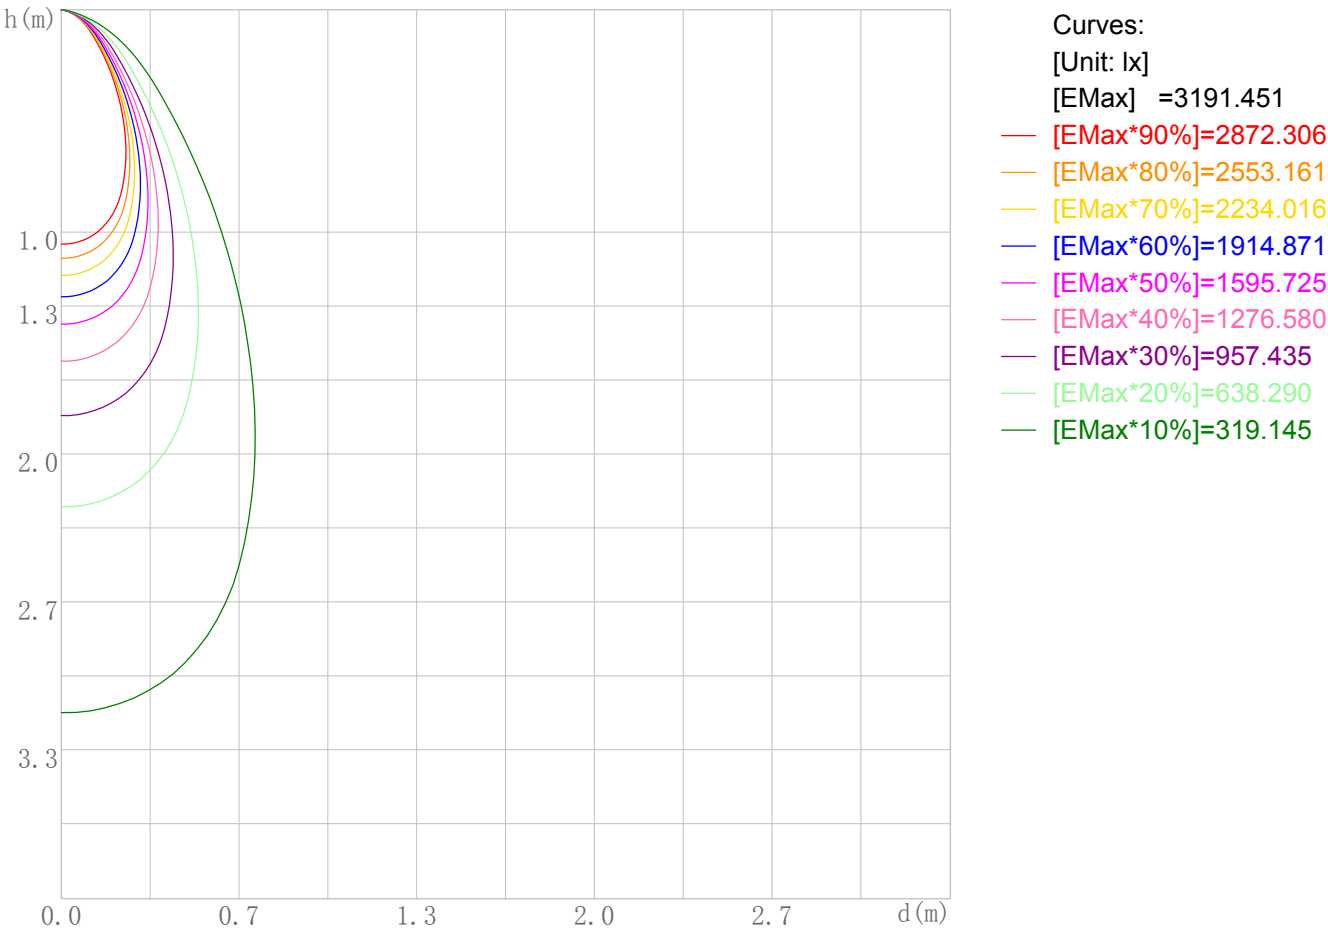

Space Plane Maximum Illuminance and @Angle:3191.45lx,0.0deg
Plane Maximum Lighting Intensity and @Angle:3191.610cd,0deg


IES Indoor Report

Photometric Filename:MD10-18-XX-01 3000K RA90 36D.IES

Illuminance-Distance Diagram

Lum. Name: MD10-18-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality peatment
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2019/12/28

Illuminance-Distance Curve

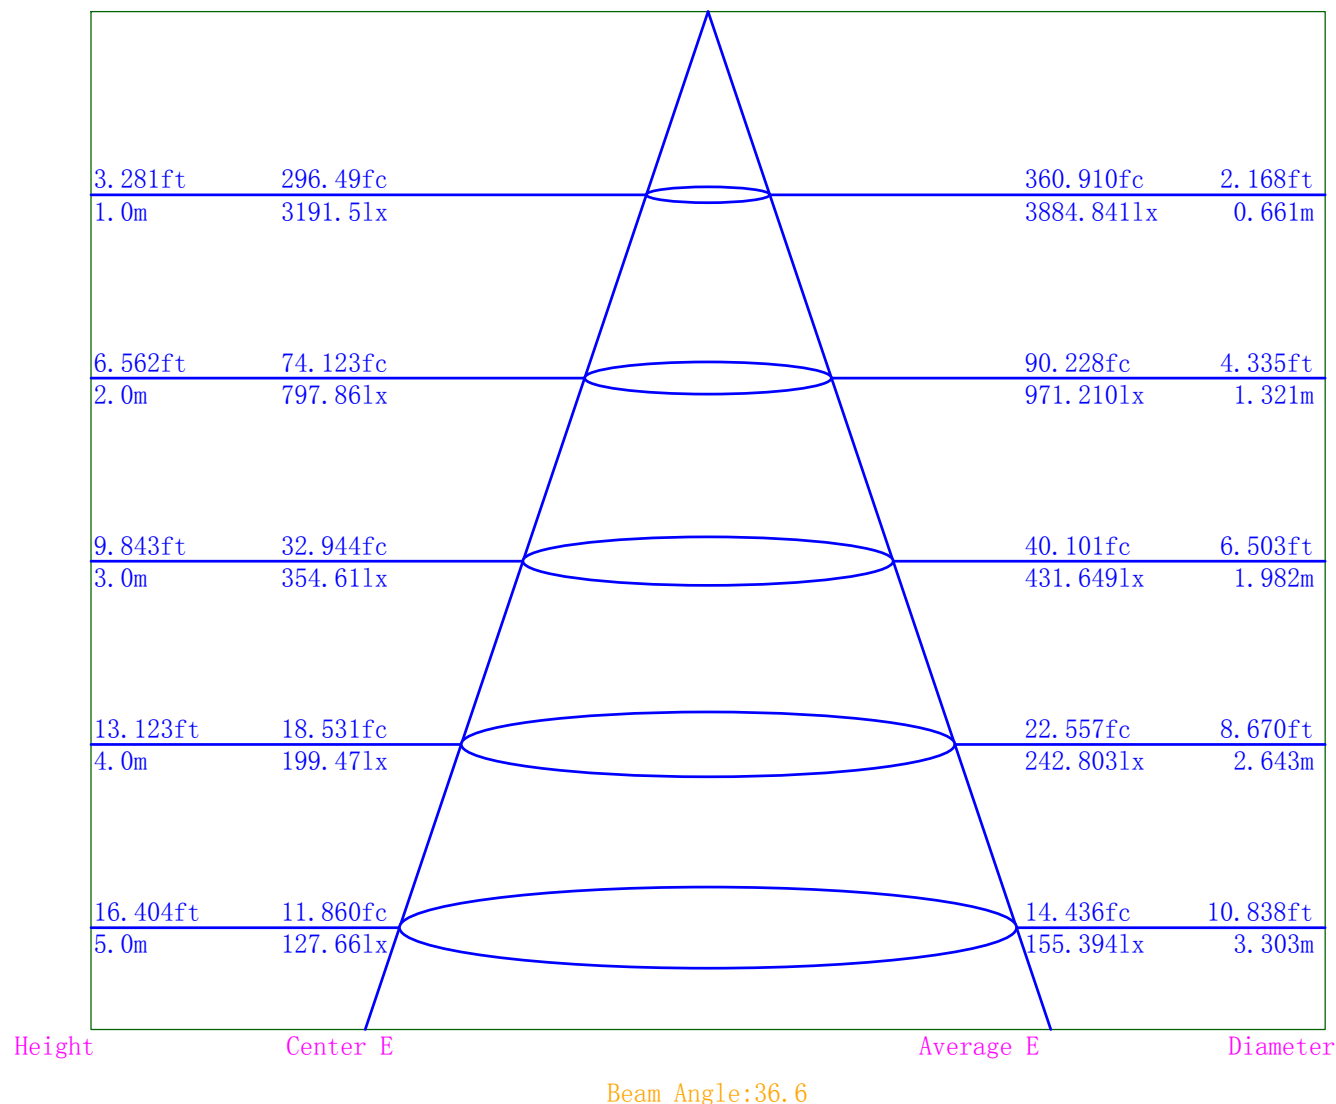

IES Indoor Report

Photometric Filename:MD10-18-XX-01 3000K RA90 36D.IES

Indoor Luminance Limiting Curves

Lum. Name: MD10-18-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality peatment
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2019/12/28


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	220	160	119	87	60	36	21	10	0
C90	178	129	96	70	47	27	12	0	0

Luminance Limiting Curve

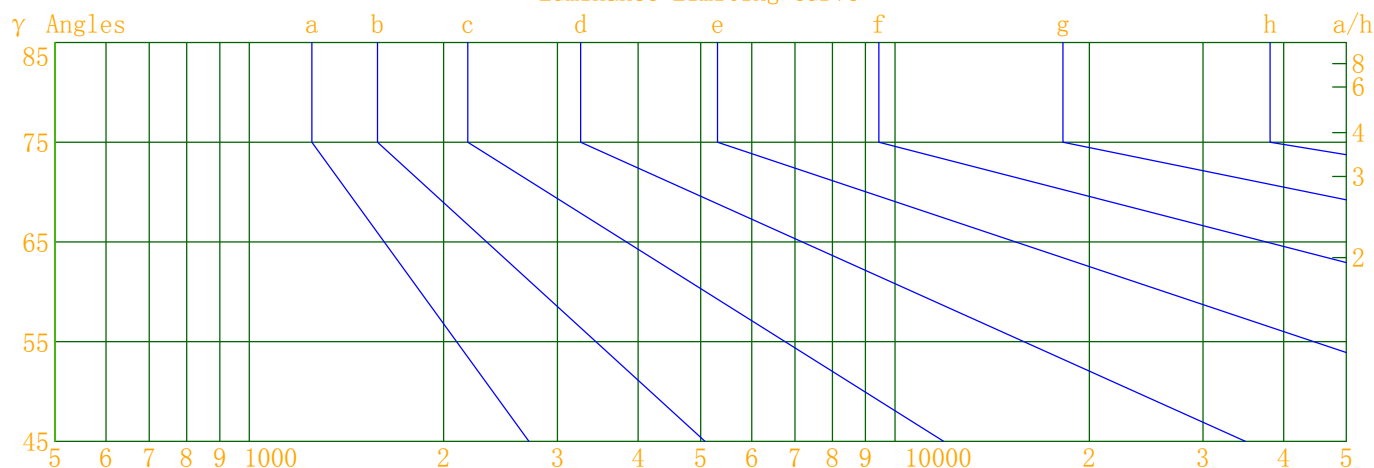


Luminous Size: Length(m)=0.550 Width(m)=0.550 Height(m)=0.850 Area(m²)=0.770000
Luminous Type: Without Luminous Side
Luminous Curves: C0-C180 Color: — C90-C270 Color: —

IES Indoor Report

Photometric Filename:MD10-18-XX-01 3000K RA90 36D.IES

Indoor Budgetary Estimate Table

Lum. Name: MD10-18-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality peatment
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2019/12/28

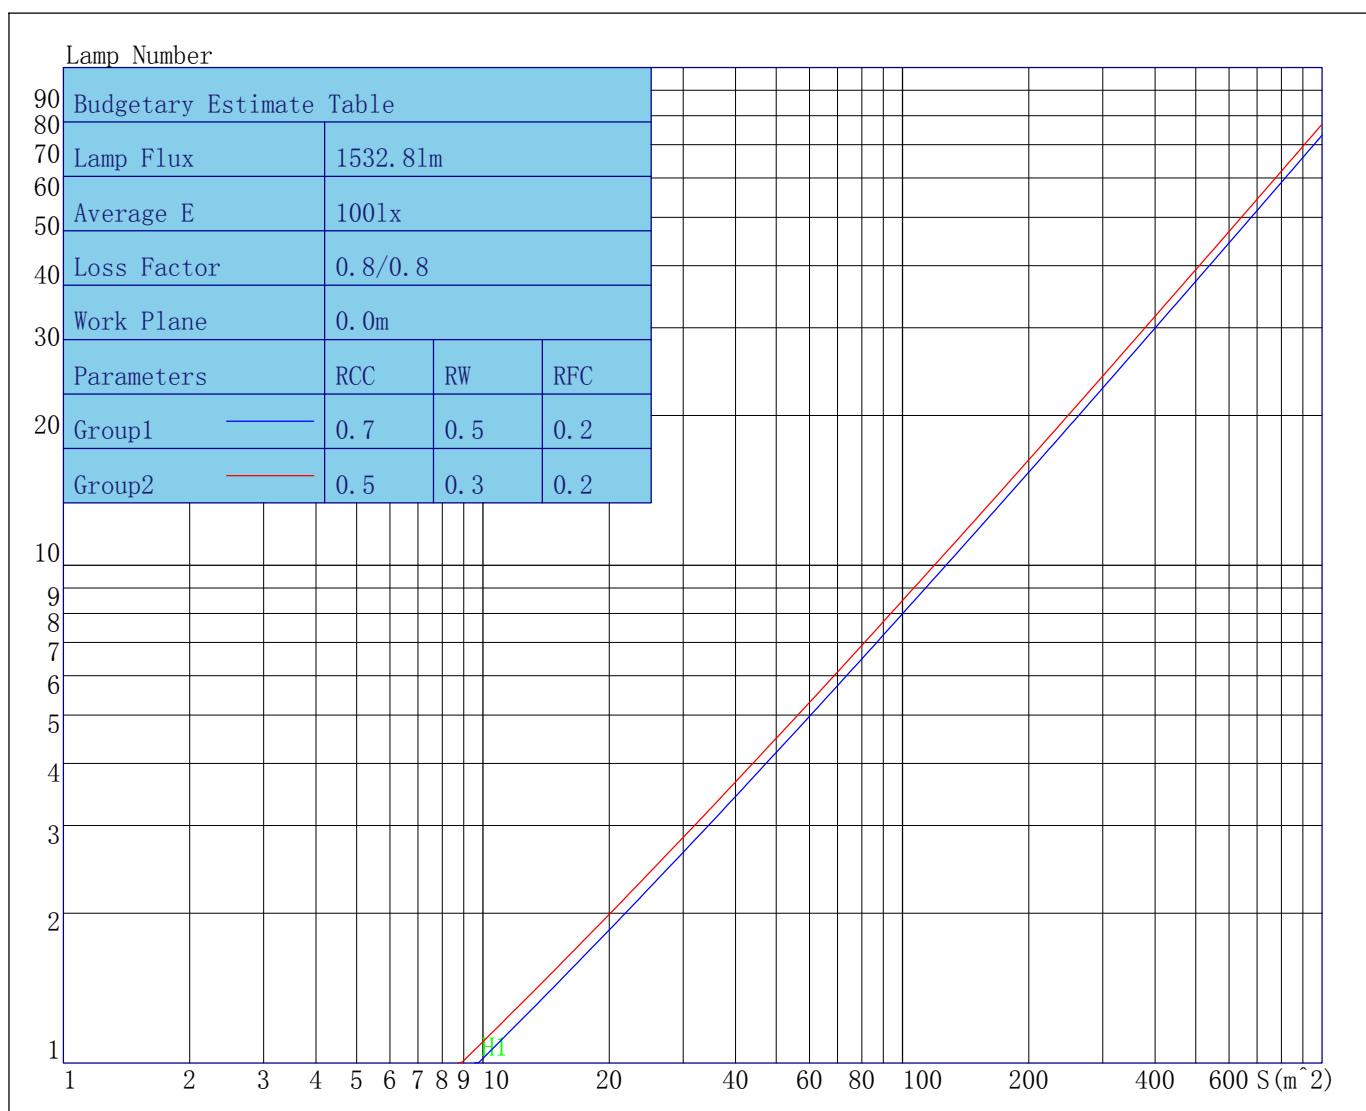

Indoor Coefficient of Utilization Table

Table with 3 columns: Lum. Name, Lum. Catalog, Test ID; Lamp Name, Lamp Catalog, Test Lab; Manufacture, Test Machine, Test Date.

Table with 7 columns: Coef., Effective Floor Cavity Reflectance RFC=0.20, RhoCC (%), RhoW (%), RCR, Coefficient of Utilization(%), and Utilization values for RCR 0-10.

Unified Glare Rating Table

Lum. Name: MD10-18-XX-01 3000K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: QQualty peatment
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2019/12/28

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size	Vewed crosswise					Vewed endwise				
X=2H Y=2H	2.1	3.1	2.4	3.4	3.7	1.0	2.0	1.4	2.4	2.7
	2.1	3.0	2.5	3.3	3.7	1.0	1.9	1.4	2.2	2.6
	2.0	2.9	2.4	3.2	3.6	0.9	1.8	1.3	2.1	2.5
	1.9	2.7	2.3	3.1	3.5	0.8	1.6	1.2	2.0	2.4
	1.9	2.6	2.3	3.0	3.4	0.8	1.5	1.2	1.9	2.3
	1.8	2.5	2.2	2.9	3.3	0.7	1.4	1.1	1.8	2.2
X=4H Y=2H	2.0	2.8	2.4	3.2	3.6	0.9	1.8	1.3	2.1	2.5
	2.0	2.7	2.4	3.1	3.5	0.9	1.6	1.4	2.0	2.5
	1.9	2.6	2.4	3.0	3.4	0.8	1.5	1.3	1.9	2.4
	1.8	2.4	2.3	2.8	3.3	0.7	1.3	1.2	1.7	2.2
	1.8	2.3	2.2	2.7	3.2	0.7	1.2	1.1	1.6	2.1
	1.7	2.1	2.2	2.6	3.1	0.6	1.0	1.1	1.5	2.0
X=8H Y=4H	1.8	2.3	2.2	2.7	3.2	0.7	1.2	1.2	1.6	2.1
	1.7	2.1	2.2	2.6	3.1	0.6	1.0	1.1	1.5	2.0
	1.6	2.0	2.1	2.5	3.0	0.5	0.9	1.0	1.4	1.9
	1.5	1.9	2.1	2.4	2.9	0.4	0.8	1.0	1.3	1.8
X=12H Y=4H	1.7	2.1	2.2	2.6	3.1	0.6	1.1	1.1	1.6	2.0
	1.6	2.0	2.1	2.4	3.0	0.5	0.9	1.0	1.3	1.9
	1.5	1.9	2.1	2.4	2.9	0.4	0.8	1.0	1.3	1.8
Variations with the objerver position at spacings										
S=1.0H	1.3/-1.6					2.8/-5.2				
S=1.5H	2.3/-3.3					3.3/-7.3				
S=2.0H	3.7/-5.3					4.2/-8.1				
Reduced UGR Table:										
Nordic Standard Table:	BK0					BK0				
Correction Value	0.3					0.2				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	3191.45	3191.45	3191.45	3191.45
γ 1.0	3191.61	3185.83	3178.26	3181.97
γ 2.0	3181.23	3171.48	3156.31	3162.92
γ 3.0	3161.62	3145.37	3118.61	3125.73
γ 4.0	3132.25	3115.30	3076.75	3086.75
γ 5.0	3096.86	3069.49	3017.54	3030.05
γ 6.0	3050.34	3016.01	2943.67	2965.92
γ 7.0	2996.30	2946.46	2858.16	2887.18
γ 8.0	2933.66	2866.79	2756.58	2803.82
γ 9.0	2855.74	2775.91	2652.41	2704.39
γ 10.0	2769.32	2679.25	2535.29	2599.89
γ 11.0	2675.23	2567.63	2411.38	2488.71
γ 12.0	2570.47	2457.97	2281.14	2367.70
γ 13.0	2456.50	2335.19	2147.34	2239.52
γ 14.0	2335.14	2207.09	2007.90	2101.91
γ 15.0	2200.74	2071.90	1868.96	1958.02
γ 16.0	2062.45	1936.91	1733.04	1818.19
γ 17.0	1925.39	1803.81	1603.61	1682.25
γ 18.0	1789.27	1674.70	1476.05	1550.94
γ 19.0	1659.46	1543.04	1350.39	1422.58
γ 20.0	1532.08	1417.81	1228.28	1302.15
γ 21.0	1406.13	1292.73	1110.36	1183.44
γ 22.0	1287.33	1176.12	999.19	1074.18
γ 23.0	1171.18	1060.20	895.79	967.97
γ 24.0	1063.87	955.61	799.86	870.47
γ 25.0	963.00	857.12	711.85	779.44
γ 26.0	871.75	768.07	633.92	698.27
γ 27.0	784.93	684.36	562.88	622.64
γ 28.0	704.85	610.23	501.38	555.50
γ 29.0	631.66	542.95	445.50	496.44
γ 30.0	565.49	482.16	397.21	443.92
γ 31.0	506.33	429.63	353.31	397.25
γ 32.0	453.66	383.09	314.39	355.36
γ 33.0	406.19	340.54	279.75	318.32
γ 34.0	363.20	302.52	248.95	285.24
γ 35.0	324.60	268.35	222.46	256.10
γ 36.0	290.43	238.57	199.49	230.39
γ 37.0	260.22	212.28	179.03	207.54
γ 38.0	233.58	189.99	161.04	187.30
γ 39.0	210.43	170.55	145.36	169.48
γ 40.0	190.00	154.12	131.87	153.46
γ 41.0	171.71	139.52	119.61	139.47
γ 42.0	156.14	126.93	108.71	127.19
γ 43.0	142.49	115.62	98.95	116.33
γ 44.0	130.43	105.87	90.03	106.48
γ 45.0	119.64	96.91	82.19	97.99
γ 46.0	109.91	89.31	75.35	90.50

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	101.17	81.81	69.14	83.30
γ 48.0	93.05	75.26	63.58	76.87
γ 49.0	85.76	69.19	58.47	70.68
γ 50.0	79.05	63.82	53.91	65.19
γ 51.0	72.88	58.83	49.53	60.13
γ 52.0	67.22	54.37	45.40	55.49
γ 53.0	61.89	50.09	41.74	51.03
γ 54.0	57.03	46.17	38.27	46.78
γ 55.0	52.46	42.38	35.09	42.94
γ 56.0	48.05	38.88	32.08	39.37
γ 57.0	44.12	35.70	29.27	36.01
γ 58.0	40.29	32.57	26.72	32.89
γ 59.0	36.74	29.66	24.31	29.98
γ 60.0	33.40	26.95	22.01	27.30
γ 61.0	30.33	24.41	19.77	24.66
γ 62.0	27.39	22.00	17.77	22.23
γ 63.0	24.71	19.51	15.91	19.83
γ 64.0	22.11	17.40	14.14	17.76
γ 65.0	19.57	15.35	12.39	15.69
γ 66.0	17.49	13.48	10.72	13.75
γ 67.0	15.17	11.74	9.35	12.08
γ 68.0	13.08	9.69	7.62	9.88
γ 69.0	10.86	8.32	6.50	8.45
γ 70.0	9.48	7.16	5.67	7.41
γ 71.0	8.26	6.16	4.79	6.45
γ 72.0	7.10	5.10	3.90	5.48
γ 73.0	6.11	4.18	3.09	4.72
γ 74.0	5.16	3.34	2.43	3.90
γ 75.0	4.26	2.46	1.76	3.22
γ 76.0	3.46	1.70	1.13	2.57
γ 77.0	2.74	0.99	0.60	2.06
γ 78.0	2.06	0.50	0.27	1.58
γ 79.0	1.59	0.10	0.00	1.19
γ 80.0	1.28	0.00	0.00	0.89
γ 81.0	0.97	0.00	0.00	0.59
γ 82.0	0.64	0.00	0.00	0.26
γ 83.0	0.36	0.00	0.00	0.02
γ 84.0	0.09	0.00	0.00	0.00
γ 85.0	0.00	0.00	0.00	0.00
γ 86.0	0.00	0.00	0.00	0.00
γ 87.0	0.00	0.00	0.00	0.00
γ 88.0	0.00	0.00	0.00	0.00
γ 89.0	0.00	0.00	0.00	0.00
γ 90.0	0.00	0.00	0.00	0.00
γ 91.0	0.00	0.00	0.00	0.00
γ 92.0	0.00	0.00	0.00	0.00
γ 93.0	0.00	0.00	0.00	0.00

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	0.00	0.00	0.00	0.00
γ 95.0	0.00	0.00	0.00	0.00
γ 96.0	0.00	0.00	0.00	0.00
γ 97.0	0.00	0.00	0.00	0.00
γ 98.0	0.00	0.00	0.00	0.00
γ 99.0	0.00	0.00	0.00	0.00
γ 100.0	0.00	0.00	0.00	0.00
γ 101.0	0.00	0.00	0.00	0.00
γ 102.0	0.00	0.00	0.00	0.00
γ 103.0	0.00	0.00	0.00	0.00
γ 104.0	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00
γ 106.0	0.00	0.00	0.00	0.00
γ 107.0	0.00	0.00	0.00	0.00
γ 108.0	0.00	0.00	0.00	0.00
γ 109.0	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00
γ 111.0	0.00	0.00	0.00	0.00
γ 112.0	0.00	0.00	0.00	0.00
γ 113.0	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.00
γ 122.0	0.00	0.00	0.00	0.00
γ 123.0	0.00	0.00	0.00	0.00
γ 124.0	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00
γ 126.0	0.00	0.00	0.00	0.00
γ 127.0	0.00	0.00	0.00	0.00
γ 128.0	0.00	0.00	0.00	0.00
γ 129.0	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00
γ 131.0	0.00	0.00	0.00	0.00
γ 132.0	0.00	0.00	0.00	0.00
γ 133.0	0.00	0.00	0.00	0.00
γ 134.0	0.00	0.00	0.00	0.00
γ 135.0	0.00	0.00	0.00	0.00
γ 136.0	0.00	0.00	0.00	0.00
γ 137.0	0.00	0.00	0.00	0.00
γ 138.0	0.00	0.00	0.00	0.00
γ 139.0	0.00	0.00	0.17	0.00
γ 140.0	0.00	0.00	0.43	0.08

IES Indoor Report

Photometric Filename:MD10-18-XX-01 3000K RA90 36D.IES

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	0.00	0.00	0.67	0.41
γ 142.0	0.00	0.00	0.99	0.66
γ 143.0	0.01	0.17	1.21	0.93
γ 144.0	0.20	0.39	1.41	1.10
γ 145.0	0.49	0.67	1.64	1.35
γ 146.0	0.71	0.91	1.87	1.60
γ 147.0	0.92	1.20	2.16	1.83
γ 148.0	1.26	1.50	2.41	2.14
γ 149.0	1.50	1.67	2.64	2.34
γ 150.0	1.74	1.90	2.90	2.59
γ 151.0	1.92	2.10	3.13	2.76
γ 152.0	2.14	2.41	3.23	2.92
γ 153.0	2.45	2.54	3.52	3.07
γ 154.0	2.68	2.81	3.60	3.33
γ 155.0	2.86	2.95	3.78	3.49
γ 156.0	3.00	3.13	3.96	3.56
γ 157.0	3.20	3.32	4.05	3.68
γ 158.0	3.31	3.39	4.20	3.90
γ 159.0	3.49	3.62	4.27	4.01
γ 160.0	3.76	3.73	4.41	4.02
γ 161.0	3.81	3.85	4.42	4.15
γ 162.0	3.93	3.92	4.54	4.13
γ 163.0	4.05	3.99	4.54	4.32
γ 164.0	4.16	4.17	4.66	4.39
γ 165.0	4.24	4.28	4.70	4.47
γ 166.0	4.33	4.27	4.69	4.45
γ 167.0	4.38	4.39	4.70	4.48
γ 168.0	4.41	4.36	4.77	4.51
γ 169.0	4.55	4.37	4.72	4.57
γ 170.0	4.53	4.49	4.84	4.57
γ 171.0	4.65	4.52	4.76	4.64
γ 172.0	4.65	4.55	4.79	4.64
γ 173.0	4.74	4.59	4.92	4.70
γ 174.0	4.76	4.64	4.89	4.76
γ 175.0	4.80	4.72	5.02	4.78
γ 176.0	4.86	4.74	4.97	4.82
γ 177.0	4.88	4.74	5.01	4.83
γ 178.0	4.93	4.89	5.03	4.88
γ 179.0	5.01	4.93	5.06	4.93
γ 180.0	4.96	4.96	4.96	4.96