



Indoor Luminaire Photometric Data

Description Information

Luminary Name: MD12-09-XX-01 RA90 2700K 60D		Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Date: 2019/04/24
Manufacture: Shenzhen Norming Lighting Co.,Ltd		Shld.Ang(°):	Test Machine:GON-2000
Test Lab: Quaility Department		Frequency(Hz):	Lamp CCT(K): Ra:
Lum.Size(W*L*H):0.050m*0.050m*0.045m		Lum.Area(m2):0.005	Lum.W(kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=1.0	Temp.(°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 731.000	Luminary Flux(lm): 585.795	Field Angle(10%Imax): 90.5(°)	
Rated Power(W):	Luminary Efficiency: 80.14%	Down Lumens&Percent: 563.807lm 96.25%	
Rated Voltage(V):	Luminary EER(lm/W): 65.153	Up Lumens&Percent: 21.988lm 3.75%	
Tested Power(W): 8.991	Max. Candela(cd): 567.856	S/MH: C0_a180=0.923 C90_270=0.924	
Lamps' Inside: 1	Max Cand@Ang.(°): C=180.0 γ=3.0	CIE Type: Semi-Direct	
Tested Electrics(V, A, pf):240.0, 0.040, 0.914		ErP Φuse(90°): 509.003lm	
Lamp Size(W*L*H):0.050m*0.050m*0.045m		IRF(%): 245.516	
		Left=-26.3°, Right=32.8°	

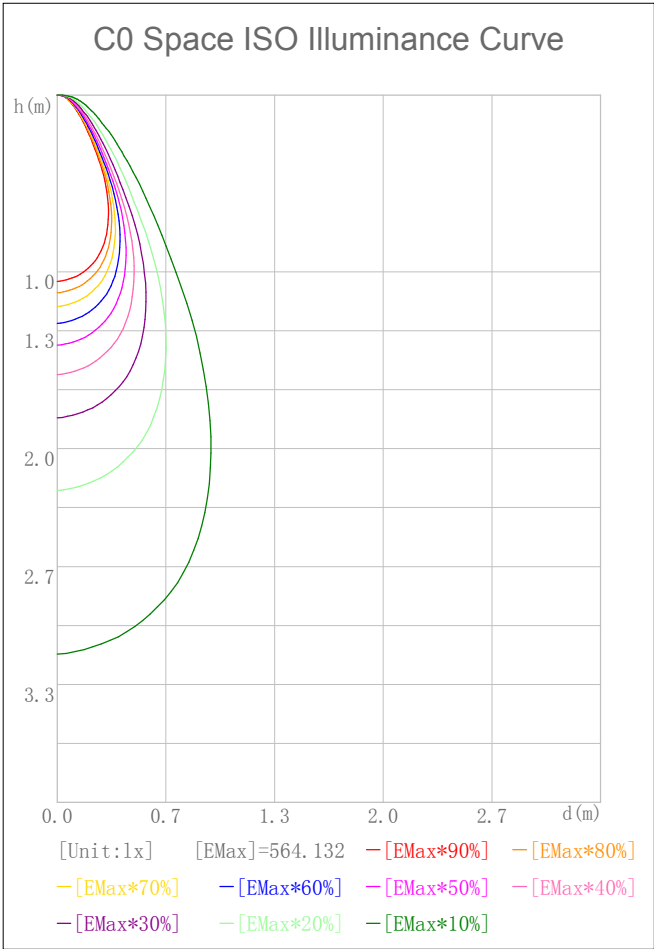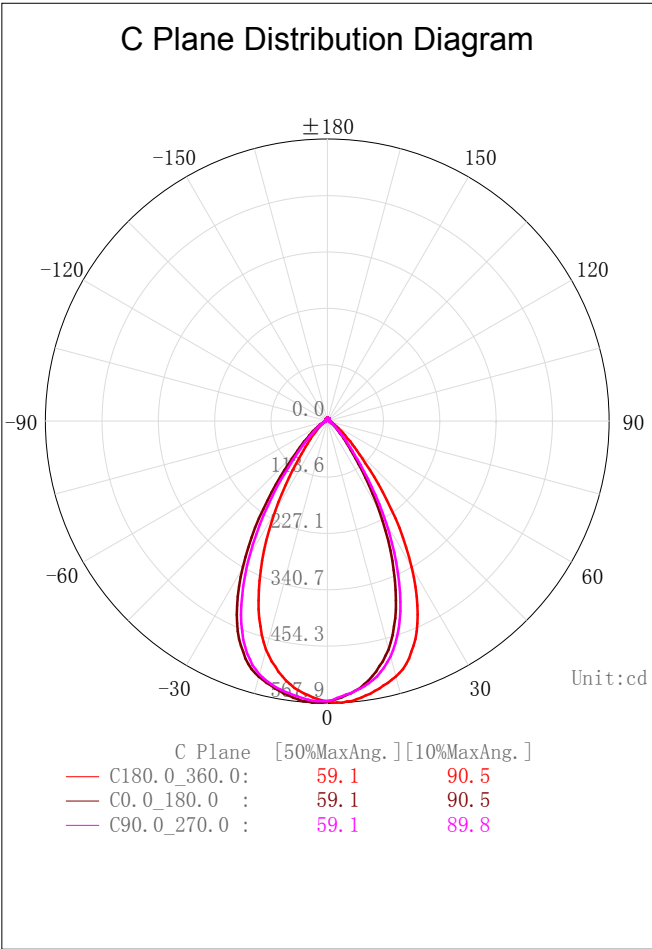

2D Plane Light Intensity Distribution Curve


Lum. Name:MD12-09-XX-01 RA90 2700K 60D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quaality Department
Manufacture:Shenzhen Norming Lighting Co.,Ltd	Test Machine:GON-2000	Test Date:2019/04/24

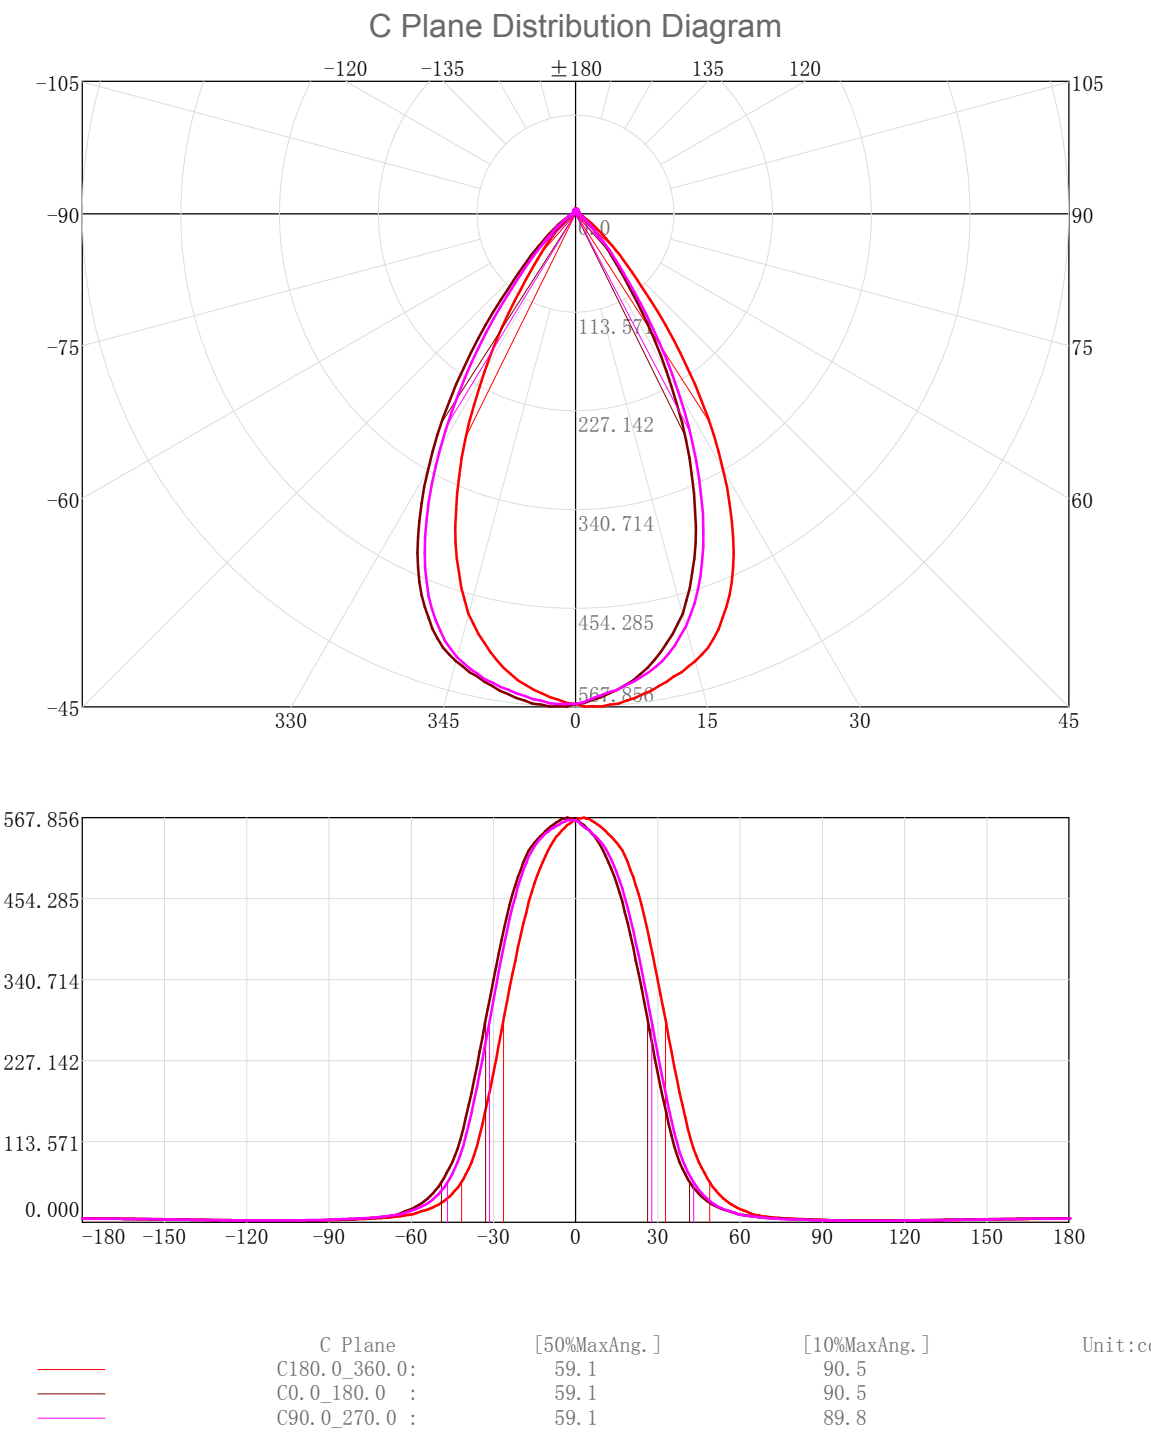

3D Light Intensity Distribution Modal

Lum. Name:MD12-09-XX-01 RA90 2700K 60D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quaality Department
Manufacture:Shenzhen Norming Lighting Co.,Ltd	Test Machine:GON-2000	Test Date:2019/04/24

3D Light Intensity Distribution Modal

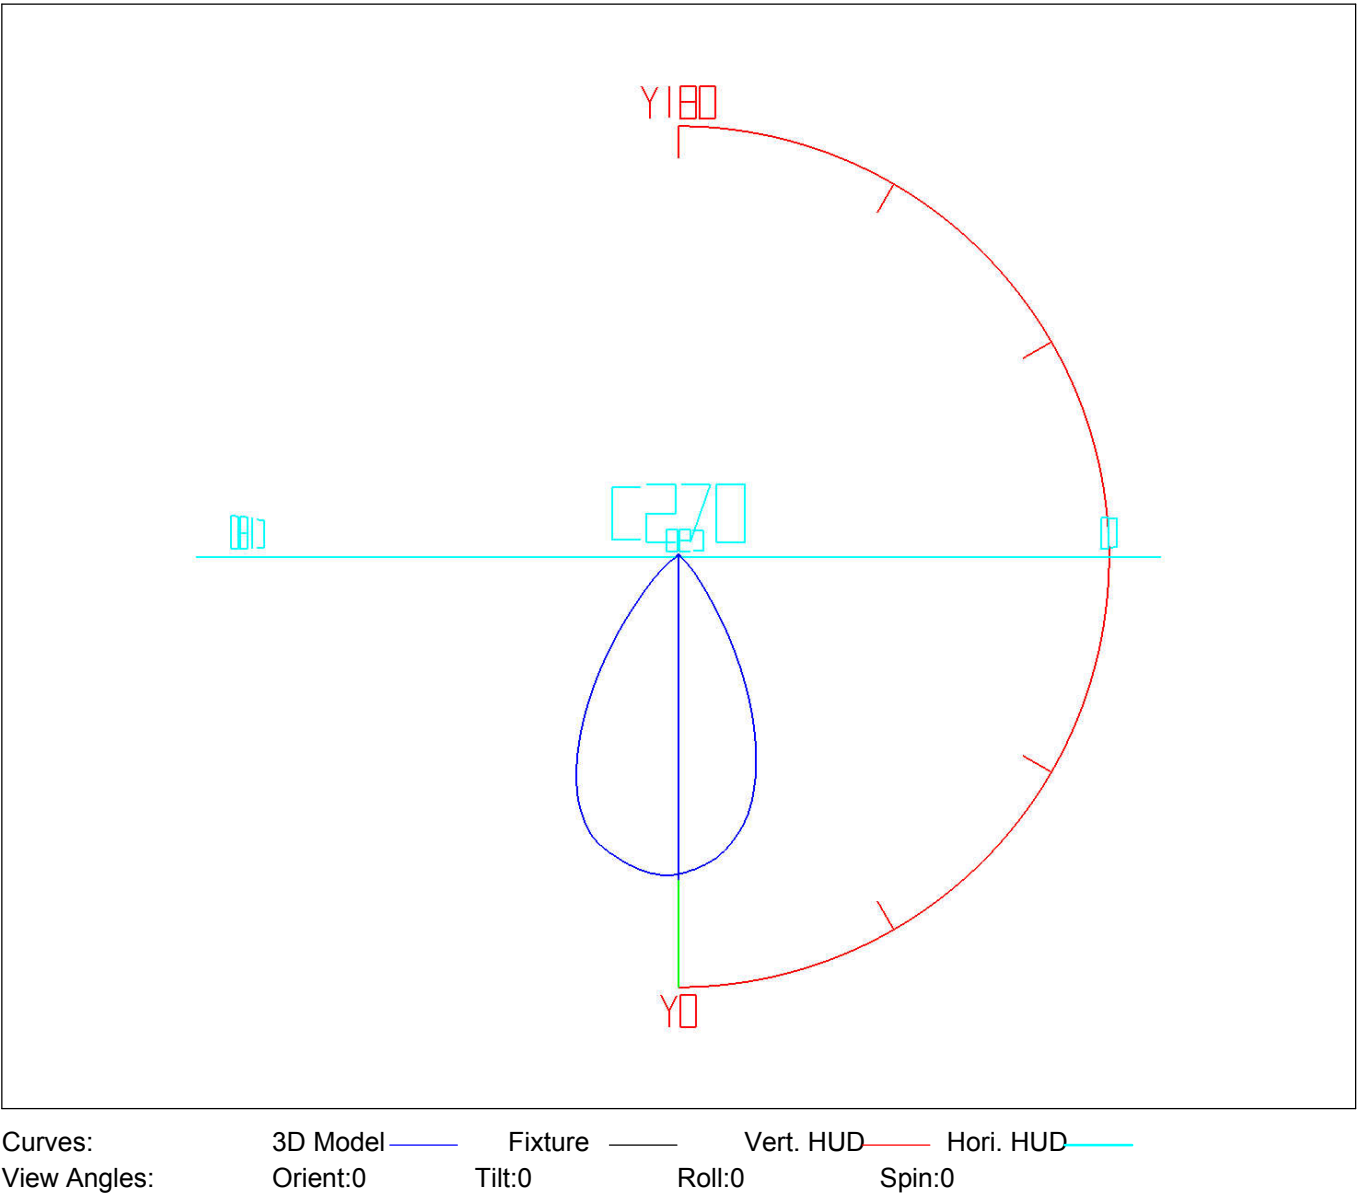

Photometric Filename:MD12-09-XX-01 RA90 2700K 60D.IES


Zone(γ)	Zone Flux (1m)	Sums Flux (1m)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (1m)	Sums Flux (1m)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.54	0.54	0.07	0.07	47.0-48.0	3.73	515.39	0.51	70.50
1.0-2.0	1.62	2.16	0.22	0.30	48.0-49.0	3.42	518.81	0.47	70.97
2.0-3.0	2.69	4.84	0.37	0.66	49.0-50.0	3.14	521.95	0.43	71.40
3.0-4.0	3.75	8.59	0.51	1.18	50.0-51.0	2.88	524.83	0.39	71.80
4.0-5.0	4.80	13.39	0.66	1.83	51.0-52.0	2.66	527.49	0.36	72.16
5.0-6.0	5.83	19.22	0.80	2.63	52.0-53.0	2.45	529.95	0.34	72.50
6.0-7.0	6.85	26.07	0.94	3.57	53.0-54.0	2.27	532.21	0.31	72.81
7.0-8.0	7.85	33.92	1.07	4.64	54.0-55.0	2.10	534.32	0.29	73.09
8.0-9.0	8.83	42.75	1.21	5.85	55.0-56.0	1.95	536.27	0.27	73.36
9.0-10.0	9.78	52.53	1.34	7.19	56.0-57.0	1.81	538.08	0.25	73.61
10.0-11.0	10.70	63.23	1.46	8.65	57.0-58.0	1.68	539.76	0.23	73.84
11.0-12.0	11.59	74.82	1.59	10.23	58.0-59.0	1.55	541.31	0.21	74.05
12.0-13.0	12.44	87.26	1.70	11.94	59.0-60.0	1.44	542.75	0.20	74.25
13.0-14.0	13.25	100.51	1.81	13.75	60.0-61.0	1.35	544.10	0.18	74.43
14.0-15.0	14.02	114.53	1.92	15.67	61.0-62.0	1.26	545.36	0.17	74.60
15.0-16.0	14.73	129.26	2.01	17.68	62.0-63.0	1.17	546.53	0.16	74.76
16.0-17.0	15.36	144.62	2.10	19.78	63.0-64.0	1.08	547.60	0.15	74.91
17.0-18.0	15.92	160.54	2.18	21.96	64.0-65.0	1.00	548.61	0.14	75.05
18.0-19.0	16.40	176.94	2.24	24.21	65.0-66.0	0.94	549.55	0.13	75.18
19.0-20.0	16.79	193.73	2.30	26.50	66.0-67.0	0.90	550.45	0.12	75.30
20.0-21.0	17.09	210.83	2.34	28.84	67.0-68.0	0.85	551.30	0.12	75.42
21.0-22.0	17.30	228.13	2.37	31.21	68.0-69.0	0.81	552.11	0.11	75.53
22.0-23.0	17.41	245.54	2.38	33.59	69.0-70.0	0.78	552.89	0.11	75.63
23.0-24.0	17.41	262.95	2.38	35.97	70.0-71.0	0.74	553.63	0.10	75.74
24.0-25.0	17.30	280.25	2.37	38.34	71.0-72.0	0.71	554.34	0.10	75.83
25.0-26.0	17.10	297.35	2.34	40.68	72.0-73.0	0.68	555.02	0.09	75.93
26.0-27.0	16.80	314.15	2.30	42.98	73.0-74.0	0.66	555.68	0.09	76.02
27.0-28.0	16.41	330.56	2.24	45.22	74.0-75.0	0.63	556.32	0.09	76.10
28.0-29.0	15.91	346.47	2.18	47.40	75.0-76.0	0.61	556.93	0.08	76.19
29.0-30.0	15.34	361.82	2.10	49.50	76.0-77.0	0.59	557.52	0.08	76.27
30.0-31.0	14.70	376.52	2.01	51.51	77.0-78.0	0.58	558.10	0.08	76.35
31.0-32.0	14.02	390.54	1.92	53.42	78.0-79.0	0.56	558.66	0.08	76.42
32.0-33.0	13.26	403.80	1.81	55.24	79.0-80.0	0.54	559.21	0.07	76.50
33.0-34.0	12.46	416.25	1.70	56.94	80.0-81.0	0.53	559.73	0.07	76.57
34.0-35.0	11.63	427.88	1.59	58.53	81.0-82.0	0.51	560.25	0.07	76.64
35.0-36.0	10.79	438.67	1.48	60.01	82.0-83.0	0.50	560.75	0.07	76.71
36.0-37.0	9.96	448.62	1.36	61.3					

Zonal Flux Tabulation - (Cont.)

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94. 0-95. 0	0. 35	565. 64	0. 05	77. 38	141. 0-142. 0	0. 27	579. 49	0. 04	79. 27
95. 0-96. 0	0. 35	565. 99	0. 05	77. 43	142. 0-143. 0	0. 27	579. 76	0. 04	79. 31
96. 0-97. 0	0. 34	566. 34	0. 05	77. 47	143. 0-144. 0	0. 27	580. 03	0. 04	79. 35
97. 0-98. 0	0. 34	566. 67	0. 05	77. 52	144. 0-145. 0	0. 27	580. 30	0. 04	79. 38
98. 0-99. 0	0. 33	567. 01	0. 05	77. 57	145. 0-146. 0	0. 26	580. 56	0. 04	79. 42
99. 0-100. 0	0. 33	567. 34	0. 05	77. 61	146. 0-147. 0	0. 26	580. 83	0. 04	79. 46
100. 0-101. 0	0. 32	567. 66	0. 04	77. 66	147. 0-148. 0	0. 26	581. 08	0. 04	79. 49
101. 0-102. 0	0. 32	567. 98	0. 04	77. 70	148. 0-149. 0	0. 25	581. 34	0. 03	79. 53
102. 0-103. 0	0. 32	568. 30	0. 04	77. 74	149. 0-150. 0	0. 25	581. 59	0. 03	79. 56
103. 0-104. 0	0. 31	568. 61	0. 04	77. 79	150. 0-151. 0	0. 25	581. 84	0. 03	79. 59
104. 0-105. 0	0. 31	568. 92	0. 04	77. 83	151. 0-152. 0	0. 24	582. 08	0. 03	79. 63
105. 0-106. 0	0. 31	569. 22	0. 04	77. 87	152. 0-153. 0	0. 24	582. 31	0. 03	79. 66
106. 0-107. 0	0. 30	569. 53	0. 04	77. 91	153. 0-154. 0	0. 23	582. 54	0. 03	79. 69
107. 0-108. 0	0. 30	569. 83	0. 04	77. 95	154. 0-155. 0	0. 22	582. 77	0. 03	79. 72
108. 0-109. 0	0. 30	570. 13	0. 04	77. 99	155. 0-156. 0	0. 22	582. 99	0. 03	79. 75
109. 0-110. 0	0. 30	570. 42	0. 04	78. 03	156. 0-157. 0	0. 21	583. 20	0. 03	79. 78
110. 0-111. 0	0. 29	570. 71	0. 04	78. 07	157. 0-158. 0	0. 21	583. 40	0. 03	79. 81
111. 0-112. 0	0. 29	571. 00	0. 04	78. 11	158. 0-159. 0	0. 20	583. 60	0. 03	79. 84
112. 0-113. 0	0. 29	571. 29	0. 04	78. 15	159. 0-160. 0	0. 19	583. 79	0. 03	79. 86
113. 0-114. 0	0. 29	571. 58	0. 04	78. 19	160. 0-161. 0	0. 18	583. 98	0. 03	79. 89
114. 0-115. 0	0. 29	571. 87	0. 04	78. 23	161. 0-162. 0	0. 18	584. 16	0. 02	79. 91
115. 0-116. 0	0. 29	572. 15	0. 04	78. 27	162. 0-163. 0	0. 17	584. 32	0. 02	79. 93
116. 0-117. 0	0. 28	572. 44	0. 04	78. 31	163. 0-164. 0	0. 16	584. 49	0. 02	79. 96
117. 0-118. 0	0. 28	572. 72	0. 04	78. 35	164. 0-165. 0	0. 15	584. 64	0. 02	79. 98
118. 0-119. 0	0. 28	573. 00	0. 04	78. 39	165. 0-166. 0	0. 14	584. 78	0. 02	80. 00
119. 0-120. 0	0. 28	573. 29	0. 04	78. 43	166. 0-167. 0	0. 14	584. 92	0. 02	80. 02
120. 0-121. 0	0. 28	573. 57	0. 04	78. 46	167. 0-168. 0	0. 13	585. 04	0. 02	80. 03
121. 0-122. 0	0. 28	573. 85	0. 04	78. 50	168. 0-169. 0	0. 12	585. 16	0. 02	80. 05
122. 0-123. 0	0. 28	574. 14	0. 04	78. 54	169. 0-170. 0	0. 11	585. 27	0. 01	80. 06
123. 0-124. 0	0. 28	574. 42	0. 04	78. 58	170. 0-171. 0	0. 10	585. 37	0. 01	80. 08
124. 0-125. 0	0. 28	574. 70	0. 04	78. 62	171. 0-172. 0	0. 09	585. 46	0. 01	80. 09
125. 0-126. 0	0. 28	574. 98	0. 04	78. 66	172. 0-173. 0	0. 08	585. 53	0. 01	80. 10
126. 0-127. 0	0. 28	575. 27	0. 04	78. 70	173. 0-174. 0	0. 07	585. 60	0. 01	80. 11
127. 0-128. 0	0. 28	575. 55	0. 04	78. 73	174. 0-175. 0	0. 06	585. 66	0. 01	80. 12
128. 0-129. 0	0. 28	575. 83	0. 04	78. 77	175. 0-176. 0	0. 05	585. 71	0. 01	80. 12
129. 0-130. 0	0. 28	576. 12	0. 04	78. 81	176. 0-177. 0	0. 04	585. 75	0. 01	80. 13
130. 0-131. 0	0. 28	576. 40	0. 04	78. 85	177. 0-178. 0	0. 03	585. 77	0. 00	80. 13
131. 0-132. 0	0. 28	576. 68	0. 04	78. 89	178. 0-179. 0	0. 02	585. 79	0. 00	80. 14
132. 0-133. 0	0. 28	576. 97	0. 04	78. 93	179. 0-180. 0	0. 01	585. 80	0. 00	80. 14
133. 0-134. 0	0. 28	577. 25	0. 04	78. 97					
134. 0-135. 0	0. 28	577. 53	0. 04	79. 01					
135. 0-136. 0	0. 28	577. 82	0. 04	79. 04					
136. 0-137. 0	0. 28	578. 10	0. 04	79. 08					
137. 0-138. 0	0. 28	578. 38	0. 04	79. 12					
138. 0-139. 0	0. 28	578. 66	0. 04	79. 16					
139. 0-140. 0	0. 28	578. 94	0. 04	79. 20					
140. 0-141. 0	0. 28	579. 21	0. 04	79. 24					

Rectangle ISO Lighting Intensity Diagram

Lum. Name:MD12-09-XX-01 RA90 2700K 60D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quaality Department
Manufacture:Shenzhen Norming Lighting Co.,Ltd	Test Machine:GON-2000	Test Date:2019/04/24

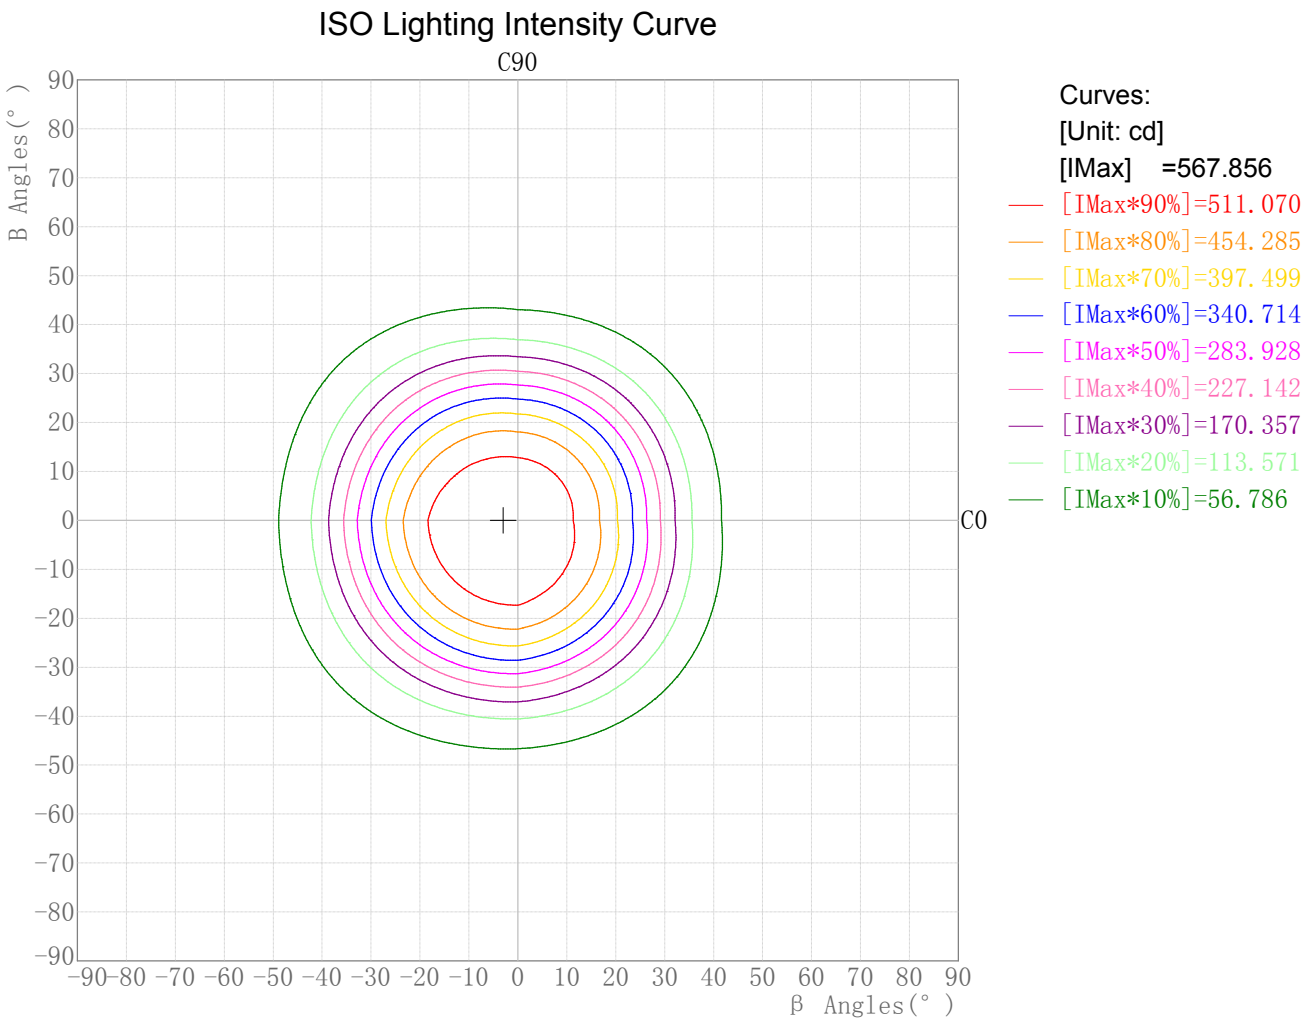


Photometric Filename:MD12-09-XX-01 RA90 2700K 60D.IES

Plane ISO-Illuminance Diagram

Lum. Name: MD12-09-XX-01 RA90 2700K 60D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quaility Department
Manufacture: Shenzhen Norming Lighting Co.,Ltd	Test Machine:GON-2000	Test Date: 2019/04/24

Plane ISO-Illuminance Curve

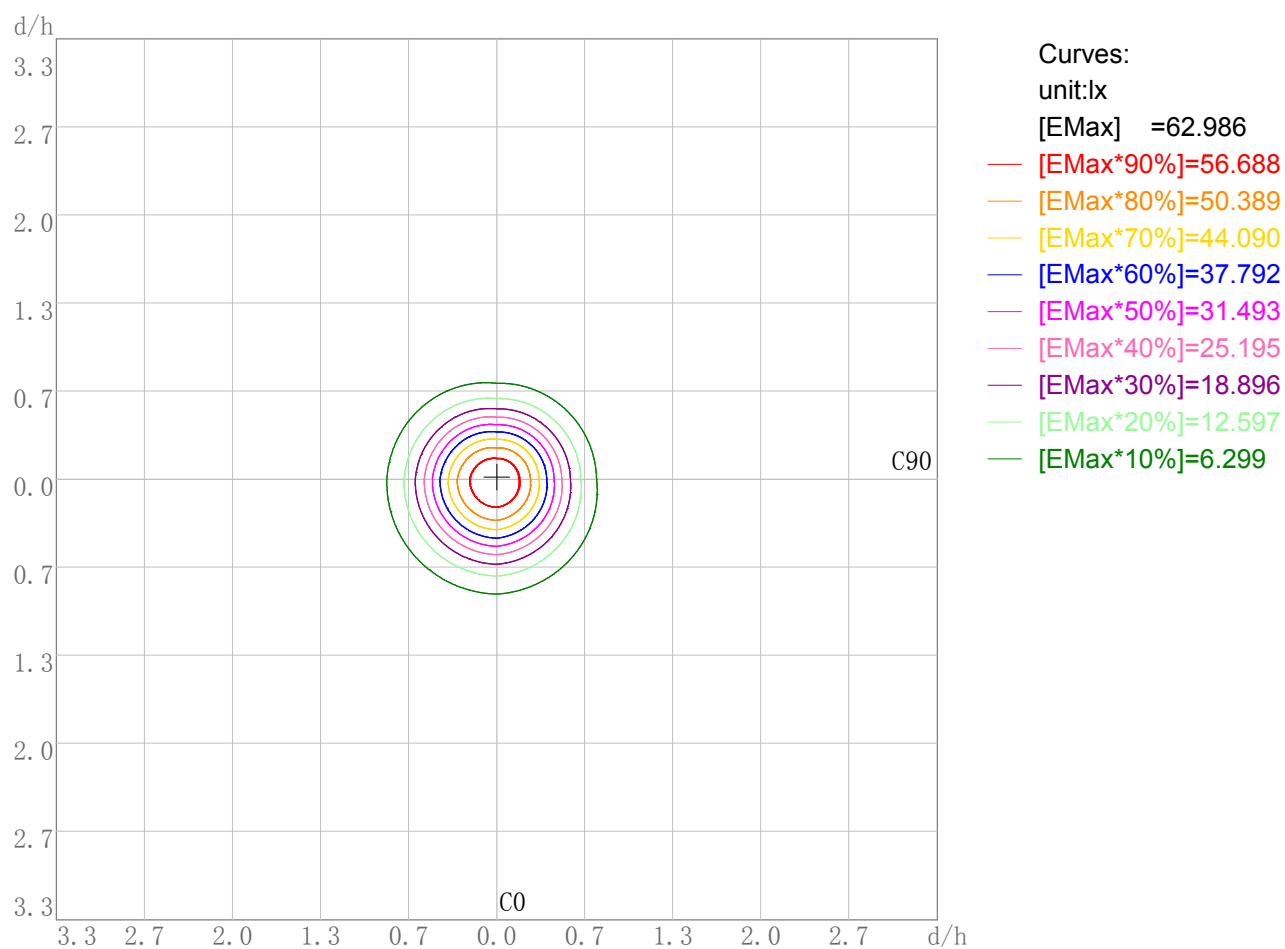

Working Plane Luminaire Mounting Height(m): 3.00


Working Plane Maximum Illuminance(lx): 62.99

Working Plane Maximum Illuminance Position(d/h):H0.0 V-0.0

3D Plane ISO Illuminance Diagram

Lum. Name:MD12-09-XX-01 RA90 2700K 60D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quaality Department
Manufacture:Shenzhen Norming Lighting Co.,Ltd	Test Machine:GON-2000	Test Date:2019/04/24


3D Plane Illuminance Modal

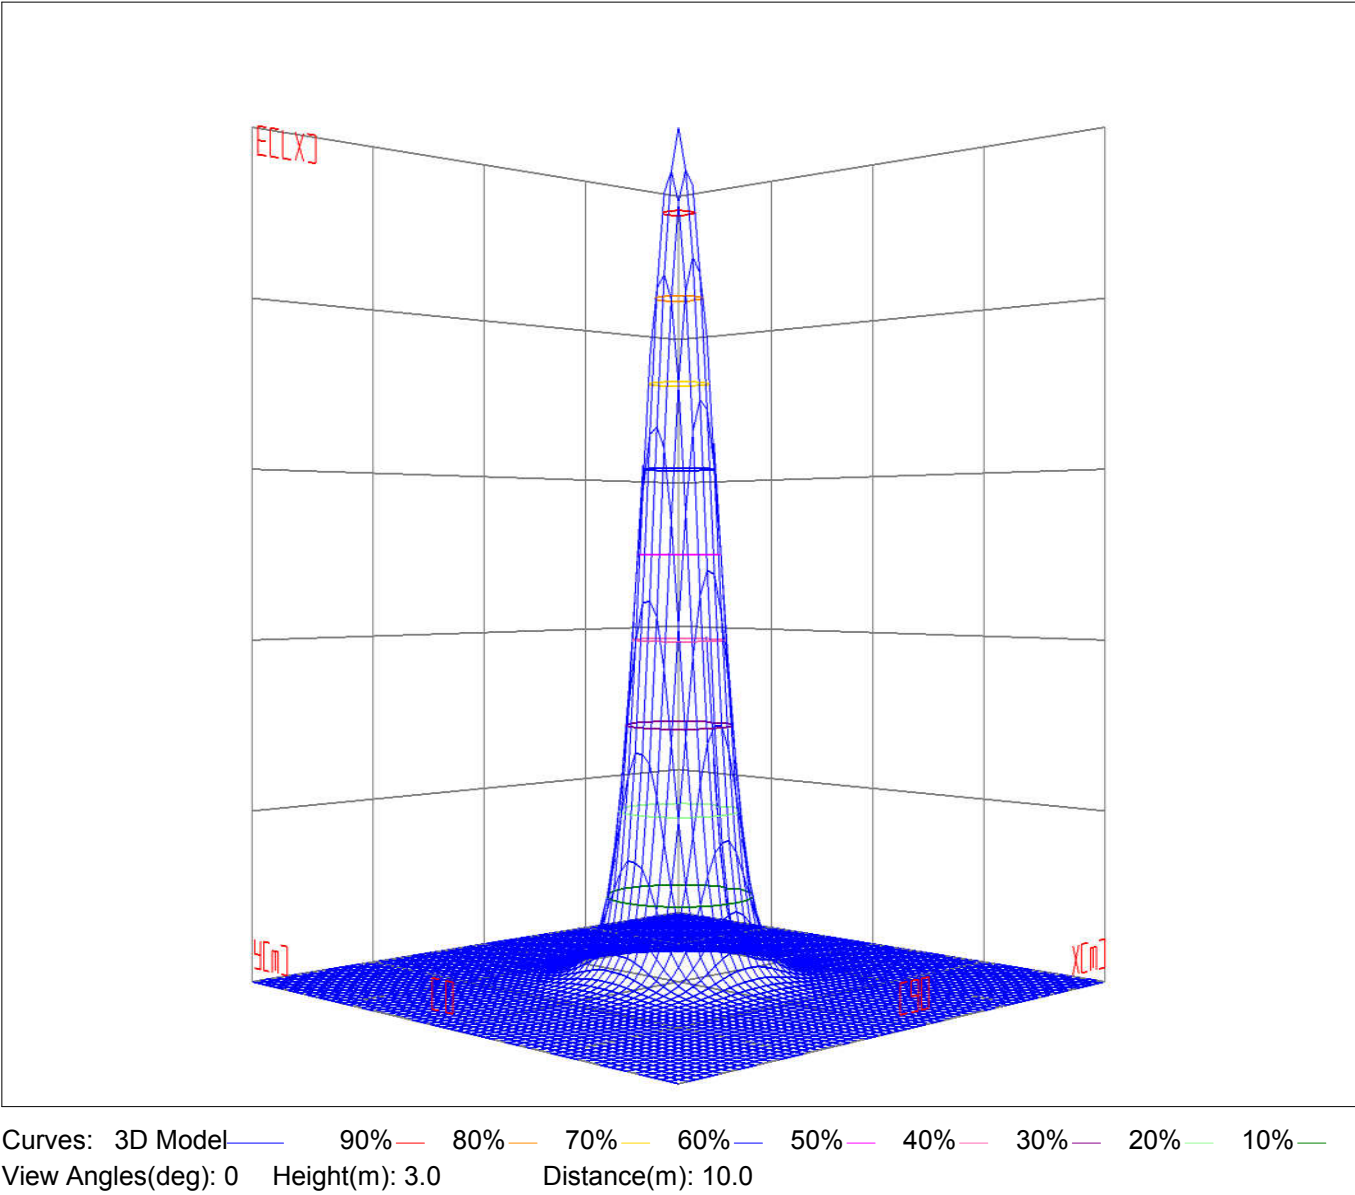

Space ISO Illuminance Diagram

Lum. Name:MD12-09-XX-01 RA90 2700K 60D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quaality Department
Manufacture:Shenzhen Norming Lighting Co.,Ltd	Test Machine:GON-2000	Test Date:2019/04/24


Space ISO Illuminance Curve

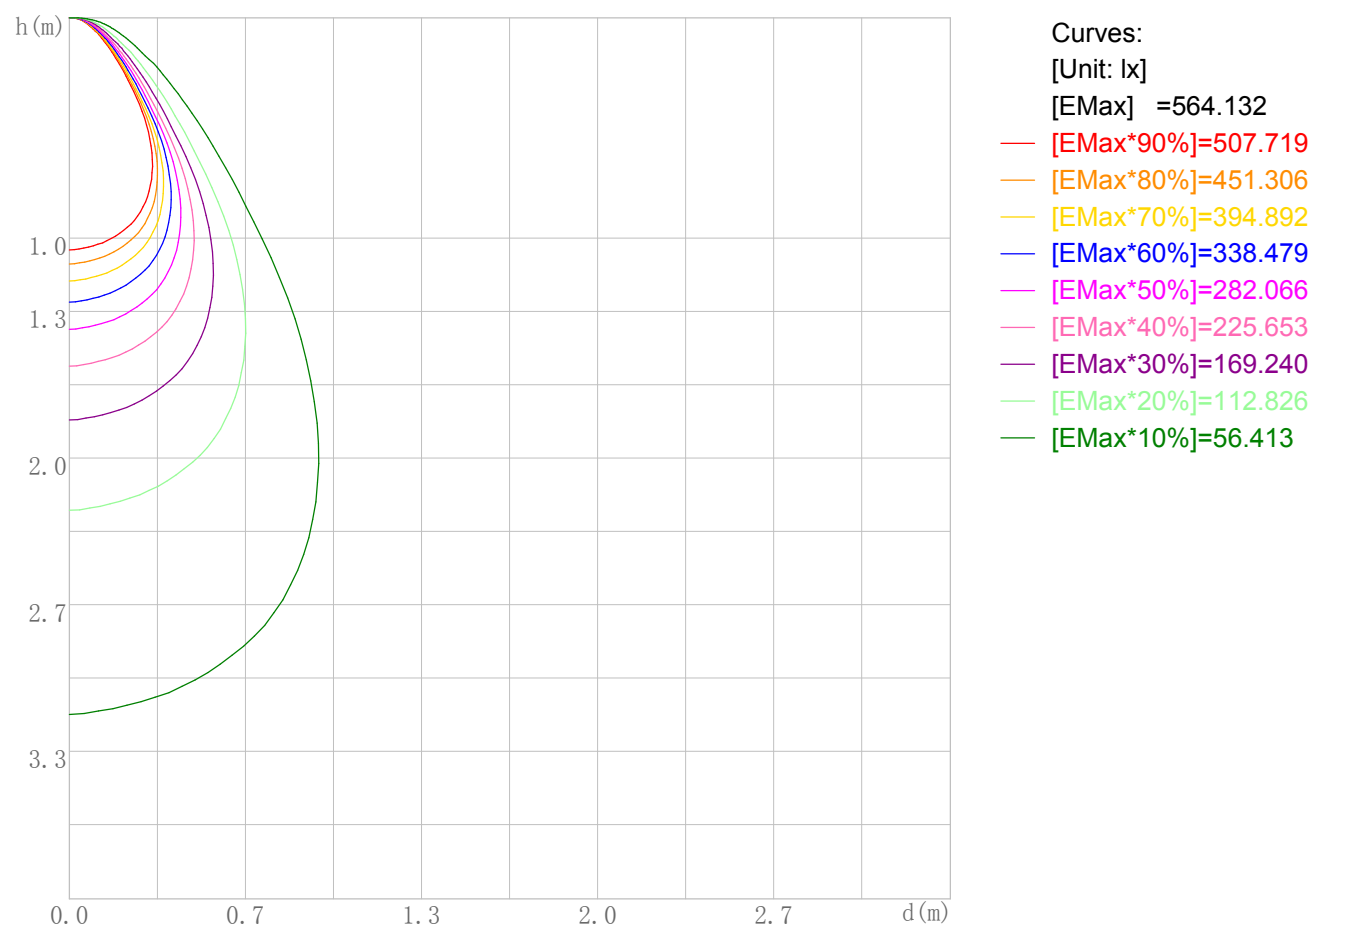

Space Plane Maximum Illuminance and @Angle:564.13lx,0.0deg
Plane Maximum Lighting Intensity and @Angle:564.132cd,0deg

Illuminance-Distance Diagram

Lum. Name:MD12-09-XX-01 RA90 2700K 60D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quaality Department
Manufacture:Shenzhen Norming Lighting Co.,Ltd	Test Machine:GON-2000	Test Date:2019/04/24

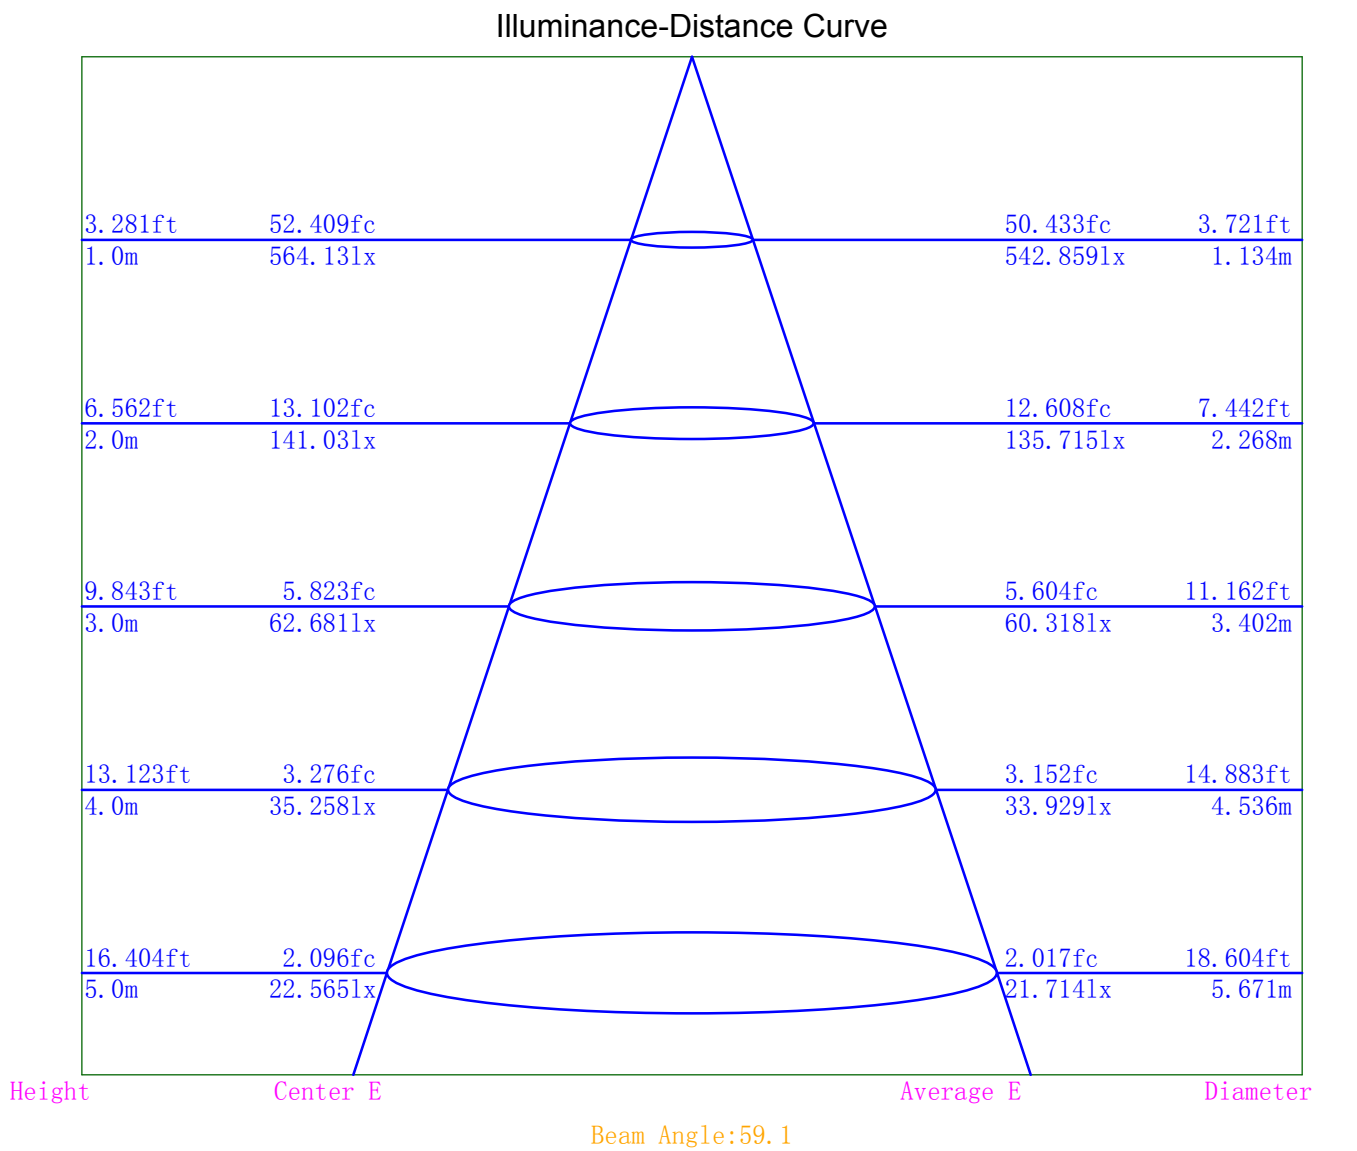

Indoor Luminance Limiting Curves

Lum. Name: MD12-09-XX-01 RA90 2700K 60D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quaility Department
Manufacture: Shenzhen Norming Lighting Co.,Ltd	Test Machine:GON-2000	Test Date: 2019/04/24


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama (deg)	45	50	55	60	65	70	75	80	85
C0	12078	8283	6335	4798	4292	4082	4467	5674	9457
C90	13690	8911	6383	4760	4143	3878	4184	5292	8814


Luminance Limiting Curve

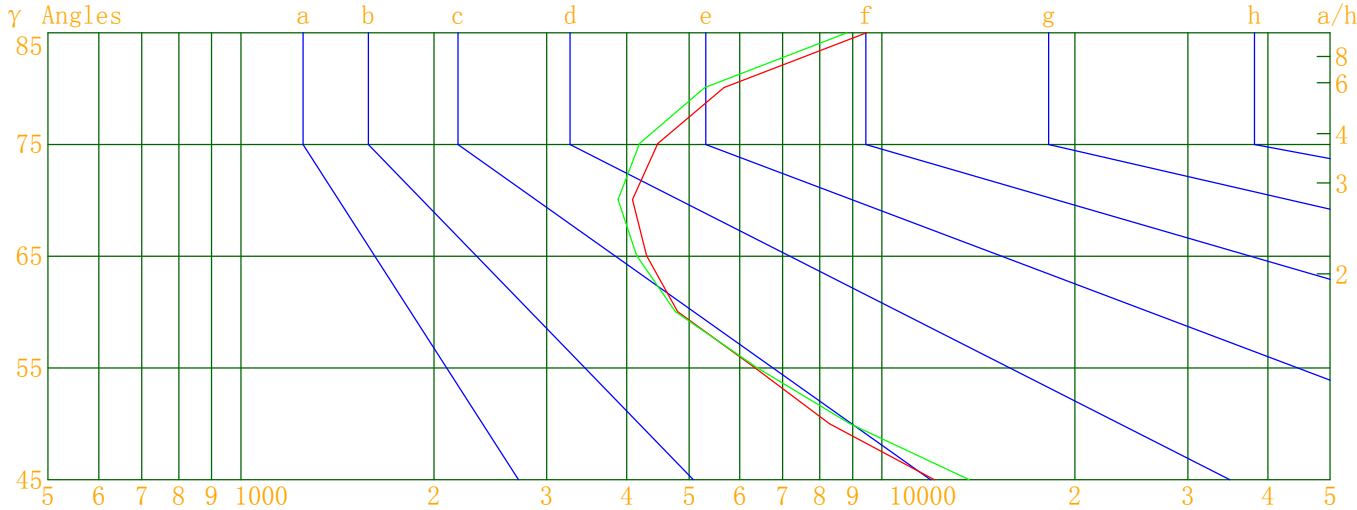

Luminous Size: Length(m)=0.050 Width(m)=0.050 Height(m)=0.045 Area(m^2)=0.004750
Luminous Type: Without Luminous Side
Luminous Curves: C0-C180 Color: — C90-C270 Color: —

Indoor Budgetary Estimate Table

Lum. Name:MD12-09-XX-01 RA90 2700K 60D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quaality Department
Manufacture:Shenzhen Norming Lighting Co.,Ltd	Test Machine:GON-2000	Test Date:2019/04/24

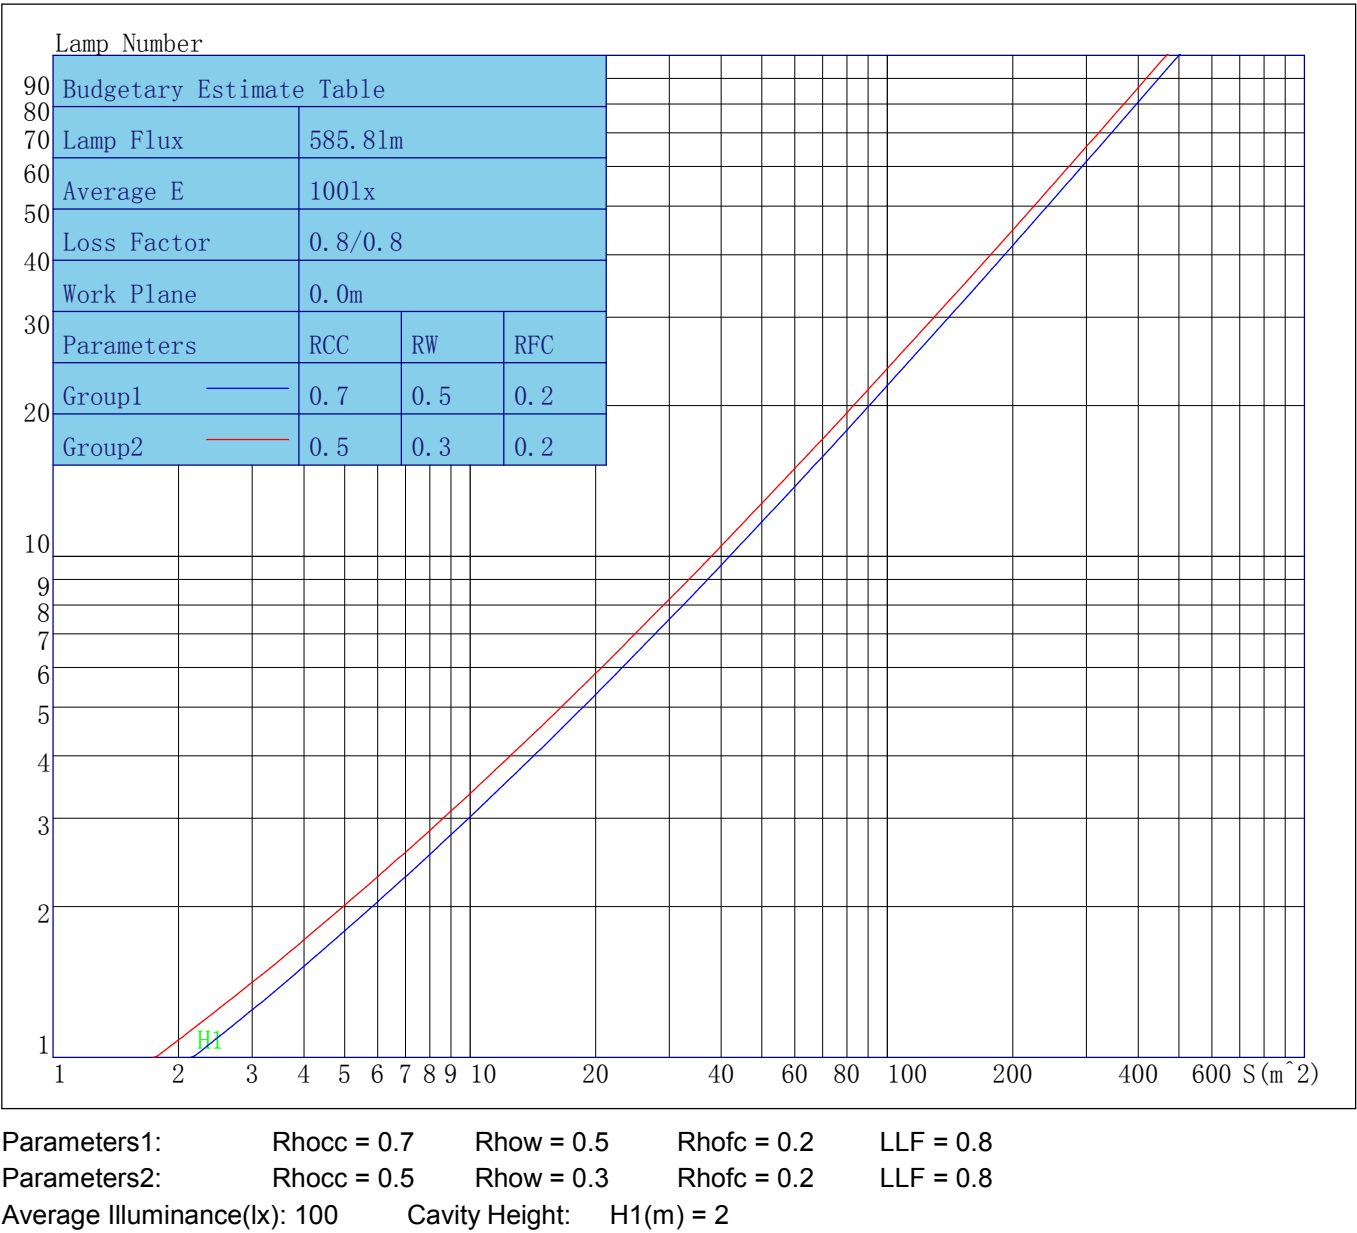

Photometric Filename:MD12-09-XX-01 RA90 2700K 60D.IES

Lum. Name: MD12-09-XX-01 RA90 2700K 60D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quaility Department
Manufacture: Shenzhen Norming Lighting Co.,Ltd	Test Machine:GON-2000	Test Date: 2019/04/24

Coefficients of Utilization – Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	95	95	95	95	92	92	92	92	87	87	87	83	83	83	79	79	79	77
1	89	87	85	83	87	85	83	81	81	79	78	78	76	75	74	73	72	71
2	84	80	76	73	82	78	75	72	75	72	70	72	70	68	70	68	66	65
3	80	74	69	66	78	72	68	65	70	66	64	67	65	62	65	63	61	59
4	75	68	64	60	73	67	63	59	65	61	58	63	60	57	61	58	56	55
5	71	64	58	55	69	63	58	54	61	57	54	59	56	53	58	54	52	51
6	67	59	54	50	66	58	54	50	57	53	49	55	52	49	54	51	48	47
7	63	55	50	47	62	55	50	46	53	49	46	52	48	45	51	48	45	44
8	60	52	47	43	59	51	47	43	50	46	43	49	45	42	48	45	42	41
9	57	49	44	40	56	48	44	40	47	43	40	46	42	40	45	42	39	38
10	54	46	41	38	53	46	41	38	45	40	37	44	40	37	43	40	37	36

Unified Glare Rating Table

Lum. Name: MD12-09-XX-01 RA90 2700K 60D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quaility Department
Manufacture: Shenzhen Norming Lighting Co.,Ltd	Test Machine:GON-2000	Test Date: 2019/04/24

Unified Glare Rating Table

Ceiling RCC		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size		Vewed crosswise					Vewed endwise				
X=2H	Y=2H	17.8	18.4	18.2	18.8	19.2	18.5	19.1	18.9	19.5	19.9
	Y=3H	18.0	18.5	18.5	18.9	19.4	18.6	19.1	19.1	19.5	20.0
	Y=4H	18.2	18.6	18.7	19.1	19.6	18.8	19.2	19.3	19.6	20.1
	Y=6H	18.5	18.8	19.0	19.3	19.8	19.0	19.3	19.5	19.7	20.2
	Y=8H	18.7	19.0	19.3	19.5	20.0	19.1	19.4	19.6	19.8	20.4
	Y=12H	19.0	19.2	19.5	19.7	20.2	19.3	19.5	19.8	20.0	20.5
X=4H	Y=2H	17.8	18.2	18.3	18.6	19.1	18.5	18.9	19.0	19.3	19.8
	Y=3H	18.2	18.4	18.7	18.9	19.4	18.8	19.0	19.3	19.5	20.0
	Y=4H	18.6	18.7	19.1	19.2	19.7	19.0	19.1	19.5	19.6	20.2
	Y=6H	19.1	19.1	19.6	19.6	20.2	19.4	19.4	20.0	19.9	20.5
	Y=8H	19.4	19.3	20.0	19.9	20.4	19.6	19.6	20.2	20.1	20.7
	Y=12H	19.8	19.7	20.4	20.3	20.8	20.0	19.9	20.6	20.4	21.0
X=8H	Y=4H	18.7	18.6	19.3	19.2	19.7	19.1	19.0	19.7	19.6	20.1
	Y=6H	19.4	19.2	20.0	19.8	20.3	19.7	19.5	20.3	20.1	20.6
	Y=8H	19.9	19.7	20.6	20.3	20.9	20.1	19.8	20.7	20.5	21.1
	Y=12H	20.6	20.3	21.2	20.9	21.6	20.7	20.4	21.3	20.9	21.6
X=12H	Y=4H	18.7	18.6	19.3	19.1	19.7	19.1	19.0	19.7	19.5	20.1
	Y=6H	19.5	19.3	20.1	19.8	20.5	19.7	19.5	20.4	20.1	20.7
	Y=8H	20.1	19.8	20.8	20.4	21.1	20.3	20.0	20.9	20.5	21.2
Variations with the objerver position at spacings											
S=1.0H		0.1/-0.1					0.1/-0.1				
S=1.5H		0.2/-0.2					0.2/-0.2				
S=2.0H		0.3/-0.3					0.3/-0.3				
Reduced UGR Table:											
Nordic Standard Table:		BK0					BK0				
Correction Value		2.0					1.7				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	564.13	564.13	564.13	564.13
γ 1.0	563.07	562.03	567.14	564.34
γ 2.0	559.71	558.00	567.16	564.42
γ 3.0	557.33	554.88	567.86	564.09
γ 4.0	553.35	551.93	566.33	562.02
γ 5.0	549.91	550.21	565.92	560.61
γ 6.0	545.50	545.90	563.29	558.12
γ 7.0	541.40	542.84	561.33	556.02
γ 8.0	535.08	538.69	558.08	553.45
γ 9.0	529.22	534.67	555.81	551.50
γ 10.0	521.67	529.49	552.09	548.32
γ 11.0	513.84	524.28	548.78	545.83
γ 12.0	504.95	516.89	544.50	541.54
γ 13.0	496.57	509.56	541.43	537.91
γ 14.0	486.55	500.21	536.82	532.65
γ 15.0	476.31	491.35	532.84	527.89
γ 16.0	463.13	480.13	527.50	520.79
γ 17.0	450.24	468.61	522.06	514.06
γ 18.0	434.65	455.12	514.28	504.20
γ 19.0	419.87	441.35	505.56	494.75
γ 20.0	403.58	426.09	494.85	483.32
γ 21.0	386.42	410.21	484.78	471.82
γ 22.0	367.36	392.86	473.25	457.14
γ 23.0	349.31	375.20	460.40	443.28
γ 24.0	329.27	355.41	445.68	426.65
γ 25.0	310.35	336.37	430.59	409.39
γ 26.0	289.98	316.81	413.53	390.67
γ 27.0	270.01	297.30	396.46	372.50
γ 28.0	249.11	276.84	377.61	352.24
γ 29.0	229.11	256.83	359.20	332.27
γ 30.0	209.35	235.93	339.20	311.09
γ 31.0	190.77	216.77	319.94	290.51
γ 32.0	172.56	197.17	300.14	269.16
γ 33.0	154.80	178.09	280.08	248.58
γ 34.0	137.59	159.73	259.24	228.22
γ 35.0	121.79	142.72	239.39	208.70
γ 36.0	107.27	126.75	219.07	189.51
γ 37.0	94.82	112.09	200.14	171.58
γ 38.0	84.23	98.84	181.99	153.90
γ 39.0	75.55	87.93	164.61	137.11
γ 40.0	67.67	78.55	147.12	121.22
γ 41.0	60.61	70.59	131.03	107.50
γ 42.0	54.29	63.39	116.43	95.36
γ 43.0	49.07	57.09	104.24	85.32
γ 44.0	44.73	51.16	93.66	76.37
γ 45.0	40.57	45.98	84.65	68.33
γ 46.0	36.58	41.17	76.55	61.19

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	33.30	37.03	69.36	54.53
γ 48.0	30.29	33.46	62.52	49.06
γ 49.0	27.62	30.16	55.98	44.46
γ 50.0	25.29	27.21	50.18	40.16
γ 51.0	23.31	24.68	45.63	36.26
γ 52.0	21.48	22.45	41.35	32.75
γ 53.0	19.91	20.54	37.23	29.82
γ 54.0	18.51	18.87	33.78	27.14
γ 55.0	17.26	17.39	30.65	24.79
γ 56.0	16.02	16.04	27.58	22.84
γ 57.0	14.92	14.87	25.18	21.02
γ 58.0	13.45	13.80	22.88	19.35
γ 59.0	12.28	12.34	20.87	17.99
γ 60.0	11.40	11.30	19.07	16.71
γ 61.0	10.74	10.52	17.67	15.47
γ 62.0	10.15	9.88	16.33	13.81
γ 63.0	9.61	9.33	14.52	12.35
γ 64.0	9.09	8.80	12.62	11.45
γ 65.0	8.61	8.32	11.29	10.82
γ 66.0	8.16	7.87	10.37	10.25
γ 67.0	7.72	7.43	9.72	9.72
γ 68.0	7.32	7.02	9.17	9.22
γ 69.0	6.96	6.65	8.67	8.76
γ 70.0	6.63	6.30	8.19	8.29
γ 71.0	6.37	6.01	7.76	7.89
γ 72.0	6.11	5.76	7.32	7.52
γ 73.0	5.88	5.53	6.95	7.18
γ 74.0	5.67	5.33	6.60	6.88
γ 75.0	5.49	5.14	6.30	6.61
γ 76.0	5.30	4.97	6.05	6.36
γ 77.0	5.13	4.82	5.84	6.14
γ 78.0	4.97	4.65	5.62	5.93
γ 79.0	4.82	4.50	5.43	5.74
γ 80.0	4.68	4.36	5.26	5.55
γ 81.0	4.54	4.22	5.09	5.37
γ 82.0	4.39	4.10	4.93	5.22
γ 83.0	4.24	3.96	4.78	5.06
γ 84.0	4.07	3.82	4.62	4.91
γ 85.0	3.91	3.65	4.49	4.77
γ 86.0	3.75	3.48	4.34	4.62
γ 87.0	3.64	3.31	4.21	4.49
γ 88.0	3.58	3.18	4.07	4.29
γ 89.0	3.51	3.12	3.91	4.12
γ 90.0	3.45	3.08	3.74	3.95
γ 91.0	3.41	3.04	3.57	3.78
γ 92.0	3.35	2.99	3.41	3.70
γ 93.0	3.30	2.96	3.33	3.64

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	3.26	2.92	3.27	3.58
γ 95.0	3.22	2.88	3.23	3.52
γ 96.0	3.18	2.86	3.17	3.46
γ 97.0	3.14	2.82	3.13	3.42
γ 98.0	3.11	2.80	3.09	3.37
γ 99.0	3.08	2.78	3.05	3.33
γ 100.0	3.05	2.75	3.02	3.28
γ 101.0	3.03	2.73	2.98	3.23
γ 102.0	3.00	2.71	2.96	3.20
γ 103.0	2.99	2.69	2.92	3.17
γ 104.0	2.96	2.68	2.89	3.14
γ 105.0	2.95	2.67	2.88	3.11
γ 106.0	2.94	2.67	2.86	3.09
γ 107.0	2.93	2.66	2.84	3.06
γ 108.0	2.93	2.66	2.82	3.04
γ 109.0	2.93	2.66	2.81	3.03
γ 110.0	2.93	2.66	2.80	3.01
γ 111.0	2.93	2.67	2.79	3.01
γ 112.0	2.94	2.68	2.78	3.00
γ 113.0	2.96	2.69	2.78	2.99
γ 114.0	2.97	2.71	2.79	3.00
γ 115.0	2.99	2.73	2.79	3.00
γ 116.0	3.01	2.75	2.80	3.01
γ 117.0	3.03	2.77	2.81	3.02
γ 118.0	3.06	2.81	2.82	3.02
γ 119.0	3.08	2.83	2.85	3.04
γ 120.0	3.12	2.87	2.86	3.07
γ 121.0	3.15	2.90	2.89	3.08
γ 122.0	3.19	2.94	2.91	3.11
γ 123.0	3.23	2.99	2.94	3.14
γ 124.0	3.26	3.03	2.97	3.16
γ 125.0	3.32	3.07	3.00	3.20
γ 126.0	3.37	3.12	3.04	3.24
γ 127.0	3.41	3.17	3.09	3.27
γ 128.0	3.46	3.22	3.13	3.31
γ 129.0	3.51	3.27	3.18	3.36
γ 130.0	3.56	3.34	3.21	3.40
γ 131.0	3.62	3.38	3.26	3.45
γ 132.0	3.67	3.44	3.32	3.50
γ 133.0	3.73	3.49	3.37	3.55
γ 134.0	3.78	3.56	3.42	3.59
γ 135.0	3.84	3.62	3.48	3.65
γ 136.0	3.90	3.68	3.53	3.70
γ 137.0	3.96	3.74	3.59	3.76
γ 138.0	4.01	3.81	3.65	3.81
γ 139.0	4.07	3.86	3.70	3.87
γ 140.0	4.13	3.93	3.77	3.92

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	4.20	3.98	3.83	3.97
γ 142.0	4.26	4.04	3.90	4.03
γ 143.0	4.31	4.11	3.95	4.10
γ 144.0	4.38	4.17	4.01	4.15
γ 145.0	4.42	4.23	4.07	4.21
γ 146.0	4.48	4.28	4.14	4.27
γ 147.0	4.54	4.35	4.20	4.33
γ 148.0	4.60	4.41	4.26	4.38
γ 149.0	4.65	4.47	4.32	4.44
γ 150.0	4.70	4.53	4.39	4.50
γ 151.0	4.75	4.57	4.45	4.55
γ 152.0	4.80	4.64	4.50	4.59
γ 153.0	4.85	4.68	4.55	4.65
γ 154.0	4.89	4.74	4.61	4.70
γ 155.0	4.94	4.79	4.67	4.74
γ 156.0	4.98	4.83	4.72	4.79
γ 157.0	5.02	4.89	4.76	4.85
γ 158.0	5.07	4.93	4.81	4.88
γ 159.0	5.11	4.97	4.87	4.93
γ 160.0	5.14	5.03	4.91	4.98
γ 161.0	5.19	5.07	4.95	5.02
γ 162.0	5.23	5.12	5.00	5.05
γ 163.0	5.28	5.15	5.05	5.11
γ 164.0	5.32	5.21	5.08	5.14
γ 165.0	5.35	5.24	5.13	5.18
γ 166.0	5.39	5.29	5.18	5.22
γ 167.0	5.43	5.31	5.22	5.26
γ 168.0	5.47	5.36	5.26	5.30
γ 169.0	5.50	5.39	5.30	5.34
γ 170.0	5.52	5.43	5.33	5.38
γ 171.0	5.55	5.46	5.38	5.42
γ 172.0	5.58	5.49	5.42	5.45
γ 173.0	5.59	5.51	5.45	5.48
γ 174.0	5.61	5.54	5.49	5.51
γ 175.0	5.62	5.56	5.51	5.54
γ 176.0	5.64	5.57	5.54	5.56
γ 177.0	5.64	5.58	5.56	5.58
γ 178.0	5.64	5.59	5.59	5.59
γ 179.0	5.63	5.60	5.60	5.61
γ 180.0	5.62	5.62	5.62	5.62