


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:240.3V I:0.0273A P:5.7W PF:0.8747 Freq:49.99Hz		
UTHDi:0.16% ITHDi:23.84% KDisp:0.8999 Lamp Flux:511.932x1 lm		
NAME: MD16-06-XX-01 2700K RA90 24D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 89.26 lm/W
MODEL		Imax (cd)	3006	S/MH(C0/180)	0.26	
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	0.35	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	511.93	η UP,DN(C0-180)	0.0,51.1	
NOMINAL FLUX(lm)	511.932	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,48.9	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00	
TEST VOLTAGE(V)	240.28	η down (%)	100.0	CIBSE SHR MAX	0.30	

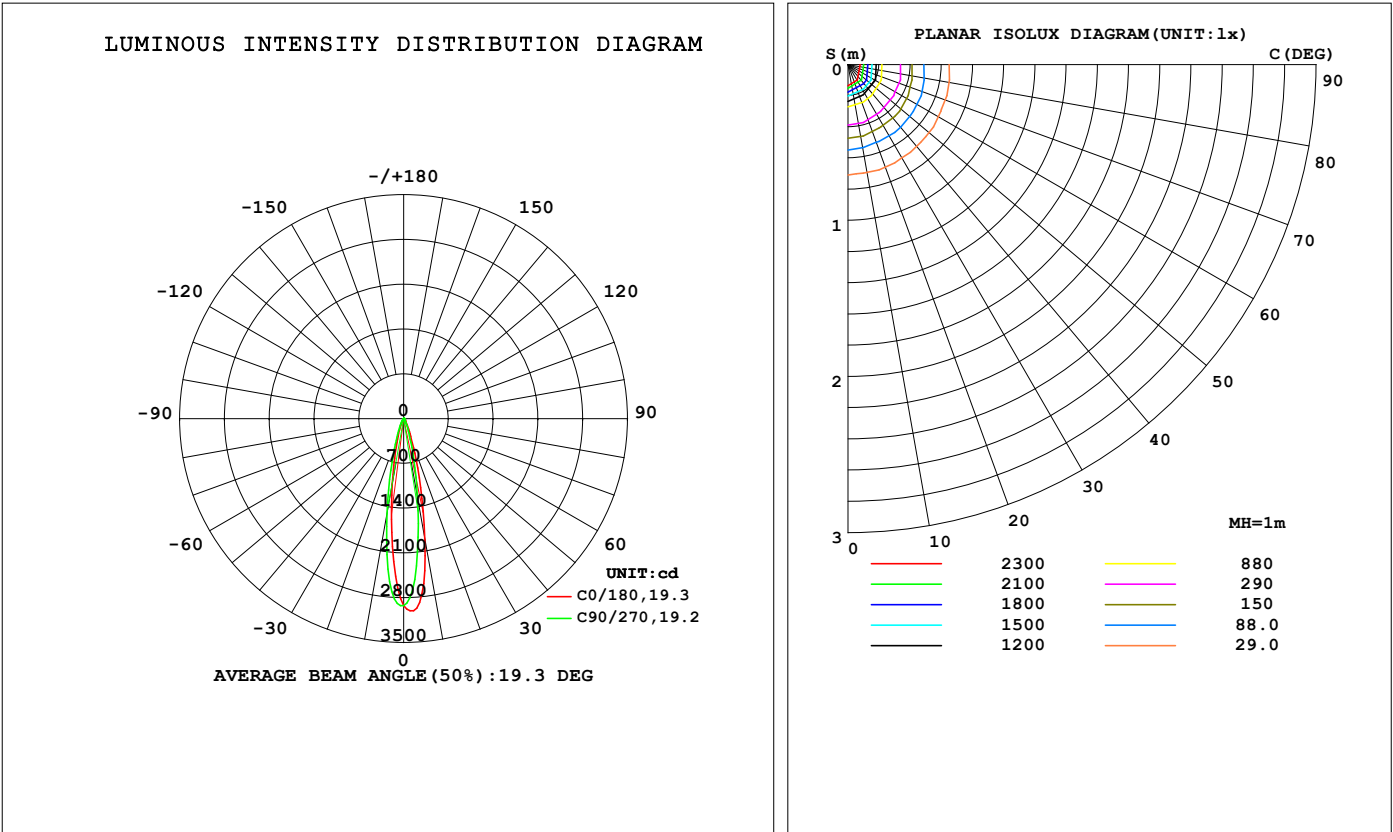

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1922	1637	1266	1069	1044	1187	1508	1838	0- 10	199.2	199.2	38.9,38.9
20	408.1	336.4	250.7	221.4	222.2	246.2	309.7	379.1	10- 20	191.5	390.7	76.3,76.3
30	105.6	90.79	69.12	61.74	60.56	66.96	86.81	101.5	20- 30	72.70	463.4	90.5,90.5
40	28.90	23.37	17.96	16.59	16.47	17.87	23.12	28.27	30- 40	27.30	490.7	95.9,95.9
50	9.482	8.256	7.269	6.959	7.211	7.494	8.370	9.218	40- 50	9.939	500.7	97.8,97.8
60	5.394	5.019	4.698	4.701	4.820	4.783	5.124	5.412	50- 60	5.594	506.3	98.9,98.9
70	3.225	3.023	2.654	2.360	2.409	2.687	2.969	3.171	60- 70	3.893	510.2	99.7,99.7
80	0.5994	0.3875	0.3086	0.2626	0.2653	0.2862	0.3590	0.4952	70- 80	1.589	511.7	100,100
90	0.0793	0.0279	0.0112	0.0016	0.0029	0.0019	0.0061	0.0604	80- 90	0.1855	511.9	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 496.72 lm

%lum = 97.0%

%lamp = 97.0%

Conical surface Flux(120deg): 506.26 lm

%lum = 98.9%


%lamp = 98.9%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.3V I:0.0273A P:5.7W PF:0.8747 Freq:49.99Hz		
UTHDi:0.16% ITHDi:23.84% KDisp:0.8999 Lamp Flux:511.932x1 lm		
NAME: MD16-06-XX-01 2700K RA90 24D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:

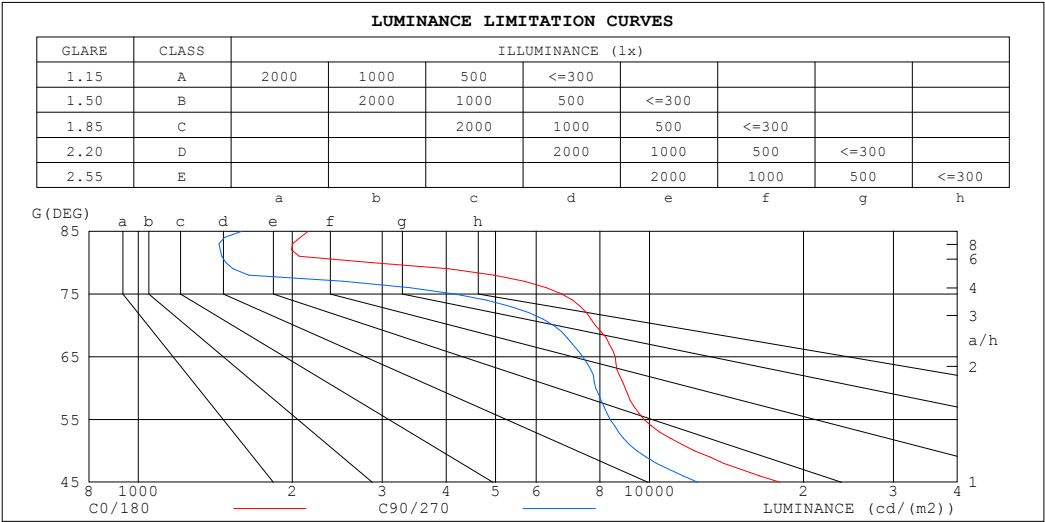

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2150	1592
80	2867	1485
75	6739	4161
70	7831	6484
65	8569	7410
60	8960	7851
55	9755	8379
50	12251	9448
45	18001	12438


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.3V I:0.0273A P:5.7W PF:0.8747 Freq:49.99Hz		
UTHDi:0.16% ITHDi:23.84% KDisp:0.8999		
Lamp Flux:511.932x1 lm		
NAME: MD16-06-XX-01 2700K RA90 24D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.13	1.11	1.09	1.10	1.09	1.07	1.07	1.05	1.04	1.03	1.02	1.01	.99	.99	.98	.96
2.0	1.07	1.04	1.01	1.05	1.03	1.00	1.02	1.00	.98	.99	.98	.96	.97	.95	.94	.93
3.0	1.02	.99	.96	1.01	.98	.95	.98	.96	.93	.96	.94	.92	.94	.92	.91	.89
4.0	.98	.94	.91	.97	.93	.90	.95	.92	.89	.93	.91	.88	.91	.89	.87	.86
5.0	.94	.90	.87	.94	.90	.87	.92	.89	.86	.90	.87	.85	.89	.87	.85	.83
6.0	.91	.87	.84	.90	.86	.83	.89	.86	.83	.88	.85	.82	.87	.84	.82	.81
7.0	.88	.84	.81	.88	.84	.81	.86	.83	.80	.85	.82	.80	.84	.82	.79	.78
8.0	.85	.81	.78	.85	.81	.78	.84	.80	.78	.83	.80	.78	.82	.79	.77	.76
9.0	.83	.79	.76	.83	.79	.76	.82	.78	.76	.81	.78	.75	.80	.77	.75	.74
10.0	.81	.77	.74	.80	.76	.74	.80	.76	.74	.79	.76	.74	.78	.75	.73	.72

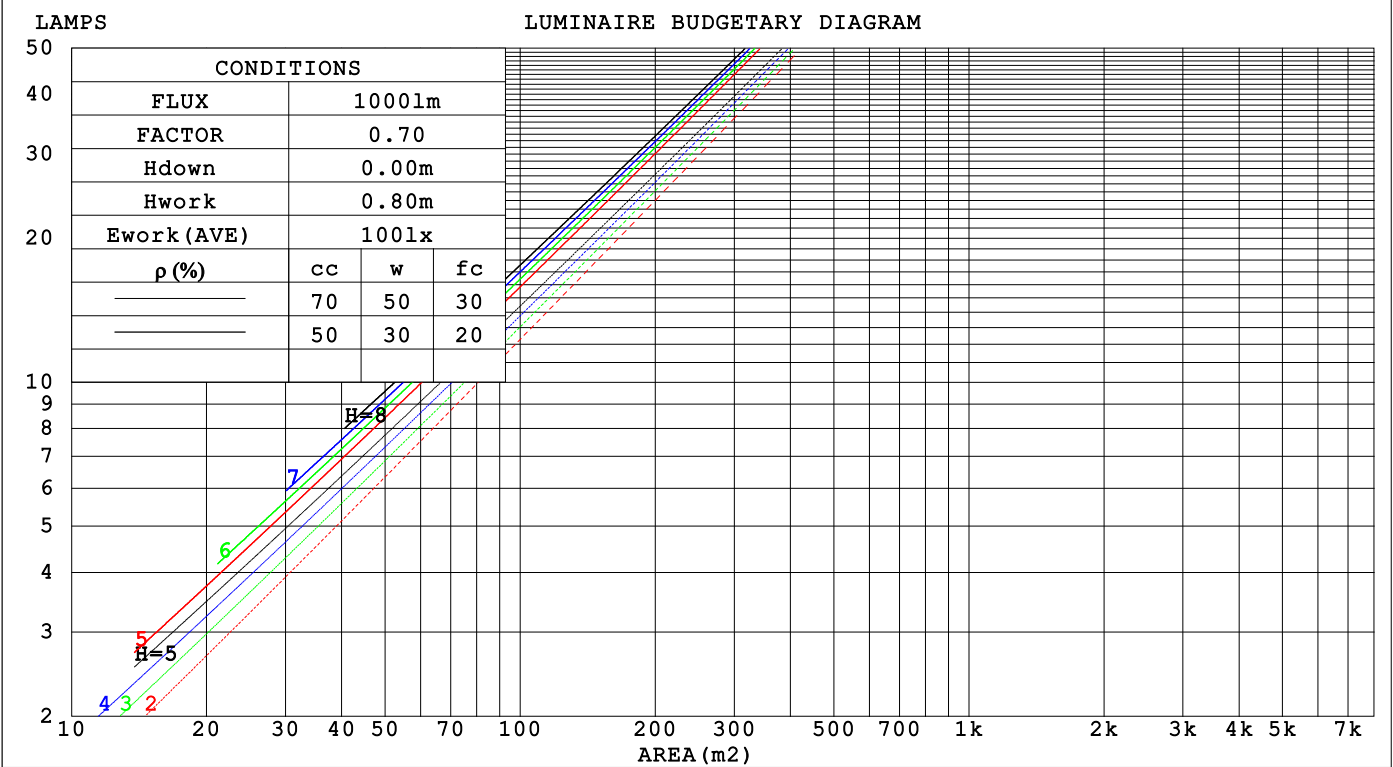

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.3V I:0.0273A P:5.7W PF:0.8747 Freq:49.99Hz		
UTHDi:0.16% ITHDi:23.84% KDisp:0.8999 Lamp Flux:511.932x1 lm		
NAME: MD16-06-XX-01 2700K RA90 24D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.142	.081	.026	.136	.077	.025	.123	.071	.023	.112	.064	.021	.101	.059	.019	
2.0	.132	.072	.022	.127	.070	.022	.116	.065	.020	.107	.060	.019	.098	.056	.018	
3.0	.123	.066	.020	.119	.064	.019	.110	.060	.018	.102	.056	.017	.095	.052	.016	
4.0	.115	.060	.018	.111	.058	.017	.104	.055	.016	.097	.052	.016	.091	.050	.015	
5.0	.108	.055	.016	.105	.054	.016	.099	.051	.015	.093	.049	.015	.088	.047	.014	
6.0	.102	.051	.015	.099	.050	.014	.094	.048	.014	.089	.046	.014	.084	.044	.013	
7.0	.097	.048	.014	.094	.047	.013	.090	.045	.013	.085	.044	.013	.081	.042	.012	
8.0	.092	.045	.013	.090	.044	.012	.086	.043	.012	.082	.041	.012	.078	.040	.012	
9.0	.088	.042	.012	.086	.042	.012	.082	.041	.012	.079	.039	.011	.076	.038	.011	
10.0	.084	.040	.011	.082	.040	.011	.079	.039	.011	.076	.038	.011	.073	.037	.011	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.169	.158	.148	.144	.135	.127	.099	.093	.088	.057	.054	.051	.018	.017	.017	
2.0	.151	.133	.117	.129	.114	.101	.089	.079	.071	.051	.046	.041	.016	.015	.014	
3.0	.136	.113	.095	.117	.098	.082	.080	.068	.058	.046	.040	.034	.015	.013	.011	
4.0	.124	.098	.078	.106	.085	.068	.073	.059	.048	.042	.035	.028	.014	.011	.009	
5.0	.113	.086	.065	.097	.074	.057	.067	.052	.040	.039	.030	.024	.013	.010	.008	
6.0	.104	.076	.055	.090	.066	.048	.062	.046	.034	.036	.027	.020	.012	.009	.007	
7.0	.097	.068	.047	.083	.059	.041	.058	.041	.029	.033	.024	.017	.011	.008	.006	
8.0	.090	.061	.041	.078	.053	.035	.054	.037	.025	.031	.022	.015	.010	.007	.005	
9.0	.085	.055	.035	.073	.048	.031	.050	.034	.022	.029	.020	.013	.010	.007	.004	
10.0	.080	.050	.031	.069	.044	.027	.048	.031	.019	.028	.018	.012	.009	.006	.004	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.3V I:0.0273A P:5.7W PF:0.8747 Freq:49.99Hz										
UTHDi:0.16% ITHDi:23.84% KDisp:0.8999					Lamp Flux:511.932x1 lm					
NAME: MD16-06-XX-01 2700K RA90 24D THU					TYPE:			WEIGHT:		
SPEC.:					DIM.:			SERIAL No.:		
MFR.: Norming lighting					SUR.: 40mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	15.0	15.6	15.2	15.8	15.9	13.6	14.3	13.8	14.4	14.6
3H	15.5	16.1	15.7	16.3	16.5	14.2	14.9	14.5	15.0	15.2
4H	15.7	16.3	16.0	16.5	16.7	14.4	15.0	14.6	15.2	15.4
6H	15.8	16.3	16.0	16.6	16.8	14.3	14.9	14.6	15.1	15.4
8H	15.7	16.3	16.0	16.5	16.8	14.3	14.8	14.6	15.1	15.3
12H	15.7	16.2	16.0	16.5	16.8	14.3	14.8	14.6	15.1	15.3
4H 2H	15.1	15.7	15.3	15.9	16.1	13.8	14.4	14.1	14.7	14.9
3H	15.8	16.3	16.1	16.6	16.8	14.6	15.2	15.0	15.4	15.7
4H	16.1	16.5	16.4	16.8	17.1	14.9	15.3	15.2	15.6	15.9
6H	16.1	16.6	16.5	16.9	17.2	14.8	15.3	15.2	15.6	15.9
8H	16.1	16.5	16.5	16.8	17.2	14.8	15.2	15.2	15.5	15.9
12H	16.0	16.4	16.4	16.8	17.2	14.7	15.1	15.1	15.5	15.9
8H 4H	16.1	16.5	16.4	16.8	17.2	14.9	15.3	15.3	15.7	16.0
6H	16.1	16.5	16.5	16.8	17.3	14.9	15.2	15.3	15.6	16.0
8H	16.1	16.4	16.5	16.8	17.2	14.8	15.1	15.3	15.6	16.0
12H	16.0	16.3	16.5	16.7	17.2	14.8	15.1	15.3	15.5	16.0
12H 4H	16.0	16.4	16.4	16.7	17.1	14.9	15.2	15.3	15.6	16.0
6H	16.1	16.4	16.5	16.8	17.2	14.8	15.1	15.3	15.5	16.0
8H	16.0	16.3	16.5	16.7	17.2	14.8	15.1	15.3	15.5	16.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 1.7 / - 1.6					+ 1.0 / - 1.3				
1.5H	+ 3.1 / - 1.4					+ 1.8 / - 1.2				
2.0H	+ 1.9 / - 0.7					+ 1.1 / - 0.8				

CIE Pub.117, 511.9 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = -2.3$)
Area: 0.0012 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.3V I:0.0273A P:5.7W PF:0.8747 Freq:49.99Hz		
UTHDi:0.16% ITHDi:23.84% KDisp:0.8999 Lamp Flux:511.932x1 lm		
NAME: MD16-06-XX-01 2700K RA90 24D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	89	83	79	89	83	79	88	82	79	76
0.80	96	91	87	96	90	87	94	90	87	83
1.00	100	95	91	99	94	91	98	94	91	87
1.25	104	99	96	103	98	95	101	97	95	90
1.50	107	102	99	105	101	98	103	100	97	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	97
4.00	114	111	109	112	110	108	108	107	105	98
5.00	115	113	111	113	111	110	109	108	107	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-08-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 γ Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.3V I:0.0273A P:5.7W PF:0.8747 Freq:49.99Hz		
UTHDi:0.16% ITHDi:23.84% KDisp:0.8999 Lamp Flux:511.932x1 lm		
NAME: MD16-06-XX-01 2700K RA90 24D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:

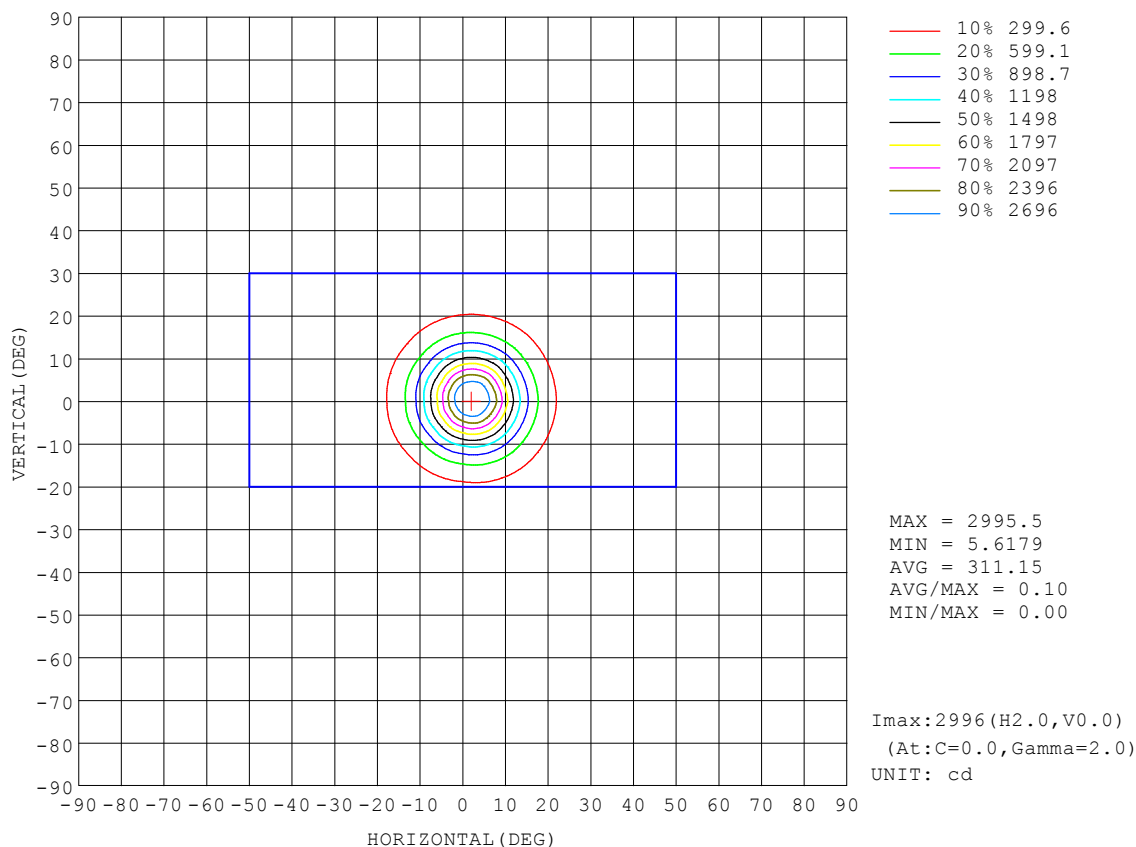


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.3V I:0.0273A P:5.7W PF:0.8747 Freq:49.99Hz		
UTHDi:0.16% ITHDi:23.84% KDisp:0.8999 Lamp Flux:511.932x1 lm		
NAME: MD16-06-XX-01 2700K RA90 24D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:

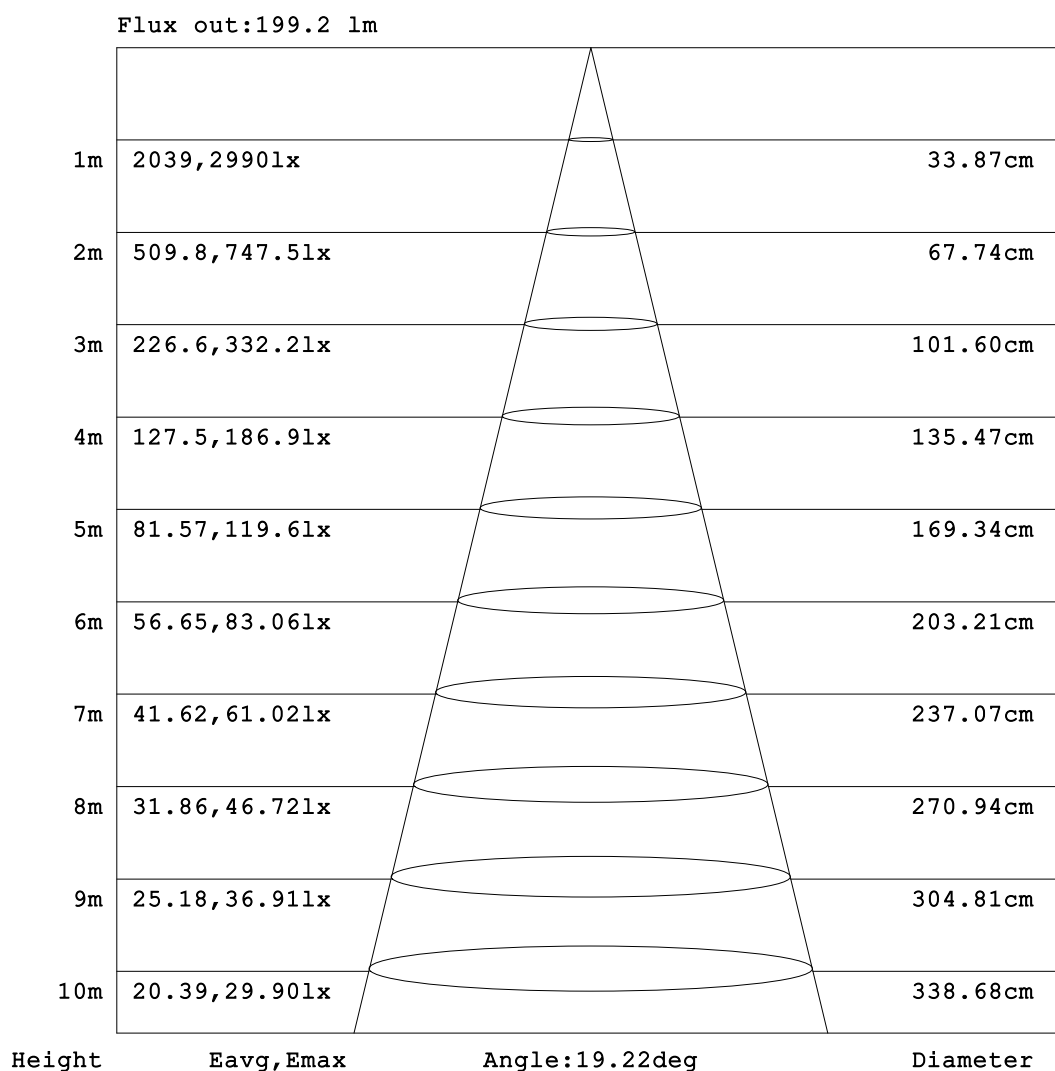


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.3V I:0.0273A P:5.7W PF:0.8747 Freq:49.99Hz		
UTHDi:0.16% ITHDi:23.84% KDisp:0.8999 Lamp Flux:511.932x1 lm		
NAME: MD16-06-XX-01 2700K RA90 24D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:

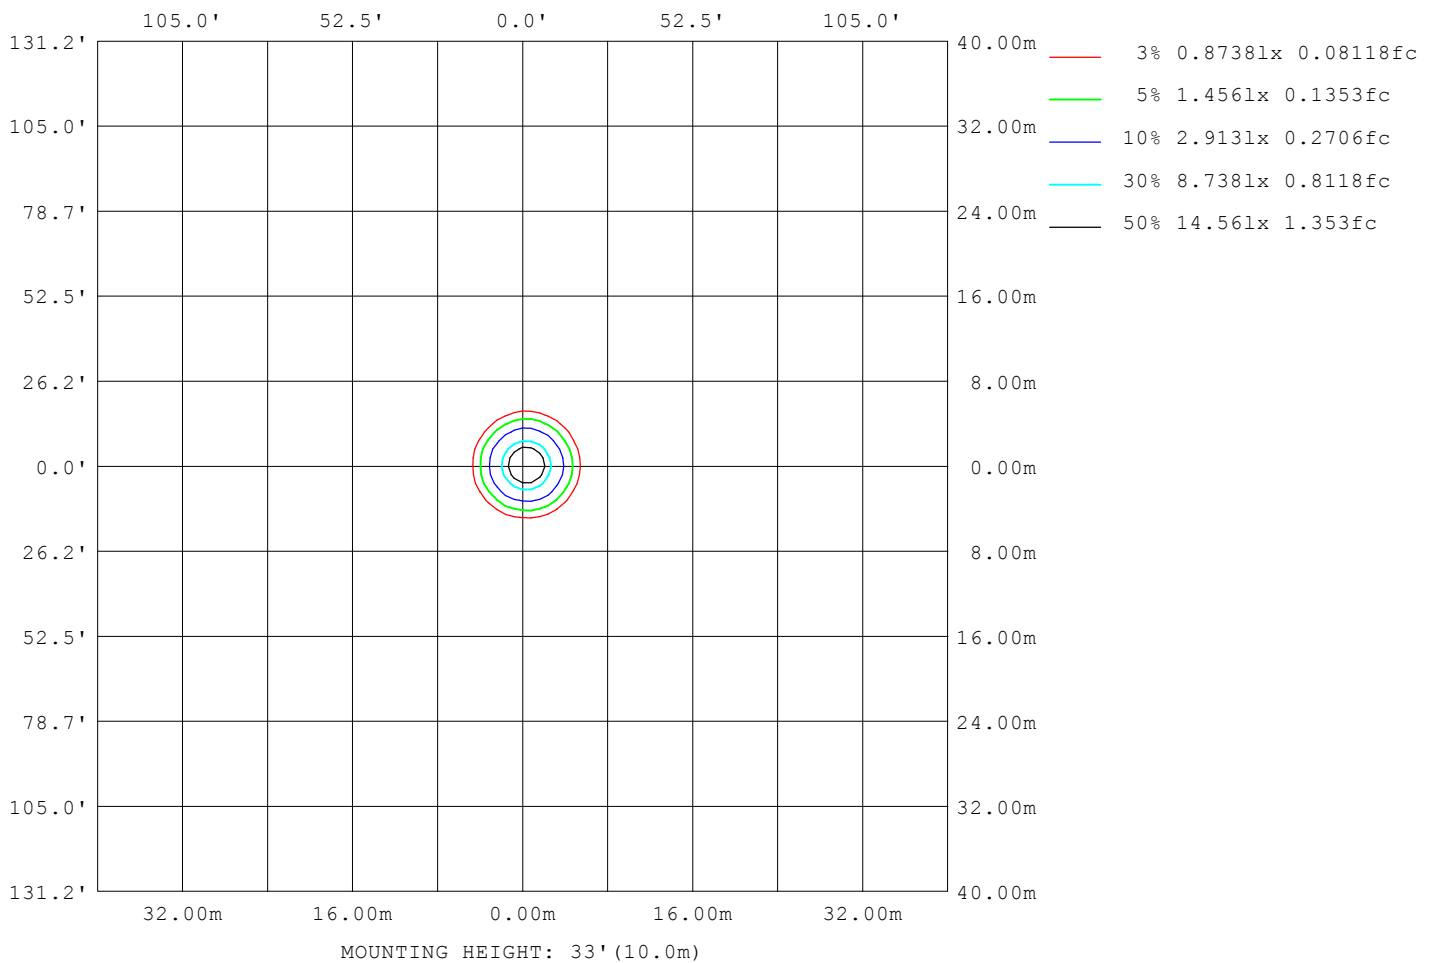

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.3V I:0.0273A P:5.7W PF:0.8747 Freq:49.99Hz		
UTHDi:0.16% ITHDi:23.84% KDisp:0.8999 Lamp Flux:511.932x1 lm		
NAME: MD16-06-XX-01 2700K RA90 24D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	7897
L_0~180 (75) av	4782
L_0~180 (85) av	1636
L_90~270 (65) av	7766
L_90~270 (75) av	4785
L_90~270 (85) av	1709
L_45 (65) av	7778
L_45 (75) av	4833
L_45 (85) av	1573

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

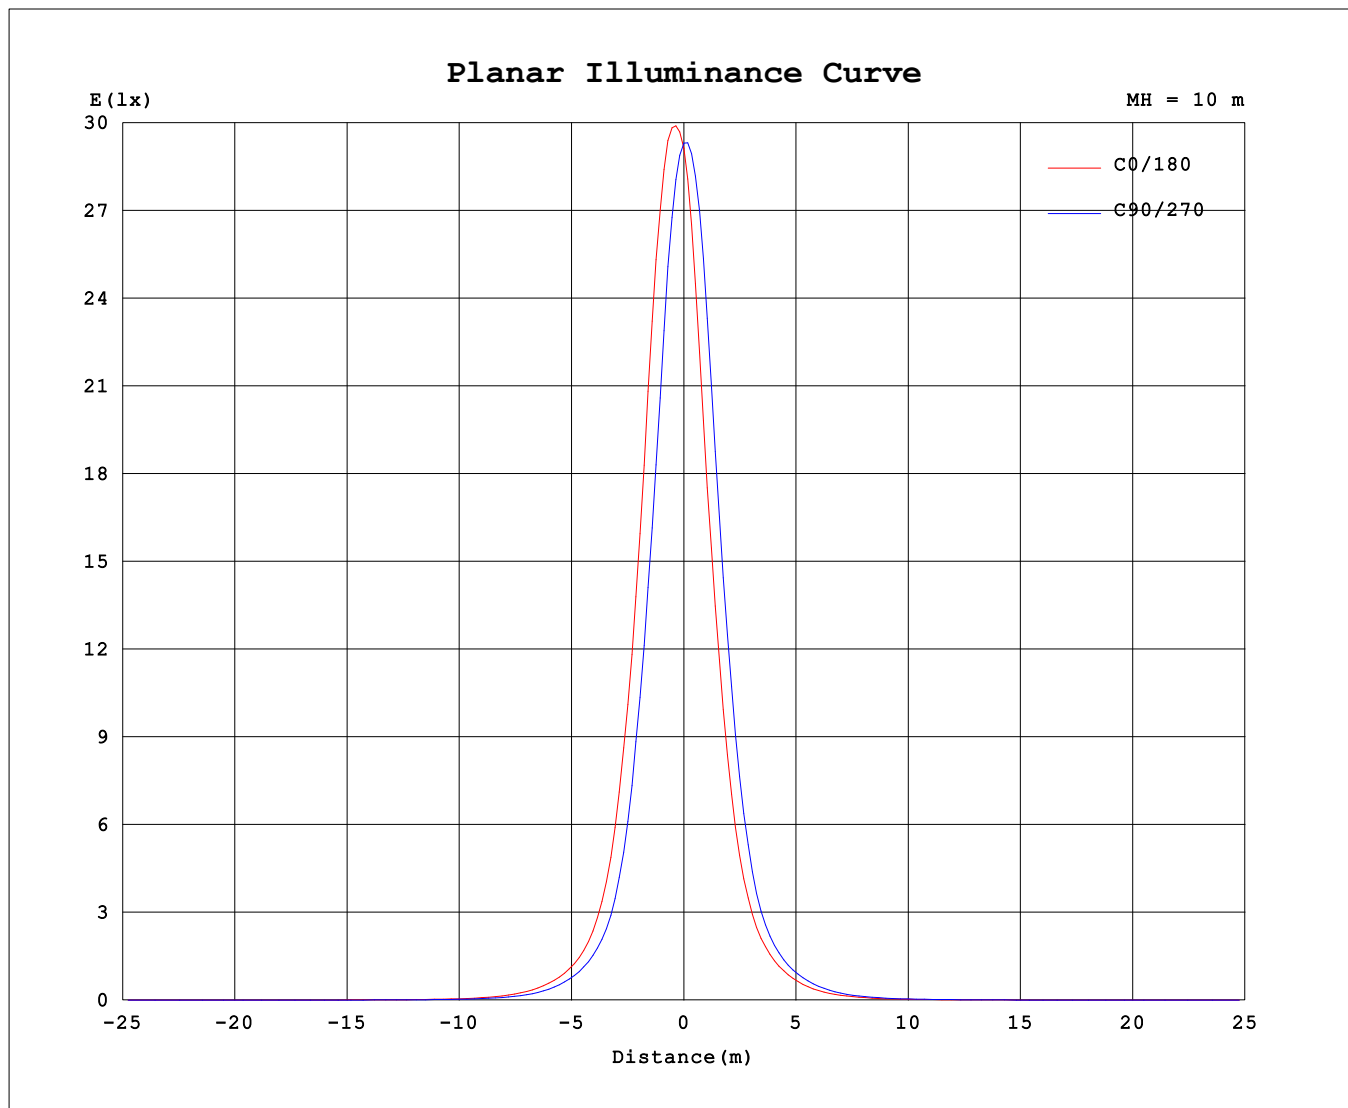

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	2923	2923	2923	2923	2923	2923	2923	2923
3.0	3005	2879	2680	2498	2468	2612	2822	2973
6.0	2755	2504	2088	1840	1786	1971	2365	2703
9.0	2168	1849	1461	1241	1213	1366	1710	2075
12.0	1480	1247	941.8	769.8	755.4	884.7	1143	1411
15.0	960.3	782.7	560.3	462.7	462.5	531.8	706.4	897.4
18.0	569.5	467.8	336.9	288.5	289.9	328.0	423.2	531.2
21.0	348.4	289.5	219.3	192.7	193.3	214.9	268.6	324.1
24.0	224.4	192.1	149.0	134.4	133.0	146.6	181.1	213.0
27.0	152.7	132.6	102.8	91.75	90.78	99.71	126.1	146.7
30.0	105.6	90.79	69.12	61.74	60.56	66.96	86.81	101.5
33.0	71.45	60.55	45.85	41.59	40.30	44.59	58.08	69.52
36.0	48.20	39.92	30.39	28.01	27.42	30.04	39.13	46.95
39.0	32.72	26.67	20.40	19.04	18.82	20.31	26.34	32.08
42.0	22.28	17.94	14.18	13.23	13.19	14.15	18.01	21.82
45.0	15.33	12.80	10.53	9.813	9.951	10.64	12.81	15.10
48.0	11.26	9.594	8.260	7.785	8.008	8.457	9.737	10.95
51.0	8.774	7.732	6.873	6.643	6.891	7.099	7.832	8.521
54.0	7.126	6.518	6.007	5.895	6.102	6.158	6.636	6.986
57.0	6.118	5.698	5.312	5.293	5.440	5.441	5.812	6.074
60.0	5.394	5.019	4.698	4.701	4.820	4.783	5.124	5.412
63.0	4.720	4.407	4.166	4.044	4.155	4.245	4.545	4.762
66.0	4.146	3.844	3.523	3.302	3.402	3.582	3.904	4.154
69.0	3.468	3.218	2.885	2.612	2.674	2.928	3.190	3.425
72.0	2.802	2.615	2.146	1.813	1.825	2.143	2.499	2.724
75.0	2.100	1.860	1.289	0.9264	0.8700	1.220	1.684	1.998
78.0	1.243	0.9238	0.4094	0.3358	0.3443	0.3747	0.7455	1.138
81.0	0.3886	0.3315	0.2725	0.2240	0.2268	0.2505	0.3139	0.3537
84.0	0.2609	0.2166	0.1845	0.1539	0.1596	0.1684	0.2090	0.2374
87.0	0.1706	0.1459	0.0953	0.0276	0.0157	0.0635	0.1467	0.1599
90.0	0.0793	0.0279	0.0112	0.0016	0.0029	0.0019	0.0061	0.0604

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-08-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks: