


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.0272A P:5.7W PF:0.8745 Freq:49.99Hz		
UTHDi:0.17% ITHDi:23.93% KDisp:0.8997 Lamp Flux:496.64lx1 lm		
NAME: MD16-06-XX-01 2700K RA90 60D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 86.69 lm/W
MODEL		Imax (cd)	477.5	S/MH(C0/180)	0.86	
NOMINAL POWER(W)	6	LOR(%)	100.0	S/MH(C90/270)	0.94	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	496.64	η UP,DN(C0-180)	0.0,50.0	
NOMINAL FLUX(lm)	496.641	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.0	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.75	
TEST VOLTAGE(V)	240.34	η down (%)	100.0	CIBSE SHR MAX	0.95	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

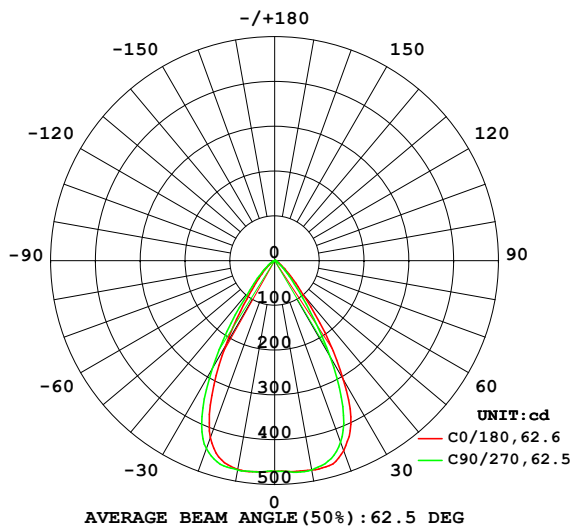

PLANAR ISOLUX DIAGRAM (UNIT: lx)

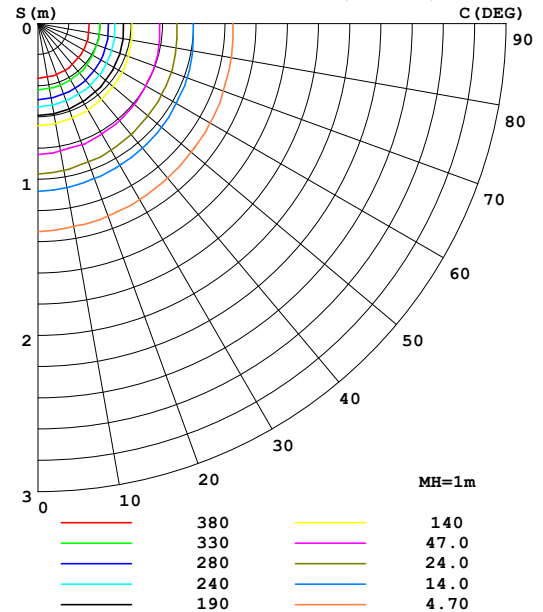

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	474.8	476.0	474.5	472.1	473.4	473.4	474.9	476.4	0- 10	45.22	45.22	9.11,9.11
20	451.4	443.5	430.8	421.4	420.2	432.6	446.3	454.4	10- 20	130.8	176.0	35.4,35.4
30	308.5	283.7	249.7	221.6	219.8	243.4	278.8	305.9	20- 30	165.5	341.5	68.8,68.8
40	99.84	85.19	69.38	63.01	66.02	73.81	87.00	99.65	30- 40	98.80	440.3	88.7,88.7
50	31.10	26.22	21.97	20.94	21.66	23.88	28.03	31.15	40- 50	36.43	476.7	96,96
60	9.949	8.523	7.092	6.771	6.986	7.651	8.970	10.06	50- 60	13.63	490.4	98.7,98.7
70	2.799	2.517	2.122	1.879	1.846	2.043	2.384	2.668	60- 70	4.698	495.1	99.7,99.7
80	0.6588	0.6037	0.5155	0.4503	0.4434	0.4951	0.5805	0.6307	70- 80	1.264	496.3	99.9,99.9
90	0.1287	0.0536	0.0055	0	0.0019	0	0	0.0907	80- 90	0.3134	496.6	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 462.83 lm

%lum = 93.2%

%lamp = 93.2%

Conical surface Flux(120deg): 490.37 lm

%lum = 98.7%


%lamp = 98.7%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.0272A P:5.7W PF:0.8745 Freq:49.99Hz		
UTHDi:0.17% ITHDi:23.93% KDisp:0.8997 Lamp Flux:496.64lx1 lm		
NAME: MD16-06-XX-01 2700K RA90 60D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:

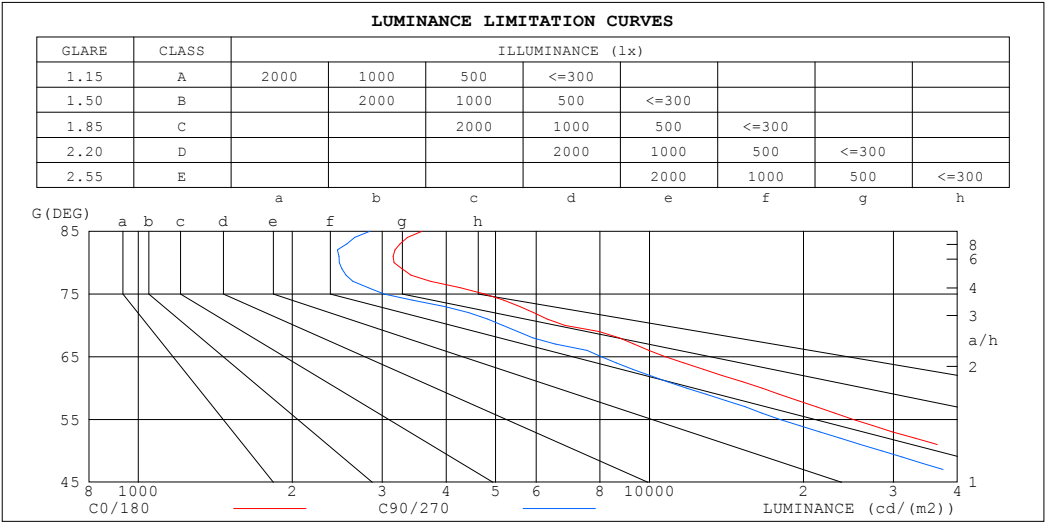

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	3587	2835
80	3165	2472
75	4757	3027
70	6829	5168
65	10749	8055
60	16602	11813
55	25047	18010
50	40373	28463
45	64439	45359


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.0272A P:5.7W PF:0.8745 Freq:49.99Hz		
UTHDi:0.17% ITHDi:23.93% KDisp:0.8997		
Lamp Flux:496.64lx1 lm		
NAME: MD16-06-XX-01 2700K RA90 60D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.10	1.08	1.05	1.08	1.06	1.04	1.04	1.02	1.01	1.00	.99	.98	.97	.96	.95	.93
2.0	1.02	.98	.95	1.01	.97	.93	.97	.94	.91	.94	.92	.89	.92	.89	.88	.86
3.0	.95	.90	.86	.94	.89	.85	.91	.87	.84	.88	.85	.82	.86	.83	.81	.79
4.0	.88	.83	.78	.87	.82	.78	.85	.80	.77	.83	.79	.76	.81	.78	.75	.73
5.0	.82	.76	.72	.81	.76	.72	.80	.75	.71	.78	.74	.70	.76	.73	.70	.68
6.0	.77	.71	.66	.76	.70	.66	.75	.70	.66	.73	.69	.65	.72	.68	.65	.63
7.0	.72	.66	.62	.72	.66	.62	.70	.65	.61	.69	.64	.61	.68	.64	.61	.59
8.0	.68	.62	.57	.67	.61	.57	.66	.61	.57	.65	.60	.57	.64	.60	.57	.55
9.0	.64	.58	.54	.63	.58	.54	.62	.57	.53	.62	.57	.53	.61	.56	.53	.52
10.0	.60	.54	.50	.60	.54	.50	.59	.54	.50	.58	.53	.50	.58	.53	.50	.49

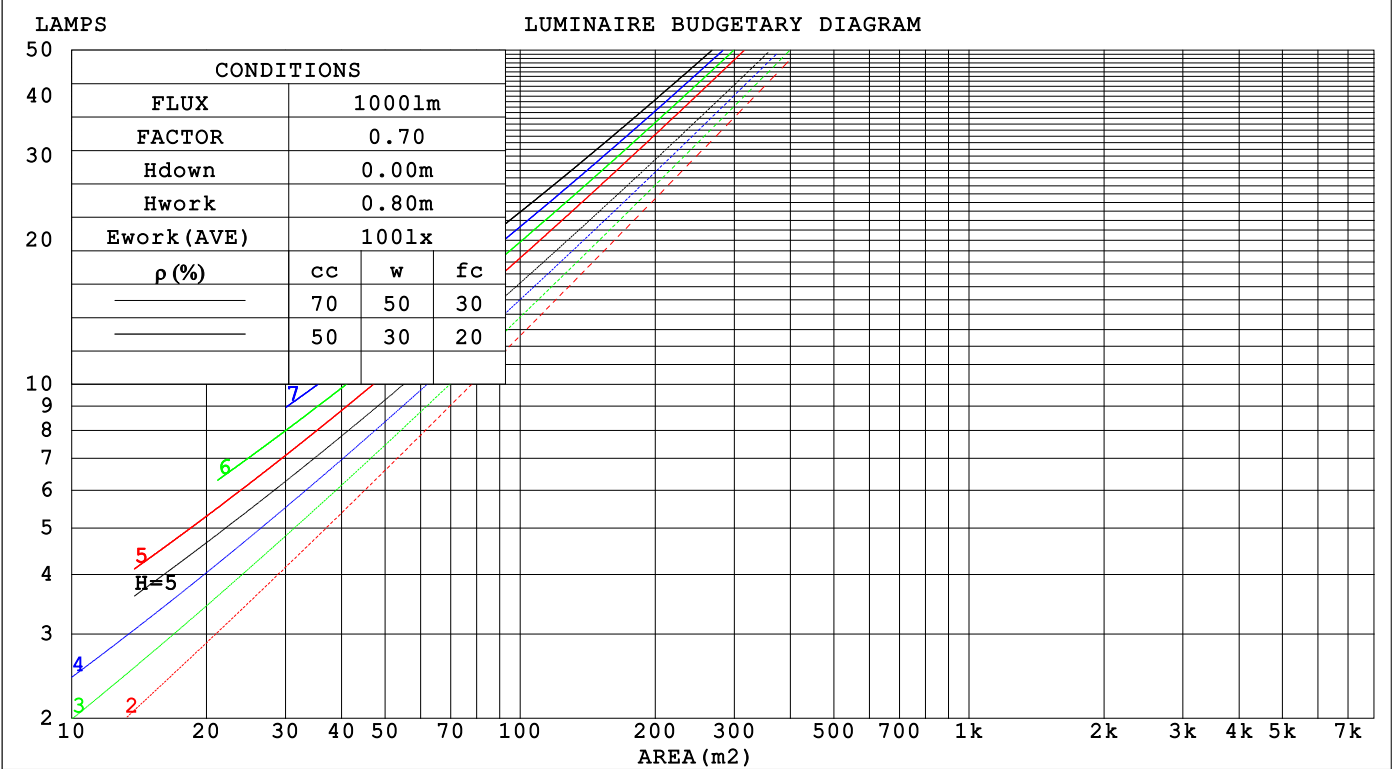

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.0272A P:5.7W PF:0.8745 Freq:49.99Hz		
UTHDi:0.17% ITHDi:23.93% KDisp:0.8997 Lamp Flux:496.64lx1 lm		
NAME: MD16-06-XX-01 2700K RA90 60D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Wall Exitance Coefficients(WEC)														
0.0																														
1.0	.185	.105	.033	.179	.102	.032	.166	.095	.030	.154	.089	.029	.144	.083	.027															
2.0	.178	.098	.030	.173	.095	.029	.162	.090	.028	.152	.085	.027	.143	.081	.026															
3.0	.170	.091	.027	.165	.088	.027	.156	.085	.026	.148	.081	.025	.140	.077	.024															
4.0	.162	.084	.025	.158	.083	.024	.150	.079	.024	.143	.077	.023	.136	.074	.022															
5.0	.154	.079	.023	.151	.077	.023	.144	.075	.022	.137	.072	.022	.131	.070	.021															
6.0	.147	.074	.021	.144	.073	.021	.138	.071	.021	.132	.069	.020	.127	.067	.020															
7.0	.140	.069	.020	.138	.069	.020	.132	.067	.019	.127	.065	.019	.122	.064	.019															
8.0	.134	.066	.018	.132	.065	.018	.127	.063	.018	.122	.062	.018	.118	.061	.018															
9.0	.129	.062	.017	.126	.062	.017	.122	.060	.017	.118	.059	.017	.114	.058	.017															
10.0	.123	.059	.016	.121	.058	.016	.117	.057	.016	.113	.056	.016	.110	.055	.016															

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.172	.157	.144	.147	.135	.124	.100	.093	.086	.058	.054	.050	.019	.017	.016	
2.0	.157	.132	.112	.135	.114	.097	.092	.079	.067	.053	.046	.039	.017	.015	.013	
3.0	.145	.114	.088	.125	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010	
4.0	.135	.099	.071	.116	.086	.062	.080	.060	.044	.046	.035	.026	.015	.011	.008	
5.0	.127	.088	.058	.109	.076	.051	.075	.053	.036	.044	.031	.021	.014	.010	.007	
6.0	.120	.078	.049	.103	.068	.042	.071	.048	.030	.041	.028	.018	.013	.009	.006	
7.0	.113	.071	.041	.098	.061	.036	.067	.043	.025	.039	.025	.015	.013	.008	.005	
8.0	.108	.065	.035	.093	.056	.031	.064	.039	.022	.037	.023	.013	.012	.008	.004	
9.0	.103	.060	.031	.088	.052	.027	.061	.036	.019	.036	.021	.011	.012	.007	.004	
10.0	.098	.055	.027	.085	.048	.023	.059	.034	.017	.034	.020	.010	.011	.007	.003	

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.0272A P:5.7W PF:0.8745 Freq:49.99Hz											
UTHDi:0.17% ITHDi:23.93% KDisp:0.8997						Lamp Flux:496.64lx1 lm					
NAME: MD16-06-XX-01 2700K RA90 60D THU						TYPE:			WEIGHT:		
SPEC.:						DIM.:			SERIAL No.:		
MFR.: Norming lighting						SUR.: 40mm			Shielding Angle:		
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	23.1	24.1	23.3	24.2	24.4	21.8	22.8	22.0	23.0	23.1
	3H	23.0	23.9	23.2	24.1	24.3	21.7	22.6	22.0	22.8	23.0
	4H	22.9	23.8	23.2	24.0	24.2	21.6	22.5	21.9	22.7	22.9
	6H	22.8	23.6	23.1	23.9	24.1	21.5	22.3	21.8	22.6	22.8
	8H	22.8	23.6	23.1	23.8	24.1	21.5	22.3	21.8	22.5	22.8
	12H	22.7	23.5	23.1	23.7	24.0	21.4	22.2	21.8	22.5	22.7
4H	2H	22.9	23.7	23.2	24.0	24.2	21.6	22.5	21.9	22.7	23.0
	3H	22.8	23.5	23.1	23.8	24.1	21.5	22.3	21.9	22.6	22.8
	4H	22.7	23.4	23.1	23.7	24.0	21.5	22.2	21.8	22.5	22.8
	6H	22.6	23.2	23.0	23.6	23.9	21.4	22.0	21.8	22.3	22.7
	8H	22.6	23.1	23.0	23.5	23.9	21.4	21.9	21.7	22.3	22.6
	12H	22.6	23.1	23.0	23.4	23.8	21.3	21.8	21.7	22.2	22.6
8H	4H	22.6	23.1	23.0	23.5	23.9	21.4	21.9	21.7	22.3	22.6
	6H	22.5	23.0	22.9	23.4	23.8	21.3	21.7	21.7	22.1	22.5
	8H	22.5	22.9	22.9	23.3	23.7	21.2	21.6	21.7	22.0	22.5
	12H	22.4	22.8	22.9	23.2	23.7	21.2	21.5	21.7	22.0	22.4
12H	4H	22.5	23.0	23.0	23.4	23.8	21.3	21.8	21.7	22.2	22.6
	6H	22.5	22.9	22.9	23.3	23.7	21.2	21.6	21.7	22.0	22.5
	8H	22.4	22.8	22.9	23.2	23.7	21.2	21.5	21.7	22.0	22.4
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 3.1 / - 5.4					+ 2.2 / - 5.4				
1.5H		+ 4.6 / - 4.4					+ 3.6 / - 3.7				
2.0H		+ 4.7 / - 4.6					+ 3.9 / - 4.0				

CIE Pub.117, 496.6 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -2.4)
Area: 0.0012 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.0272A P:5.7W PF:0.8745 Freq:49.99Hz		
UTHDi:0.17% ITHDi:23.93% KDisp:0.8997 Lamp Flux:496.64lx1 lm		
NAME: MD16-06-XX-01 2700K RA90 60D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	84	77	73	83	77	73	69
0.80	92	86	82	92	86	82	90	85	81	77
1.00	97	91	87	96	91	87	95	91	87	82
1.25	102	96	92	101	96	92	99	94	91	87
1.50	105	100	96	103	99	95	101	97	94	90
2.00	108	103	100	106	102	99	103	100	98	92
2.50	109	105	102	108	104	101	105	102	99	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	112	110	109	108	107	105	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-08-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 γ Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.0272A P:5.7W PF:0.8745 Freq:49.99Hz		
UTHDi:0.17% ITHDi:23.93% KDisp:0.8997 Lamp Flux:496.64lx1 lm		
NAME: MD16-06-XX-01 2700K RA90 60D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:

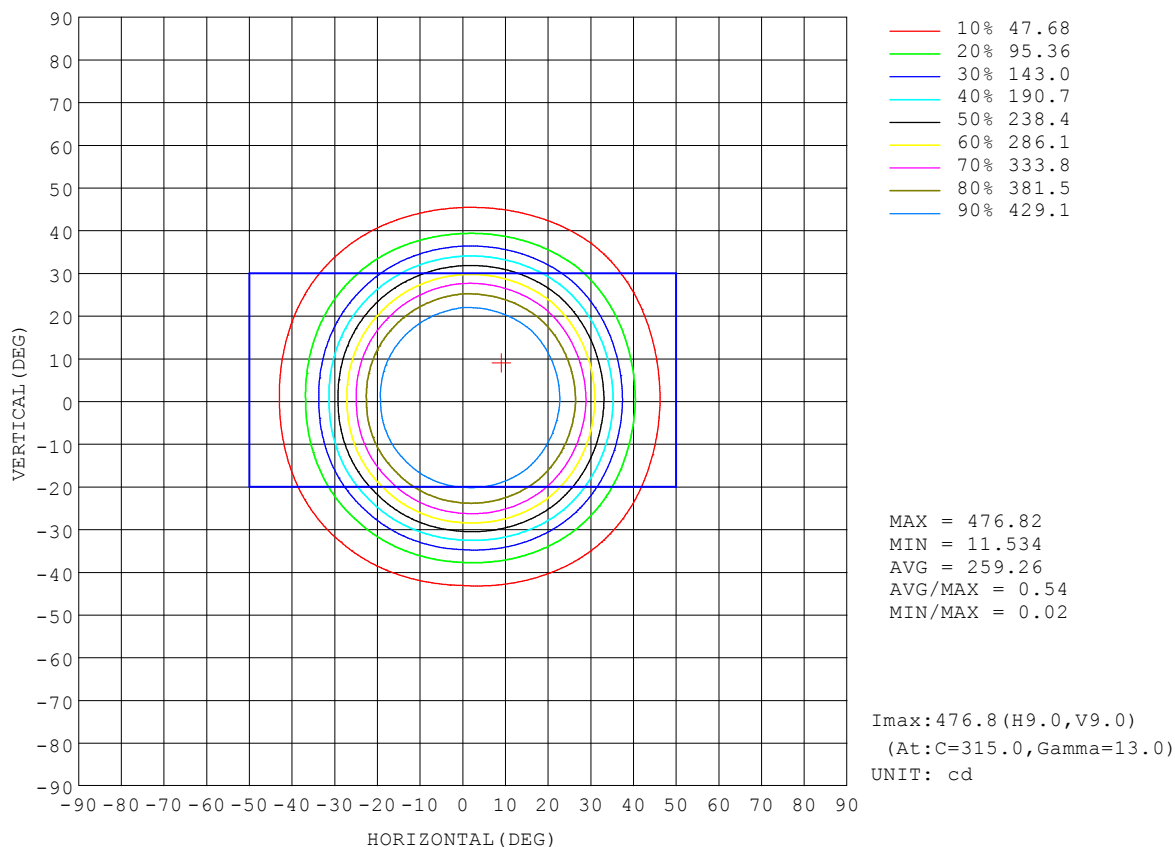


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.0272A P:5.7W PF:0.8745 Freq:49.99Hz		
UTHDi:0.17% ITHDi:23.93% KDisp:0.8997 Lamp Flux:496.64lx1 lm		
NAME: MD16-06-XX-01 2700K RA90 60D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:

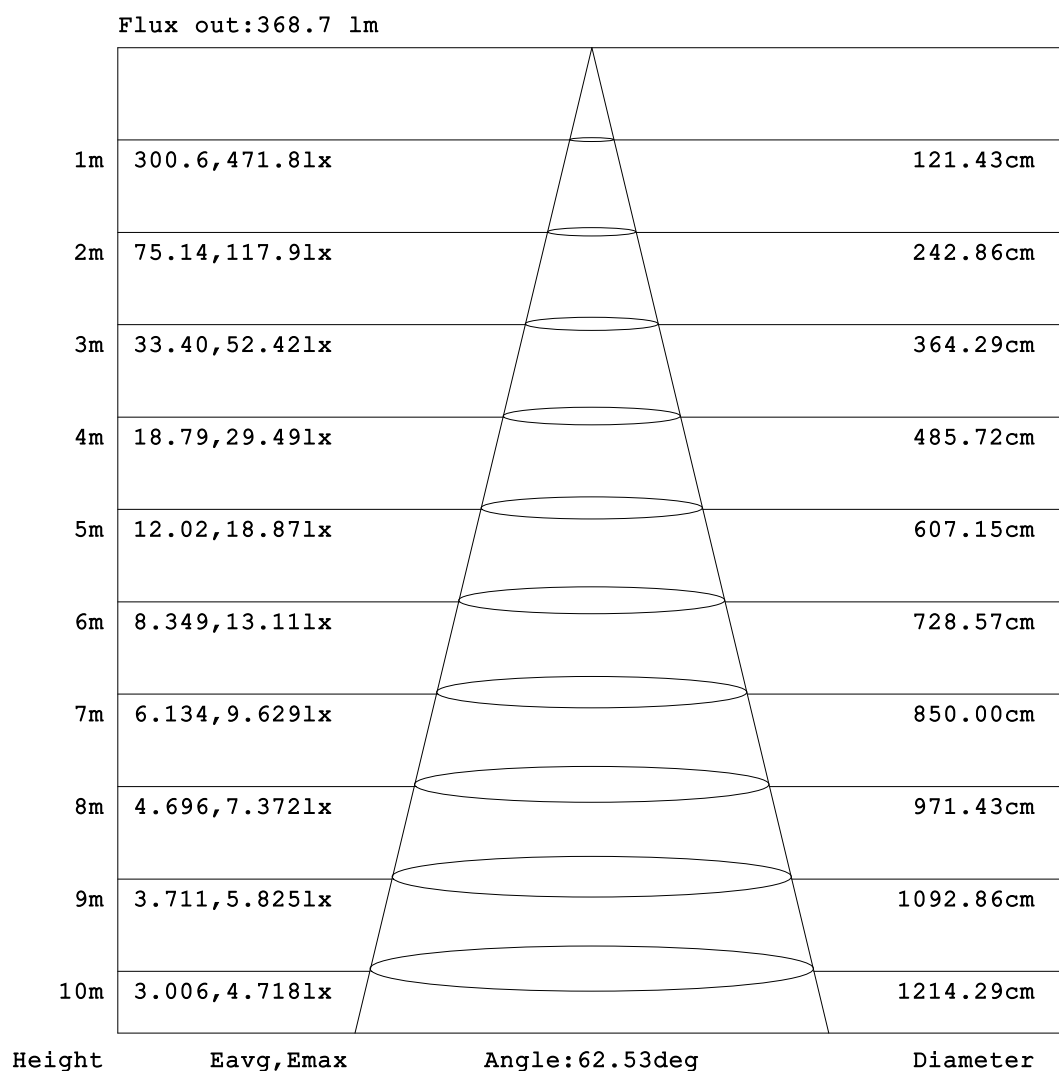


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.0272A P:5.7W PF:0.8745 Freq:49.99Hz		
UTHDi:0.17% ITHDi:23.93% KDisp:0.8997 Lamp Flux:496.64lx1 lm		
NAME: MD16-06-XX-01 2700K RA90 60D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:

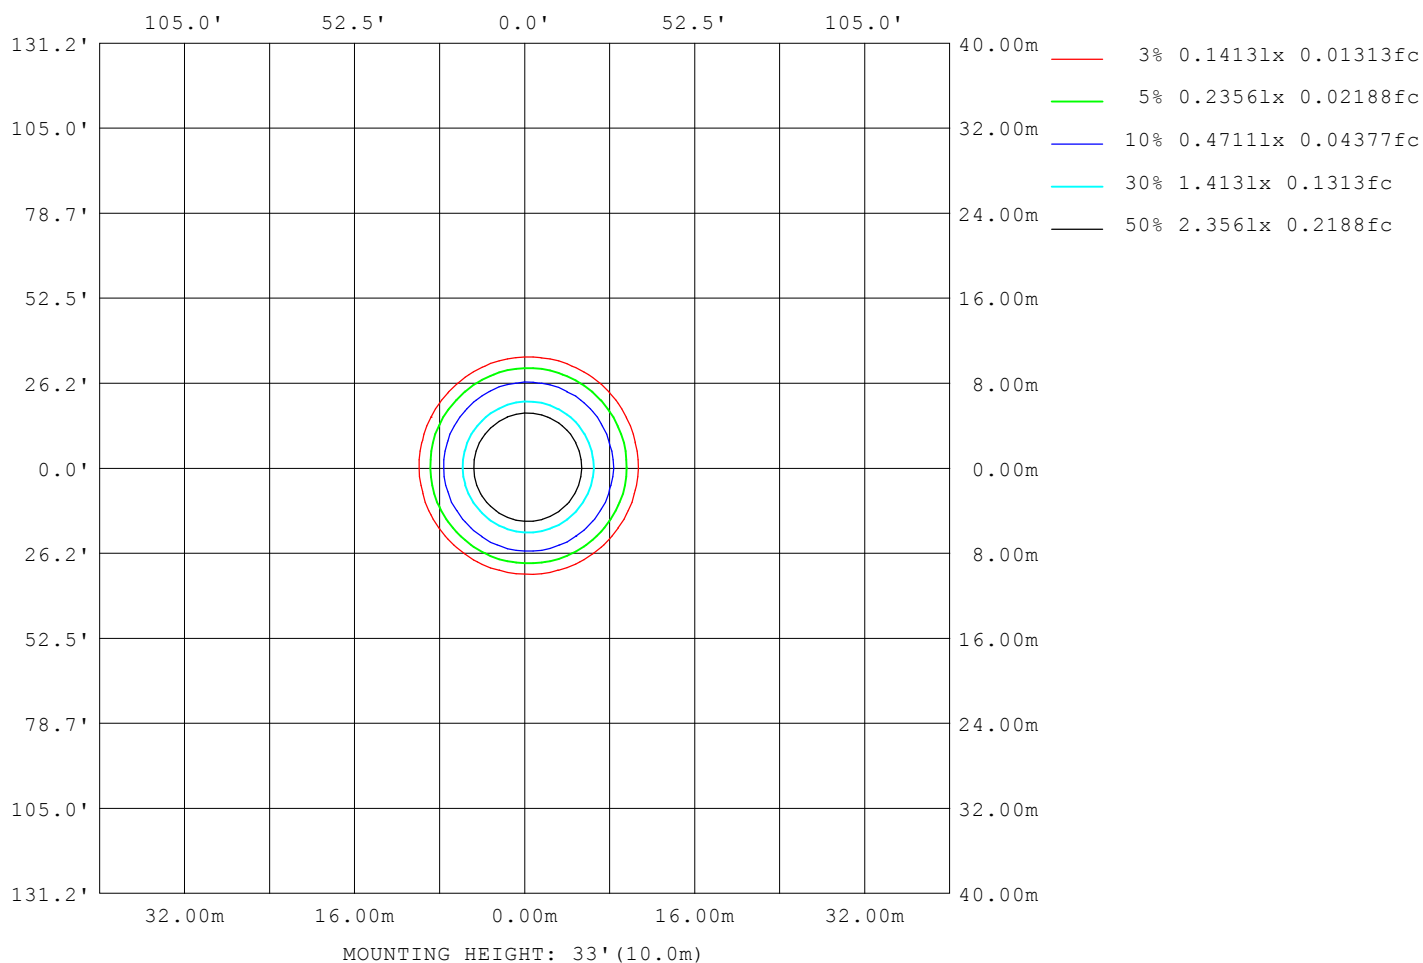

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.0272A P:5.7W PF:0.8745 Freq:49.99Hz UTHDi:0.17% ITHDi:23.93% KDisp:0.8997 Lamp Flux:496.64lx1 lm		
NAME: MD16-06-XX-01 2700K RA90 60D THU	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 40mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	8870
L_0~180 (75) av	3648
L_0~180 (85) av	2701
L_90~270 (65) av	8962
L_90~270 (75) av	3275
L_90~270 (85) av	3007
L_45 (65) av	8971
L_45 (75) av	3503
L_45 (85) av	2889

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-08-03

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

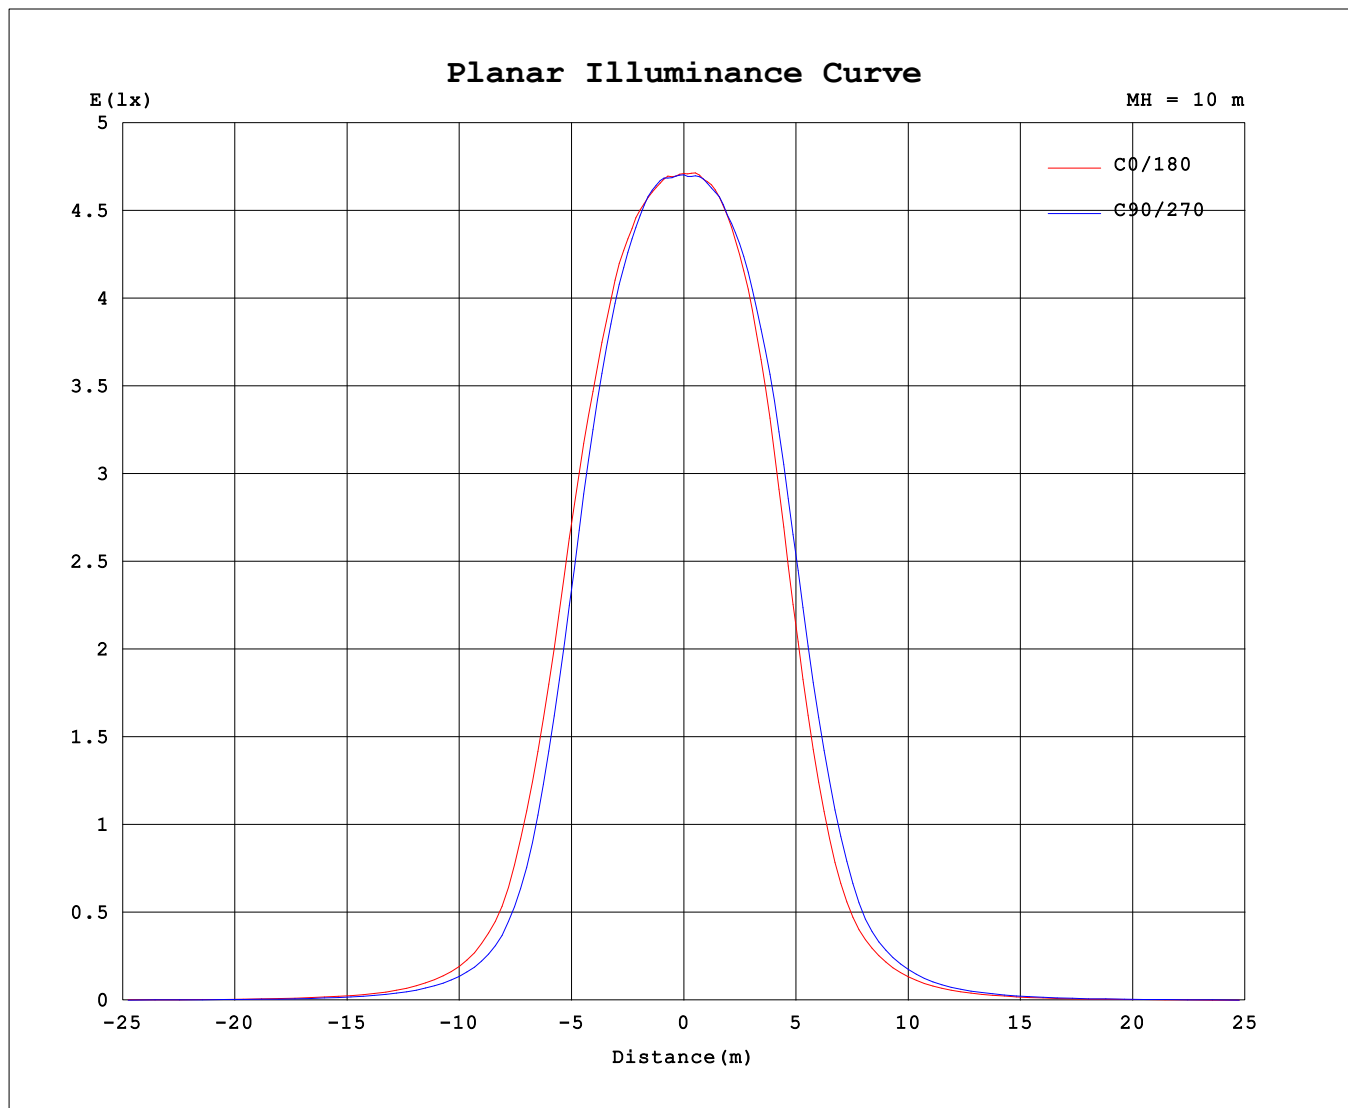

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	470.6	470.6	470.6	470.6	470.6	470.6	470.6	470.6
3.0	470.6	469.3	470.9	474.3	472.8	472.9	472.0	471.6
6.0	472.7	471.2	475.1	474.5	473.7	475.0	473.6	473.7
9.0	474.2	475.5	475.5	473.4	474.4	473.8	475.4	475.3
12.0	476.0	475.4	470.8	468.8	470.0	472.5	473.3	477.2
15.0	473.6	471.7	463.5	459.8	460.6	465.2	470.5	474.9
18.0	463.3	457.3	448.2	440.8	440.7	450.7	458.6	464.2
21.0	442.9	435.1	420.6	407.9	407.3	420.6	438.6	447.5
24.0	415.6	401.1	378.6	355.5	353.3	373.1	400.7	415.5
27.0	371.8	350.3	318.0	291.2	288.3	309.5	346.5	368.8
30.0	308.5	283.7	249.7	221.6	219.8	243.4	278.8	305.9
33.0	240.2	215.6	179.1	156.1	156.3	176.6	212.1	236.3
36.0	173.6	149.4	120.5	104.4	105.7	121.0	149.7	169.9
39.0	113.8	97.65	78.93	70.84	73.49	82.68	98.72	114.3
42.0	78.67	66.33	54.45	50.37	53.07	59.46	69.73	77.77
45.0	54.61	46.71	38.51	36.40	37.62	42.07	49.77	55.26
48.0	39.08	33.11	27.48	26.12	27.31	29.77	35.02	39.34
51.0	27.59	23.24	19.55	18.80	19.53	21.37	25.14	27.64
54.0	19.26	16.59	13.88	13.49	14.07	15.43	18.09	19.56
57.0	13.83	11.96	10.06	9.646	10.01	10.88	12.92	13.99
60.0	9.949	8.523	7.092	6.771	6.986	7.651	8.970	10.06
63.0	6.932	5.934	5.052	4.842	4.980	5.448	6.269	6.948
66.0	4.863	4.270	3.687	3.040	3.009	3.410	4.482	4.886
69.0	3.421	2.871	2.375	2.130	2.122	2.333	2.671	3.136
72.0	2.199	2.014	1.643	1.354	1.264	1.483	1.859	2.116
75.0	1.476	1.288	0.9407	0.8008	0.7905	0.8845	1.094	1.378
78.0	0.8504	0.7751	0.6359	0.5612	0.5650	0.6183	0.7170	0.8078
81.0	0.5904	0.5447	0.4637	0.4018	0.3966	0.4375	0.5255	0.5656
84.0	0.4209	0.3843	0.3324	0.2850	0.2763	0.3096	0.3728	0.4060
87.0	0.2953	0.2761	0.1691	0.0394	0.0099	0.0783	0.2563	0.2878
90.0	0.1287	0.0536	0.0055	0	0.0019	0	0	0.0907

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-08-03

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks: