


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.0441A P:9.9W PF:0.9304 Freq:49.99Hz		
UTHDi:0.18% ITHDi:19.08% KDisp:0.9475		Lamp Flux:1173.39x1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 4000K RA90 25D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 118.84 lm/W			
MODEL		Imax (cd)	2847	S/MH(C0/180)	0.43
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.44
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	1173.4	η UP,DN(C0-180)	0.0,48.1
NOMINAL FLUX(lm)	1173.39	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,51.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	240.39	η down (%)	100.0	CIBSE SHR MAX	0.50

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

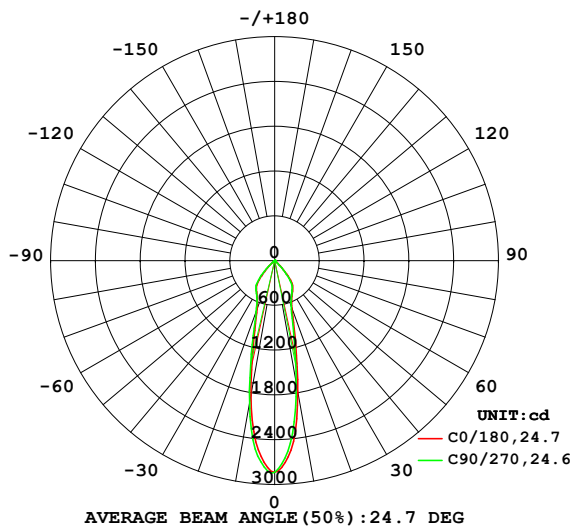

PLANAR ISOLUX DIAGRAM(UNIT:lx)

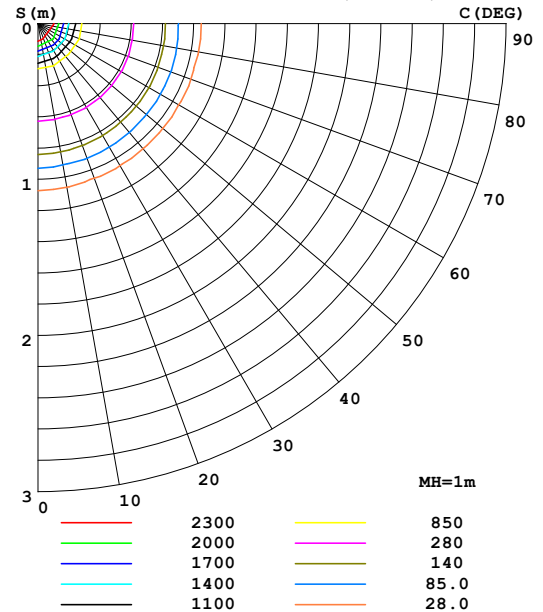

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1794	1708	1675	1742	1839	1908	1946	1884	0- 10	219.0	219.0	18.7,18.7
20	684.1	661.6	652.5	669.6	694.6	715.7	728.2	714.1	10- 20	304.3	523.3	44.6,44.6
30	480.2	473.4	469.8	477.6	488.3	492.6	493.7	489.2	20- 30	257.7	781.0	66.6,66.6
40	309.8	287.5	275.0	284.2	301.2	320.4	336.8	329.0	30- 40	258.2	1039	88.6,88.6
50	26.36	22.47	21.05	24.45	27.12	31.79	36.18	31.24	40- 50	110.6	1150	98,98
60	6.554	6.180	5.965	6.420	6.778	7.156	7.390	7.055	50- 60	11.90	1162	99,99
70	4.245	4.051	3.962	4.104	4.325	4.530	4.586	4.603	60- 70	5.073	1167	99.4,99.4
80	4.556	4.102	4.134	4.222	4.484	4.210	4.489	4.685	70- 80	4.335	1171	99.8,99.8
90	0.0414	0.0337	0.0479	0.0361	0.0350	0.0324	0.0402	0.0341	80- 90	2.255	1173	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1120.4 lm

%lum = 95.5%

%lamp = 95.5%

Conical surface Flux(120deg): 1161.7 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.0441A P:9.9W PF:0.9304 Freq:49.99Hz			Lamp Flux:1173.39x1 lm		
UTHDi:0.18% ITHDi:19.08% KDisp:0.9475					
NAME: FUSION-MD23-AHD-013-COB-02SC 4000K RA90 25D			LOWTYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: Norming lighting			SUR.: 41mm		Shielding Angle:

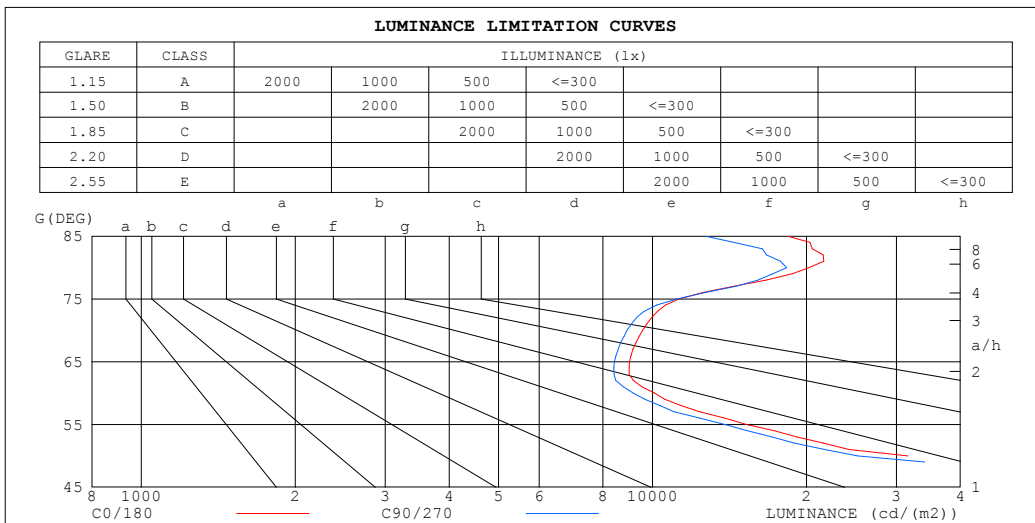

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	18402	12730
80	20208	18306
75	11246	11163
70	9560	8908
65	9017	8426
60	10096	9174
55	15278	13869
50	31588	25190
45	150634	122870


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.0441A P:9.9W PF:0.9304 Freq:49.99Hz		
UTHDi:0.18% ITHDi:19.08% KDisp:0.9475		Lamp Flux:1173.39x1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 4000K RA90 25D	10WTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

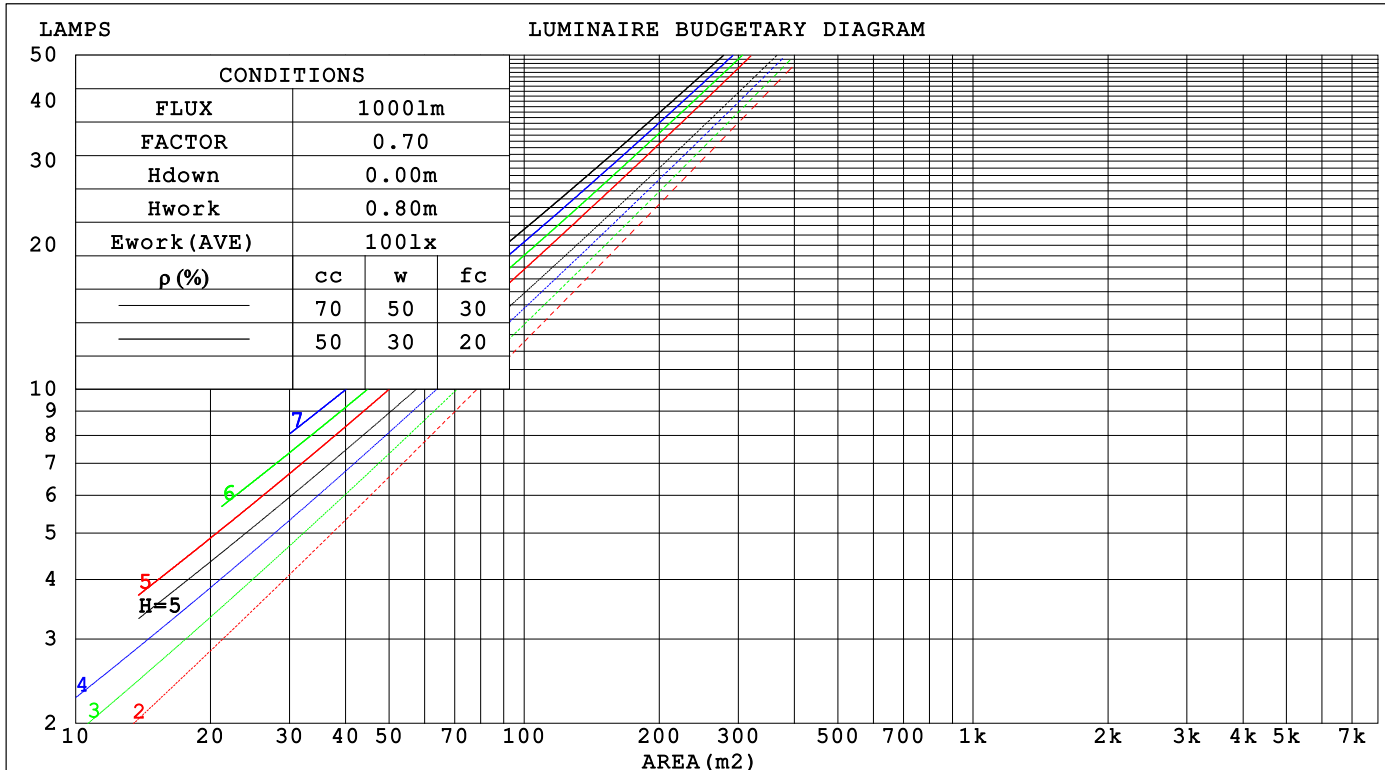

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.0441A P:9.9W PF:0.9304 Freq:49.99Hz			UTHDi:0.18% ITHDi:19.08% KDisp:0.9475			Lamp Flux:1173.39x1 lm		
NAME: FUSION-MD23-AHD-013-COB-02SC 4000K RA90 25D			LOWTYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: Norming lighting			SUR.: 41mm			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.178	.101	.032	.171	.097	.031	.158	.091	.029	.147	.085	.027	.136	.079	.025		
2.0	.169	.093	.028	.164	.090	.028	.153	.085	.026	.143	.080	.025	.134	.076	.024		
3.0	.161	.086	.026	.156	.084	.025	.147	.080	.024	.139	.076	.023	.131	.072	.022		
4.0	.153	.079	.023	.149	.078	.023	.141	.075	.022	.134	.072	.022	.127	.069	.021		
5.0	.145	.074	.021	.142	.073	.021	.135	.070	.021	.129	.068	.020	.123	.066	.020		
6.0	.138	.069	.020	.135	.068	.020	.129	.066	.019	.124	.064	.019	.118	.062	.019		
7.0	.132	.065	.018	.129	.064	.018	.124	.063	.018	.119	.061	.018	.114	.059	.017		
8.0	.126	.061	.017	.123	.061	.017	.119	.059	.017	.114	.058	.017	.110	.057	.016		
9.0	.120	.058	.016	.118	.058	.016	.114	.056	.016	.110	.055	.016	.106	.054	.016		
10.0	.115	.055	.015	.113	.055	.015	.109	.054	.015	.106	.052	.015	.102	.051	.015		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.086	.058	.054	.050	.018	.017	.016		
2.0	.156	.133	.113	.134	.114	.098	.092	.079	.068	.053	.046	.040	.017	.015	.013		
3.0	.143	.114	.090	.123	.098	.078	.084	.068	.055	.049	.040	.032	.016	.013	.011		
4.0	.133	.099	.073	.114	.085	.063	.079	.060	.044	.045	.035	.026	.015	.011	.009		
5.0	.124	.087	.060	.107	.075	.052	.074	.053	.037	.043	.031	.022	.014	.010	.007		
6.0	.117	.078	.050	.100	.067	.044	.069	.047	.031	.040	.028	.018	.013	.009	.006		
7.0	.110	.070	.042	.095	.061	.037	.065	.043	.026	.038	.025	.016	.012	.008	.005		
8.0	.104	.064	.036	.090	.056	.032	.062	.039	.022	.036	.023	.013	.012	.008	.004		
9.0	.099	.059	.032	.085	.051	.028	.059	.036	.020	.034	.021	.012	.011	.007	.004		
10.0	.094	.054	.028	.081	.047	.024	.056	.033	.017	.033	.020	.010	.011	.006	.003		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.0441A P:9.9W PF:0.9304 Freq:49.99Hz UTHDi:0.18% ITHDi:19.08% KDisp:0.9475Lamp Flux:1173.39x1 lm										
NAME: FUSION-MD23-AHD-013-COB-02SC 4000K RA90 25D 1						LOWTYPE:		WEIGHT:		
SPEC.:						DIM.:		SERIAL No.:		
MFR.: Norming lighting						SUR.: 41mm		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.3	26.2	25.5	26.4	26.6	24.9	25.9	25.2	26.0	26.2
3H	25.2	26.0	25.4	26.2	26.4	24.8	25.7	25.1	25.9	26.1
4H	25.1	25.9	25.4	26.1	26.3	24.7	25.5	25.0	25.8	26.0
6H	25.1	25.8	25.4	26.1	26.3	24.7	25.5	25.0	25.7	26.0
8H	25.1	25.8	25.4	26.0	26.3	24.7	25.4	25.0	25.7	25.9
12H	25.0	25.7	25.4	26.0	26.3	24.7	25.4	25.0	25.6	25.9
4H 2H	25.1	25.9	25.3	26.1	26.3	24.7	25.5	25.0	25.7	26.0
3H	24.9	25.6	25.2	25.9	26.2	24.6	25.3	24.9	25.5	25.8
4H	24.8	25.5	25.2	25.8	26.1	24.5	25.1	24.8	25.4	25.7
6H	24.9	25.4	25.2	25.8	26.1	24.5	25.1	24.9	25.4	25.8
8H	24.9	25.4	25.3	25.8	26.1	24.5	25.0	24.9	25.4	25.8
12H	24.9	25.4	25.3	25.7	26.1	24.5	25.0	24.9	25.3	25.7
8H 4H	24.7	25.2	25.1	25.6	26.0	24.4	24.9	24.8	25.3	25.6
6H	24.8	25.2	25.2	25.6	26.0	24.4	24.9	24.9	25.3	25.7
8H	24.8	25.2	25.3	25.6	26.1	24.5	24.8	24.9	25.3	25.7
12H	24.9	25.2	25.3	25.6	26.1	24.5	24.8	24.9	25.2	25.7
12H 4H	24.7	25.2	25.1	25.5	25.9	24.3	24.8	24.8	25.2	25.6
6H	24.8	25.1	25.2	25.5	26.0	24.4	24.8	24.9	25.2	25.6
8H	24.8	25.1	25.3	25.6	26.0	24.5	24.8	24.9	25.2	25.7
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.6 / - 8.1					+ 2.5 / - 8.2				
1.5H	+ 4.7 / - 8.2					+ 4.7 / - 8.1				
2.0H	+ 7.1 / - 3.4					+ 6.6 / - 3.1				

CIE Pub.117, 1173 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 0.6$)
Area: 0.0013 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.0441A P:9.9W PF:0.9304 Freq:49.99Hz		
UTHDi:0.18% ITHDi:19.08% KDisp:0.9475		Lamp Flux:1173.39x1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 4000K RA90 25D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	78	73	84	77	73	83	77	73	69
0.80	92	86	82	92	86	82	90	85	81	77
1.00	97	91	88	97	91	87	95	91	87	83
1.25	102	96	93	101	96	92	99	94	91	87
1.50	105	100	96	103	99	96	101	97	94	90
2.00	108	103	100	106	102	99	104	100	98	92
2.50	110	105	102	108	104	101	105	102	99	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	105	104	97
5.00	115	112	110	112	110	108	108	107	105	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-10-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.0441A P:9.9W PF:0.9304 Freq:49.99Hz		
UTHDi:0.18% ITHDi:19.08% KDisp:0.9475		Lamp Flux:1173.39x1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 4000K RA90 25D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

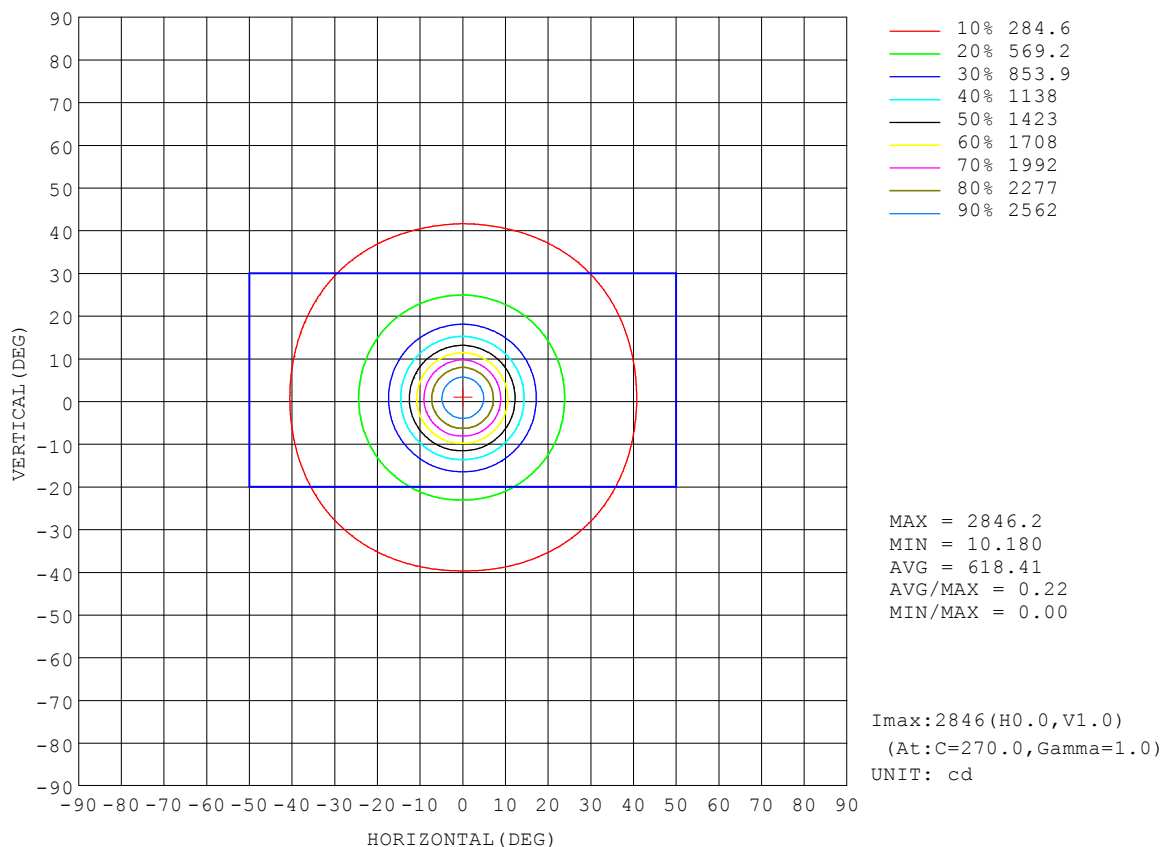


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:240.4V I:0.0441A P:9.9W PF:0.9304 Freq:49.99Hz		
UTHDi:0.18% ITHDi:19.08% KDisp:0.9475		Lamp Flux:1173.39x1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 4000K RA90 25D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

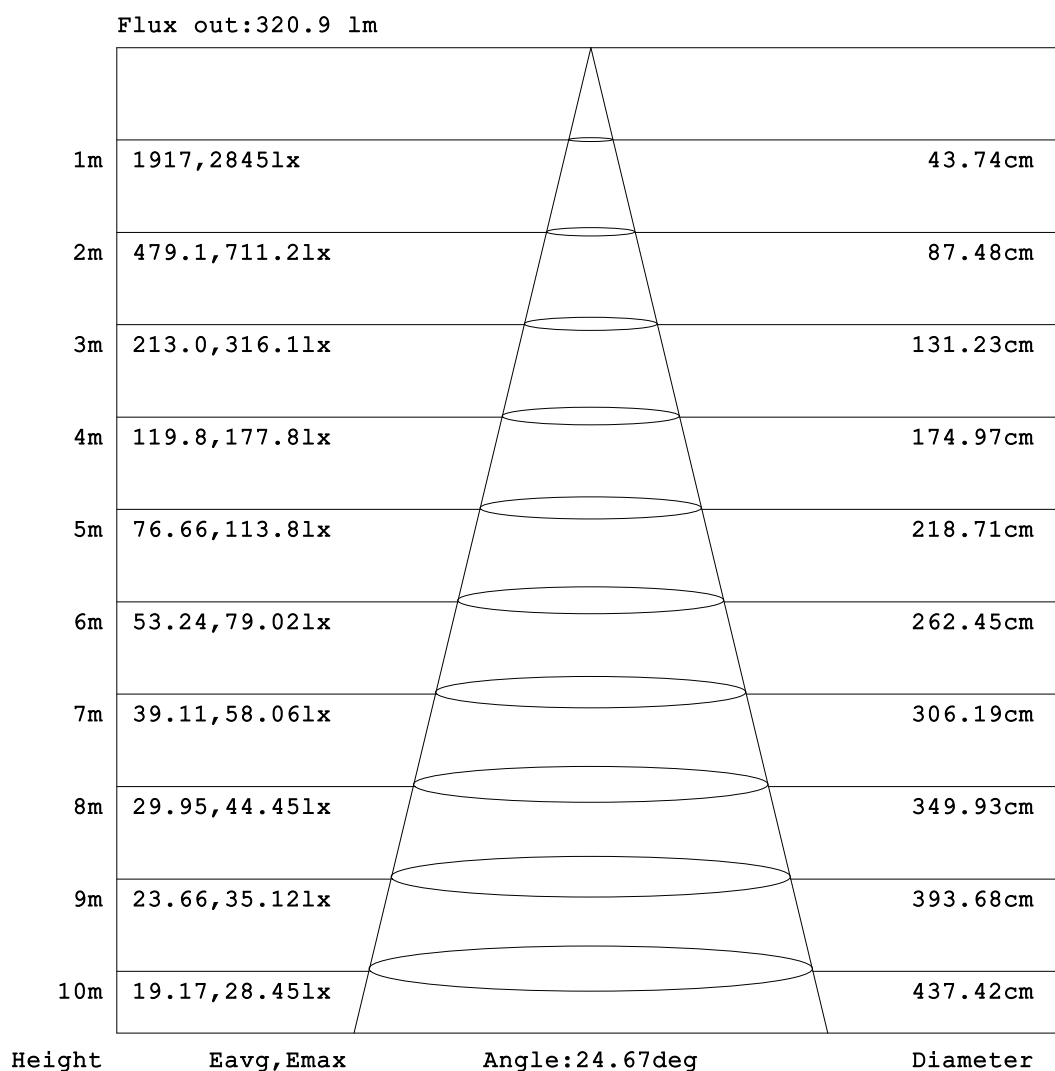


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.0441A P:9.9W PF:0.9304 Freq:49.99Hz		
UTHDi:0.18% ITHDi:19.08% KDisp:0.9475		Lamp Flux:1173.39x1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 4000K RA90 25D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

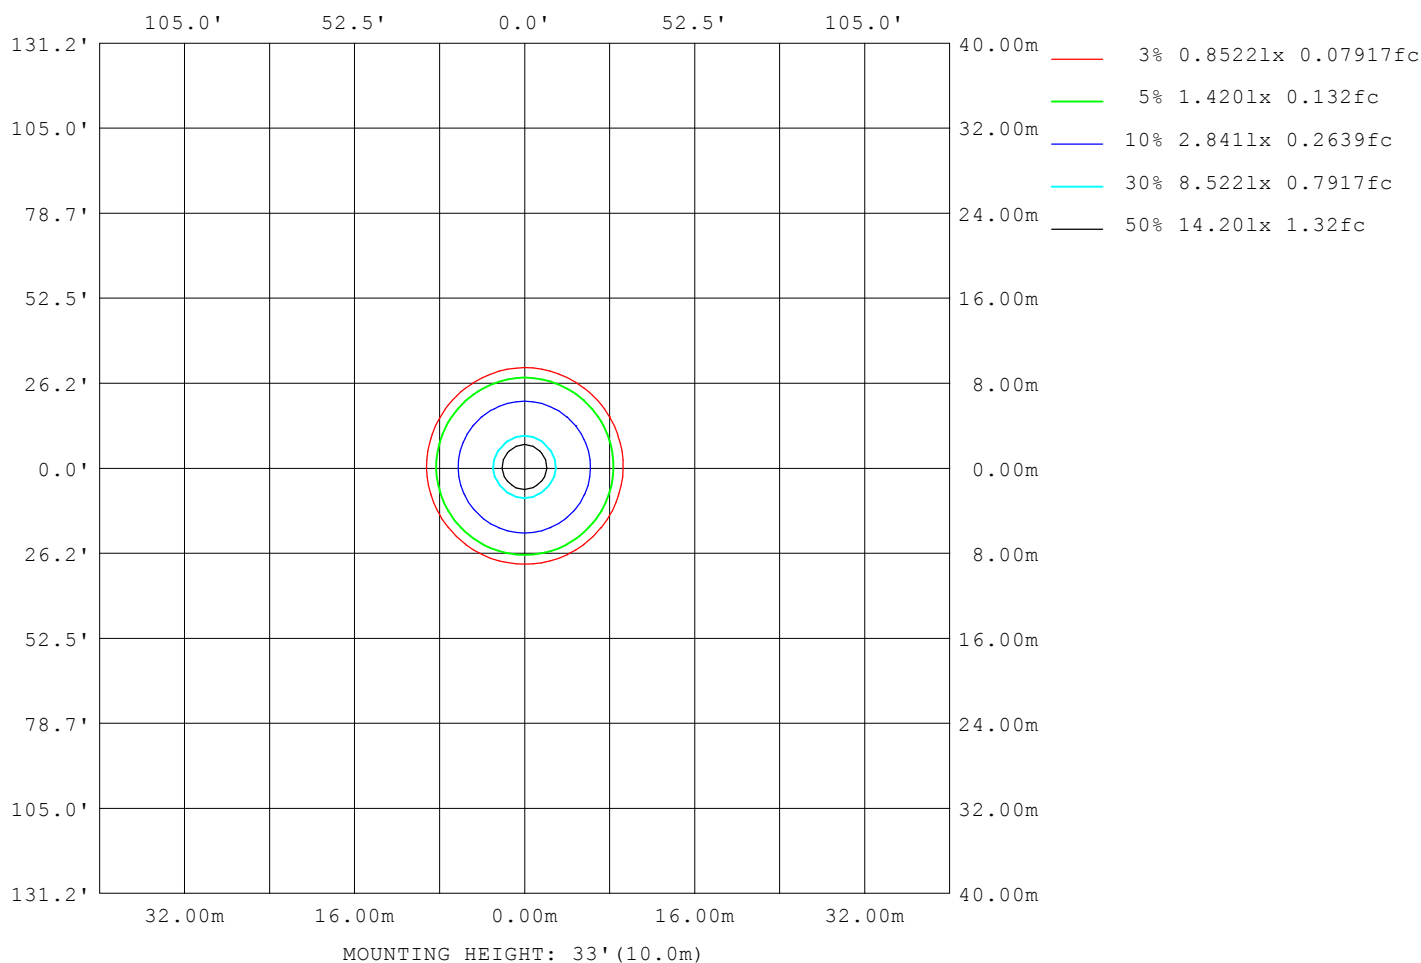

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.0441A P:9.9W PF:0.9304 Freq:49.99Hz		
UTHDi:0.18% ITHDi:19.08% KDisp:0.9475		Lamp Flux:1173.39x1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 4000K RA90 25D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	8991
L_0~180 (75) av	11420
L_0~180 (85) av	19307
L_90~270 (65) av	9040
L_90~270 (75) av	11662
L_90~270 (85) av	19002
L_45 (65) av	9110
L_45 (75) av	11374
L_45 (85) av	18976

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

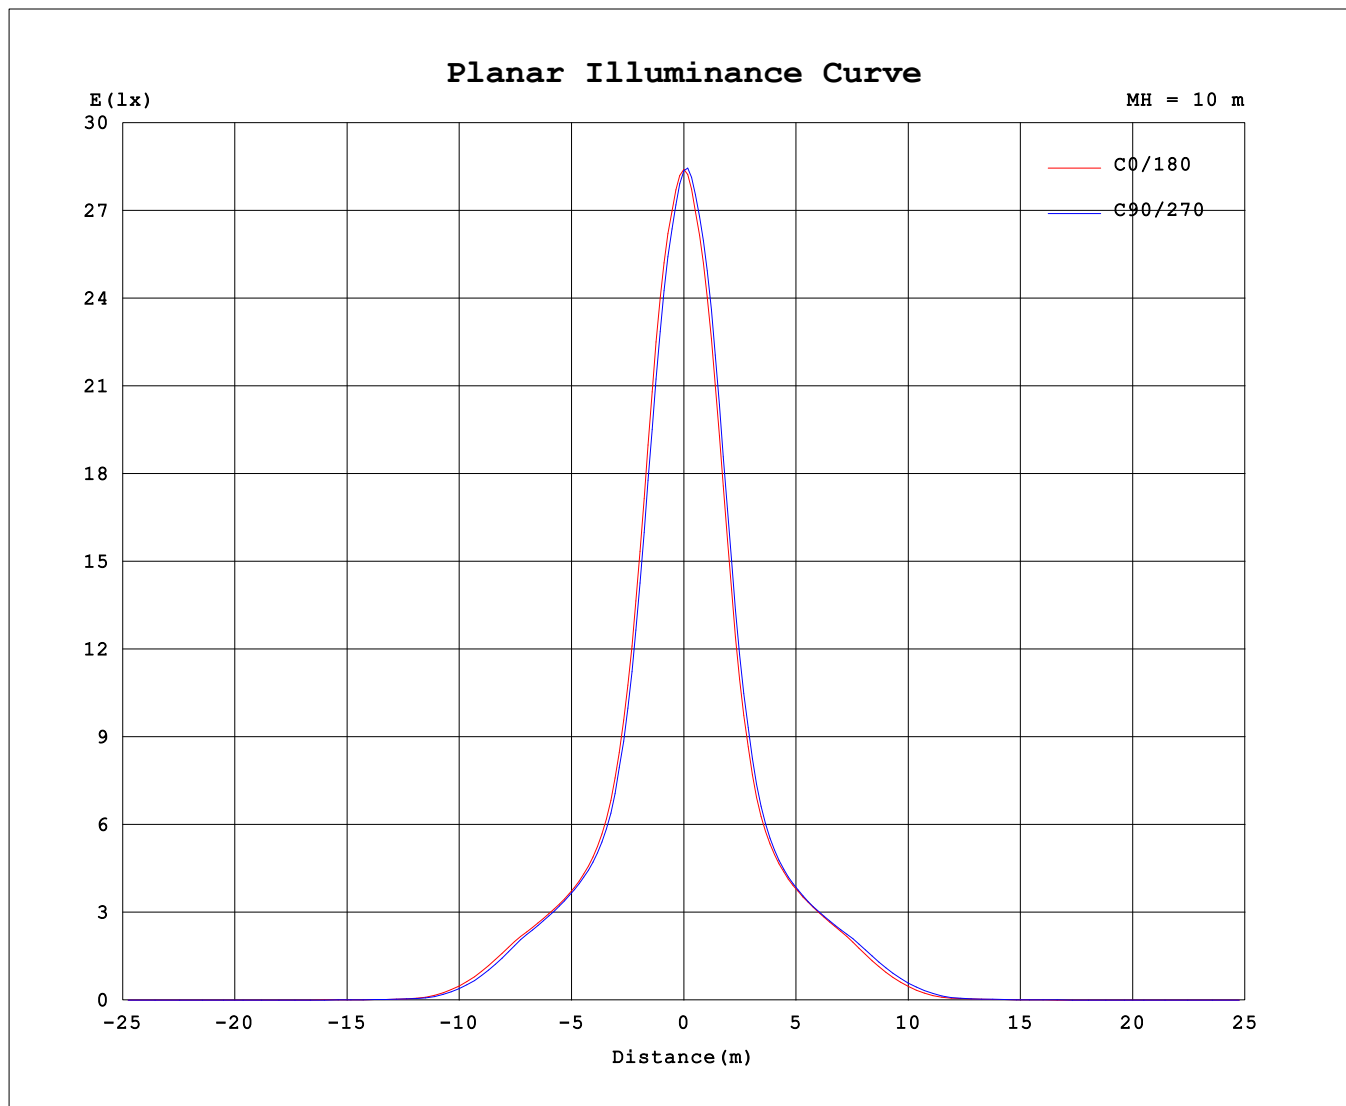

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-18

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

Test:U:240.4V I:0.0441A P:9.9W PF:0.9304 Freq:49.99Hz UTHDi:0.18% ITHDi:19.08% KDisp:0.9475 Lamp Flux:1173.39x1 lm		
NAME: FUSION-MD23-AHD-013-COB-02SC 4000K RA90 25D	10W TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

UNIT: cd

[illegible]

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	2837	2837	2837	2837	2837	2837	2837	2837
3.0	2706	2658	2649	2668	2704	2744	2766	2750
6.0	2437	2358	2324	2365	2440	2492	2536	2506
9.0	1967	1884	1845	1908	2001	2073	2114	2057
12.0	1457	1381	1352	1415	1498	1565	1607	1544
15.0	1062	1005	983.6	1019	1080	1135	1164	1126
18.0	793.5	757.5	744.1	766.1	804.7	837.4	857.9	836.6
21.0	645.2	626.6	619.7	634.5	656.6	672.7	682.1	669.6
24.0	565.3	553.9	552.3	561.4	575.9	584.1	588.4	580.1
27.0	515.8	508.9	507.1	514.8	525.8	530.6	533.1	526.9
30.0	480.2	473.4	469.8	477.6	488.3	492.6	493.7	489.2
33.0	447.2	439.8	434.1	442.6	453.4	458.7	460.4	456.5
36.0	411.9	399.9	391.5	398.3	412.6	421.2	427.5	423.9
39.0	341.6	321.5	307.8	316.7	333.3	351.8	366.7	359.9
42.0	241.0	218.5	207.5	216.3	233.2	252.3	270.9	260.9
45.0	138.3	119.9	113.0	119.2	133.4	150.7	166.8	155.1
48.0	57.05	45.35	42.34	47.63	54.27	65.87	77.25	68.29
51.0	19.81	19.24	17.77	21.13	22.88	24.76	26.47	22.42
54.0	13.17	12.42	11.70	13.33	14.73	15.76	16.40	14.01
57.0	8.734	8.227	7.803	8.703	9.365	10.12	10.54	9.567
60.0	6.554	6.180	5.965	6.420	6.778	7.156	7.390	7.055
63.0	5.307	5.129	4.964	5.112	5.311	5.595	5.759	5.730
66.0	4.795	4.617	4.484	4.589	4.782	5.010	5.130	5.132
69.0	4.378	4.189	4.097	4.210	4.424	4.644	4.720	4.713
72.0	3.992	3.798	3.736	3.888	4.129	4.296	4.364	4.384
75.0	3.779	3.549	3.757	3.702	3.906	3.966	4.091	4.090
78.0	4.500	4.096	4.344	4.282	4.344	4.008	4.199	4.401
81.0	4.392	3.692	3.618	3.988	4.179	4.034	4.353	4.493
84.0	2.759	1.980	1.959	2.486	2.745	3.148	3.515	3.157
87.0	0.5705	0.3309	0.2998	0.5018	0.8113	1.176	1.418	1.117
90.0	0.0414	0.0337	0.0479	0.0361	0.0350	0.0324	0.0402	0.0341

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-18

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: