


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.5V I:0.0442A P:9.9W PF:0.9310 Freq:49.99Hz		
UTHDi:0.17% ITHDi:18.98% KDisp:0.9480		Lamp Flux:1063.66x1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 2700K RA90 38D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 107.48 lm/W
MODEL		Imax (cd)	1696	S/MH(C0/180)	0.62	
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.60	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	1063.7	η UP,DN(C0-180)	0.0,50.0	
NOMINAL FLUX(lm)	1063.66	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,50.0	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	240.41	η down (%)	100.0	CIBSE SHR MAX	0.60	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

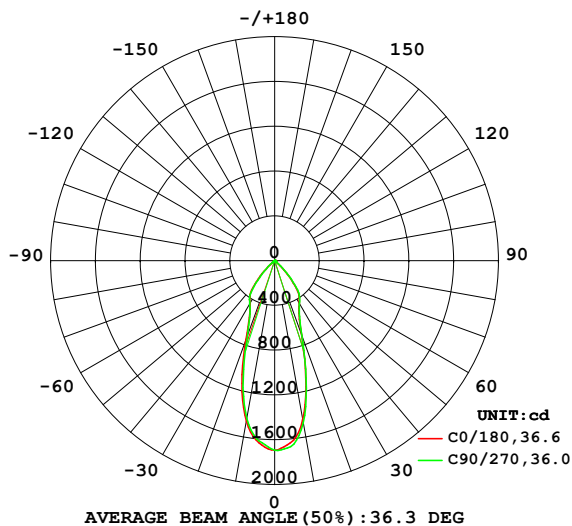

PLANAR ISOLUX DIAGRAM(UNIT:lx)

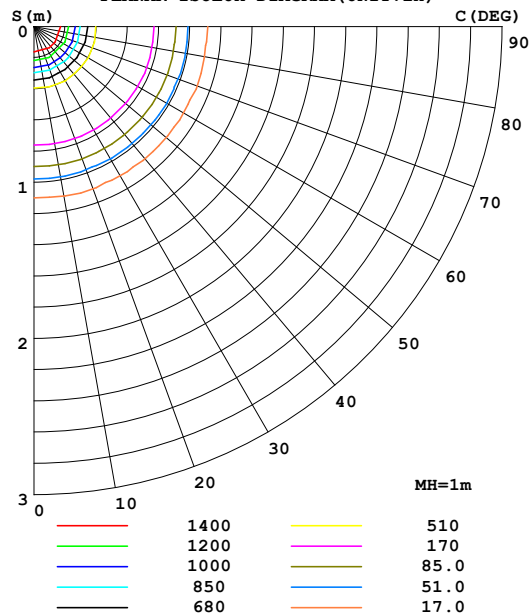

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1445	1465	1473	1473	1459	1452	1433	1430	0- 10	150.7	150.7	14.2,14.2
20	702.0	715.9	711.9	736.5	755.9	744.6	717.9	700.8	10- 20	298.9	449.6	42.3,42.3
30	441.9	447.3	444.5	447.0	444.3	446.9	447.5	442.1	20- 30	248.1	697.8	65.6,65.6
40	261.4	271.8	277.8	286.3	279.5	274.9	264.8	257.4	30- 40	234.6	932.4	87.7,87.7
50	28.10	27.07	27.92	29.32	30.26	32.02	29.72	27.81	40- 50	99.99	1032	97.1,97.1
60	10.81	10.30	10.32	11.04	11.86	12.03	11.19	10.50	50- 60	15.70	1048	98.5,98.5
70	5.772	5.406	5.238	5.575	6.061	6.177	5.692	5.669	60- 70	7.580	1056	99.2,99.2
80	4.439	4.252	4.096	4.570	4.849	5.054	4.741	4.470	70- 80	5.863	1062	99.8,99.8
90	0.0405	0.0350	0.0427	0.0315	0.0344	0.0324	0.0366	0.0363	80- 90	2.158	1064	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1004.9 lm

%lum = 94.5%

%lamp = 94.5%

Conical surface Flux(120deg): 1048.1 lm

%lum = 98.5%


%lamp = 98.5%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.5V I:0.0442A P:9.9W PF:0.9310 Freq:49.99Hz			Lamp Flux:1063.66x1 lm		
UTHDi:0.17% ITHDi:18.98% KDisp:0.9480					
NAME: FUSION-MD23-AHD-013-COB-02SC 2700K RA90 38D			LOWTYPE:		WEIGHT:
SPEC.:			DIM.:		SERIAL No.:
MFR.: Norming lighting			SUR.: 41mm		Shielding Angle:

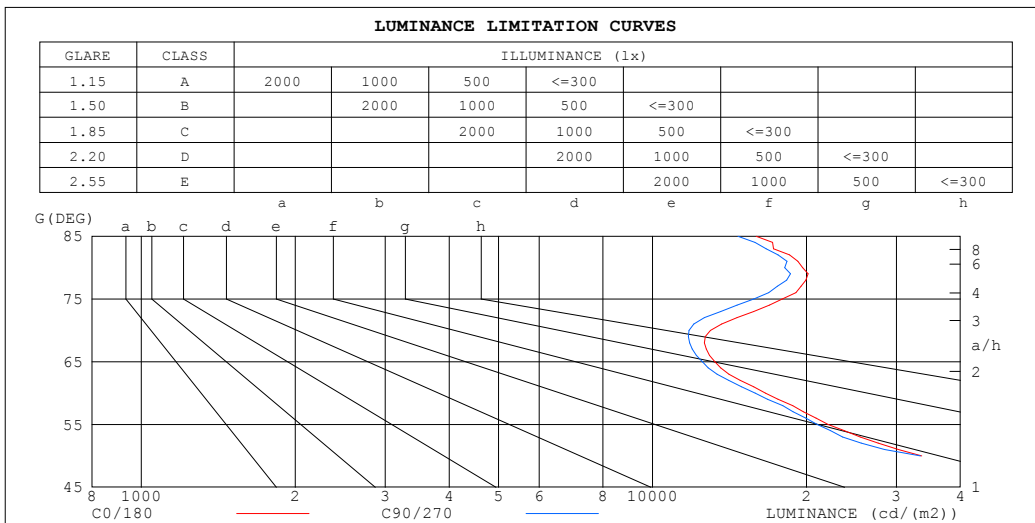

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	15944	14687
80	19668	18146
75	17921	15765
70	12983	11781
65	13246	12513
60	16638	15876
55	22073	21022
50	33630	33413
45	126107	138749


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.5V I:0.0442A P:9.9W PF:0.9310 Freq:49.99Hz		
UTHDi:0.17% ITHDi:18.98% KDisp:0.9480		Lamp Flux:1063.66x1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 2700K RA90 38D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.10	1.08	1.06	1.08	1.06	1.04	1.04	1.02	1.01	1.01	.99	.98	.97	.96	.95	.93														
2.0	1.03	.98	.95	1.01	.97	.94	.98	.95	.92	.95	.92	.90	.92	.90	.88	.86														
3.0	.96	.90	.86	.94	.89	.86	.92	.88	.84	.89	.86	.83	.87	.84	.82	.80														
4.0	.89	.84	.79	.88	.83	.79	.86	.81	.78	.84	.80	.77	.82	.79	.76	.75														
5.0	.84	.78	.73	.83	.77	.73	.81	.76	.72	.79	.75	.72	.78	.74	.71	.70														
6.0	.78	.72	.68	.78	.72	.68	.76	.71	.67	.75	.70	.67	.73	.69	.66	.65														
7.0	.74	.68	.64	.73	.67	.63	.72	.67	.63	.71	.66	.63	.70	.65	.62	.61														
8.0	.70	.64	.60	.69	.63	.59	.68	.63	.59	.67	.62	.59	.66	.62	.59	.57														
9.0	.66	.60	.56	.65	.60	.56	.64	.59	.56	.64	.59	.56	.63	.58	.55	.54														
10.0	.63	.57	.53	.62	.57	.53	.61	.56	.53	.60	.56	.53	.60	.55	.52	.51														

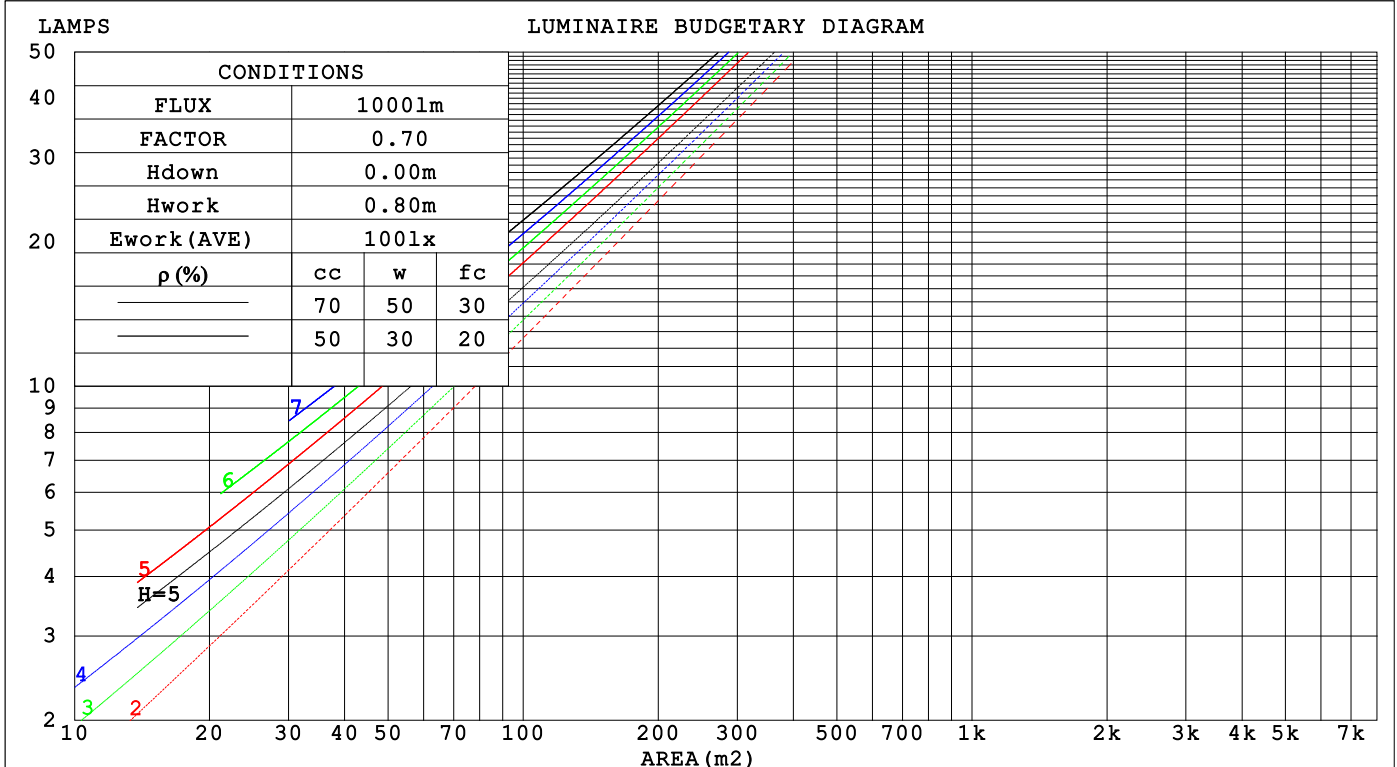

WEC AND CCEC

Test:U:240.5V I:0.0442A P:9.9W PF:0.9310 Freq:49.99Hz			UTHDi:0.17% ITHDi:18.98% KDisp:0.9480			Lamp Flux:1063.66x1 lm		
NAME: FUSION-MD23-AHD-013-COB-02SC 2700K RA90 38D			LOTTYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: Norming lighting			SUR.: 41mm			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.183	.104	.033	.177	.101	.032	.164	.094	.030	.152	.088	.028	.142	.082	.026		
2.0	.175	.096	.029	.169	.093	.029	.159	.088	.027	.149	.084	.026	.140	.079	.025		
3.0	.166	.089	.027	.162	.086	.026	.152	.083	.025	.144	.079	.024	.136	.075	.023		
4.0	.158	.082	.024	.154	.080	.024	.146	.077	.023	.139	.074	.022	.132	.072	.022		
5.0	.150	.077	.022	.147	.075	.022	.140	.073	.021	.133	.070	.021	.127	.068	.020		
6.0	.143	.072	.021	.140	.071	.020	.134	.069	.020	.128	.067	.020	.123	.065	.019		
7.0	.136	.067	.019	.133	.066	.019	.128	.065	.019	.123	.063	.018	.118	.061	.018		
8.0	.130	.064	.018	.128	.063	.018	.123	.061	.018	.118	.060	.017	.114	.059	.017		
9.0	.124	.060	.017	.122	.059	.017	.118	.058	.017	.114	.057	.016	.110	.056	.016		
10.0	.119	.057	.016	.117	.056	.016	.113	.055	.016	.109	.054	.015	.106	.053	.015		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.172	.157	.144	.147	.135	.124	.100	.093	.086	.058	.054	.050	.019	.017	.016		
2.0	.157	.132	.112	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013		
3.0	.145	.114	.089	.124	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010		
4.0	.134	.099	.072	.115	.086	.062	.079	.060	.044	.046	.035	.026	.015	.011	.009		
5.0	.126	.087	.059	.108	.076	.051	.074	.053	.036	.043	.031	.022	.014	.010	.007		
6.0	.118	.078	.049	.102	.068	.043	.070	.047	.030	.041	.028	.018	.013	.009	.006		
7.0	.112	.071	.042	.096	.061	.036	.066	.043	.026	.039	.025	.015	.012	.008	.005		
8.0	.106	.064	.036	.091	.056	.031	.063	.039	.022	.037	.023	.013	.012	.008	.004		
9.0	.101	.059	.031	.087	.051	.027	.060	.036	.019	.035	.021	.011	.011	.007	.004		
10.0	.096	.055	.027	.083	.048	.024	.058	.033	.017	.034	.020	.010	.011	.007	.003		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.5V I:0.0442A P:9.9W PF:0.9310 Freq:49.99Hz UTHDi:0.17% ITHDi:18.98% KDisp:0.9480Lamp Flux:1063.66x1 lm											
NAME: FUSION-MD23-AHD-013-COB-02SC 2700K RA90 38D						LOWTYPE:		WEIGHT:			
SPEC.:						DIM.:		SERIAL No.:			
MFR.: Norming lighting						SUR.: 41mm		Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H	y = 2H	25.1	26.0	25.3	26.2	26.4	25.2	26.2	25.4	26.3	26.5
	3H	24.9	25.8	25.2	26.0	26.2	25.1	26.0	25.3	26.2	26.4
	4H	24.9	25.7	25.2	26.0	26.2	25.0	25.9	25.3	26.1	26.3
	6H	24.9	25.7	25.2	25.9	26.2	25.0	25.8	25.3	26.0	26.3
	8H	24.9	25.7	25.2	25.9	26.2	25.0	25.8	25.3	26.0	26.3
	12H	24.9	25.6	25.2	25.9	26.1	25.0	25.7	25.3	26.0	26.3
4H	2H	24.8	25.7	25.1	25.9	26.1	25.0	25.8	25.2	26.0	26.3
	3H	24.7	25.4	25.0	25.7	26.0	24.9	25.6	25.2	25.9	26.1
	4H	24.7	25.4	25.1	25.7	26.0	24.8	25.5	25.2	25.8	26.1
	6H	24.8	25.4	25.2	25.7	26.0	24.9	25.5	25.3	25.8	26.1
	8H	24.8	25.3	25.2	25.7	26.1	24.9	25.4	25.3	25.8	26.1
	12H	24.8	25.3	25.2	25.7	26.0	24.9	25.4	25.3	25.7	26.1
8H	4H	24.6	25.2	25.0	25.5	25.9	24.8	25.3	25.1	25.6	26.0
	6H	24.7	25.2	25.2	25.6	26.0	24.8	25.3	25.3	25.7	26.1
	8H	24.8	25.2	25.2	25.6	26.0	24.9	25.3	25.3	25.7	26.1
	12H	24.8	25.1	25.3	25.6	26.0	24.9	25.2	25.3	25.7	26.1
12H	4H	24.6	25.1	25.0	25.5	25.9	24.7	25.2	25.1	25.6	26.0
	6H	24.7	25.1	25.2	25.5	26.0	24.8	25.2	25.3	25.6	26.1
	8H	24.8	25.1	25.2	25.5	26.0	24.9	25.2	25.3	25.6	26.1
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H		+ 2.3 / - 6.4					+ 2.4 / - 6.8				
1.5H		+ 4.4 / - 6.3					+ 4.5 / - 6.7				
2.0H		+ 5.8 / - 2.4					+ 6.3 / - 2.7				

CIE Pub.117, 1064 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.2)
Area: 0.0013 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.5V I:0.0442A P:9.9W PF:0.9310 Freq:49.99Hz		
UTHDi:0.17% ITHDi:18.98% KDisp:0.9480		Lamp Flux:1063.66x1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 2700K RA90 38D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	83	77	73	82	76	72	69
0.80	92	85	81	91	85	81	90	84	81	77
1.00	97	91	87	96	90	87	94	90	86	82
1.25	101	96	92	100	95	92	98	94	91	86
1.50	104	99	96	103	98	95	101	97	94	89
2.00	107	103	100	106	102	99	103	100	97	92
2.50	109	105	102	108	104	101	104	102	99	93
3.00	111	107	104	109	106	103	106	103	101	94
4.00	113	110	108	111	108	106	107	105	104	96
5.00	114	112	110	112	110	108	108	107	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.5V I:0.0442A P:9.9W PF:0.9310 Freq:49.99Hz		
UTHDi:0.17% ITHDi:18.98% KDisp:0.9480		Lamp Flux:1063.66x1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 2700K RA90 38D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

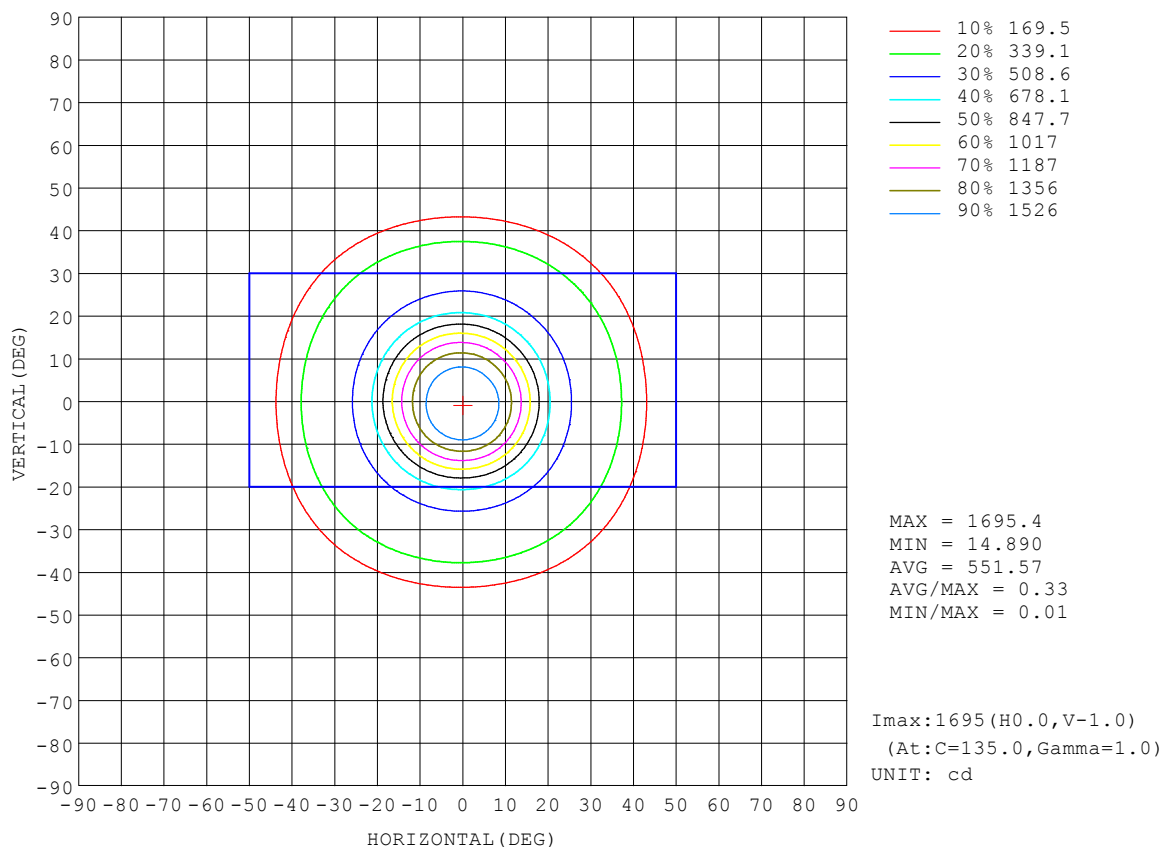


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.5V I:0.0442A P:9.9W PF:0.9310 Freq:49.99Hz		
UTHDi:0.17% ITHDi:18.98% KDisp:0.9480		Lamp Flux:1063.66x1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 2700K RA90 38D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

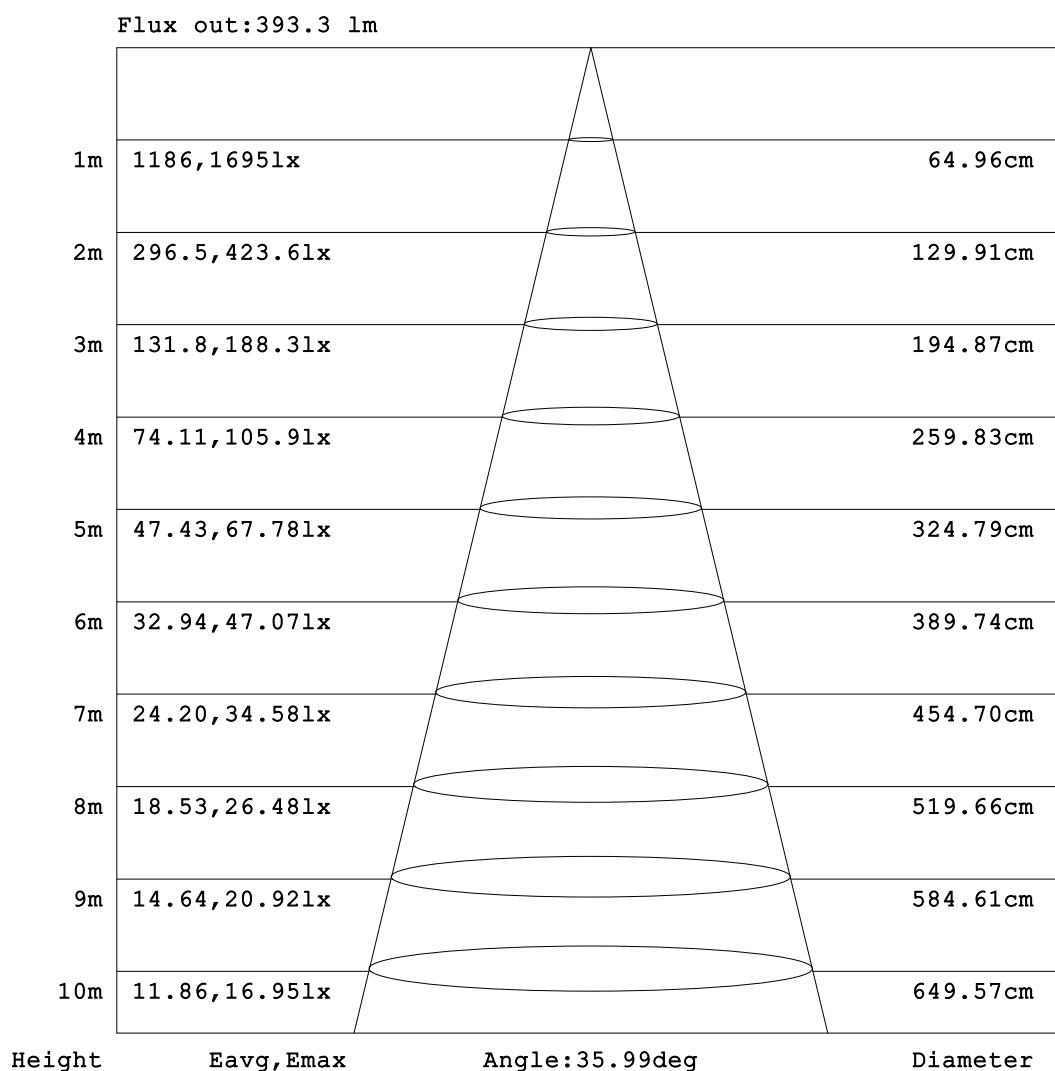


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:240.5V I:0.0442A P:9.9W PF:0.9310 Freq:49.99Hz		
UTHDi:0.17% ITHDi:18.98% KDisp:0.9480		Lamp Flux:1063.66x1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 2700K RA90 38D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

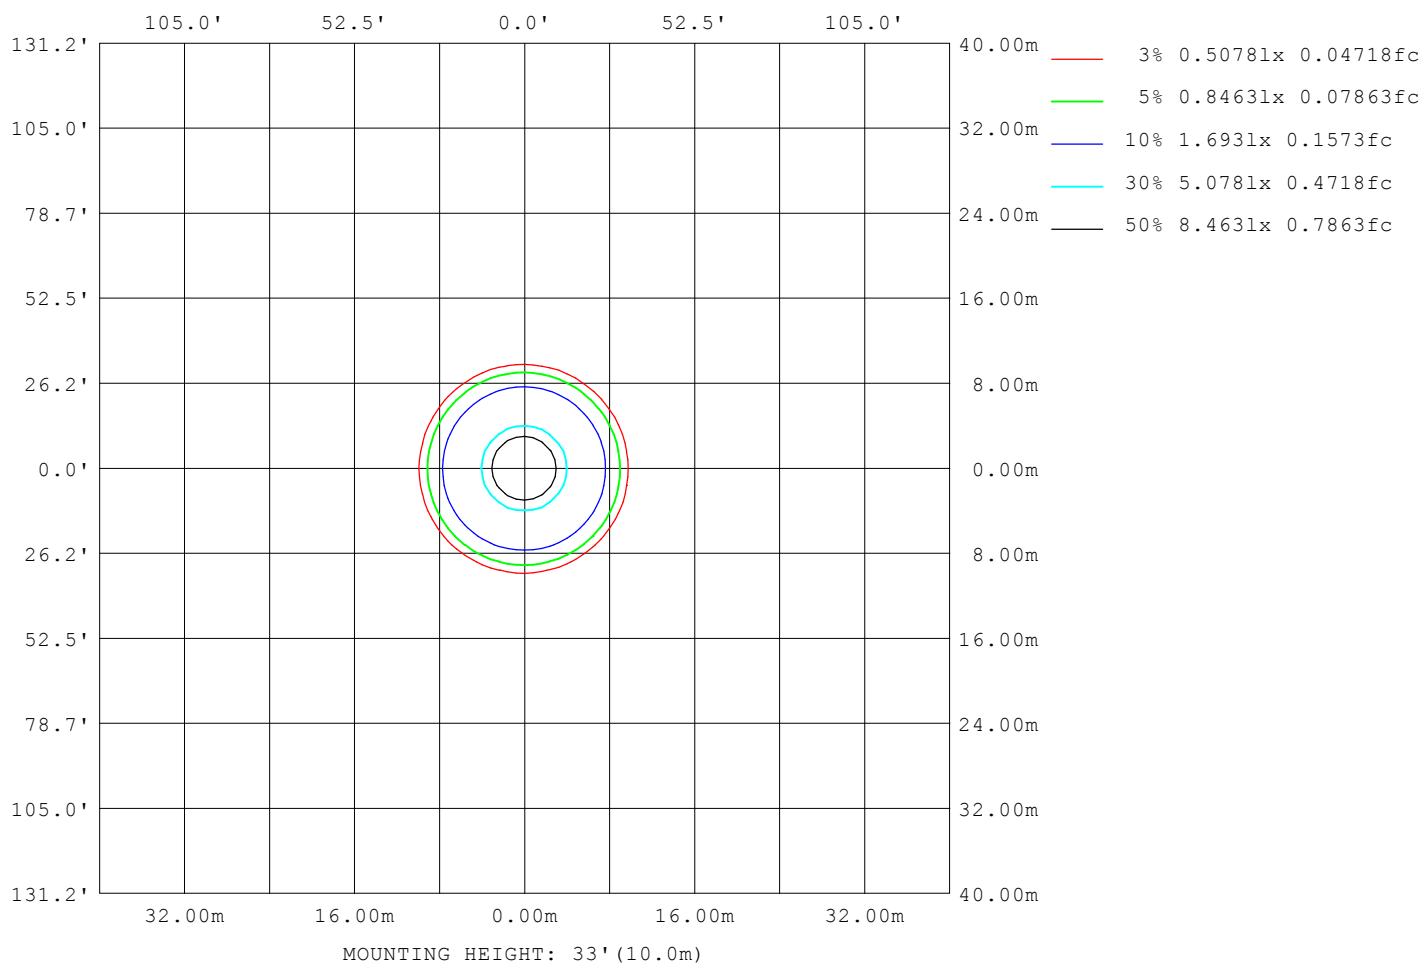

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.5V I:0.0442A P:9.9W PF:0.9310 Freq:49.99Hz		
UTHDi:0.17% ITHDi:18.98% KDisp:0.9480 Lamp Flux:1063.66x1 lm		
NAME: FUSION-MD23-AHD-013-COB-02SC 2700K RA90 38D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	13876
L_0~180 (75) av	18058
L_0~180 (85) av	18111
L_90~270 (65) av	12978
L_90~270 (75) av	16347
L_90~270 (85) av	17237
L_45 (65) av	13290
L_45 (75) av	17459
L_45 (85) av	17514

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

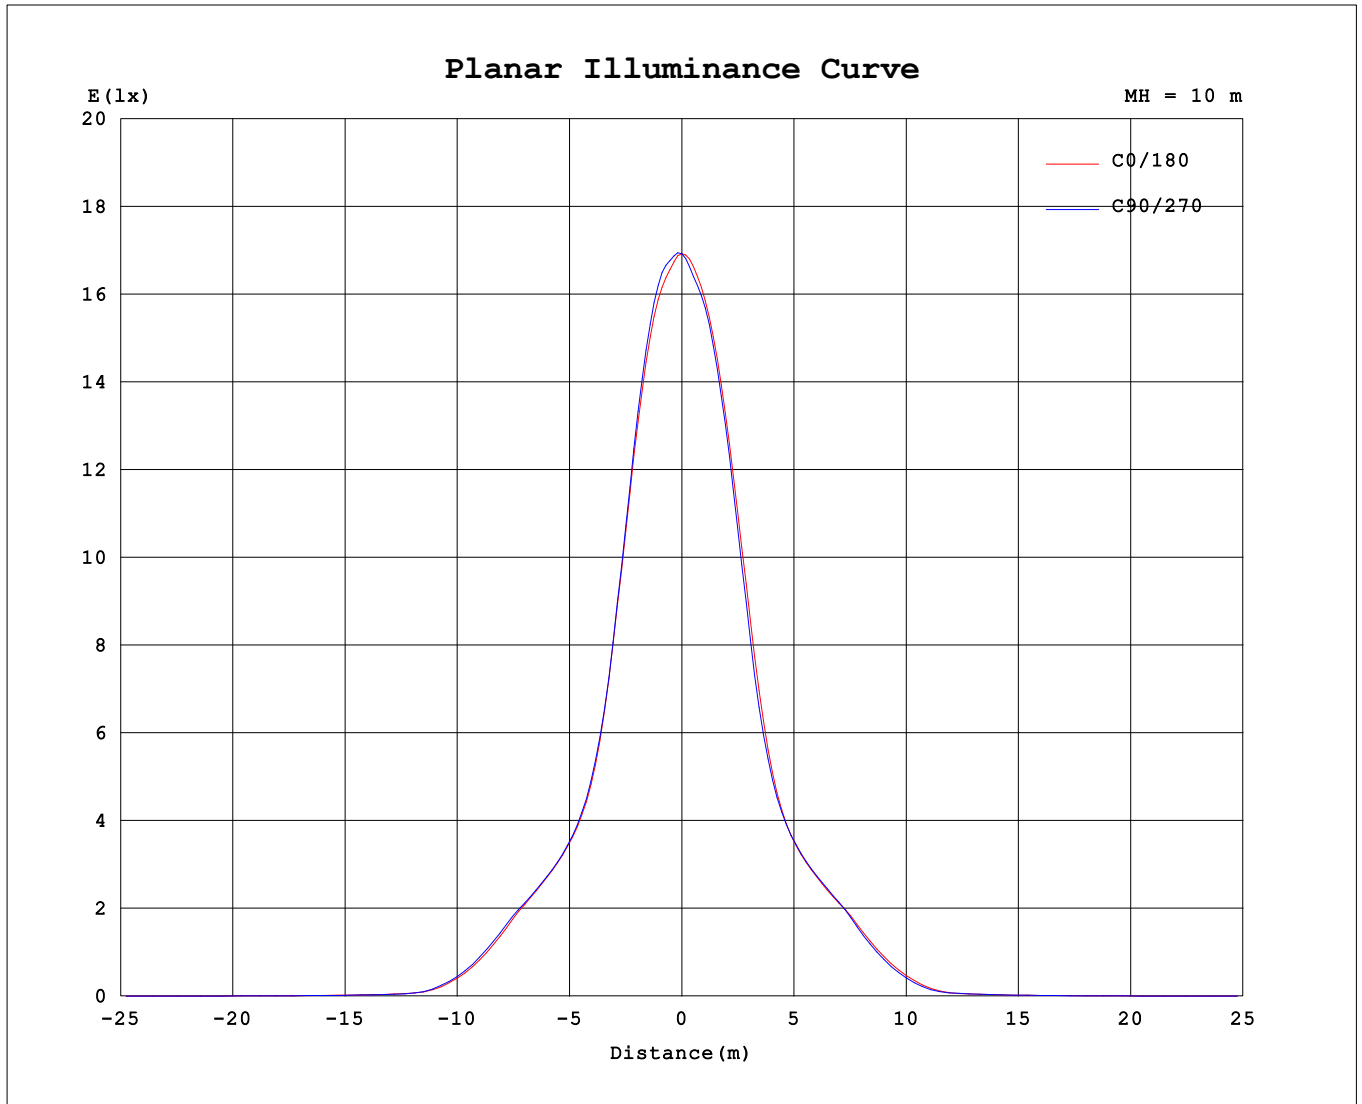

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	1692	1692	1692	1692	1692	1692	1692	1692
3.0	1663	1680	1684	1679	1670	1652	1648	1650
6.0	1614	1634	1647	1638	1611	1600	1595	1594
9.0	1500	1521	1529	1526	1507	1497	1483	1483
12.0	1316	1332	1335	1348	1343	1340	1314	1299
15.0	1080	1092	1090	1120	1135	1127	1091	1069
18.0	841.2	847.9	843.9	874.3	901.1	890.6	851.4	830.5
21.0	648.6	662.5	660.9	680.8	692.0	682.2	666.0	648.6
24.0	541.3	547.9	548.6	555.6	557.2	552.5	550.9	540.3
27.0	481.9	485.5	485.3	488.1	485.6	487.5	487.9	481.3
30.0	441.9	447.3	444.5	447.0	444.3	446.9	447.5	442.1
33.0	406.6	412.8	410.2	412.5	409.3	413.3	414.5	407.8
36.0	365.6	373.6	374.5	377.8	375.0	377.0	373.4	364.7
39.0	290.7	301.8	306.8	315.3	308.4	305.3	294.8	288.3
42.0	201.8	211.2	218.0	224.8	220.7	214.4	204.9	197.6
45.0	115.9	121.1	127.5	136.2	133.5	126.6	119.1	113.7
48.0	49.11	51.84	55.22	58.90	59.96	58.36	50.37	48.60
51.0	24.75	23.20	23.26	23.22	24.79	27.04	26.46	24.61
54.0	18.13	16.89	17.02	17.82	18.82	19.74	19.62	18.37
57.0	13.95	13.25	13.34	14.19	15.02	15.36	14.63	13.61
60.0	10.81	10.30	10.32	11.04	11.86	12.03	11.19	10.50
63.0	8.331	7.895	7.894	8.435	9.165	9.173	8.488	8.045
66.0	6.837	6.509	6.444	6.880	7.475	7.428	6.954	6.644
69.0	5.909	5.614	5.472	5.841	6.318	6.346	5.939	5.787
72.0	5.873	5.309	5.073	5.290	5.892	6.213	5.406	5.742
75.0	6.029	5.476	5.304	5.575	6.123	6.470	5.696	5.976
78.0	5.392	5.055	4.945	5.360	5.643	5.867	5.487	5.389
81.0	3.911	3.791	3.725	4.119	4.364	4.473	4.399	3.987
84.0	2.335	2.170	2.157	2.433	2.746	2.817	2.804	2.438
87.0	0.5724	0.4529	0.4529	0.7724	1.012	1.100	0.9937	0.7206
90.0	0.0405	0.0350	0.0427	0.0315	0.0344	0.0324	0.0366	0.0363

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: