


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.0444A P:9.9W PF:0.9314 Freq:49.99Hz		
UTHDi:0.17% ITHDi:18.99% KDisp:0.9482		Lamp Flux:1106.1lx 1m
NAME: FUSION-MD23-AHD-013-COB-02SC 3000K RA90 38D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 111.32 lm/W
MODEL		Imax (cd)	1765	S/MH(C0/180)	0.61	
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.62	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	1106.1	η UP,DN(C0-180)	0.0,48.9	
NOMINAL FLUX(lm)	1106.11	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,51.1	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	240.38	η down (%)	100.0	CIBSE SHR MAX	0.60	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

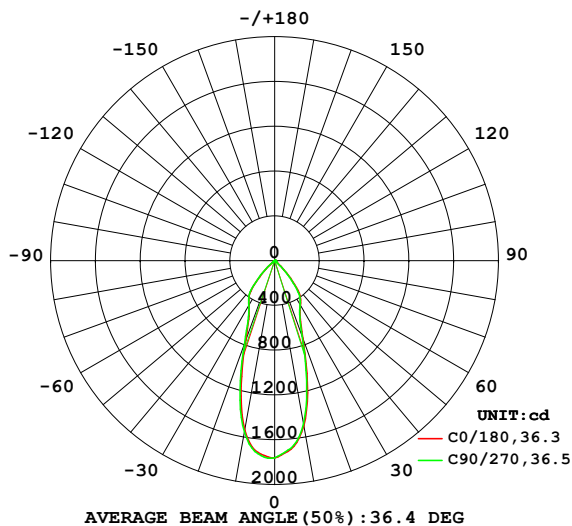

PLANAR ISOLUX DIAGRAM(UNIT:lx)

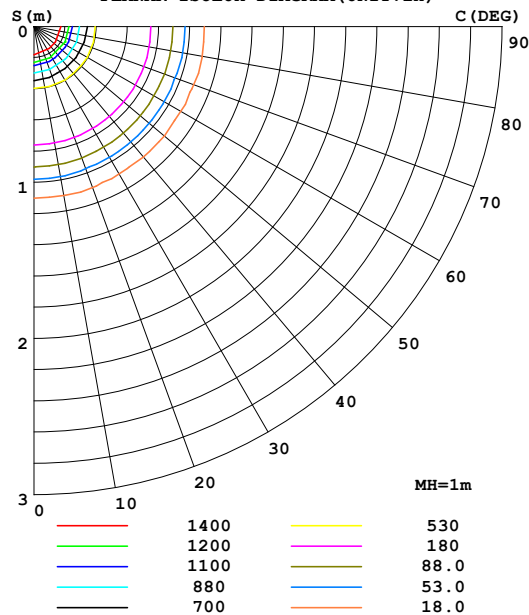

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1499	1470	1481	1510	1538	1557	1555	1534	0- 10	157.1	157.1	14.2,14.2
20	738.0	719.9	719.8	750.3	759.6	771.3	792.3	772.1	10- 20	312.3	469.3	42.4,42.4
30	461.8	456.8	456.4	460.4	462.6	461.9	463.9	460.3	20- 30	257.2	726.6	65.7,65.7
40	278.6	262.1	261.5	274.8	289.6	304.7	304.0	291.1	30- 40	242.9	969.5	87.6,87.6
50	30.06	28.82	29.76	29.62	30.38	32.94	32.66	30.87	40- 50	104.8	1074	97.1,97.1
60	11.18	10.54	11.02	11.21	10.82	11.09	11.53	11.66	50- 60	16.07	1090	98.6,98.6
70	5.749	5.678	6.183	5.832	5.385	5.292	5.654	5.959	60- 70	7.617	1098	99.3,99.3
80	4.701	4.642	4.773	4.845	4.547	4.477	4.678	4.638	70- 80	5.945	1104	99.8,99.8
90	0.0430	0.0321	0.0444	0.0377	0.0375	0.0343	0.0428	0.0358	80- 90	2.179	1106	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1045.2 lm

%lum = 94.5%

%lamp = 94.5%

Conical surface Flux(120deg): 1090.4 lm

%lum = 98.6%


%lamp = 98.6%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.0444A P:9.9W PF:0.9314 Freq:49.99Hz			UTHDi:0.17% ITHDi:18.99% KDisp:0.9482			Lamp Flux:1106.11x1 lm		
NAME: FUSION-MD23-AHD-013-COB-02SC 3000K RA90 38D			LOWTYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: Norming lighting			SUR.: 41mm			Shielding Angle:		

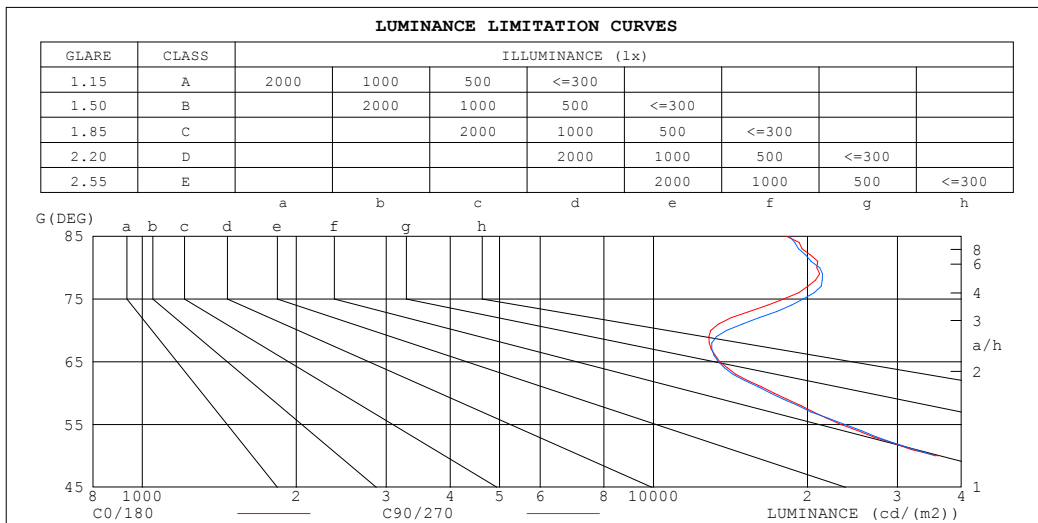

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	18200	18466
80	20848	21129
75	17953	19618
70	12945	13898
65	13482	13400
60	17223	16940
55	23280	23688
50	36020	35591
45	134828	122921


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.0444A P:9.9W PF:0.9314 Freq:49.99Hz		
UTHDi:0.17% ITHDi:18.99% KDisp:0.9482		Lamp Flux:1106.11x1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 3000K RA90 38D	10WTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

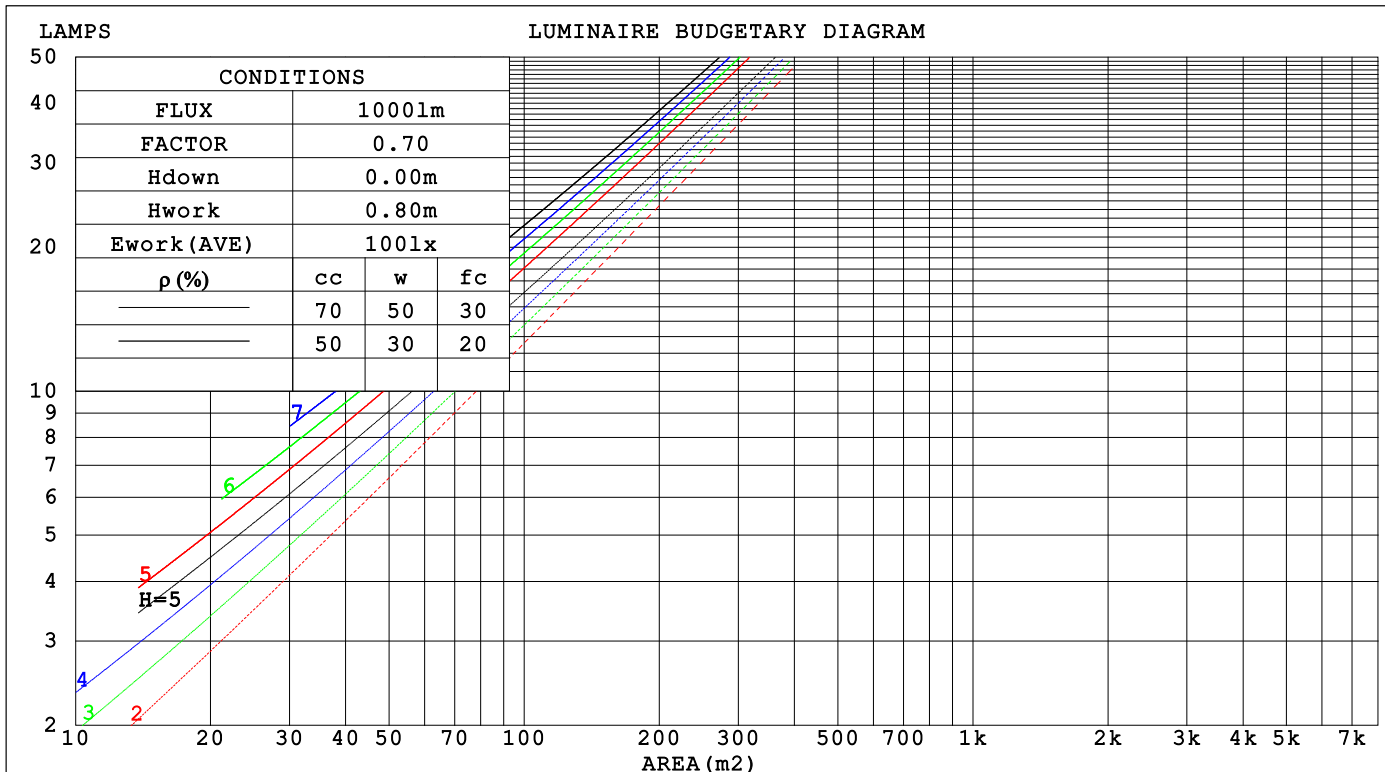

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-17

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.0444A P:9.9W PF:0.9314 Freq:49.99Hz			UTHDi:0.17% ITHDi:18.99% KDisp:0.9482			Lamp Flux:1106.11x1 lm		
NAME: FUSION-MD23-AHD-013-COB-02SC 3000K RA90 38D			LOWTYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: Norming lighting			SUR.: 41mm			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.183	.104	.033	.176	.101	.032	.164	.094	.030	.152	.088	.028	.141	.082	.026		
2.0	.175	.096	.029	.169	.093	.029	.159	.088	.027	.149	.083	.026	.140	.079	.025		
3.0	.166	.088	.026	.161	.086	.026	.152	.082	.025	.144	.079	.024	.136	.075	.023		
4.0	.158	.082	.024	.154	.080	.024	.146	.077	.023	.138	.074	.022	.132	.072	.022		
5.0	.150	.076	.022	.146	.075	.022	.139	.073	.021	.133	.070	.021	.127	.068	.020		
6.0	.143	.072	.020	.140	.071	.020	.134	.068	.020	.128	.066	.020	.123	.065	.019		
7.0	.136	.067	.019	.133	.066	.019	.128	.065	.019	.123	.063	.018	.118	.061	.018		
8.0	.130	.063	.018	.127	.063	.018	.123	.061	.017	.118	.060	.017	.114	.059	.017		
9.0	.124	.060	.017	.122	.059	.017	.118	.058	.016	.114	.057	.016	.110	.056	.016		
10.0	.119	.057	.016	.117	.056	.016	.113	.055	.016	.109	.054	.015	.106	.053	.015		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.172	.157	.144	.147	.135	.124	.100	.093	.086	.058	.054	.050	.019	.017	.016		
2.0	.157	.132	.112	.134	.114	.097	.092	.079	.068	.053	.046	.040	.017	.015	.013		
3.0	.144	.114	.089	.124	.098	.077	.085	.068	.054	.049	.040	.032	.016	.013	.010		
4.0	.134	.099	.072	.115	.086	.062	.079	.060	.044	.046	.035	.026	.015	.011	.009		
5.0	.126	.087	.059	.108	.076	.051	.074	.053	.036	.043	.031	.022	.014	.010	.007		
6.0	.118	.078	.049	.102	.068	.043	.070	.047	.030	.041	.028	.018	.013	.009	.006		
7.0	.112	.071	.042	.096	.061	.036	.066	.043	.026	.039	.025	.015	.012	.008	.005		
8.0	.106	.064	.036	.091	.056	.031	.063	.039	.022	.037	.023	.013	.012	.008	.004		
9.0	.101	.059	.031	.087	.051	.027	.060	.036	.019	.035	.021	.011	.011	.007	.004		
10.0	.096	.055	.027	.083	.048	.024	.057	.033	.017	.034	.020	.010	.011	.006	.003		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-17

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.0444A P:9.9W PF:0.9314 Freq:49.99Hz UTHDi:0.17% ITHDi:18.99% KDisp:0.9482Lamp Flux:1106.11x1 lm										
NAME: FUSION-MD23-AHD-013-COB-02SC 3000K RA90 38D 1						LOWTYPE:		WEIGHT:		
SPEC.:						DIM.:		SERIAL No.:		
MFR.: Norming lighting						SUR.: 41mm		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.1	26.0	25.3	26.2	26.4	24.9	25.9	25.1	26.0	26.2
3H	25.0	25.8	25.2	26.0	26.2	24.8	25.7	25.0	25.9	26.1
4H	24.9	25.8	25.2	26.0	26.2	24.8	25.6	25.0	25.8	26.1
6H	24.9	25.7	25.2	26.0	26.2	24.8	25.6	25.1	25.8	26.1
8H	24.9	25.7	25.2	25.9	26.2	24.8	25.5	25.1	25.8	26.1
12H	24.9	25.6	25.2	25.9	26.2	24.8	25.5	25.1	25.8	26.0
4H 2H	24.8	25.7	25.1	25.9	26.1	24.7	25.5	24.9	25.7	26.0
3H	24.7	25.5	25.1	25.7	26.0	24.6	25.3	24.9	25.6	25.9
4H	24.8	25.4	25.1	25.7	26.0	24.6	25.3	25.0	25.6	25.9
6H	24.8	25.4	25.2	25.7	26.1	24.7	25.3	25.1	25.6	25.9
8H	24.8	25.4	25.2	25.7	26.1	24.7	25.2	25.1	25.6	26.0
12H	24.8	25.3	25.3	25.7	26.1	24.7	25.2	25.1	25.6	26.0
8H 4H	24.7	25.2	25.1	25.6	25.9	24.5	25.1	24.9	25.4	25.8
6H	24.8	25.2	25.2	25.6	26.0	24.7	25.1	25.1	25.5	25.9
8H	24.8	25.2	25.3	25.7	26.1	24.7	25.1	25.2	25.5	26.0
12H	24.9	25.2	25.4	25.7	26.1	24.8	25.1	25.2	25.5	26.0
12H 4H	24.6	25.1	25.0	25.5	25.9	24.5	25.0	24.9	25.4	25.7
6H	24.8	25.2	25.2	25.6	26.0	24.6	25.0	25.1	25.4	25.9
8H	24.8	25.2	25.3	25.6	26.1	24.7	25.0	25.2	25.5	26.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.5 / - 6.2					+ 2.4 / - 6.0				
1.5H	+ 4.6 / - 6.1					+ 4.5 / - 5.8				
2.0H	+ 5.9 / - 2.3					+ 5.5 / - 2.1				

CIE Pub.117, 1106 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.4)
Area: 0.0013 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-17

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.0444A P:9.9W PF:0.9314 Freq:49.99Hz			UTHDi:0.17% ITHDi:18.99% KDisp:0.9482			Lamp Flux:1106.11x1 lm		
NAME: FUSION-MD23-AHD-013-COB-02SC 3000K RA90 38D			LOWTYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: Norming lighting			SUR.: 41mm			Shielding Angle:		


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	77	73	83	77	73	82	76	72	69
0.80	92	85	81	91	85	81	90	84	81	77
1.00	97	91	87	96	90	87	94	90	86	82
1.25	101	96	92	100	95	92	98	94	91	86
1.50	104	99	96	103	98	95	101	97	94	89
2.00	107	103	100	106	102	99	103	100	97	92
2.50	109	105	102	108	104	101	104	102	99	93
3.00	111	107	104	109	106	103	106	103	101	95
4.00	113	110	108	111	108	106	107	105	104	96
5.00	114	112	110	112	110	108	108	107	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.0444A P:9.9W PF:0.9314 Freq:49.99Hz		
UTHDi:0.17% ITHDi:18.99% KDisp:0.9482		Lamp Flux:1106.1lx1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 3000K RA90 38D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

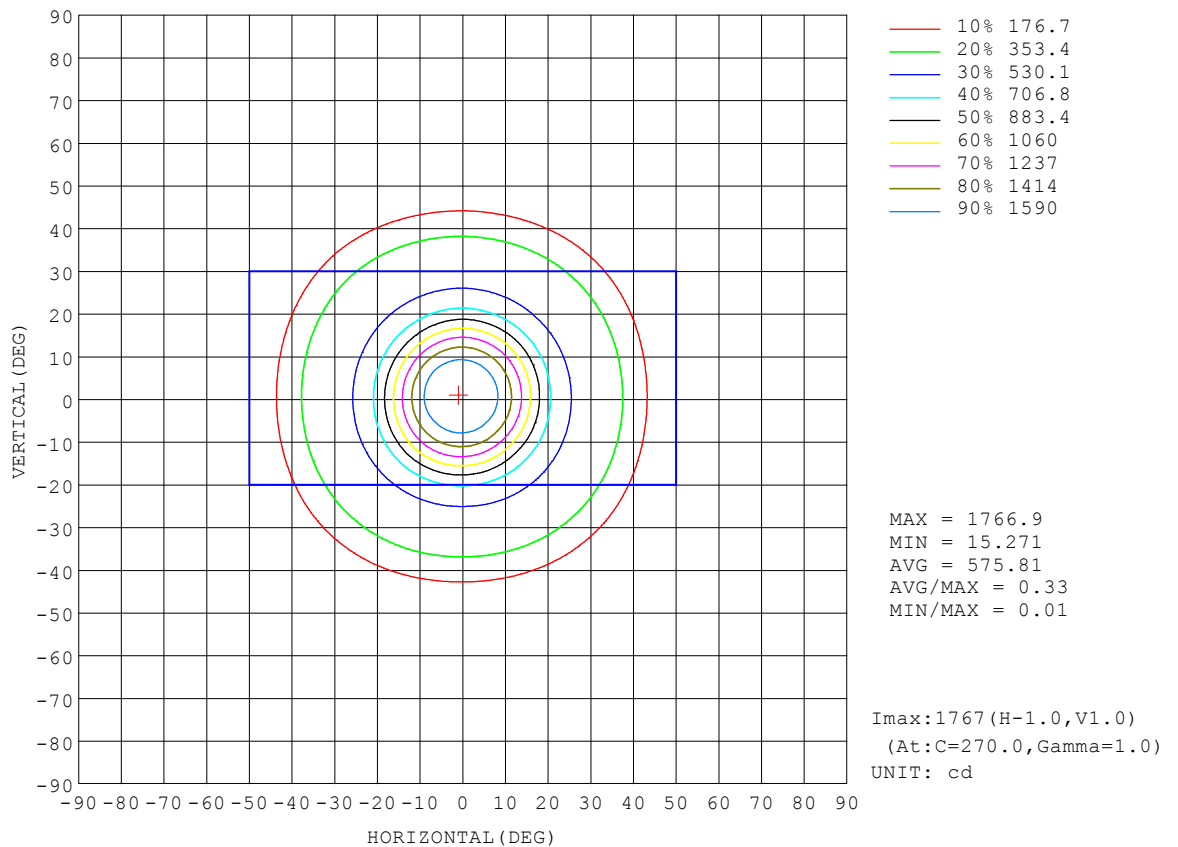


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-17

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.0444A P:9.9W PF:0.9314 Freq:49.99Hz		
UTHDi:0.17% ITHDi:18.99% KDisp:0.9482		Lamp Flux:1106.11x1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 3000K RA90 38D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

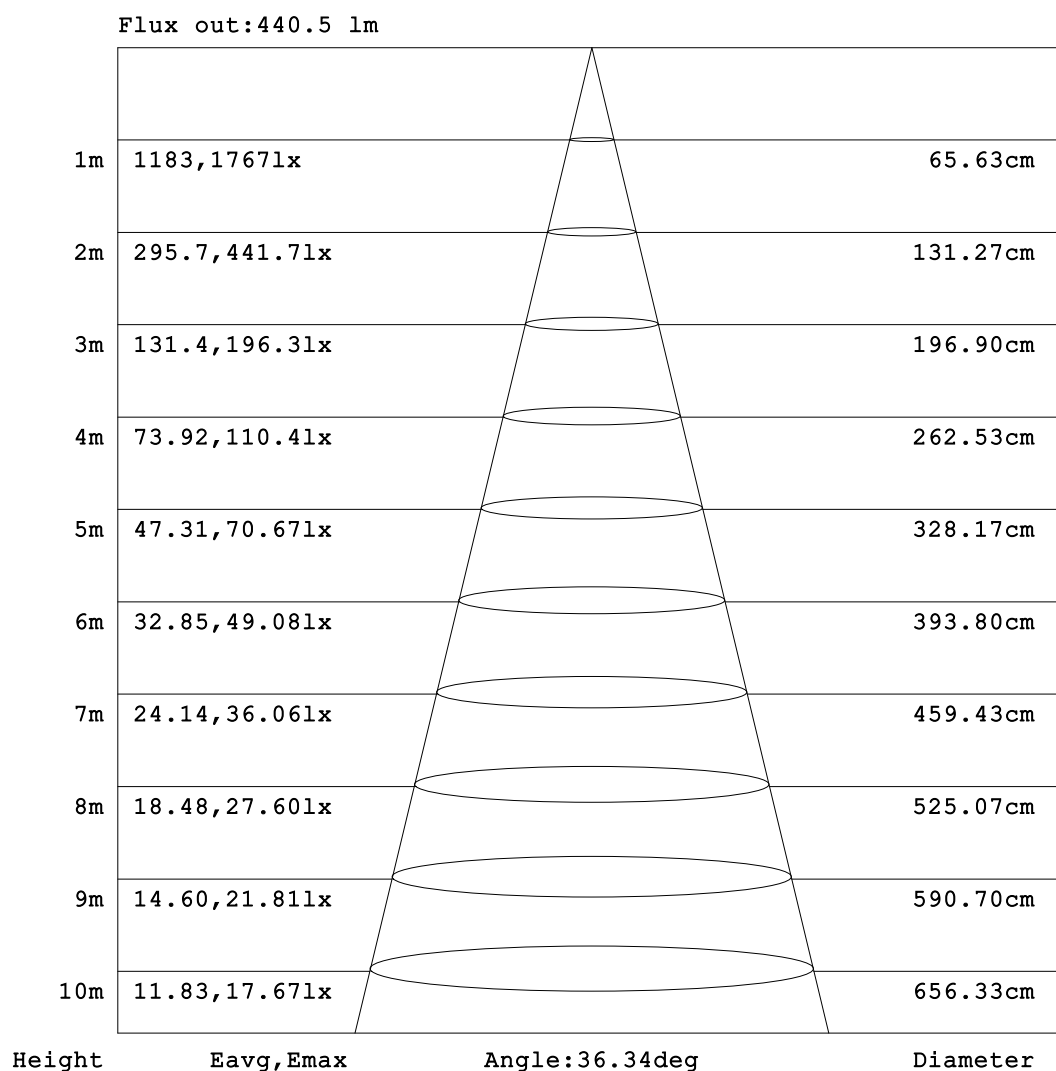


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-17

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.0444A P:9.9W PF:0.9314 Freq:49.99Hz		
UTHDi:0.17% ITHDi:18.99% KDisp:0.9482		Lamp Flux:1106.1lx1 lm
NAME: FUSION-MD23-AHD-013-COB-02SC 3000K RA90 38D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

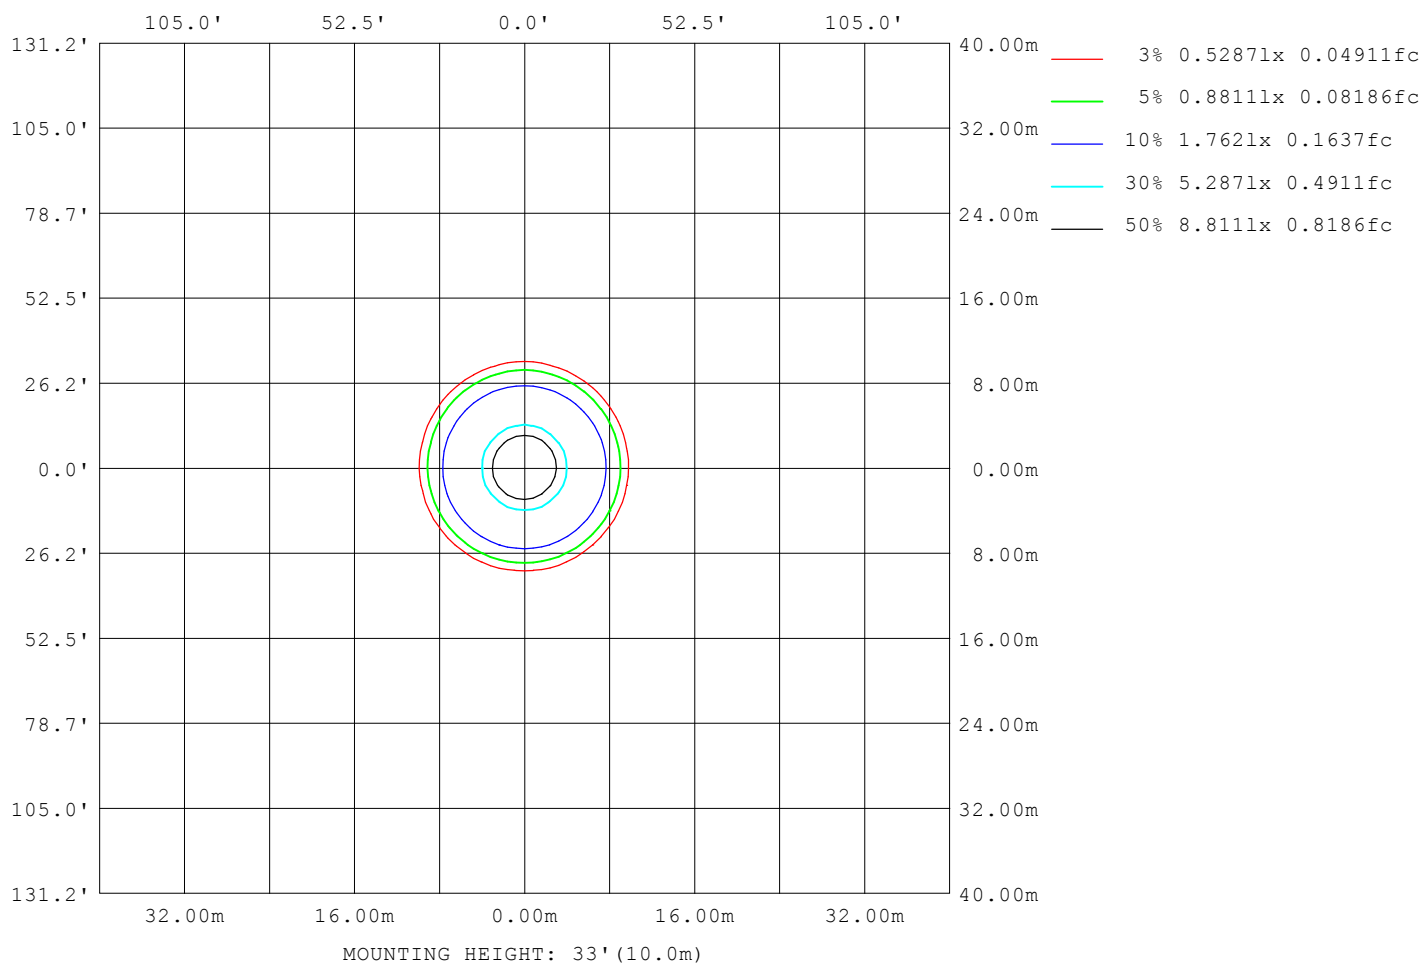

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-17

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.0444A P:9.9W PF:0.9314 Freq:49.99Hz		
UTHDi:0.17% ITHDi:18.99% KDisp:0.9482 Lamp Flux:1106.11x1 lm		
NAME: FUSION-MD23-AHD-013-COB-02SC 3000K RA90 38D	LOWTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	13132
L_0~180 (75) av	17384
L_0~180 (85) av	17454
L_90~270 (65) av	13589
L_90~270 (75) av	18191
L_90~270 (85) av	18456
L_45 (65) av	13445
L_45 (75) av	17332
L_45 (85) av	17837

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-17

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

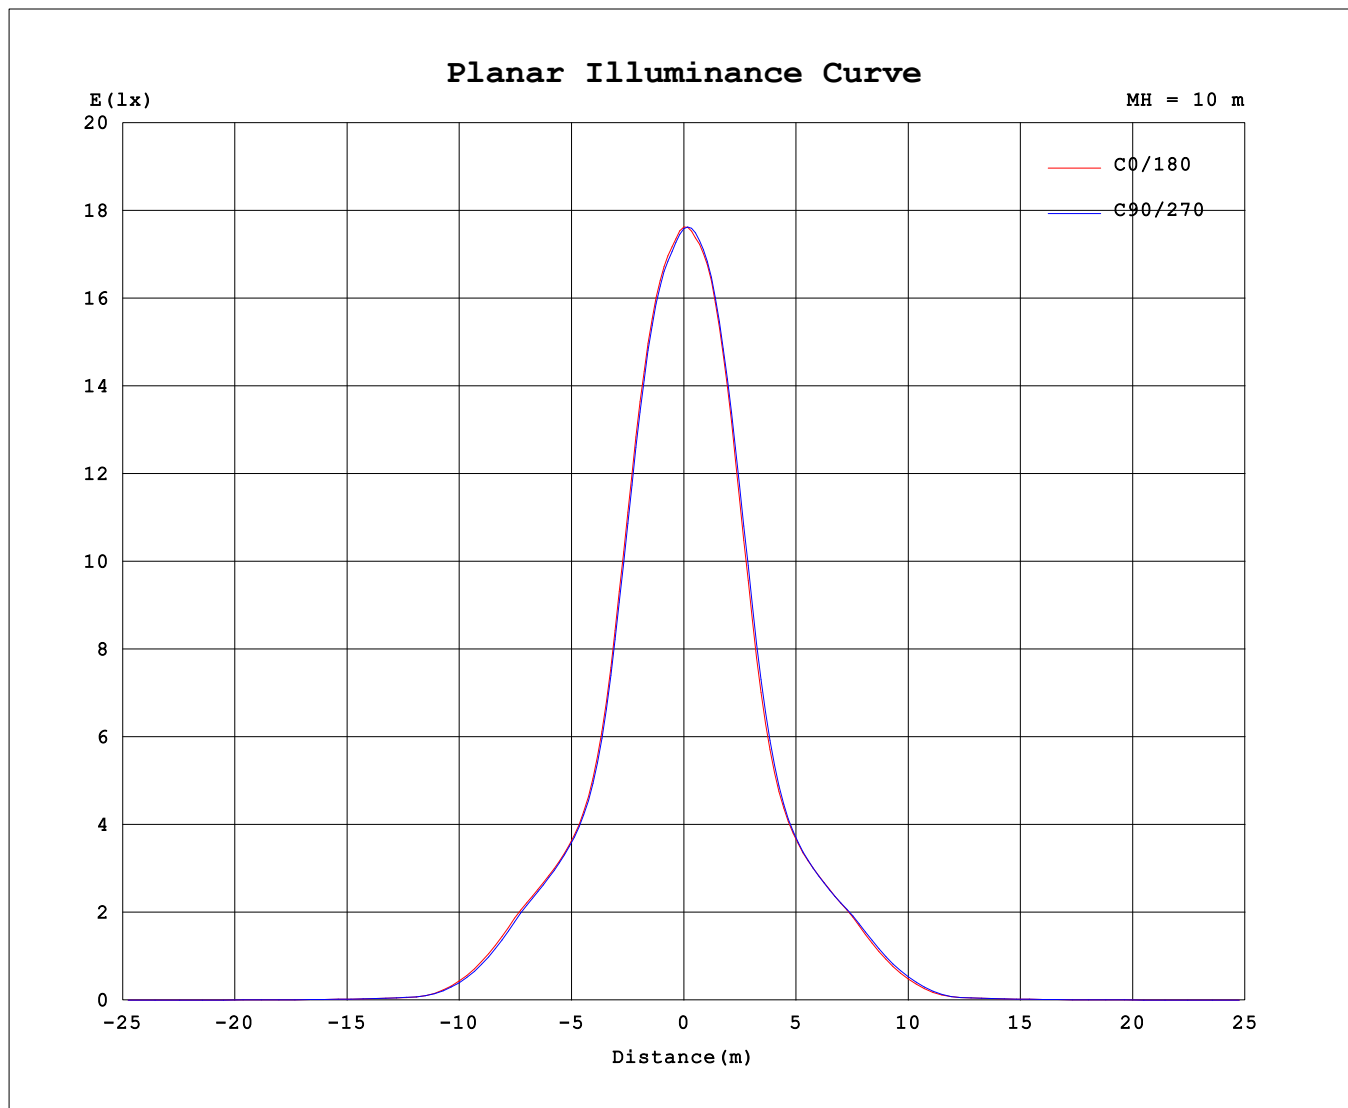

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2024-10-17

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	1760	1760	1760	1760	1760	1760	1760	1760
3.0	1722	1712	1715	1727	1743	1753	1757	1737
6.0	1666	1650	1656	1673	1703	1719	1714	1689
9.0	1552	1527	1538	1563	1589	1611	1606	1584
12.0	1371	1335	1347	1383	1407	1426	1432	1409
15.0	1132	1090	1107	1147	1162	1181	1200	1178
18.0	880.9	847.7	860.8	897.5	906.3	919.9	944.8	927.9
21.0	681.9	667.7	665.2	689.4	700.9	711.8	728.3	705.4
24.0	563.6	558.9	555.1	566.2	574.5	579.6	587.1	570.8
27.0	500.6	497.3	496.4	501.6	504.1	506.0	509.8	502.4
30.0	461.8	456.8	456.4	460.4	462.6	461.9	463.9	460.3
33.0	428.4	421.4	420.1	424.5	427.7	426.2	426.9	424.4
36.0	387.8	376.2	375.4	381.9	389.0	391.6	391.8	387.7
39.0	309.8	294.3	292.6	305.5	319.6	332.9	332.2	320.6
42.0	214.9	199.3	199.5	212.0	227.5	241.7	243.2	229.1
45.0	123.8	111.5	113.1	122.4	136.3	149.4	151.7	136.7
48.0	52.92	47.02	48.95	53.82	59.93	67.71	69.52	61.43
51.0	26.07	25.56	26.56	25.89	24.87	25.13	24.84	24.35
54.0	19.14	18.88	19.48	19.13	17.99	18.35	18.41	18.38
57.0	14.50	13.86	14.36	14.37	14.00	14.41	14.73	14.76
60.0	11.18	10.54	11.02	11.21	10.82	11.09	11.53	11.66
63.0	8.536	8.129	8.439	8.530	8.137	8.344	8.758	8.984
66.0	6.975	6.770	6.952	6.975	6.575	6.696	7.059	7.284
69.0	5.970	5.880	6.189	5.985	5.587	5.569	5.936	6.127
72.0	5.693	5.614	6.472	5.876	5.294	4.968	5.350	5.919
75.0	6.034	5.845	6.605	6.182	5.665	5.195	5.636	6.103
78.0	5.600	5.334	5.782	5.829	5.344	5.142	5.408	5.525
81.0	4.258	4.036	4.134	4.385	4.047	3.972	4.197	4.157
84.0	2.614	2.561	2.570	2.625	2.348	2.311	2.488	2.554
87.0	0.7083	0.6444	0.6352	0.6500	0.7376	0.8343	0.9178	0.7978
90.0	0.0430	0.0321	0.0444	0.0377	0.0375	0.0343	0.0428	0.0358

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-17

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: