


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.0636A P:14.7W PF:0.9627 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.58% KDisp:0.9774		Lamp Flux:1647.17x1 lm
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 25D	15W TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 111.90 lm/W
MODEL		Imax (cd)	4071	S/MH (C0/180)	0.41	
NOMINAL POWER(W)	15	LOR (%)	100.0	S/MH (C90/270)	0.43	
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	1647.2	η UP,DN (C0-180)	0.0,49.4	
NOMINAL FLUX(lm)	1647.17	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.0,50.6	
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.50	
TEST VOLTAGE(V)	240.39	η down (%)	100.0	CIBSE SHR MAX	0.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

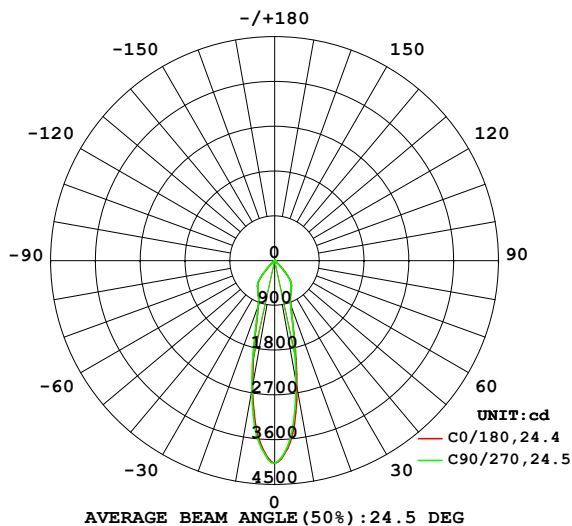

PLANAR ISOLUX DIAGRAM (UNIT: lx)

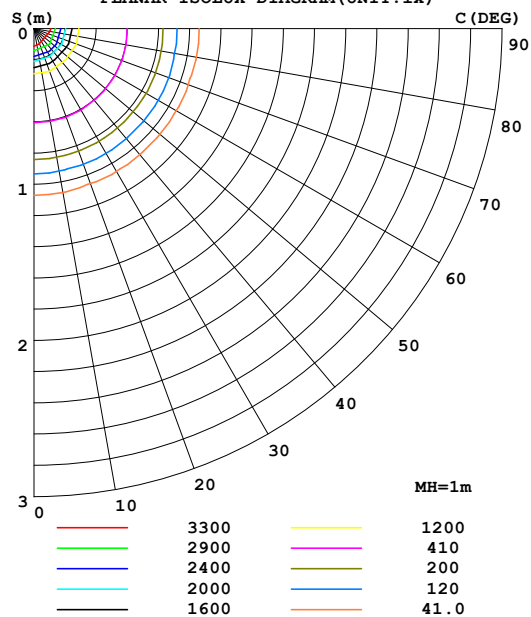

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	2580	2510	2480	2525	2566	2617	2658	2619	0- 10	312.5	312.5	19,19
20	961.6	955.7	953.2	953.7	964.4	969.1	976.8	960.6	10- 20	427.0	739.4	44.9,44.9
30	671.9	666.9	663.1	671.5	683.6	677.9	679.9	672.4	20- 30	359.3	1099	66.7,66.7
40	445.6	430.0	418.4	420.8	425.1	426.5	444.8	444.0	30- 40	361.4	1460	88.6,88.6
50	37.99	31.89	32.15	35.55	36.92	39.40	42.22	38.53	40- 50	154.3	1614	98,98
60	9.286	8.607	8.410	8.912	9.251	10.14	10.09	9.628	50- 60	16.43	1631	99,99
70	5.838	5.550	5.452	5.854	6.118	6.474	6.464	6.325	60- 70	7.056	1638	99.4,99.4
80	6.218	5.540	5.697	5.872	6.308	6.405	6.845	6.893	70- 80	6.069	1644	99.8,99.8
90	0.0591	0.0517	0.0703	0.0521	0.0533	0.0462	0.0540	0.0470	80- 90	3.259	1647	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1574.3 lm

%lum = 95.6%

%lamp = 95.6%

Conical surface Flux(120deg): 1630.8 lm

%lum = 99.0%


%lamp = 99.0%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.0636A P:14.7W PF:0.9627 Freq:49.99Hz			Lamp Flux:1647.17x1 lm		
UTHDi:0.17% ITHDi:17.58% KDisp:0.9774					
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 25D 15WTYPE:			WEIGHT:		
SPEC.:			DIM.:		
MFR.: Norming lighting			SUR.: 41mm		
			Shielding Angle:		

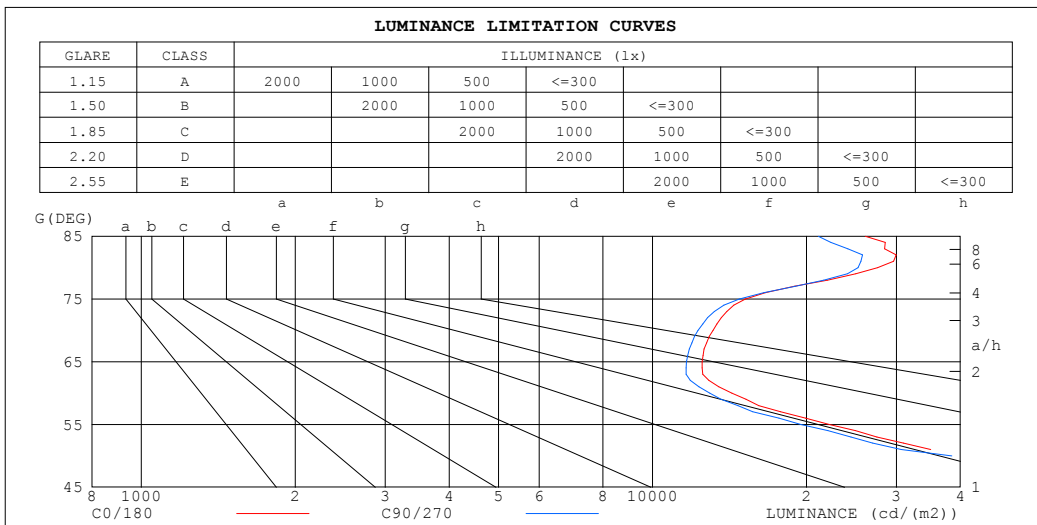

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	26090	21095
80	27551	25250
75	15191	14783
70	13133	12268
65	12495	11642
60	14291	12945
55	22190	19530
50	45476	38495
45	217331	195707


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.0636A P:14.7W PF:0.9627 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.58% KDisp:0.9774		
Lamp Flux:1647.17x1 lm		
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 25D	15WTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
p _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
p _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

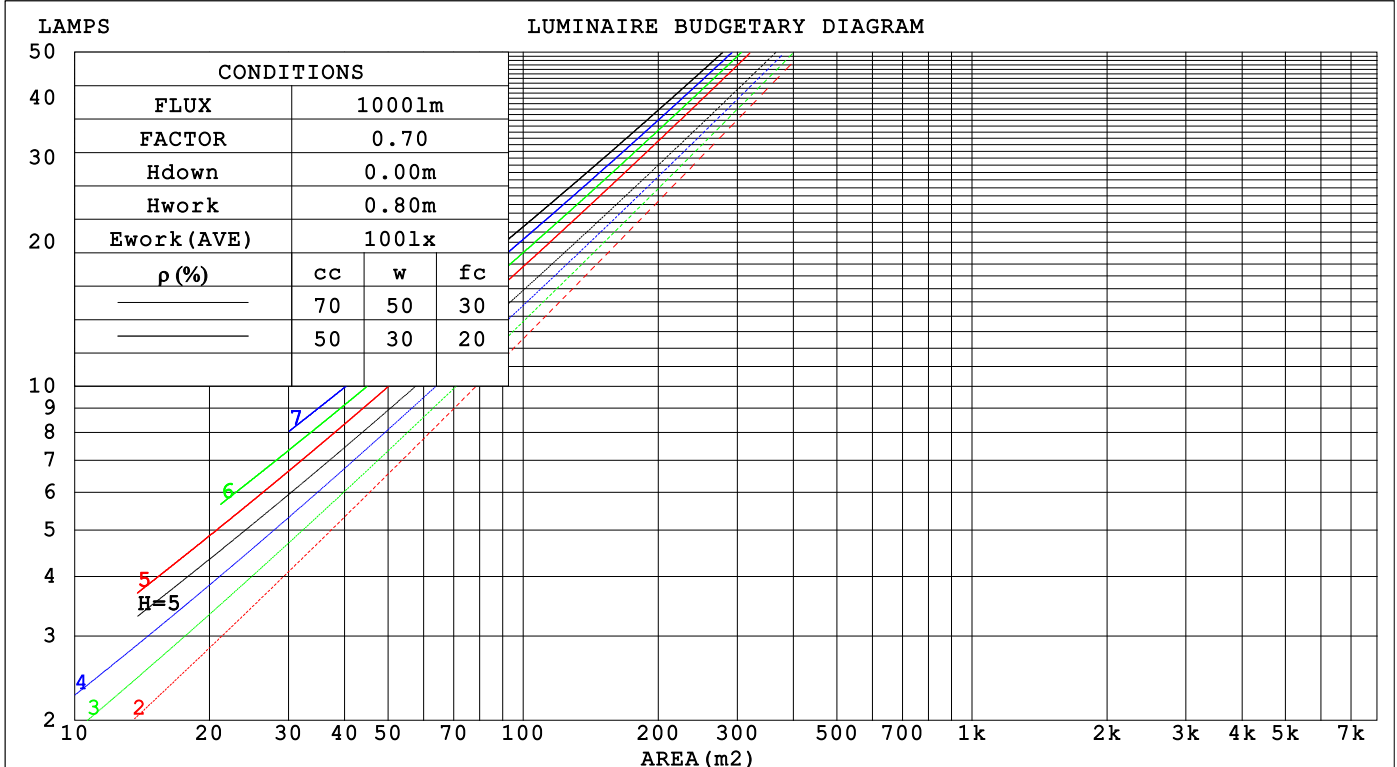

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.0636A P:14.7W PF:0.9627 Freq:49.99Hz			UTHDi:0.17% ITHDi:17.58% KDisp:0.9774			Lamp Flux:1647.17x1 lm		
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 25D			15WTYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: Norming lighting			SUR.: 41mm			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.177	.101	.032	.171	.097	.031	.158	.091	.029	.146	.084	.027	.136	.079	.025		
2.0	.169	.093	.028	.163	.090	.028	.153	.085	.026	.143	.080	.025	.134	.076	.024		
3.0	.160	.085	.026	.156	.083	.025	.147	.079	.024	.138	.076	.023	.131	.072	.022		
4.0	.152	.079	.023	.148	.078	.023	.140	.074	.022	.133	.072	.022	.127	.069	.021		
5.0	.145	.074	.021	.141	.073	.021	.134	.070	.021	.128	.068	.020	.122	.065	.020		
6.0	.138	.069	.020	.135	.068	.020	.129	.066	.019	.123	.064	.019	.118	.062	.018		
7.0	.131	.065	.018	.129	.064	.018	.123	.062	.018	.118	.061	.018	.114	.059	.017		
8.0	.125	.061	.017	.123	.061	.017	.118	.059	.017	.114	.058	.017	.110	.056	.016		
9.0	.120	.058	.016	.118	.057	.016	.113	.056	.016	.110	.055	.016	.106	.054	.016		
10.0	.115	.055	.015	.113	.054	.015	.109	.053	.015	.105	.052	.015	.102	.051	.015		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.086	.058	.054	.050	.018	.017	.016		
2.0	.156	.133	.113	.133	.114	.098	.091	.079	.068	.053	.046	.040	.017	.015	.013		
3.0	.143	.114	.090	.123	.098	.078	.084	.068	.055	.049	.040	.032	.016	.013	.011		
4.0	.133	.099	.073	.114	.085	.063	.078	.060	.044	.045	.035	.026	.015	.011	.009		
5.0	.124	.087	.060	.107	.075	.052	.073	.053	.037	.043	.031	.022	.014	.010	.007		
6.0	.117	.078	.050	.100	.067	.044	.069	.047	.031	.040	.028	.018	.013	.009	.006		
7.0	.110	.070	.042	.095	.061	.037	.065	.043	.026	.038	.025	.016	.012	.008	.005		
8.0	.104	.064	.036	.090	.055	.032	.062	.039	.023	.036	.023	.013	.012	.008	.004		
9.0	.099	.059	.032	.085	.051	.028	.059	.036	.020	.034	.021	.012	.011	.007	.004		
10.0	.094	.054	.028	.081	.047	.024	.056	.033	.017	.033	.020	.010	.011	.006	.003		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.0636A P:14.7W PF:0.9627 Freq:49.99Hz UTHDi:0.17% ITHDi:17.58% KDisp:0.9774Lamp Flux:1647.17x1 lm										
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 25D 15WTYPE:						WEIGHT:				
SPEC.:						DIM.:		SERIAL No.:		
MFR.: Norming lighting						SUR.: 41mm		Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.7	27.6	26.9	27.8	27.9	26.5	27.4	26.7	27.6	27.7
3H	26.5	27.4	26.8	27.6	27.8	26.3	27.2	26.6	27.4	27.6
4H	26.4	27.3	26.7	27.5	27.7	26.2	27.1	26.5	27.3	27.5
6H	26.4	27.2	26.7	27.4	27.7	26.2	27.0	26.5	27.2	27.5
8H	26.4	27.1	26.7	27.4	27.6	26.2	26.9	26.5	27.2	27.4
12H	26.4	27.1	26.7	27.3	27.6	26.2	26.9	26.5	27.1	27.4
4H 2H	26.4	27.2	26.7	27.4	27.7	26.2	27.0	26.5	27.2	27.5
3H	26.3	27.0	26.6	27.2	27.5	26.1	26.8	26.4	27.0	27.3
4H	26.2	26.8	26.5	27.1	27.4	26.0	26.6	26.4	26.9	27.2
6H	26.2	26.8	26.6	27.1	27.4	26.0	26.6	26.4	26.9	27.2
8H	26.2	26.7	26.6	27.1	27.5	26.0	26.5	26.4	26.9	27.2
12H	26.2	26.7	26.6	27.1	27.5	26.0	26.5	26.4	26.8	27.2
8H 4H	26.1	26.6	26.5	26.9	27.3	25.9	26.4	26.3	26.8	27.1
6H	26.1	26.5	26.5	26.9	27.3	25.9	26.3	26.3	26.7	27.2
8H	26.2	26.5	26.6	27.0	27.4	25.9	26.3	26.4	26.7	27.2
12H	26.2	26.5	26.7	26.9	27.4	26.0	26.3	26.4	26.7	27.2
12H 4H	26.0	26.5	26.4	26.9	27.3	25.8	26.3	26.3	26.7	27.1
6H	26.1	26.5	26.5	26.9	27.3	25.9	26.3	26.3	26.7	27.1
8H	26.1	26.5	26.6	26.9	27.4	25.9	26.3	26.4	26.7	27.2
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.4 / - 8.4					+ 2.5 / - 8.6				
1.5H	+ 4.5 / - 8.5					+ 4.6 / - 8.6				
2.0H	+ 7.1 / - 3.7					+ 6.9 / - 3.7				

CIE Pub.117, 1647 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 1.7$)
Area: 0.0013 m²

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.0636A P:14.7W PF:0.9627 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.58% KDisp:0.9774 Lamp Flux:1647.17x1 lm		
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 25D	15WTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	84	78	73	84	77	73	83	77	73	69
0.80	92	86	82	92	86	82	90	85	81	78
1.00	97	91	88	97	91	87	95	91	87	83
1.25	102	96	93	101	96	92	99	94	91	87
1.50	105	100	96	103	99	96	101	97	95	90
2.00	108	103	100	106	102	99	104	100	98	92
2.50	110	105	102	108	104	101	105	102	100	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	105	104	97
5.00	115	112	110	112	110	108	108	107	105	98
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.0636A P:14.7W PF:0.9627 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.58% KDisp:0.9774		Lamp Flux:1647.17x1 lm
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 25D 15WTYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

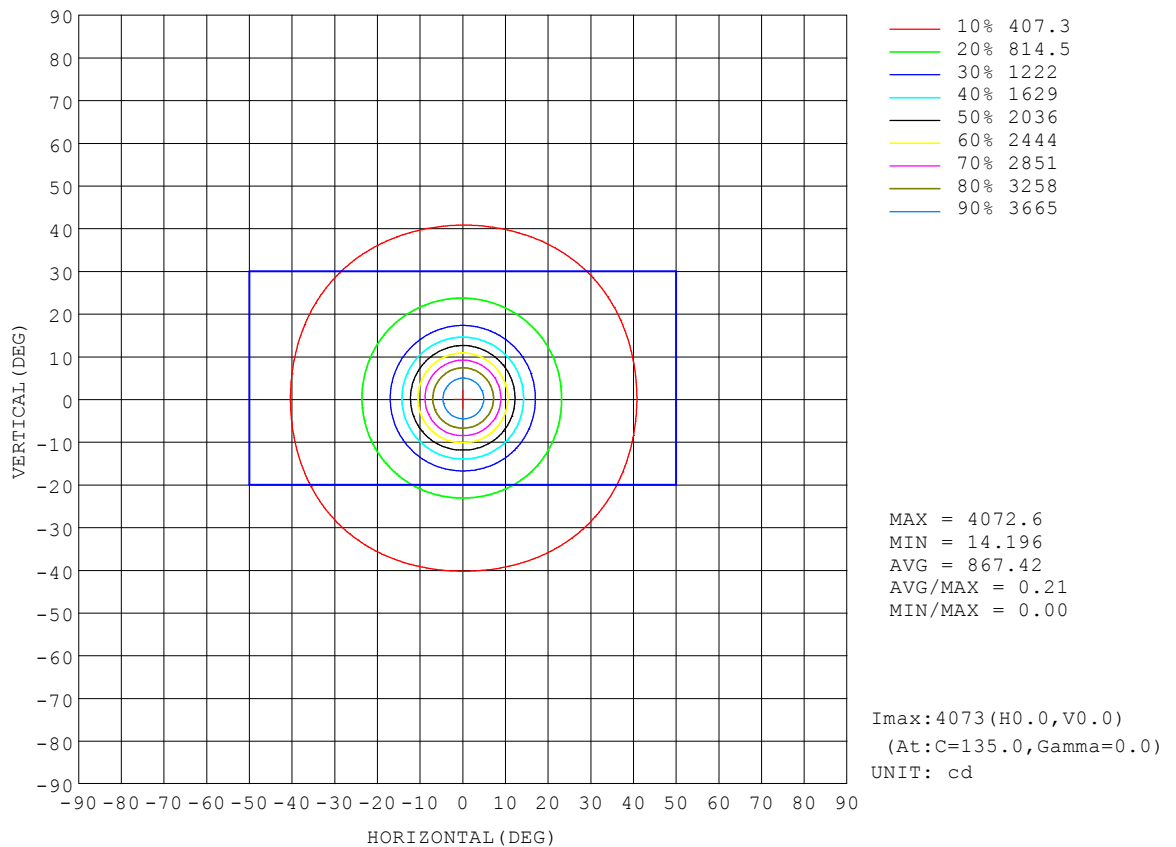


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.0636A P:14.7W PF:0.9627 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.58% KDisp:0.9774		Lamp Flux:1647.17x1 lm
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 25D	15W TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

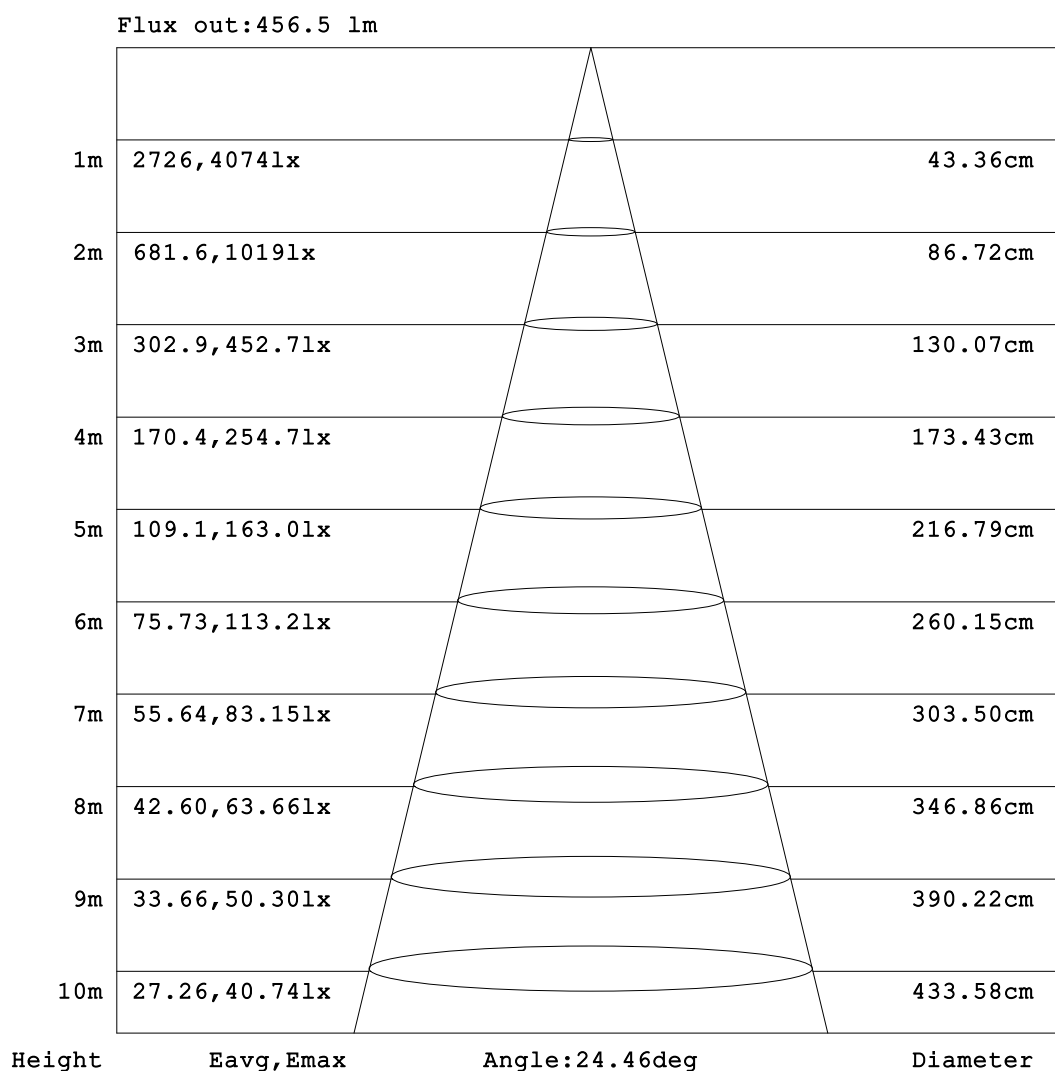


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.0636A P:14.7W PF:0.9627 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.58% KDisp:0.9774		Lamp Flux:1647.17x1 lm
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 25D	15WTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

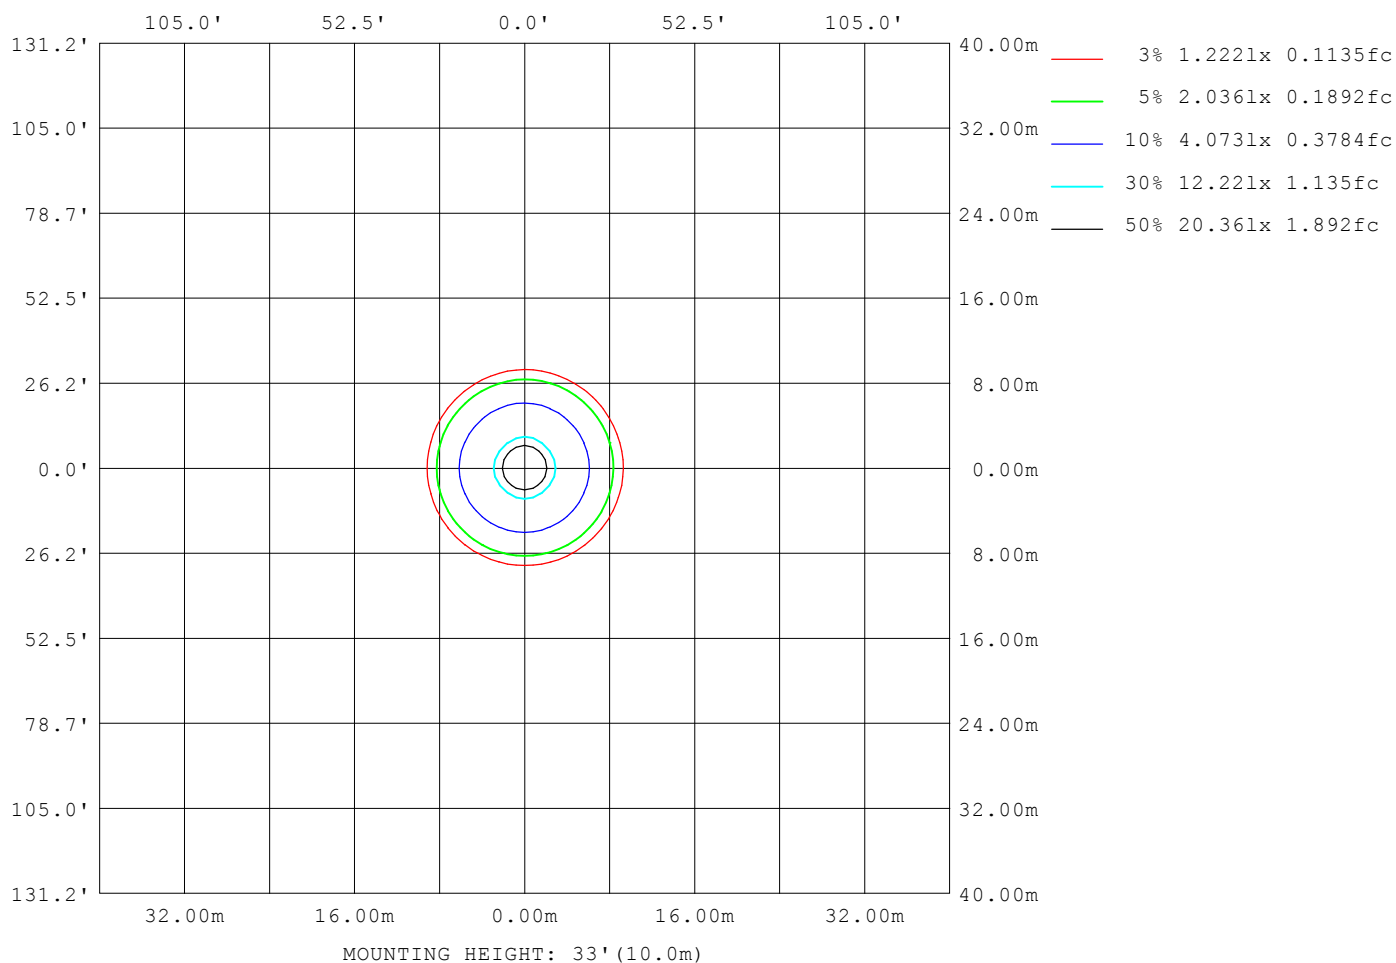

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:240.4V I:0.0636A P:14.7W PF:0.9627 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.58% KDisp:0.9774 Lamp Flux:1647.17x1 lm		
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 25D 15W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	12541
L_0~180 (75) av	15822
L_0~180 (85) av	27383
L_90~270 (65) av	12524
L_90~270 (75) av	16186
L_90~270 (85) av	28843
L_45 (65) av	12710
L_45 (75) av	15931
L_45 (85) av	27668

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

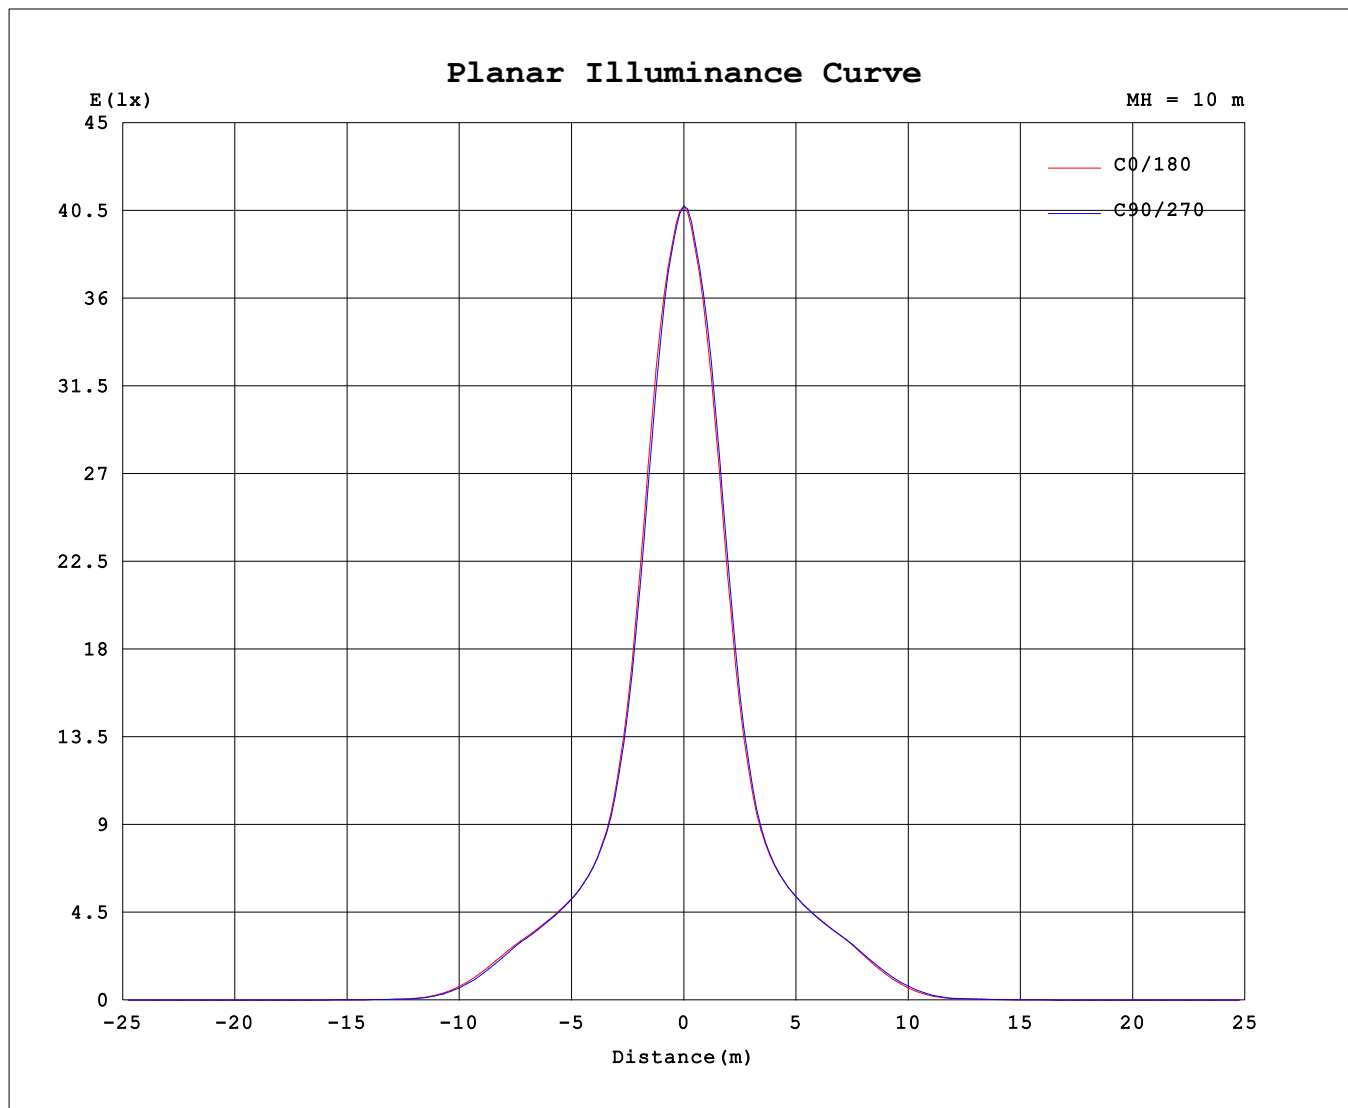

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	4071	4071	4071	4071	4071	4071	4071	4071
3.0	3886	3870	3861	3858	3860	3873	3893	3897
6.0	3500	3454	3416	3432	3452	3478	3524	3517
9.0	2837	2763	2730	2775	2813	2856	2899	2868
12.0	2089	2049	2008	2052	2088	2124	2170	2133
15.0	1502	1481	1457	1471	1496	1516	1553	1530
18.0	1113	1107	1090	1098	1113	1120	1142	1126
21.0	900.3	901.4	895.9	900.7	911.3	919.6	920.4	909.5
24.0	788.6	790.0	786.6	791.7	803.2	803.3	804.9	795.5
27.0	721.0	719.7	716.3	722.3	734.6	732.1	733.4	723.9
30.0	671.9	666.9	663.1	671.5	683.6	677.9	679.9	672.4
33.0	624.7	617.8	613.9	625.7	636.2	629.9	632.9	627.7
36.0	576.1	566.8	561.6	572.5	580.4	575.7	585.0	580.5
39.0	487.7	473.1	462.1	466.8	472.2	471.4	488.0	487.0
42.0	349.2	332.6	322.3	321.9	324.4	330.6	349.9	348.2
45.0	199.7	188.7	179.8	180.4	178.5	188.7	205.5	202.1
48.0	85.18	70.67	75.47	71.46	70.64	80.13	86.71	86.01
51.0	28.61	25.89	25.07	29.43	31.19	33.77	34.38	30.05
54.0	19.06	17.54	16.84	19.13	20.11	22.05	21.94	19.12
57.0	12.59	11.52	11.12	12.20	12.62	13.93	14.12	12.90
60.0	9.286	8.607	8.410	8.912	9.251	10.14	10.09	9.628
63.0	7.402	7.036	6.866	7.110	7.390	7.889	7.899	7.859
66.0	6.634	6.337	6.192	6.451	6.723	7.145	7.152	7.125
69.0	6.014	5.733	5.621	5.990	6.246	6.617	6.622	6.477
72.0	5.479	5.200	5.148	5.566	5.848	6.182	6.187	6.033
75.0	5.110	4.766	4.971	5.200	5.538	5.756	5.920	5.720
78.0	5.949	5.340	5.842	5.706	6.090	5.961	6.483	6.537
81.0	6.019	5.142	5.197	5.712	5.915	5.994	6.524	6.627
84.0	3.875	2.879	3.033	3.655	3.914	4.536	4.953	4.652
87.0	0.8916	0.6115	0.6538	0.7929	1.071	1.544	1.826	1.513
90.0	0.0591	0.0517	0.0703	0.0521	0.0533	0.0462	0.0540	0.0470

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: