


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:240.4V I:0.0768A P:17.9W PF:0.9714 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.53% KDisp:0.9862		Lamp Flux:1896.52x1 lm
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 60D	18WTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 105.67 lm/W
MODEL		I _{max} (cd)	2074	S/MH(C0/180)		0.80
NOMINAL POWER(W)	18	LOR(%)	100.0	S/MH(C90/270)		0.80
RATED VOLTAGE(V)	240	TOTAL FLUX(lm)	1896.5	η UP,DN(C0-180)		0.0,50.1
NOMINAL FLUX(lm)	1896.52	CIE CLASS	DIRECT	η UP,DN(C180-360)		0.0,49.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.75
TEST VOLTAGE(V)	240.38	η down (%)	100.0	CIBSE SHR MAX		0.95

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

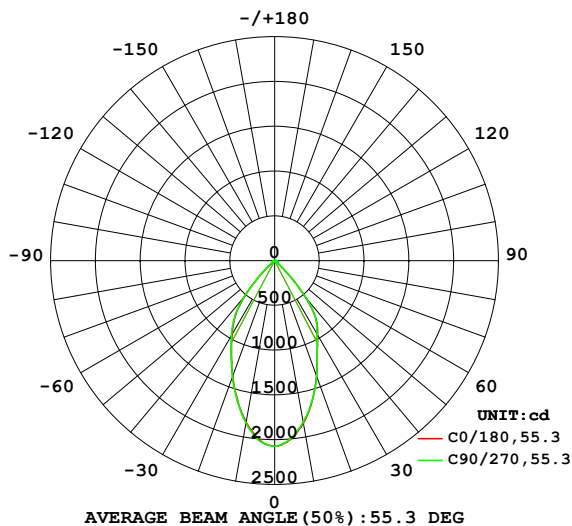

PLANAR ISOLUX DIAGRAM(UNIT:lx)

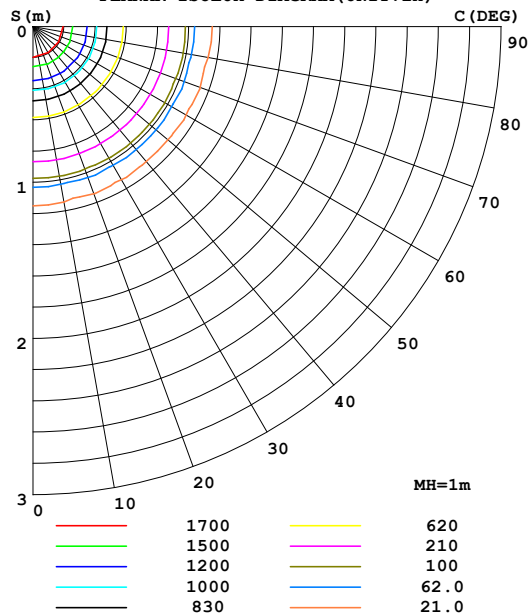

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1846	1848	1833	1835	1833	1835	1845	1843	0- 10	186.0	186.0	9.81,9.81
20	1368	1389	1375	1369	1374	1377	1378	1364	10- 20	450.6	636.6	33.6,33.6
30	962.6	959.0	950.7	957.1	957.0	979.7	965.3	962.1	20- 30	526.1	1163	61.3,61.3
40	539.5	550.4	550.3	539.9	525.6	514.0	522.4	521.1	30- 40	484.1	1647	86.8,86.8
50	47.89	44.35	42.52	42.08	43.52	43.69	47.47	49.36	40- 50	183.1	1830	96.5,96.5
60	27.92	26.78	26.06	26.01	25.56	25.12	25.74	27.05	50- 60	29.00	1859	98,98
70	17.32	16.27	15.50	15.50	16.86	18.23	18.42	17.89	60- 70	21.70	1881	99.2,99.2
80	7.869	6.850	5.995	5.845	6.399	7.398	8.043	8.023	70- 80	12.36	1893	99.8,99.8
90	0.0753	0.0687	0.0829	0.0715	0.0785	0.0706	0.0707	0.0657	80- 90	3.444	1897	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 1783.8 lm

%lum = 94.1%

%lamp = 94.1%

Conical surface Flux(120deg): 1859 lm

%lum = 98.0%


%lamp = 98.0%

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:240.4V I:0.0768A P:17.9W PF:0.9714 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.53% KDisp:0.9862		Lamp Flux:1896.52x1 lm
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 60D	18W TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

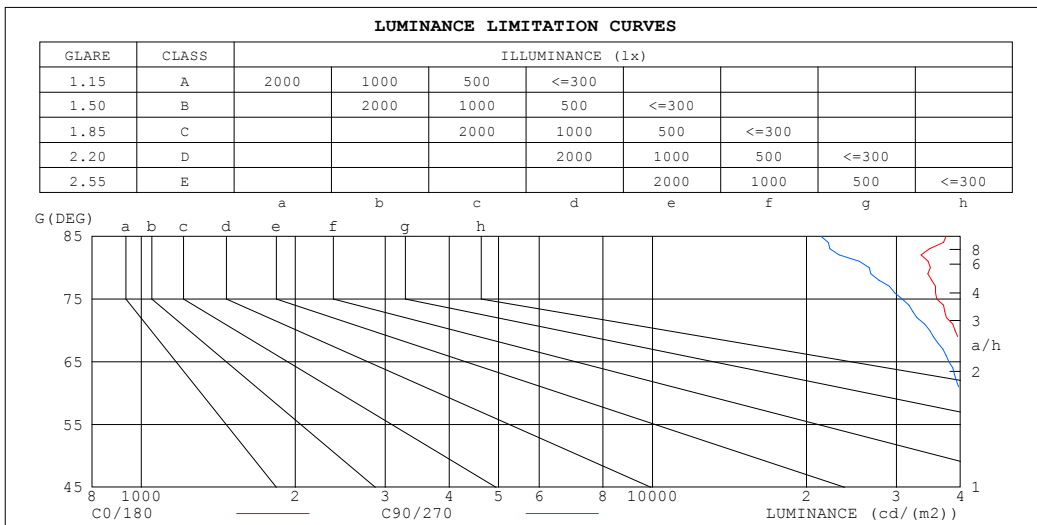

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	37531	21345
80	34939	26538
75	35957	30802
70	39046	34848
65	41474	37987
60	43053	40075
55	46699	41842
50	57444	50859
45	235379	244010


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:240.4V I:0.0768A P:17.9W PF:0.9714 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.53% KDisp:0.9862		Lamp Flux:1896.52x1 lm
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 60D	18WTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

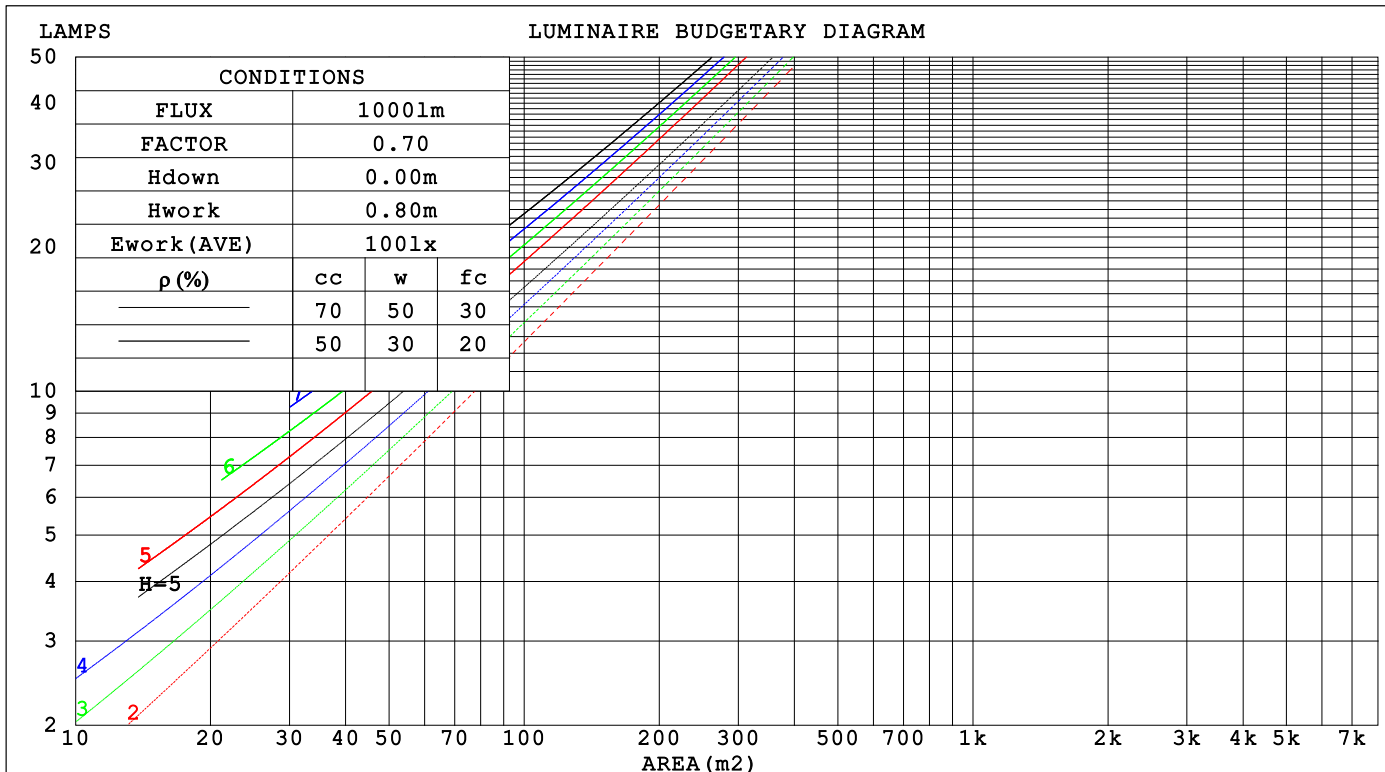

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:240.4V I:0.0768A P:17.9W PF:0.9714 Freq:49.99Hz			UTHDi:0.17% ITHDi:17.53% KDisp:0.9862			Lamp Flux:1896.52x1 lm		
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 60D			18WTYPE:			WEIGHT:		
SPEC.:			DIM.:			SERIAL No.:		
MFR.: Norming lighting			SUR.: 41mm			Shielding Angle:		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.192	.109	.035	.185	.106	.034	.172	.099	.032	.161	.093	.030	.150	.087	.028		
2.0	.184	.101	.031	.178	.098	.030	.168	.093	.029	.158	.089	.028	.149	.084	.027		
3.0	.175	.093	.028	.171	.091	.027	.161	.087	.027	.153	.084	.026	.145	.080	.025		
4.0	.167	.087	.025	.163	.085	.025	.155	.082	.024	.147	.079	.024	.140	.076	.023		
5.0	.159	.081	.023	.155	.080	.023	.148	.077	.023	.142	.075	.022	.135	.072	.022		
6.0	.151	.076	.022	.148	.075	.022	.142	.073	.021	.136	.071	.021	.131	.069	.020		
7.0	.144	.071	.020	.141	.070	.020	.136	.069	.020	.131	.067	.020	.126	.065	.019		
8.0	.138	.067	.019	.135	.067	.019	.130	.065	.019	.126	.064	.018	.121	.062	.018		
9.0	.132	.064	.018	.129	.063	.018	.125	.062	.018	.121	.061	.017	.117	.059	.017		
10.0	.126	.060	.017	.124	.060	.017	.120	.059	.017	.116	.058	.016	.113	.057	.016		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.172	.157	.144	.147	.135	.124	.101	.093	.086	.058	.054	.050	.019	.017	.016		
2.0	.158	.132	.111	.135	.114	.096	.093	.079	.067	.053	.046	.039	.017	.015	.013		
3.0	.146	.114	.088	.125	.098	.076	.086	.068	.053	.050	.040	.031	.016	.013	.010		
4.0	.137	.099	.071	.117	.086	.061	.081	.060	.043	.047	.035	.026	.015	.011	.008		
5.0	.128	.088	.058	.110	.076	.050	.076	.053	.036	.044	.031	.021	.014	.010	.007		
6.0	.121	.079	.048	.104	.068	.042	.072	.048	.030	.042	.028	.018	.013	.009	.006		
7.0	.115	.071	.041	.099	.062	.035	.068	.043	.025	.040	.025	.015	.013	.008	.005		
8.0	.109	.065	.035	.094	.056	.030	.065	.040	.022	.038	.023	.013	.012	.008	.004		
9.0	.104	.060	.030	.090	.052	.026	.062	.037	.019	.036	.022	.011	.012	.007	.004		
10.0	.100	.056	.026	.086	.048	.023	.060	.034	.016	.035	.020	.010	.011	.007	.003		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:240.4V I:0.0768A P:17.9W PF:0.9714 Freq:49.99Hz UTHDi:0.17% ITHDi:17.53% KDisp:0.9862Lamp Flux:1896.52x1 lm										
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 60D 18WTYPE:						WEIGHT:				
SPEC.:						DIM.:			SERIAL No.:	
MFR.: Norming lighting						SUR.: 41mm			Shielding Angle:	
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	28.0	29.1	28.3	29.2	29.4	28.0	29.1	28.3	29.2	29.4
3H	28.0	28.9	28.2	29.1	29.3	28.0	28.9	28.2	29.1	29.3
4H	28.0	28.8	28.2	29.1	29.3	27.9	28.8	28.2	29.0	29.3
6H	27.9	28.8	28.2	29.0	29.3	27.9	28.7	28.2	28.9	29.2
8H	27.9	28.7	28.2	29.0	29.2	27.8	28.6	28.2	28.9	29.2
12H	27.9	28.7	28.2	28.9	29.2	27.8	28.6	28.1	28.8	29.1
4H 2H	27.8	28.7	28.1	28.9	29.2	27.8	28.7	28.1	28.9	29.2
3H	27.8	28.6	28.1	28.8	29.1	27.8	28.6	28.1	28.8	29.1
4H	27.8	28.5	28.2	28.8	29.1	27.8	28.5	28.1	28.8	29.1
6H	27.8	28.4	28.2	28.8	29.1	27.8	28.4	28.1	28.7	29.0
8H	27.8	28.4	28.2	28.7	29.1	27.7	28.3	28.1	28.6	29.0
12H	27.8	28.3	28.2	28.7	29.1	27.7	28.2	28.1	28.6	29.0
8H 4H	27.7	28.3	28.1	28.6	29.0	27.7	28.2	28.1	28.6	29.0
6H	27.8	28.2	28.2	28.6	29.0	27.7	28.2	28.1	28.5	29.0
8H	27.8	28.2	28.2	28.6	29.0	27.7	28.1	28.1	28.5	28.9
12H	27.8	28.2	28.3	28.6	29.1	27.7	28.0	28.1	28.5	28.9
12H 4H	27.7	28.2	28.1	28.6	29.0	27.6	28.2	28.1	28.5	28.9
6H	27.7	28.1	28.2	28.6	29.0	27.7	28.1	28.1	28.5	28.9
8H	27.8	28.1	28.2	28.5	29.0	27.6	28.0	28.1	28.4	28.9
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 2.4 / - 6.3					+ 2.5 / - 6.9				
1.5H	+ 4.7 / - 6.2					+ 4.7 / - 7.0				
2.0H	+ 5.6 / - 1.9					+ 6.0 / - 2.1				

CIE Pub.117, 1897 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 2.2)
Area: 0.0013 m2

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:240.4V I:0.0768A P:17.9W PF:0.9714 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.53% KDisp:0.9862		Lamp Flux:1896.52x1 lm
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 60D	18WTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	83	76	72	83	76	72	82	76	72	68
0.80	91	85	81	91	84	80	89	84	80	76
1.00	97	90	86	96	90	86	94	90	85	81
1.25	101	95	91	100	95	91	98	93	90	86
1.50	104	99	95	103	98	95	100	96	93	89
2.00	107	103	99	106	102	98	103	100	97	91
2.50	109	105	102	107	104	101	104	101	99	93
3.00	111	107	104	109	106	103	106	103	101	94
4.00	113	110	107	111	108	106	107	105	103	96
5.00	114	112	110	112	110	108	108	106	105	97
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:240.4V I:0.0768A P:17.9W PF:0.9714 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.53% KDisp:0.9862 Lamp Flux:1896.52x1 lm		
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 60D 18WTYPE:	WEIGHT:	
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

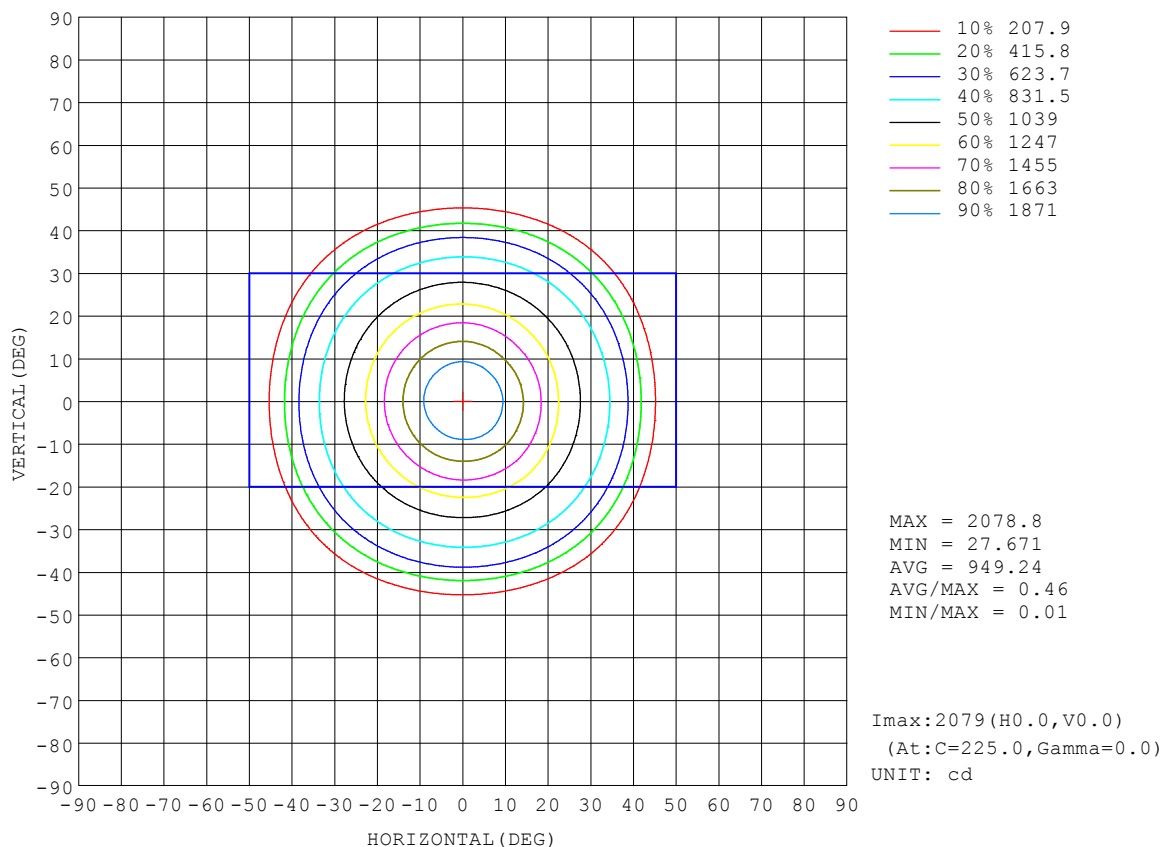


C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

AAI Figure

Test:U:240.4V I:0.0768A P:17.9W PF:0.9714 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.53% KDisp:0.9862		Lamp Flux:1896.52x1 lm
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 60D	18W TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

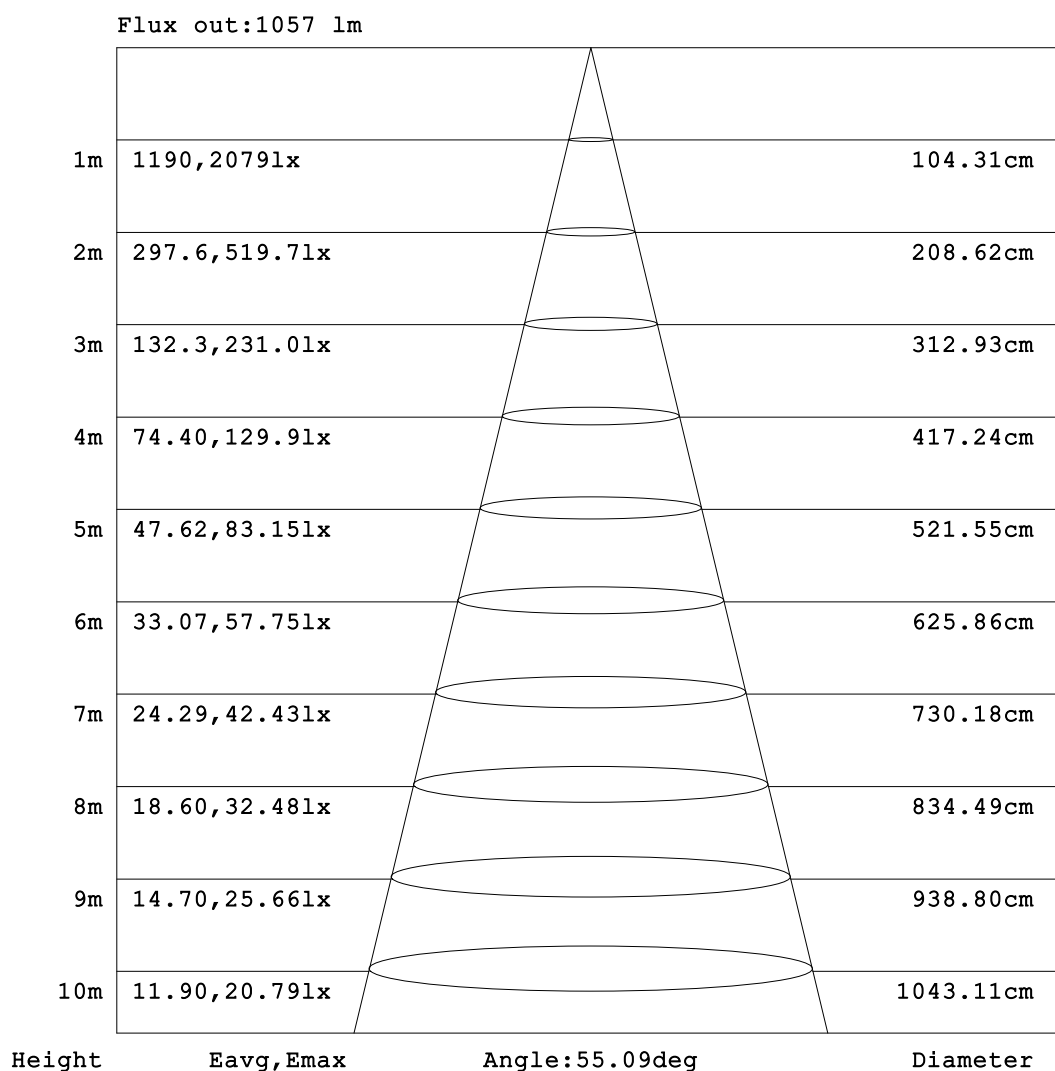


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:240.4V I:0.0768A P:17.9W PF:0.9714 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.53% KDisp:0.9862		Lamp Flux:1896.52x1 lm
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 60D	18WTYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

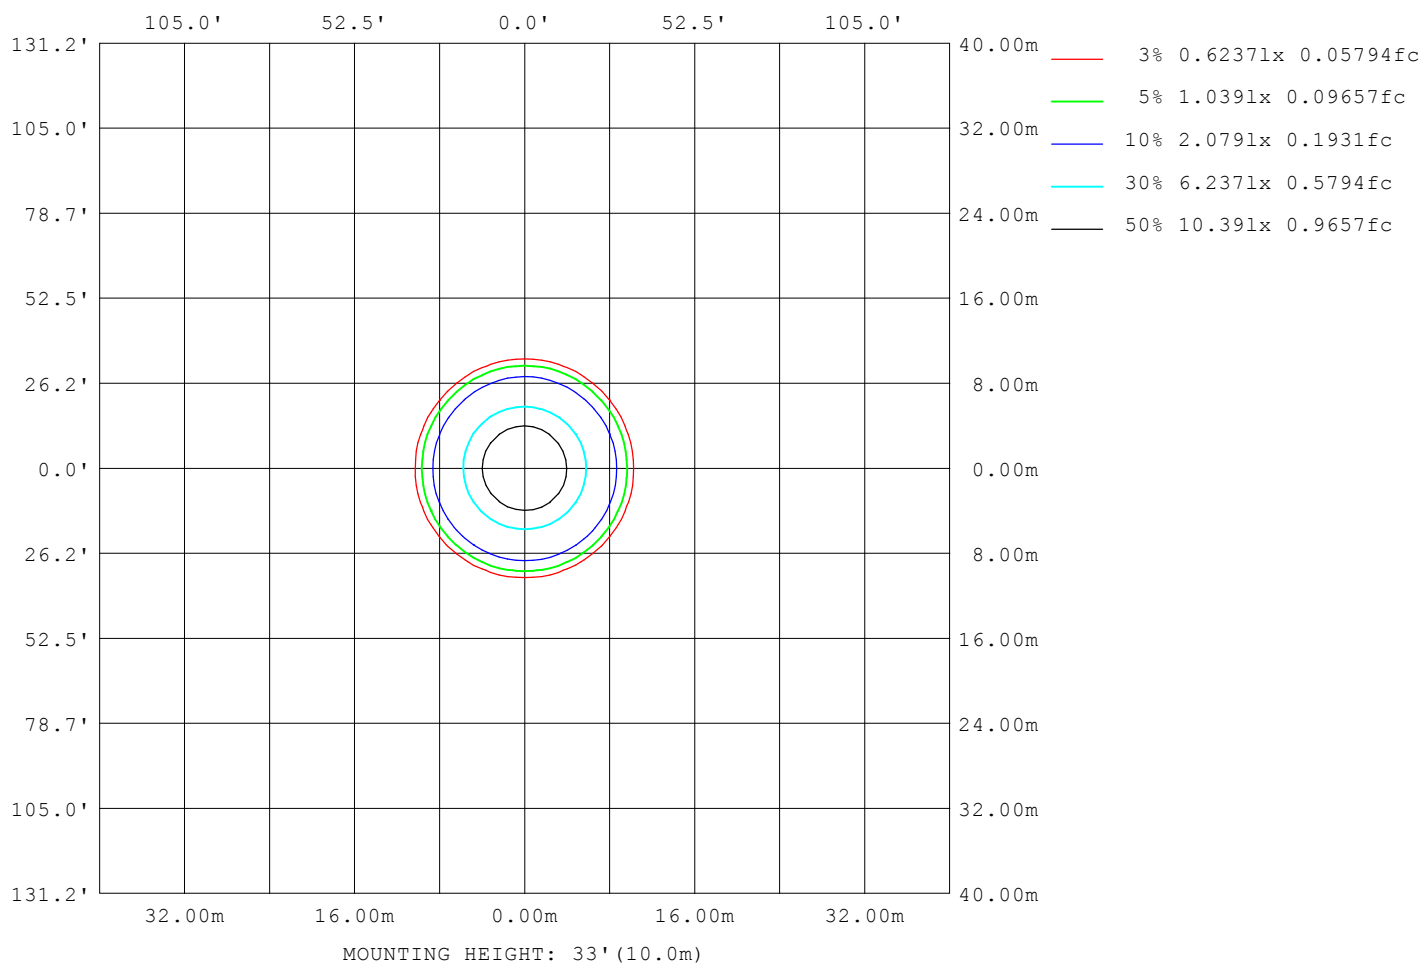

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:240.4V I:0.0768A P:17.9W PF:0.9714 Freq:49.99Hz		
UTHDi:0.17% ITHDi:17.53% KDisp:0.9862 Lamp Flux:1896.52x1 lm		
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 60D 18W	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	40770
L_0~180 (75) av	34386
L_0~180 (85) av	31263
L_90~270 (65) av	40036
L_90~270 (75) av	34575
L_90~270 (85) av	30046
L_45 (65) av	40185
L_45 (75) av	34196
L_45 (85) av	30539

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

Planar Illuminance Curve

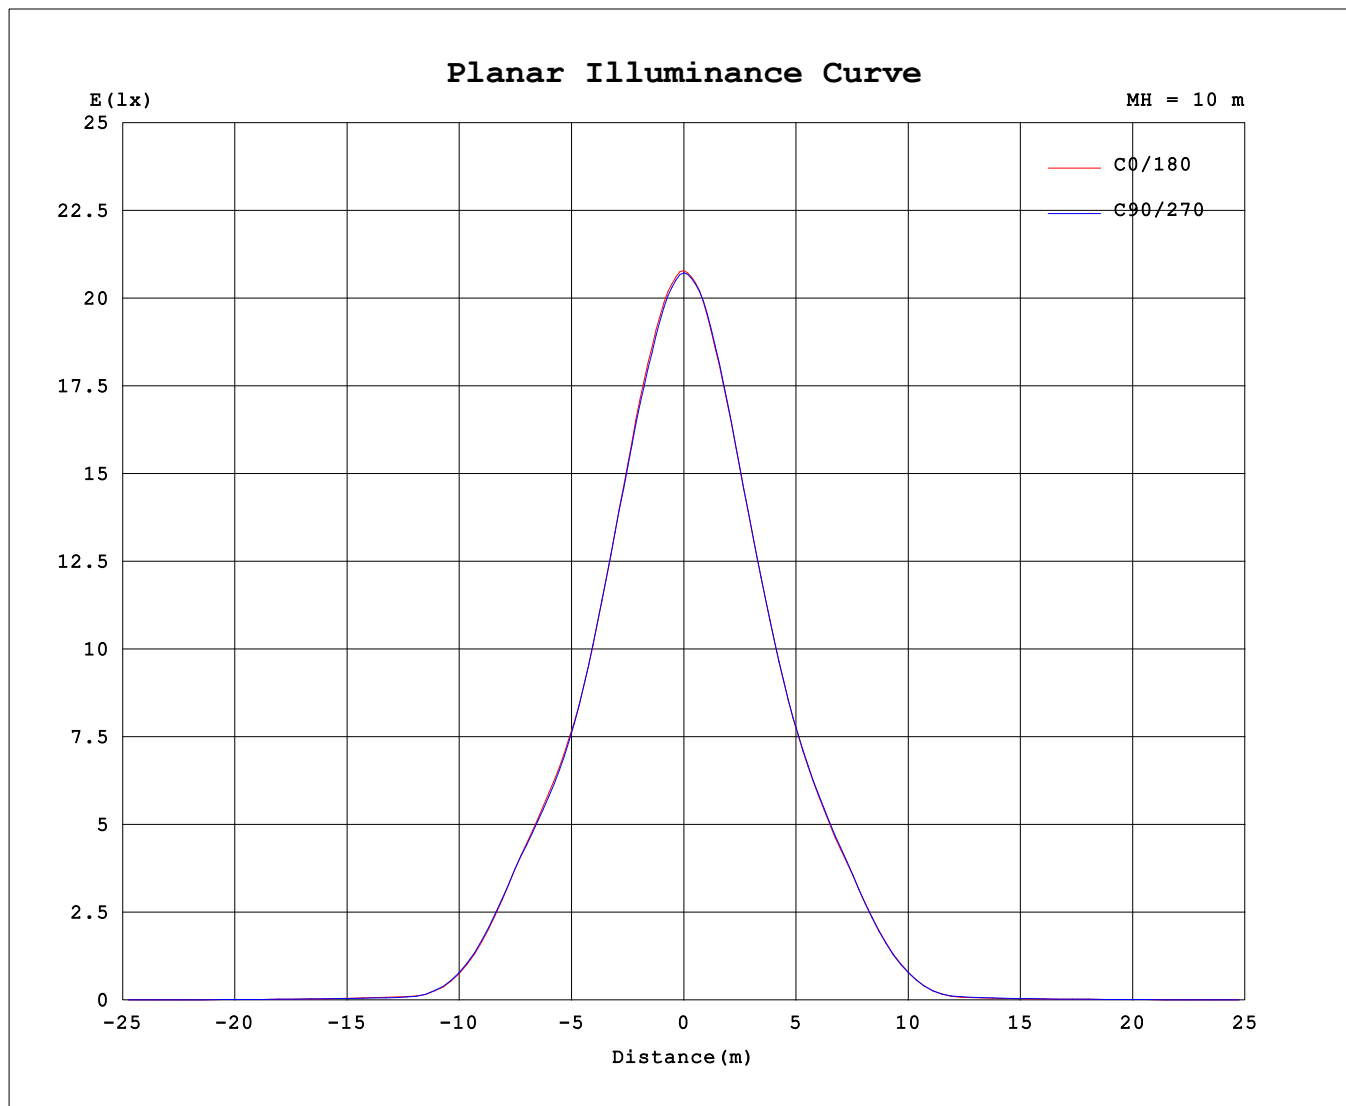

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-10-16

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity: 65.0%
Test Distance: 3.090m [K=1.0000]
Remarks:

Test:U:240.4V I:0.0768A P:17.9W PF:0.9714 Freq:49.99Hz UTHDi:0.17% ITHDi:17.53% KDisp:0.9862 Lamp Flux:1896.52x1 lm		
NAME: FUSION-MD23-AHD-018-COB-02SC 2700K RA90 60D	18W TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:
MFR.: Norming lighting	SUR.: 41mm	Shielding Angle:

UNIT: cd

[illegible]

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks:

```

Photometric Data Table [cd]

G/C	0.0	45.0	90.0	135.0	180.0	225.0	270.0	315.0
0.0	2074	2074	2074	2074	2074	2074	2074	2074
3.0	2045	2047	2041	2041	2048	2050	2051	2046
6.0	1979	1982	1971	1973	1978	1980	1989	1983
9.0	1881	1884	1870	1871	1872	1874	1884	1881
12.0	1764	1768	1756	1757	1749	1750	1759	1754
15.0	1622	1630	1619	1618	1611	1614	1617	1611
18.0	1471	1488	1478	1470	1469	1472	1476	1463
21.0	1318	1337	1324	1320	1326	1329	1332	1315
24.0	1171	1189	1174	1175	1189	1193	1193	1177
27.0	1057	1062	1048	1054	1065	1069	1072	1059
30.0	962.6	959.0	950.7	957.1	957.0	979.7	965.3	962.1
33.0	876.2	872.1	866.8	865.9	851.1	855.8	861.3	865.9
36.0	774.8	776.5	772.3	763.7	739.9	741.1	749.2	753.1
39.0	605.8	616.2	615.8	604.6	586.1	577.1	585.2	585.0
42.0	402.4	412.9	414.6	405.3	400.7	388.2	396.6	392.8
45.0	215.9	225.4	224.4	226.6	225.7	215.9	223.8	218.6
48.0	89.43	83.63	91.96	88.67	90.39	90.48	91.08	92.50
51.0	43.34	39.32	37.02	35.57	34.90	37.56	41.80	44.52
54.0	36.41	33.05	32.22	31.43	29.69	30.22	33.28	35.97
57.0	31.64	29.65	29.27	29.15	27.23	26.55	28.34	31.33
60.0	27.92	26.78	26.06	26.01	25.56	25.12	25.74	27.05
63.0	24.73	23.62	23.00	22.97	23.56	23.66	24.12	24.72
66.0	21.59	20.59	19.84	19.91	21.16	21.85	22.18	21.98
69.0	18.36	17.34	16.51	16.55	17.90	19.17	19.54	18.86
72.0	15.05	14.04	13.22	13.16	14.36	15.79	16.19	15.47
75.0	12.07	11.03	10.37	10.15	11.07	12.54	12.90	12.30
78.0	9.477	8.232	7.497	7.539	8.160	9.486	9.913	9.662
81.0	7.021	5.956	5.167	5.224	5.721	6.766	7.336	7.266
84.0	5.030	3.839	3.001	2.944	3.372	4.195	4.918	5.277
87.0	1.469	0.8773	0.5530	0.8371	1.195	1.611	2.062	1.902
90.0	0.0753	0.0687	0.0829	0.0715	0.0785	0.0706	0.0707	0.0657

C Range: 0 - 360DEG
C Interval: 45.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-10-16

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.453
Humidity:65.0%
Test Distance:3.090m [K=1.0000]
Remarks: