



FEATURES


- Modular Design.
- System power up to 20W.
- Interchangeable anti-glare reflector.
- 5-year guarantee.

Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC36V/350mA
Power	14.2W
Rated Input Current	0.071A
PF value	>0.9
THD	<35%
Ingress Protection	IP20
Operating Temperature	-10—40℃
Dimmability	Non-dimmable with AcTEC driver

Optical Data

LED Brand	Bridgelux SMD LED
CRI	Ra> 92
Beam Angle	60°
Colour temperature	2700k/3000K/4000K/5000K 2500k/2700K/3500K/4500K
System luminous efficacy up to	88.7lm/W

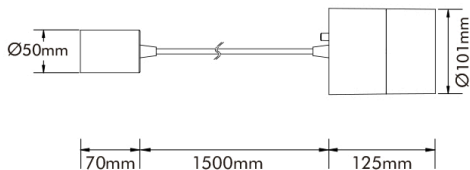

Packaging

Box Dimensions	L170 x W162 x H112mm
Box Net Weight	0.91Kg
Box Gross Weight	1.01Kg
Carton Dimensions	L500 x W355 x H360 mm/18 PCS
Carton Net Weight	16.38Kg
Carton Gross Weight	20.18Kg



Model	CCT		Beam Angle	Lumen	Efficacy	Lumen	Efficacy
PD07-15-XX-01	2700K	CRI 92+	60°	1112lm	80.4lm/W	876lm	63.2lm/W
PD07-15-XX-01	3000K		60°	1242lm	88.7lm/W	1033lm	70.6lm/W
PD07-15-XX-01	4000K		60°	1196lm	86lm/W	946lm	67.7lm/W
PD07-15-XX-01	5000K		60°	1205lm	87.2lm/W	947lm	68.7lm/W

Reflector



Model	CCT		Beam Angle	Lumen	Efficacy
PD07-15-XX-01	2500K	CRI 92+	60°	955lm	69lm/W
PD07-15-XX-01	2700K		60°	1040lm	76.4lm/W
PD07-15-XX-01	3500K		60°	1041lm	73.3lm/W
PD07-15-XX-01	4500K		60°	1026lm	73.8lm/W

Reflector



ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS