



Indoor Luminaire Photometric Data

Description Information

Luminary Name: PD07-25-XX-01 3000K RA90 白色		Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Date: 2022/09/30
Manufacture: Shenzhen Norming Lightin		Shld. Ang(° ):	Test Machine:GON-2000
Test Lab: Quality Departmnt		Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.083m*-0.083m*0.000m		Lum. Area (m2):0.005	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=1.0	Temp. (°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 2219.130	Luminary Flux(lm): 2219.134	Field Angle(10%Imax): 115.3(° )	
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 2148.012lm 96.80%	
Rated Voltage(V):	Luminary EER(lm/W): 96.233	Up Lumens&Percent: 71.122lm 3.20%	
Tested Power(W): 23.060	Max. Candela(cd): 1442.679	S/MH: C0_a180=1.067 C90_270=1.065	
Lamps' Inside: 1	Max Cand@Ang. (° ):	C=0.0 γ=1.0	CIE Type: Semi-Direct
Tested Electrics (V, A, pf):239.8, 0.100, 0.955	Beam Angle(50%Imax): 72.6(° )	ErP ϕ use(90° ):	1671.760lm
Lamp Size (W*L*H):0.083m*-0.083m*0.000m	Left=-36.2° , Right=36.4°	IRF(%):	163.812

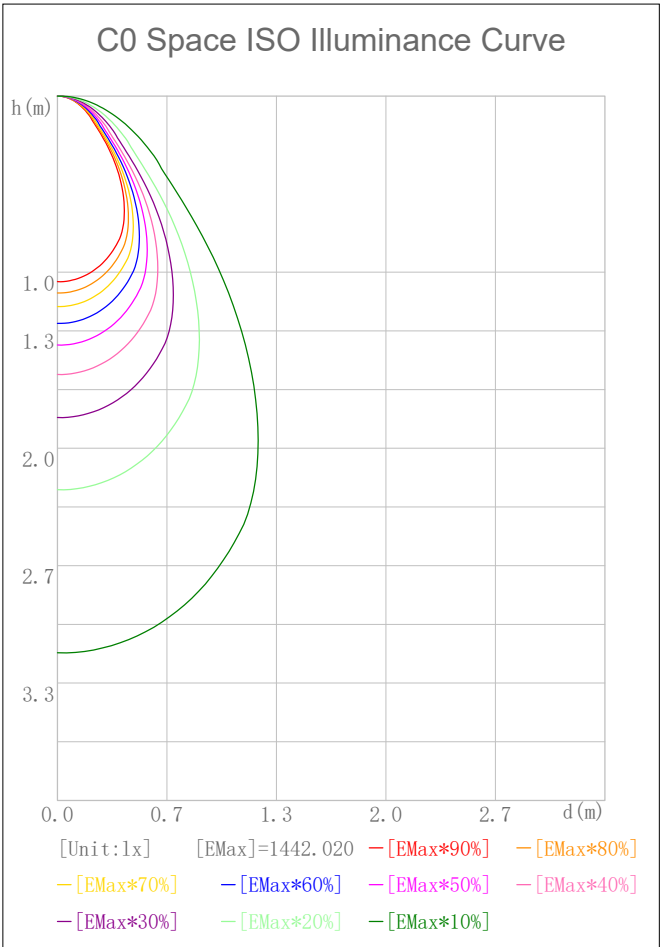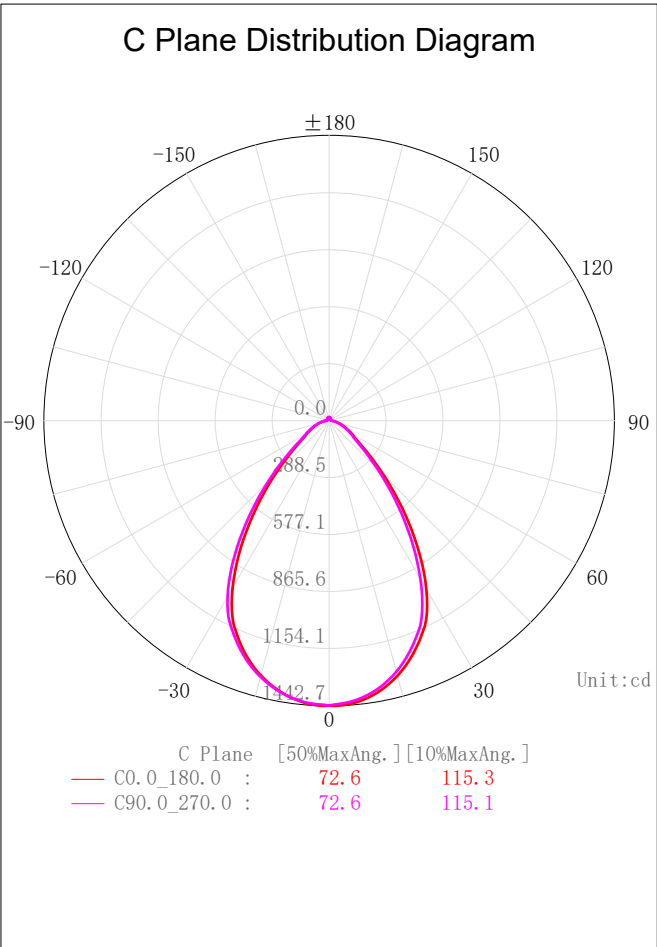

2D Plane Light Intensity Distribution Curve


Lum. Name: PD07-25-XX-01 3000K RA90 白色	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Departmnt
Manufacture: Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date: 2022/09/30

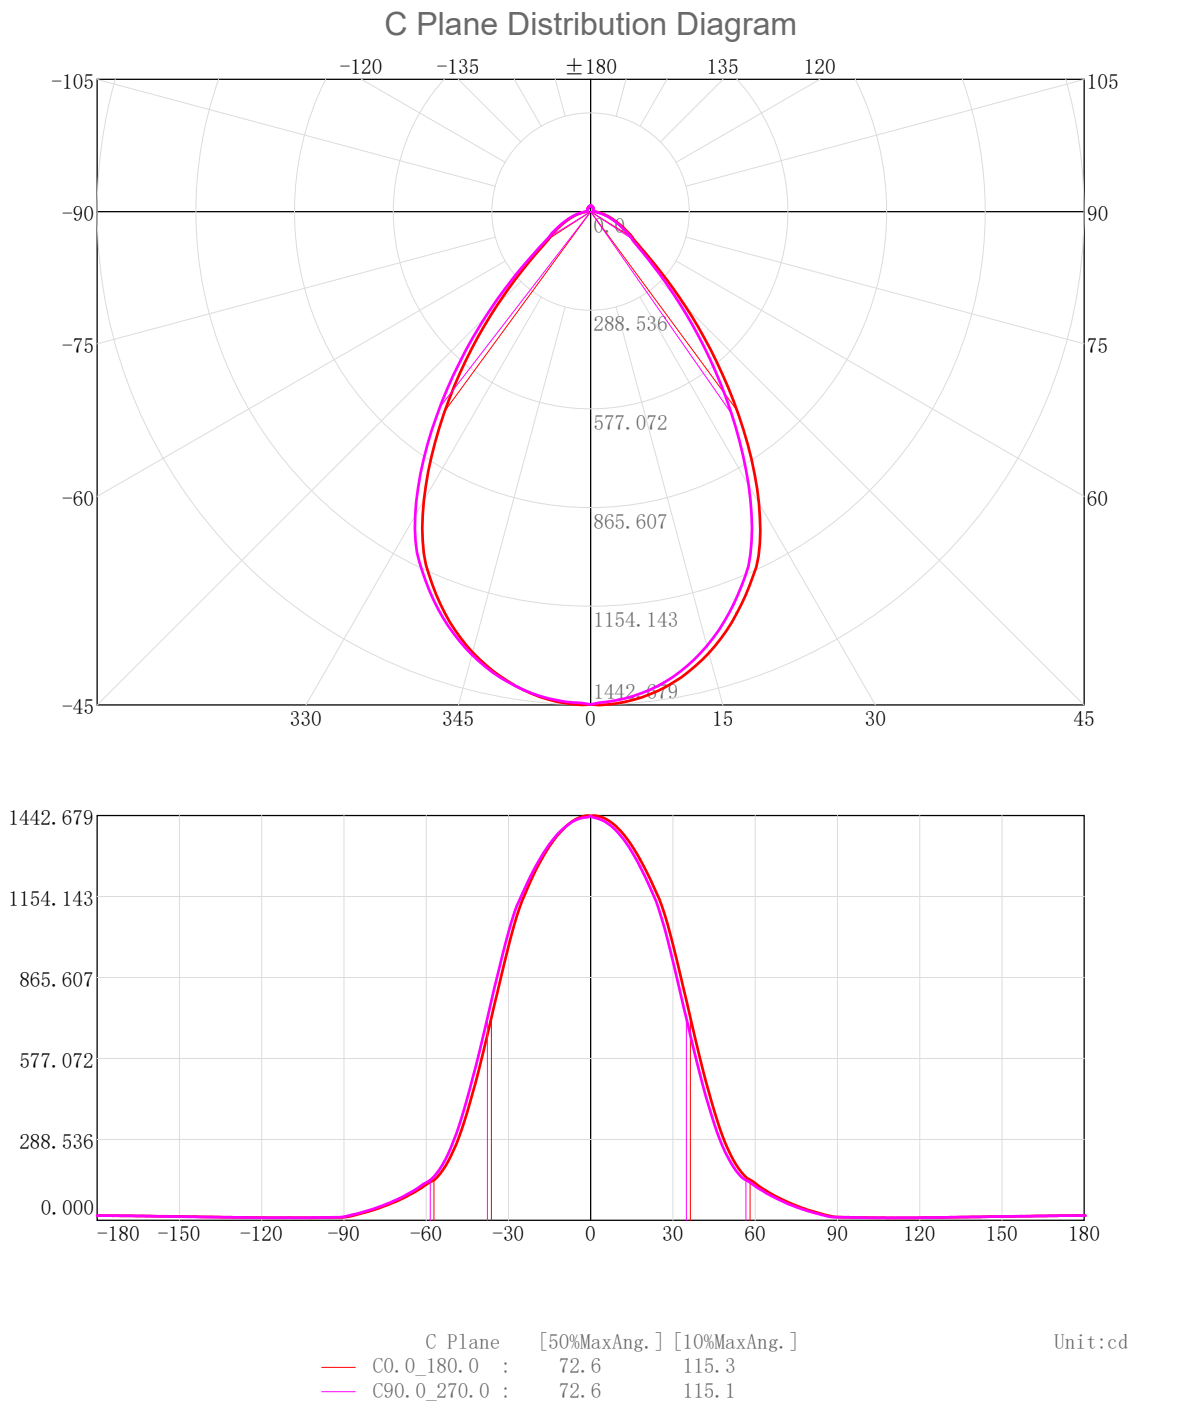

3D Light Intensity Distribution Modal

Lum. Name: PD07-25-XX-01 3000K RA90 白色	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Departmnt
Manufacture: Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date: 2022/09/30

3D Light Intensity Distribution Modal

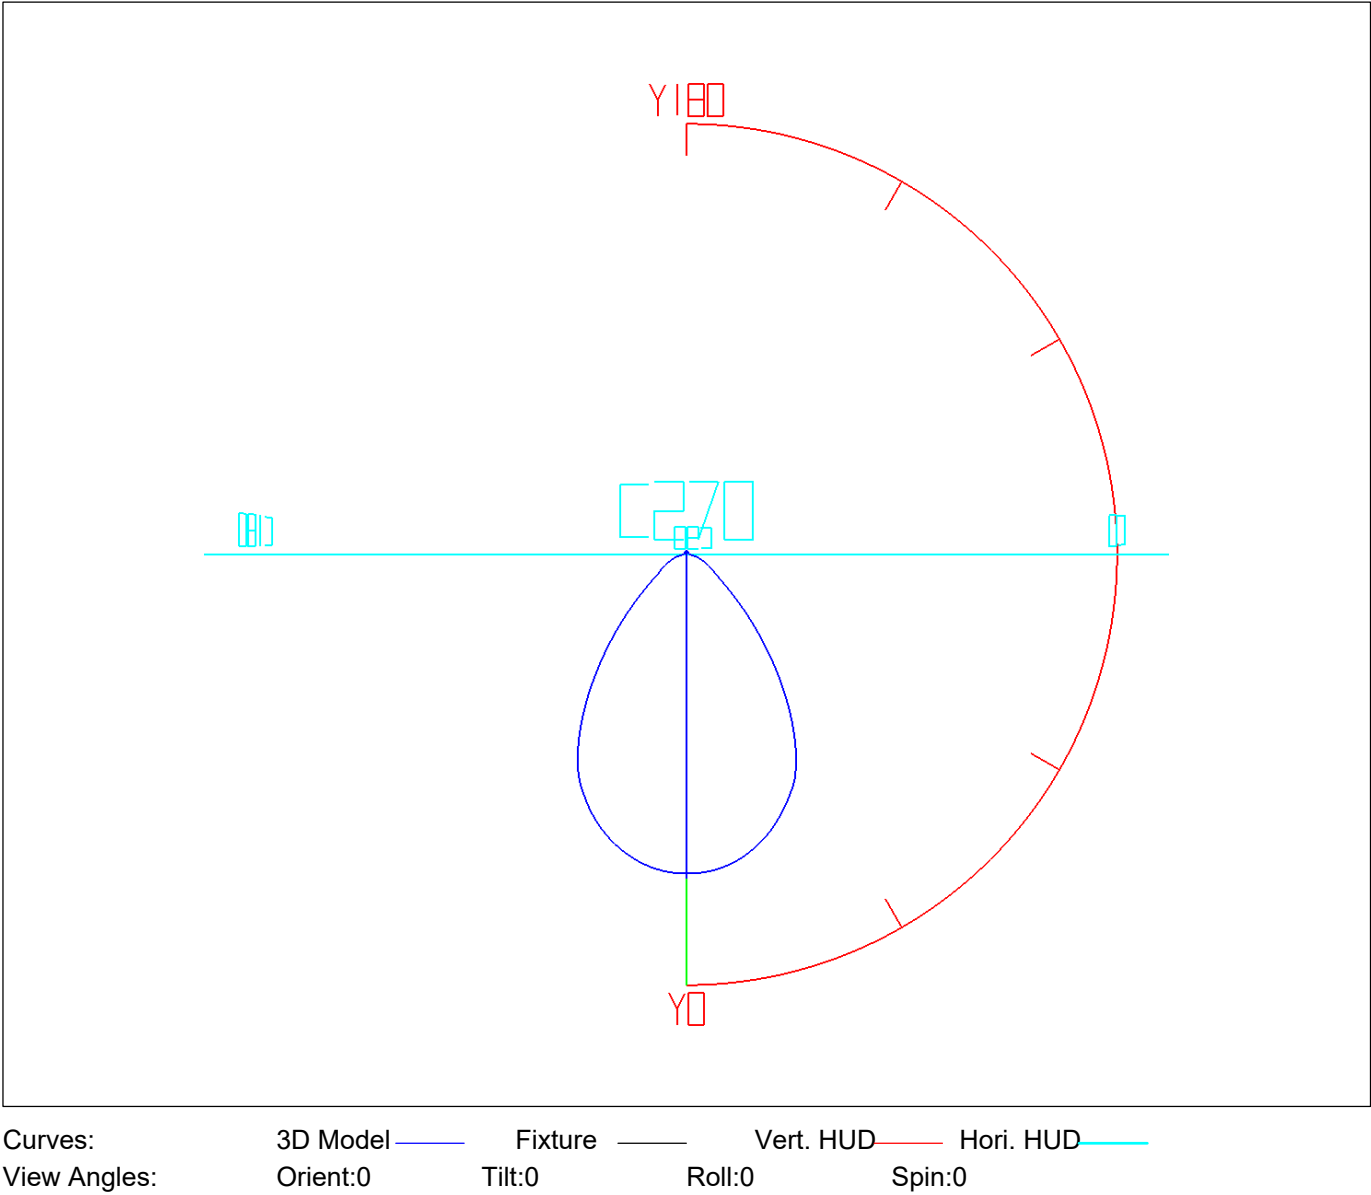

IES Indoor Report

Photometric Filename:PD07-25-XX-01 3000K RA90 白色.IE

S

Zonal Flux Tabulation									
Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	1.38	1.38	0.06	0.06	47.0-48.0	25.48	1767.01	1.15	79.63
1.0-2.0	4.13	5.51	0.19	0.25	48.0-49.0	23.72	1790.73	1.07	80.70
2.0-3.0	6.87	12.38	0.31	0.56	49.0-50.0	22.06	1812.79	0.99	81.69
3.0-4.0	9.60	21.99	0.43	0.99	50.0-51.0	20.53	1833.32	0.93	82.61
4.0-5.0	12.31	34.30	0.55	1.55	51.0-52.0	19.11	1852.43	0.86	83.48
5.0-6.0	14.99	49.29	0.68	2.22	52.0-53.0	17.83	1870.26	0.80	84.28
6.0-7.0	17.63	66.92	0.79	3.02	53.0-54.0	16.68	1886.94	0.75	85.03
7.0-8.0	20.23	87.15	0.91	3.93	54.0-55.0	15.65	1902.59	0.71	85.74
8.0-9.0	22.79	109.94	1.03	4.95	55.0-56.0	14.77	1917.36	0.67	86.40
9.0-10.0	25.28	135.22	1.14	6.09	56.0-57.0	14.04	1931.40	0.63	87.03
10.0-11.0	27.72	162.94	1.25	7.34	57.0-58.0	13.47	1944.87	0.61	87.64
11.0-12.0	30.09	193.03	1.36	8.70	58.0-59.0	12.98	1957.85	0.59	88.23
12.0-13.0	32.39	225.42	1.46	10.16	59.0-60.0	12.52	1970.37	0.56	88.79
13.0-14.0	34.60	260.02	1.56	11.72	60.0-61.0	12.03	1982.40	0.54	89.33
14.0-15.0	36.74	296.76	1.66	13.37	61.0-62.0	11.51	1993.91	0.52	89.85
15.0-16.0	38.78	335.55	1.75	15.12	62.0-63.0	10.99	2004.90	0.50	90.35
16.0-17.0	40.73	376.28	1.84	16.96	63.0-64.0	10.49	2015.39	0.47	90.82
17.0-18.0	42.58	418.86	1.92	18.87	64.0-65.0	10.00	2025.39	0.45	91.27
18.0-19.0	44.32	463.17	2.00	20.87	65.0-66.0	9.52	2034.91	0.43	91.70
19.0-20.0	45.94	509.11	2.07	22.94	66.0-67.0	9.05	2043.96	0.41	92.11
20.0-21.0	47.45	556.56	2.14	25.08	67.0-68.0	8.59	2052.55	0.39	92.49
21.0-22.0	48.84	605.40	2.20	27.28	68.0-69.0	8.14	2060.69	0.37	92.86
22.0-23.0	50.12	655.52	2.26	29.54	69.0-70.0	7.72	2068.41	0.35	93.21
23.0-24.0	51.28	706.80	2.31	31.85	70.0-71.0	7.29	2075.70	0.33	93.54
24.0-25.0	52.30	759.10	2.36	34.21	71.0-72.0	6.88	2082.58	0.31	93.85
25.0-26.0	53.11	812.21	2.39	36.60	72.0-73.0	6.47	2089.06	0.29	94.14
26.0-27.0	53.67	865.89	2.42	39.02	73.0-74.0	6.07	2095.13	0.27	94.41
27.0-28.0	53.96	919.85	2.43	41.45	74.0-75.0	5.70	2100.83	0.26	94.67
28.0-29.0	53.98	973.83	2.43	43.88	75.0-76.0	5.34	2106.17	0.24	94.91
29.0-30.0	53.75	1027.59	2.42	46.31	76.0-77.0	4.98	2111.15	0.22	95.13
30.0-31.0	53.30	1080.88	2.40	48.71	77.0-78.0	4.62	2115.77	0.21	95.34
31.0-32.0	52.62	1133.50	2.37	51.08	78.0-79.0	4.28	2120.05	0.19	95.54
32.0-33.0	51.74	1185.24	2.33	53.41	79.0-80.0	3.95	2124.00	0.18	95.71
33.0-34.0	50.66	1235.90	2.28	55.69	80.0-81.0	3.64	2127.64	0.16	95.88
34.0-35.0	49.42	1285.32	2.23	57.92	81.0-82.0	3.33	2130.98	0.15	96.03
35.0-36.0	48.01	1333.33	2.16	60.08	82.0-83.0	3.04	2134.01	0.14	96.16
36.0-37.0	46.45	1379.78	2.09	62.18	83.0-84.0	2.75	2136.76	0.12	96.29
37.0-38.0	44.77	1424.55	2.02	64.19	84.0-85.0	2.48	2139.24	0.11	96.40
38.0-39.0	43.00	1467.55	1.94	66.13	85.0-86.0	2.21	2141.45	0.10	96.50
39.0-40.0	41.15	1508.70	1.85	67.99	86.0-87.0	1.95	2143.40	0.09	96.59
40.0-41.0	39.23	1547.93	1.77	69.75	87.0-88.0	1.71	2145.12	0.08	96.66
41.0-42.0	37.26	1585.19	1.68	71.43	88.0-89.0	1.52	2146.64	0.07	96.73
42.0-43.0	35.26	1620.45	1.59	73.02	89.0-90.0	1.38	2148.01	0.06	96.80
43.0-44.0	33.25	1653.70	1.50	74.52	90.0-91.0	1.29	2149.30	0.06	96.85
44.0-45.0	31.24	1684.95	1.41	75.93	91.0-92.0	1.25	2150.56	0.06	96.91
45.0-46.0	29.26	1714.21	1.32	77.25	92.0-93.0	1.22	2151.78	0.06	96.97
46.0-47.0	27.33	1741.54	1.23	78.48	93.0-94.0	1.21	2152.99	0.05	97.02


S

Zonal Flux Tabulation - (Cont.)

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	1.18	2154.18	0.05	97.07	141.0-142.0	0.87	2199.71	0.04	99.13
95.0-96.0	1.16	2155.33	0.05	97.13	142.0-143.0	0.85	2200.57	0.04	99.16
96.0-97.0	1.14	2156.47	0.05	97.18	143.0-144.0	0.85	2201.42	0.04	99.20
97.0-98.0	1.12	2157.59	0.05	97.23	144.0-145.0	0.84	2202.26	0.04	99.24
98.0-99.0	1.10	2158.69	0.05	97.28	145.0-146.0	0.83	2203.09	0.04	99.28
99.0-100.0	1.09	2159.78	0.05	97.33	146.0-147.0	0.82	2203.91	0.04	99.31
100.0-101.0	1.08	2160.86	0.05	97.37	147.0-148.0	0.80	2204.71	0.04	99.35
101.0-102.0	1.06	2161.92	0.05	97.42	148.0-149.0	0.78	2205.49	0.04	99.39
102.0-103.0	1.04	2162.97	0.05	97.47	149.0-150.0	0.77	2206.26	0.03	99.42
103.0-104.0	1.03	2164.00	0.05	97.52	150.0-151.0	0.76	2207.02	0.03	99.45
104.0-105.0	1.02	2165.02	0.05	97.56	151.0-152.0	0.74	2207.76	0.03	99.49
105.0-106.0	1.01	2166.03	0.05	97.61	152.0-153.0	0.72	2208.49	0.03	99.52
106.0-107.0	1.01	2167.05	0.05	97.65	153.0-154.0	0.70	2209.19	0.03	99.55
107.0-108.0	1.00	2168.05	0.05	97.70	154.0-155.0	0.68	2209.88	0.03	99.58
108.0-109.0	0.99	2169.04	0.04	97.74	155.0-156.0	0.67	2210.54	0.03	99.61
109.0-110.0	0.99	2170.03	0.04	97.79	156.0-157.0	0.65	2211.19	0.03	99.64
110.0-111.0	0.98	2171.00	0.04	97.83	157.0-158.0	0.63	2211.81	0.03	99.67
111.0-112.0	0.97	2171.97	0.04	97.87	158.0-159.0	0.61	2212.42	0.03	99.70
112.0-113.0	0.97	2172.94	0.04	97.92	159.0-160.0	0.58	2213.00	0.03	99.72
113.0-114.0	0.96	2173.90	0.04	97.96	160.0-161.0	0.56	2213.56	0.03	99.75
114.0-115.0	0.95	2174.85	0.04	98.00	161.0-162.0	0.54	2214.10	0.02	99.77
115.0-116.0	0.94	2175.80	0.04	98.05	162.0-163.0	0.52	2214.62	0.02	99.80
116.0-117.0	0.94	2176.74	0.04	98.09	163.0-164.0	0.49	2215.11	0.02	99.82
117.0-118.0	0.93	2177.67	0.04	98.13	164.0-165.0	0.47	2215.58	0.02	99.84
118.0-119.0	0.93	2178.60	0.04	98.17	165.0-166.0	0.44	2216.02	0.02	99.86
119.0-120.0	0.93	2179.54	0.04	98.22	166.0-167.0	0.42	2216.43	0.02	99.88
120.0-121.0	0.93	2180.47	0.04	98.26	167.0-168.0	0.39	2216.82	0.02	99.90
121.0-122.0	0.93	2181.40	0.04	98.30	168.0-169.0	0.36	2217.18	0.02	99.91
122.0-123.0	0.93	2182.34	0.04	98.34	169.0-170.0	0.33	2217.51	0.01	99.93
123.0-124.0	0.93	2183.27	0.04	98.38	170.0-171.0	0.30	2217.81	0.01	99.94
124.0-125.0	0.94	2184.20	0.04	98.43	171.0-172.0	0.27	2218.09	0.01	99.95
125.0-126.0	0.93	2185.14	0.04	98.47	172.0-173.0	0.24	2218.33	0.01	99.96
126.0-127.0	0.93	2186.07	0.04	98.51	173.0-174.0	0.21	2218.54	0.01	99.97
127.0-128.0	0.93	2187.00	0.04	98.55	174.0-175.0	0.18	2218.72	0.01	99.98
128.0-129.0	0.93	2187.93	0.04	98.59	175.0-176.0	0.15	2218.87	0.01	99.99
129.0-130.0	0.93	2188.86	0.04	98.64	176.0-177.0	0.12	2218.98	0.01	99.99
130.0-131.0	0.93	2189.80	0.04	98.68	177.0-178.0	0.08	2219.07	0.00	100.00
131.0-132.0	0.93	2190.73	0.04	98.72	178.0-179.0	0.05	2219.12	0.00	100.00
132.0-133.0	0.92	2191.65	0.04	98.76	179.0-180.0	0.02	2219.13	0.00	100.00
133.0-134.0	0.91	2192.56	0.04	98.80					
134.0-135.0	0.91	2193.47	0.04	98.84					
135.0-136.0	0.92	2194.39	0.04	98.89					
136.0-137.0	0.91	2195.29	0.04	98.93					
137.0-138.0	0.89	2196.19	0.04	98.97					
138.0-139.0	0.89	2197.08	0.04	99.01					
139.0-140.0	0.89	2197.97	0.04	99.05					
140.0-141.0	0.88	2198.85	0.04	99.09					

Rectangle ISO Lighting Intensity Diagram


Lum. Name: PD07-25-XX-01 3000K RA90 白色	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date: 2022/09/30

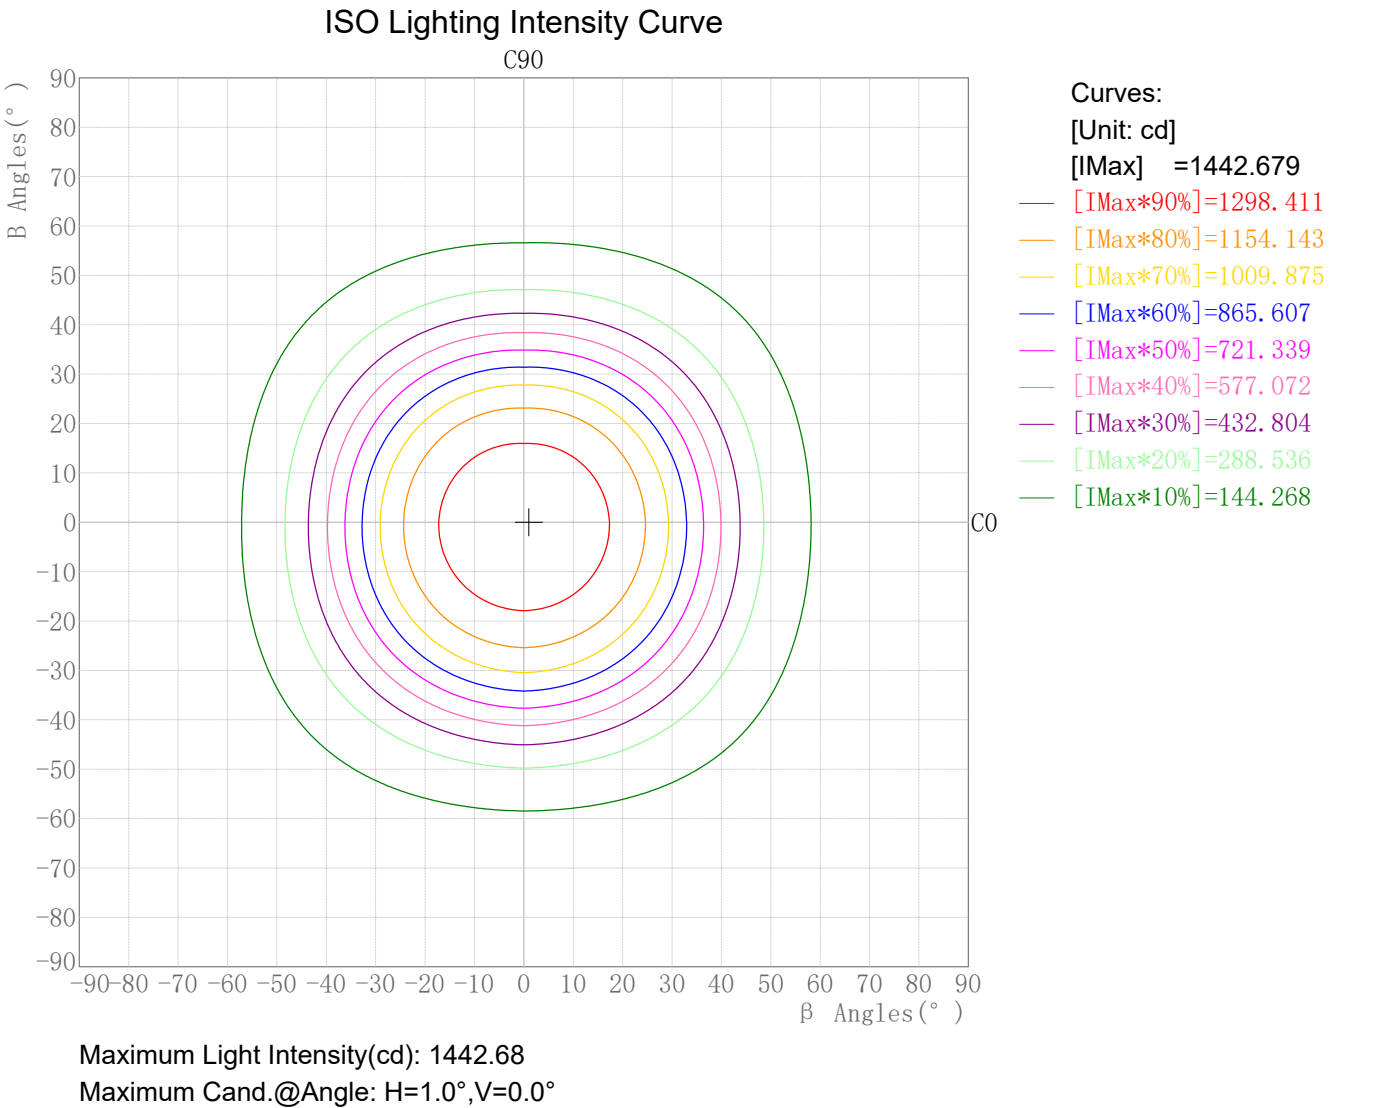

## Plane ISO-Illuminance Diagram

Lum. Name: PD07-25-XX-01 3000K RA90 白色	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date: 2022/09/30

### Plane ISO-Illuminance Curve

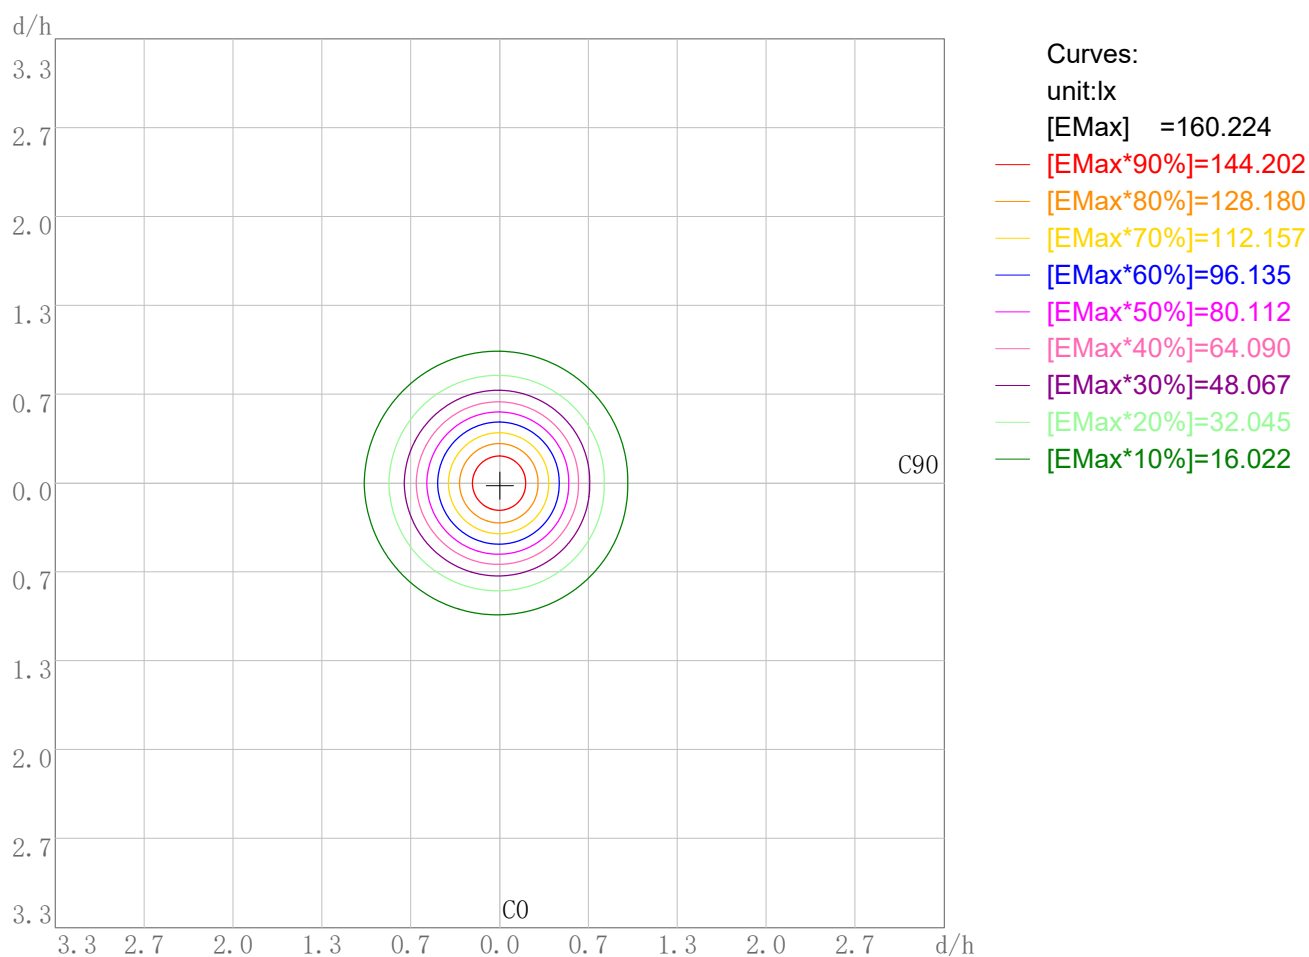

Working Plane Luminaire Mounting Height(m): 3.00


Working Plane Maximum Illuminance(lx): 160.22

Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0

3D Plane ISO Illuminance Diagram

Lum. Name: PD07-25-XX-01 3000K RA90 白色	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Departmnt
Manufacture: Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date: 2022/09/30

3D Plane Illuminance Modal

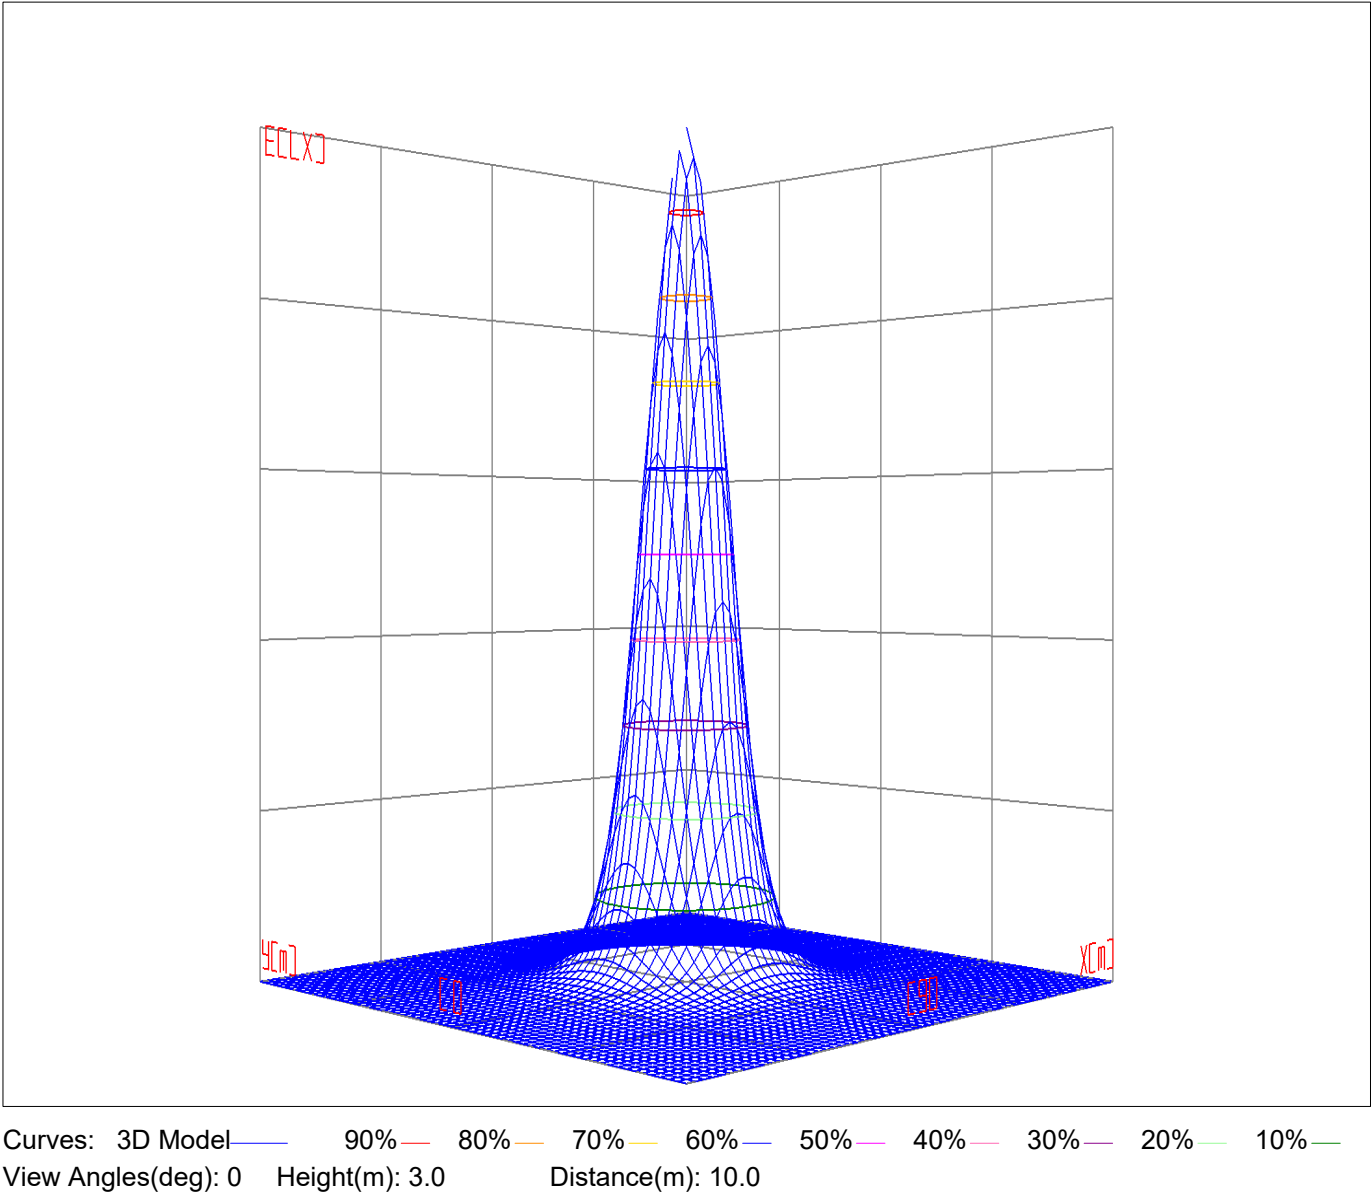




Space ISO Illuminance Diagram

Lum. Name: PD07-25-XX-01 3000K RA90 白色	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Departmnt
Manufacture: Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date: 2022/09/30


Space ISO Illuminance Curve

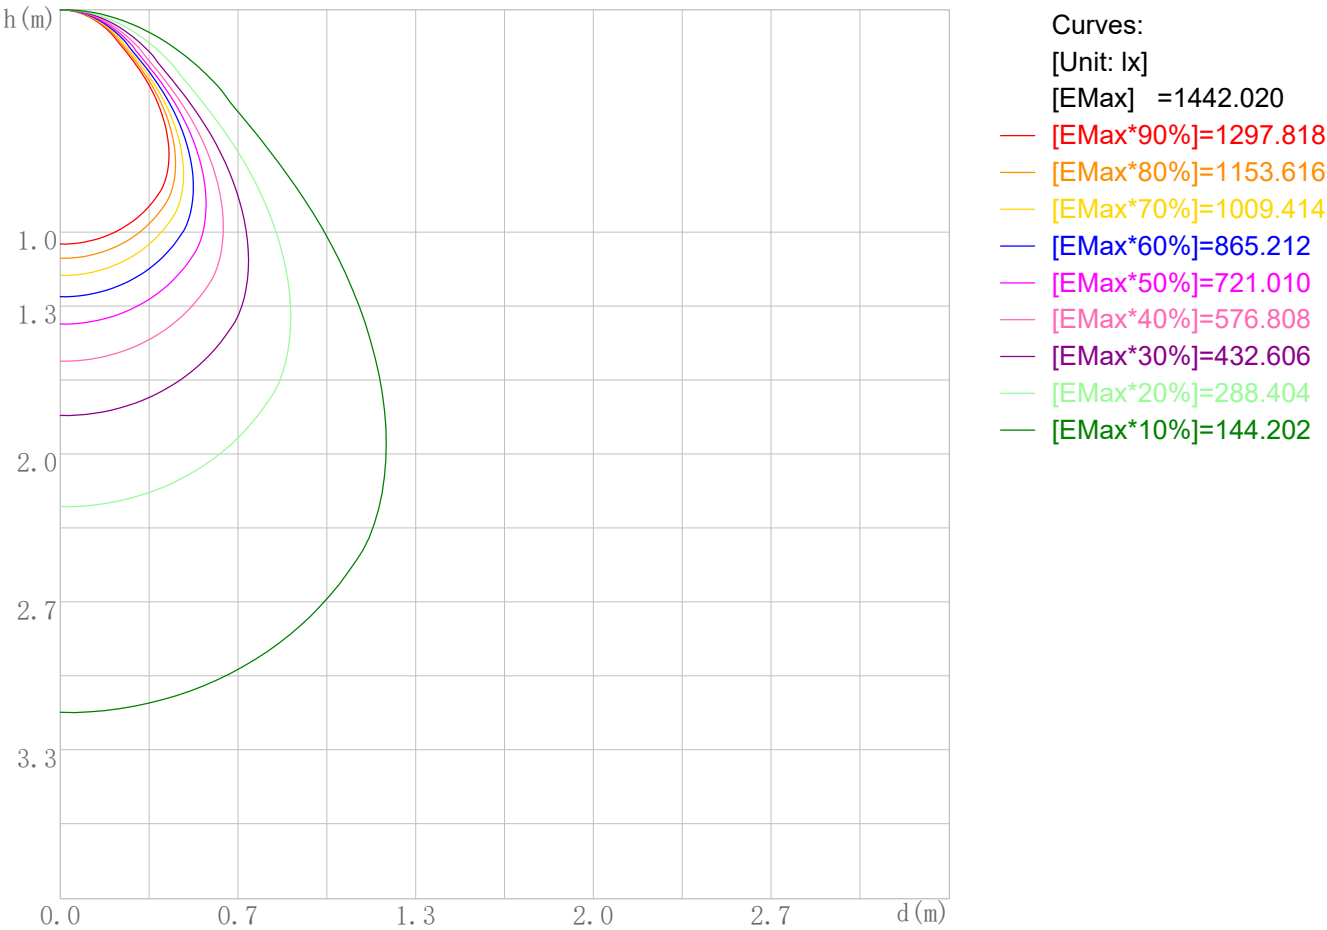

Space Plane Maximum Illuminance and @Angle:1442.02lx,1.0deg  
Plane Maximum Lighting Intensity and @Angle:1442.679cd,0deg

Illuminance-Distance Diagram

Lum. Name: PD07-25-XX-01 3000K RA90 白色	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Departmnt
Manufacture: Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date: 2022/09/30

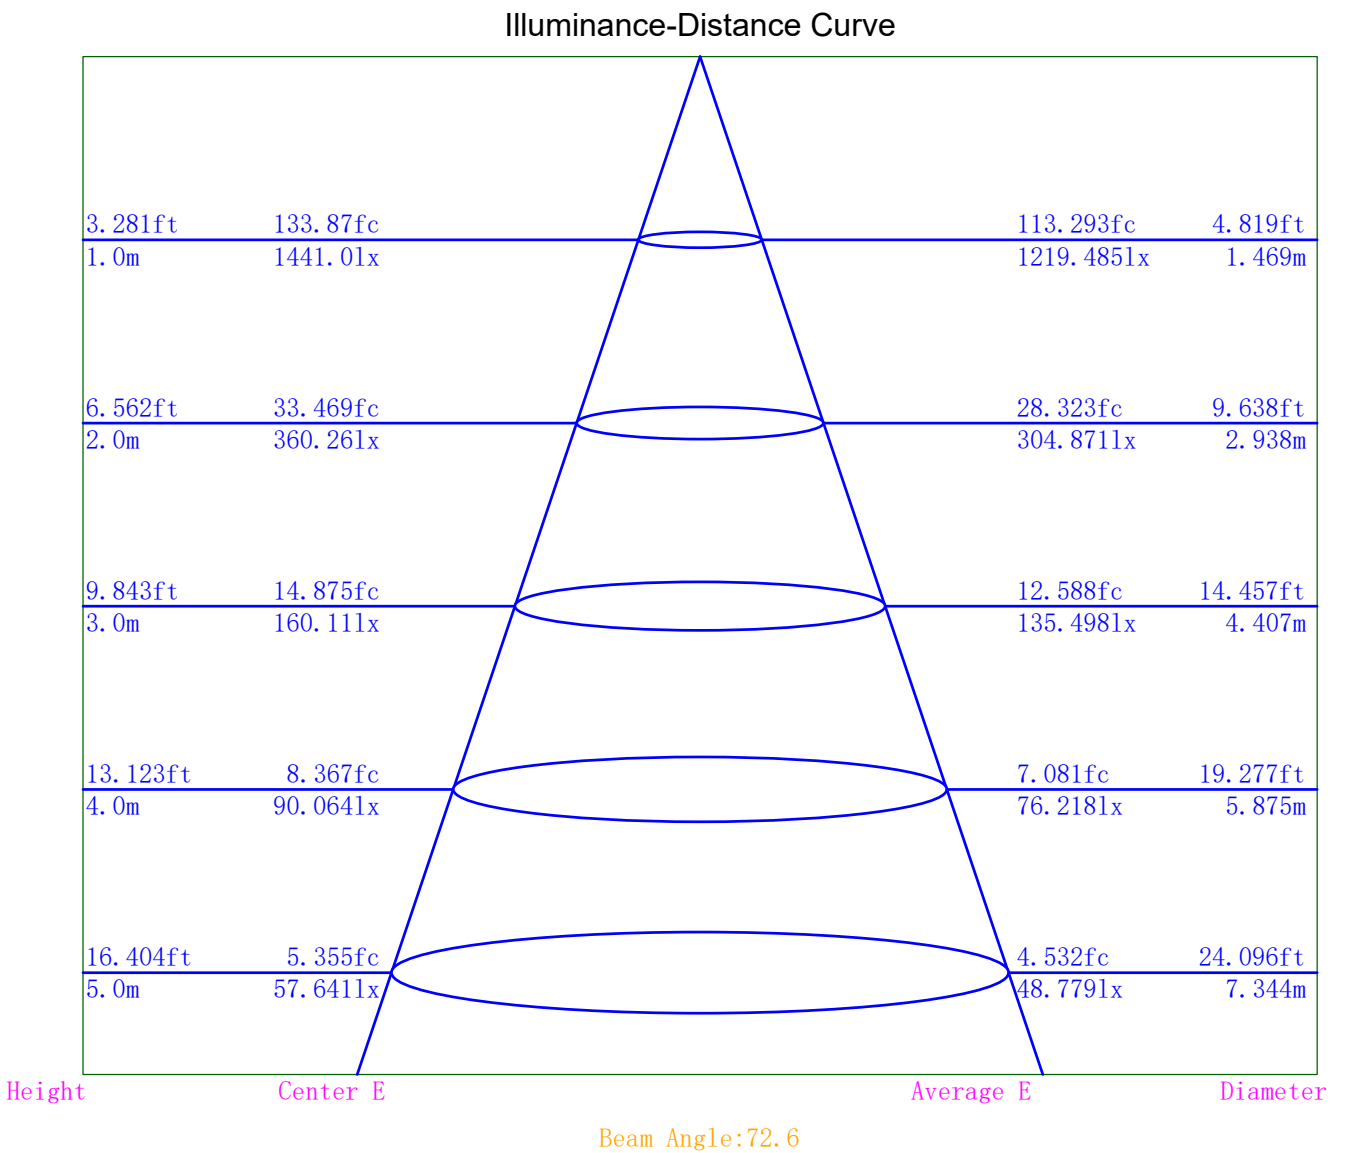

Indoor Luminance Limiting Curves

Lum. Name: PD07-25-XX-01 3000K RA90 白色	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date: 2022/09/30


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	102592	73313	55322	49121	43597	39940	37574	37592	45205
C90	90462	64730	49849	45086	40330	36587	33943	33291	39254

Luminance Limiting Curve

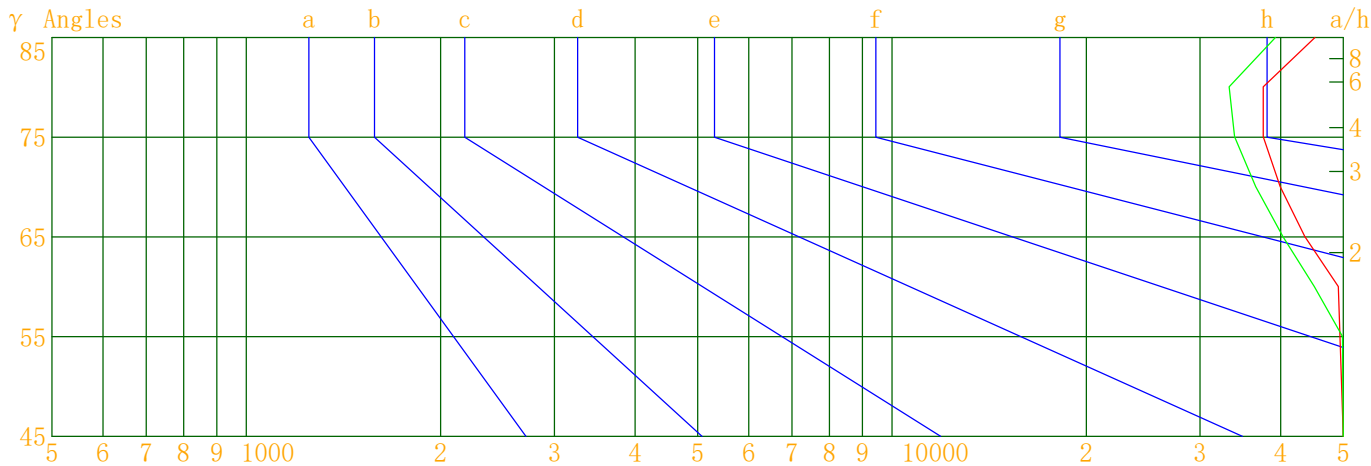


Luminous Size: Length(m)=-0.083 Width(m)=-0.083 Height(m)=0.000 Area(m^2)=0.005411

Luminous Type: Without Luminous Side

Luminous Curves: C0-C180 Color: C90-C270 Color:

Indoor Budgetary Estimate Table

Lum. Name: PD07-25-XX-01 3000K RA90 白色	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date: 2022/09/30

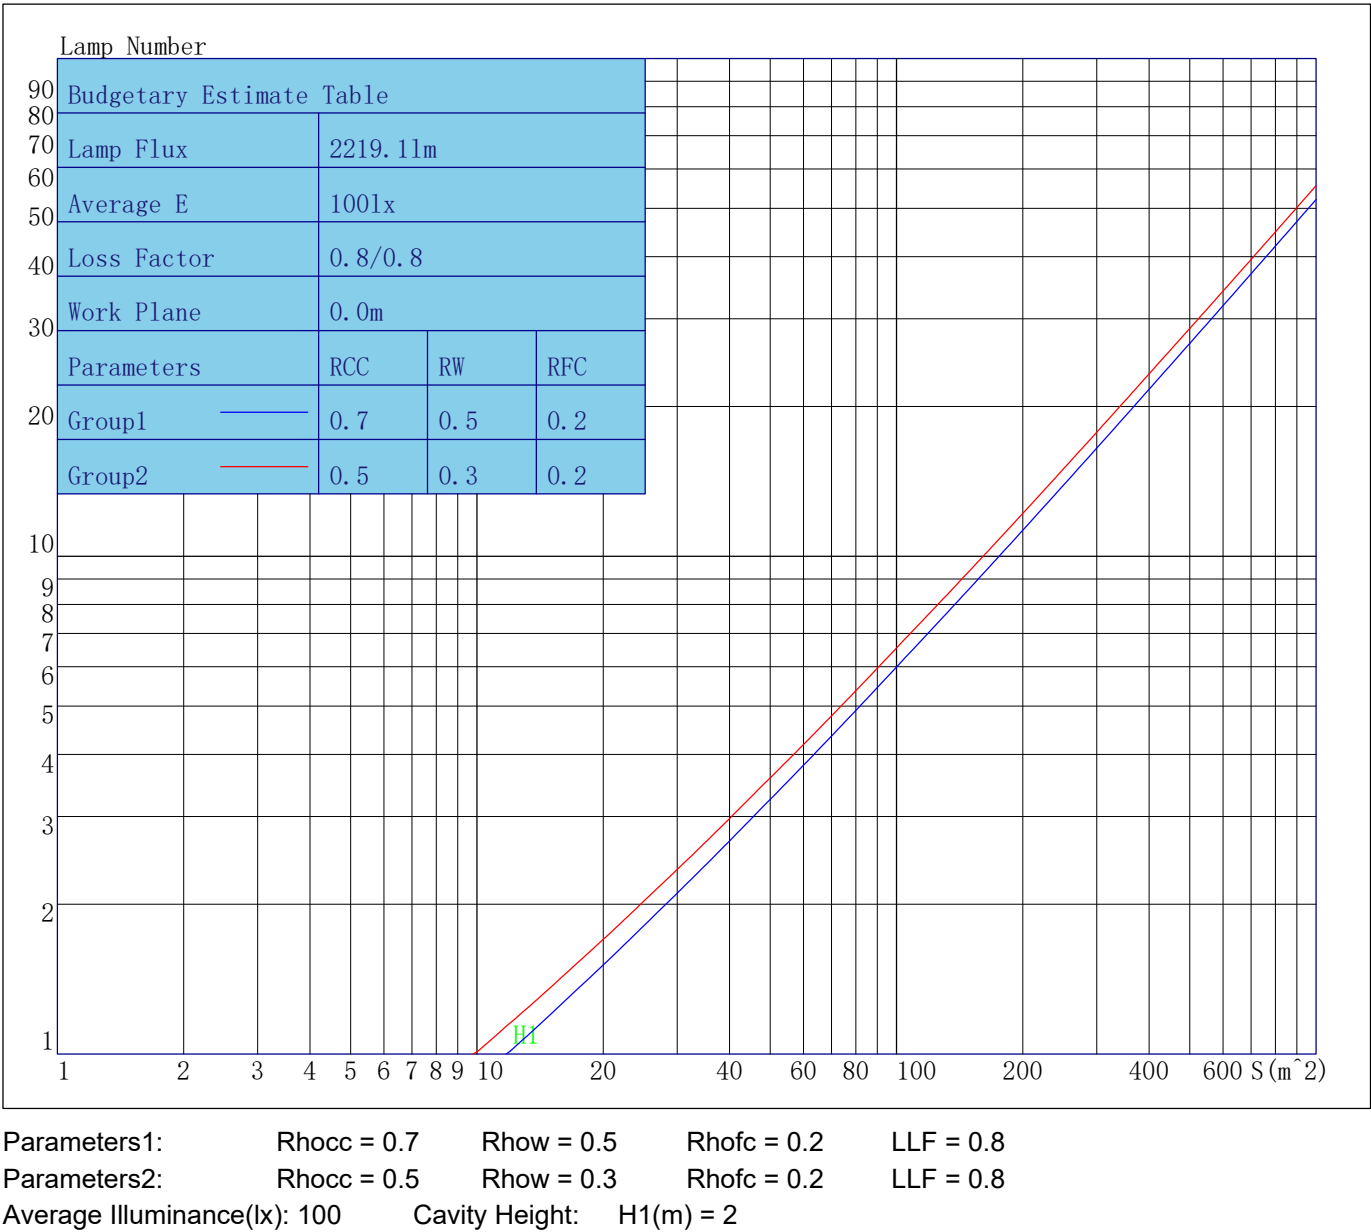

Indoor Coefficient of Utilization Table

Lum. Name: PD07-25-XX-01 3000K RA90 白色	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Departmnt
Manufacture: Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date: 2022/09/30

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	118	118	118	118	115	115	115	115	109	109	109	104	104	104	99	99	99	97
1	111	107	104	101	108	104	101	99	100	97	95	95	93	92	91	90	88	86
2	103	97	91	87	100	94	90	86	91	87	83	87	84	81	84	81	79	77
3	96	88	81	76	93	86	80	75	83	78	74	80	75	72	77	73	70	68
4	90	80	73	67	87	78	72	67	76	70	66	73	68	65	71	67	63	61
5	84	73	66	60	82	72	65	60	70	64	59	68	62	58	66	61	57	56
6	78	67	60	55	77	66	59	54	64	58	54	62	57	53	61	56	52	50
7	74	62	55	50	72	61	54	49	60	53	49	58	52	48	57	52	48	46
8	69	58	50	45	68	57	50	45	55	49	45	54	48	44	53	48	44	42
9	65	54	47	42	64	53	46	42	52	46	41	50	45	41	49	44	41	39
10	62	50	43	39	60	49	43	38	48	42	38	47	42	38	46	41	38	36

Unified Glare Rating Table

Lum. Name: PD07-25-XX-01 3000K RA90 白色	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Departmnt
Manufacture: Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date: 2022/09/30

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size	Vewed crosswise					Vewed endwise				
X=2H    Y=2H Y=3H Y=4H Y=6H Y=8H Y=12H	25.5	26.8	25.9	27.1	27.5	25.0	26.2	25.4	26.6	27.0
	26.2	27.3	26.6	27.7	28.1	25.6	26.7	26.1	27.1	27.6
	26.5	27.5	26.9	27.9	28.4	25.9	27.0	26.4	27.4	27.8
	26.7	27.7	27.2	28.1	28.6	26.2	27.1	26.7	27.6	28.1
	26.9	27.8	27.4	28.2	28.7	26.3	27.2	26.8	27.7	28.1
	27.0	27.9	27.5	28.3	28.8	26.4	27.3	26.9	27.7	28.2
X=4H    Y=2H Y=3H Y=4H Y=6H Y=8H Y=12H	25.7	26.8	26.2	27.2	27.6	25.2	26.3	25.7	26.7	27.1
	26.6	27.4	27.0	27.9	28.4	26.1	26.9	26.5	27.4	27.9
	27.0	27.8	27.5	28.2	28.8	26.5	27.3	27.0	27.7	28.3
	27.4	28.1	27.9	28.6	29.1	26.9	27.6	27.4	28.1	28.6
	27.6	28.2	28.1	28.7	29.3	27.1	27.7	27.6	28.2	28.7
	27.8	28.4	28.3	28.9	29.4	27.2	27.8	27.8	28.3	28.9
X=8H    Y=4H Y=6H Y=8H Y=12H	27.1	27.8	27.7	28.3	28.8	26.6	27.3	27.2	27.8	28.3
	27.7	28.2	28.2	28.8	29.4	27.2	27.7	27.7	28.2	28.9
	28.0	28.4	28.5	29.0	29.6	27.4	27.9	28.0	28.5	29.0
	28.3	28.7	28.8	29.2	29.9	27.7	28.1	28.3	28.7	29.3
X=12H    Y=4H Y=6H Y=8H	27.1	27.7	27.7	28.2	28.8	26.6	27.2	27.2	27.7	28.3
	27.7	28.2	28.3	28.7	29.3	27.2	27.7	27.8	28.2	28.8
	28.1	28.5	28.6	29.0	29.7	27.5	27.9	28.1	28.5	29.1
Variations with the objverver position at spacings										
S=1.0H	0.3/-0.3					0.4/-0.4				
S=1.5H	0.6/-0.7					0.7/-0.7				
S=2.0H	0.9/-0.9					0.9/-1.0				
Reduced UGR Table:										
Nordic Standard Table:	BK0					BK0				
Correction Value	1.9					1.9				

o the CIE Pub.117,data has been corrected,refers to the lamp's lumens 8.2flm.

IES Indoor Report

Photometric Filename:PD07-25-XX-01 3000K RA90 白色.IE

S

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	1441.02	1441.02	1441.02	1441.02
γ 1.0	1442.68	1435.83	1442.58	1436.87
γ 2.0	1441.72	1433.76	1441.27	1436.08
γ 3.0	1440.02	1430.70	1439.26	1434.76
γ 4.0	1437.05	1426.90	1435.82	1431.63
γ 5.0	1432.90	1421.99	1431.19	1428.61
γ 6.0	1427.85	1416.01	1426.10	1423.77
γ 7.0	1421.57	1409.11	1419.66	1418.56
γ 8.0	1414.59	1400.92	1412.14	1412.13
γ 9.0	1406.51	1391.73	1403.68	1404.44
γ 10.0	1397.00	1381.57	1394.22	1396.14
γ 11.0	1387.10	1370.01	1383.77	1387.13
γ 12.0	1375.48	1357.49	1372.83	1377.08
γ 13.0	1362.84	1344.27	1360.64	1365.87
γ 14.0	1349.89	1329.55	1347.36	1353.68
γ 15.0	1335.68	1313.94	1333.50	1341.08
γ 16.0	1320.29	1297.49	1318.52	1327.13
γ 17.0	1304.06	1279.92	1302.28	1312.61
γ 18.0	1287.03	1261.31	1285.31	1296.80
γ 19.0	1268.71	1241.75	1267.36	1280.31
γ 20.0	1249.56	1221.41	1248.10	1262.70
γ 21.0	1229.73	1200.24	1227.76	1244.41
γ 22.0	1209.79	1178.65	1206.37	1225.11
γ 23.0	1188.43	1156.78	1184.30	1205.11
γ 24.0	1167.07	1133.97	1161.71	1184.04
γ 25.0	1146.10	1105.32	1139.48	1162.59
γ 26.0	1119.93	1073.22	1112.65	1141.17
γ 27.0	1089.21	1038.81	1081.62	1118.78
γ 28.0	1056.45	1001.95	1048.25	1090.87
γ 29.0	1020.57	963.18	1012.57	1059.59
γ 30.0	983.23	923.27	975.25	1025.87
γ 31.0	944.50	882.48	936.08	990.13
γ 32.0	904.57	841.07	895.95	952.13
γ 33.0	863.42	799.36	855.11	912.94
γ 34.0	821.68	757.39	813.71	872.87
γ 35.0	779.41	715.54	772.17	831.89
γ 36.0	737.38	674.16	730.12	790.37
γ 37.0	695.14	633.03	688.34	748.33
γ 38.0	653.43	592.94	647.24	706.74
γ 39.0	612.92	554.07	606.53	665.24
γ 40.0	573.10	516.13	567.11	624.59
γ 41.0	534.03	478.91	528.28	584.46
γ 42.0	496.63	443.25	490.82	545.54
γ 43.0	460.26	408.90	454.70	507.88
γ 44.0	425.58	376.67	419.51	470.43
γ 45.0	392.51	346.10	386.13	435.01
γ 46.0	360.71	317.29	354.69	400.82

IES Indoor Report

Photometric Filename:PD07-25-XX-01 3000K RA90 白色.IE

S

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	330.74	290.93	324.95	368.39
γ 48.0	303.40	266.77	297.85	337.69
γ 49.0	278.06	245.01	272.27	308.93
γ 50.0	254.97	225.12	249.50	282.82
γ 51.0	234.28	207.48	228.38	258.32
γ 52.0	215.59	191.59	209.68	236.34
γ 53.0	199.28	177.62	192.98	216.42
γ 54.0	184.48	165.14	178.37	199.22
γ 55.0	171.69	154.70	165.29	183.69
γ 56.0	160.68	147.29	153.95	169.79
γ 57.0	151.14	142.12	145.11	158.22
γ 58.0	145.19	136.16	138.98	147.92
γ 59.0	139.43	128.96	134.06	140.04
γ 60.0	132.89	121.97	127.90	134.78
γ 61.0	125.04	115.42	120.60	129.90
γ 62.0	118.24	109.56	113.99	122.60
γ 63.0	111.79	103.62	108.62	115.67
γ 64.0	106.16	97.55	102.24	109.49
γ 65.0	99.69	92.22	96.76	103.86
γ 66.0	94.21	86.81	91.58	97.93
γ 67.0	88.65	81.88	86.36	92.72
γ 68.0	83.49	76.78	81.08	87.29
γ 69.0	78.69	72.27	76.47	82.37
γ 70.0	73.91	67.71	72.10	77.80
γ 71.0	69.42	63.26	67.31	72.89
γ 72.0	64.90	59.02	63.60	68.80
γ 73.0	60.58	54.96	59.16	64.06
γ 74.0	56.43	51.21	55.46	60.22
γ 75.0	52.62	47.53	51.87	56.40
γ 76.0	48.83	44.19	48.49	52.59
γ 77.0	45.18	40.67	44.41	49.05
γ 78.0	41.94	37.35	41.13	45.43
γ 79.0	38.39	34.49	38.06	42.01
γ 80.0	35.32	31.28	34.86	38.77
γ 81.0	32.38	28.53	32.11	35.87
γ 82.0	29.57	25.59	29.08	32.81
γ 83.0	26.67	23.11	26.53	30.05
γ 84.0	23.99	20.58	23.90	27.16
γ 85.0	21.32	18.51	21.55	24.75
γ 86.0	18.92	15.54	18.92	22.27
γ 87.0	16.51	13.68	16.32	20.29
γ 88.0	14.35	12.19	14.29	17.54
γ 89.0	12.69	11.94	12.35	15.42
γ 90.0	11.87	11.67	11.32	13.22
γ 91.0	11.97	11.26	11.11	11.88
γ 92.0	11.59	11.15	10.88	11.48
γ 93.0	11.31	11.00	10.71	11.30



S

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	11.21	11.12	10.62	11.18
γ 95.0	10.68	10.69	10.35	10.85
γ 96.0	10.65	10.50	10.19	10.81
γ 97.0	10.39	10.21	10.16	10.73
γ 98.0	10.28	10.27	10.00	10.40
γ 99.0	10.00	10.12	9.87	10.35
γ 100.0	10.06	9.97	9.60	10.44
γ 101.0	10.01	9.79	9.66	10.56
γ 102.0	9.85	9.91	9.31	10.10
γ 103.0	9.58	9.57	9.74	9.93
γ 104.0	9.62	9.94	9.52	9.71
γ 105.0	9.38	9.44	9.49	9.83
γ 106.0	9.42	9.70	9.64	9.73
γ 107.0	9.59	9.82	9.46	9.62
γ 108.0	9.18	9.29	9.92	9.61
γ 109.0	9.26	9.32	9.89	9.66
γ 110.0	9.37	9.47	10.01	9.62
γ 111.0	9.23	9.32	9.46	9.56
γ 112.0	9.27	9.46	9.48	9.91
γ 113.0	9.09	9.76	9.58	10.11
γ 114.0	9.24	9.66	9.77	9.54
γ 115.0	9.31	9.47	9.55	9.79
γ 116.0	9.27	9.56	9.76	9.60
γ 117.0	9.15	9.50	9.85	9.77
γ 118.0	9.32	9.57	9.74	9.87
γ 119.0	9.33	9.80	10.21	9.76
γ 120.0	9.44	9.93	9.90	9.89
γ 121.0	9.56	10.05	10.02	9.96
γ 122.0	10.04	10.00	10.34	9.97
γ 123.0	9.89	10.13	10.40	10.03
γ 124.0	10.02	10.36	10.39	10.18
γ 125.0	10.54	10.28	10.58	10.43
γ 126.0	10.21	10.48	10.66	10.52
γ 127.0	10.45	10.79	10.70	10.96
γ 128.0	10.54	10.73	10.93	10.82
γ 129.0	10.70	10.96	10.94	11.11
γ 130.0	10.93	11.06	11.08	11.04
γ 131.0	11.38	11.50	11.39	11.13
γ 132.0	11.36	11.48	11.27	11.14
γ 133.0	11.22	11.52	11.68	11.35
γ 134.0	11.66	11.73	11.40	11.27
γ 135.0	11.87	11.83	11.93	11.64
γ 136.0	11.96	12.06	12.16	11.86
γ 137.0	11.77	12.16	12.12	11.90
γ 138.0	11.86	12.38	12.43	11.88
γ 139.0	12.67	12.38	12.60	12.16
γ 140.0	12.62	12.51	12.41	12.24

S

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	12.71	12.79	12.77	12.66
γ 142.0	12.50	12.80	12.75	12.67
γ 143.0	12.95	13.05	12.93	12.70
γ 144.0	13.23	13.21	13.49	12.72
γ 145.0	13.46	13.33	13.46	13.10
γ 146.0	13.65	13.60	13.34	13.06
γ 147.0	13.77	13.47	13.56	13.33
γ 148.0	13.65	13.77	13.73	13.20
γ 149.0	13.84	13.95	14.02	13.41
γ 150.0	13.94	14.11	14.10	13.73
γ 151.0	14.09	14.14	14.36	13.79
γ 152.0	14.42	14.27	14.51	13.92
γ 153.0	14.31	14.44	14.40	14.15
γ 154.0	14.30	14.43	14.70	14.20
γ 155.0	14.58	14.63	14.86	14.30
γ 156.0	14.98	14.77	14.88	14.32
γ 157.0	15.13	14.81	14.88	14.50
γ 158.0	14.98	15.05	15.10	14.74
γ 159.0	15.28	15.00	15.37	14.92
γ 160.0	15.21	14.98	15.18	15.03
γ 161.0	15.28	15.51	15.77	15.30
γ 162.0	15.68	15.53	15.59	15.32
γ 163.0	15.81	15.71	15.94	15.70
γ 164.0	16.09	15.83	16.04	15.85
γ 165.0	16.18	16.12	15.98	15.63
γ 166.0	16.22	16.12	16.24	15.83
γ 167.0	16.38	16.41	16.42	16.27
γ 168.0	16.44	16.61	16.48	16.30
γ 169.0	16.45	16.37	16.47	16.42
γ 170.0	16.59	16.66	16.48	16.55
γ 171.0	16.88	16.88	16.79	16.62
γ 172.0	16.88	16.92	16.72	16.94
γ 173.0	16.87	17.13	16.93	17.11
γ 174.0	17.18	17.23	16.74	17.15
γ 175.0	17.28	17.17	16.96	17.21
γ 176.0	17.31	17.66	17.19	17.10
γ 177.0	17.55	17.25	17.19	17.22
γ 178.0	17.47	17.39	17.10	17.27
γ 179.0	17.36	17.24	17.25	17.52
γ 180.0	17.34	17.34	17.34	17.34