



## FEATURES


- Modular Design.
- System power up to 20W.
- Interchangeable beam.
- Interchangeable anti-glare reflector.
- 5-year guarantee.

## Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC36V/350mA
Power	13.5W
Rated Input Current	0.0675A
PF value	>0.9
THD	<35%
Ingress Protection	IP20
Operating Temperature	-10—40°C
Dimmability	Non-dimmable with AcTEC driver

## Optical Data

LED Brand	Bridgelux COB LED
CRI	Ra > 90
Beam Angle	15°/24°/36°/60°
Colour temperature	2700k/3000K/4000K
System luminous efficacy up to	103.2lm/W

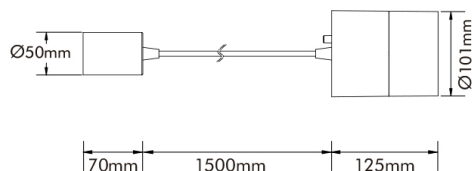

## Packaging

Box Dimensions	L170 x W162 x H112mm
Box Net Weight	0.91Kg
Box Gross Weight	1.01Kg
Carton Dimensions	L500 x W355 x H360 mm/18 PCS
Carton Net Weight	16.38Kg
Carton Gross Weight	20.18Kg



Model	CCT	Beam Angle	Lumen	Efficacy
PD08-15-XX-01	2700K	15°	1153lm	87.8lm/W
		24°	1182lm	89.5lm/W
		36°	1153lm	86.4lm/W
		60°	1116lm	84lm/W
PD08-15-XX-01	3000K	15°	1218lm	91.7lm/W
		24°	1240lm	93.5lm/W
		36°	1242lm	92.1lm/W
		60°	1172lm	88.6lm/W
PD08-15-XX-01	4000K	15°	1353lm	101.2lm/W
		24°	1351lm	103.2lm/W
		36°	1325lm	101.4lm/W
		60°	1248lm	95.2lm/W

## ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04  
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS