



Indoor Luminaire Photometric Data

Description Information

Luminary Name: PD08-35-XX-01 3000K RA90 24D		Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Date: 2022/09/19
Manufacture: Shenzhen Norming Lighting		Shld. Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department		Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.110m*0.110m*0.000m		Lum. Area (m2):0.010	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=5.0	Temp. (°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 2749.700	Luminary Flux(lm): 2749.702	Field Angle(10%Imax): 39.4(°)	
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 2689.928lm 97.83%	
Rated Voltage(V):	Luminary EER(lm/W): 86.306	Up Lumens&Percent: 59.774lm 2.17%	
Tested Power(W): 31.860	Max. Candela(cd): 12593.817	S/MH: C0_a180=0.413 C90_270=0.412	
Lamps' Inside: 1	Max Cand@Ang. (°): C=0.0 γ=0.0	CIE Type: Semi-Direct	
Tested Electrics (V, A, pf):239.7, 0.139, 0.955	Beam Angle(50%Imax): 24.1(°)	ErP Φ use(90°): 2605.979lm	
Lamp Size (W*L*H):0.110m*0.110m*0.000m	Left=-12.1°, Right=12.0°	IRF(%): 999.287	

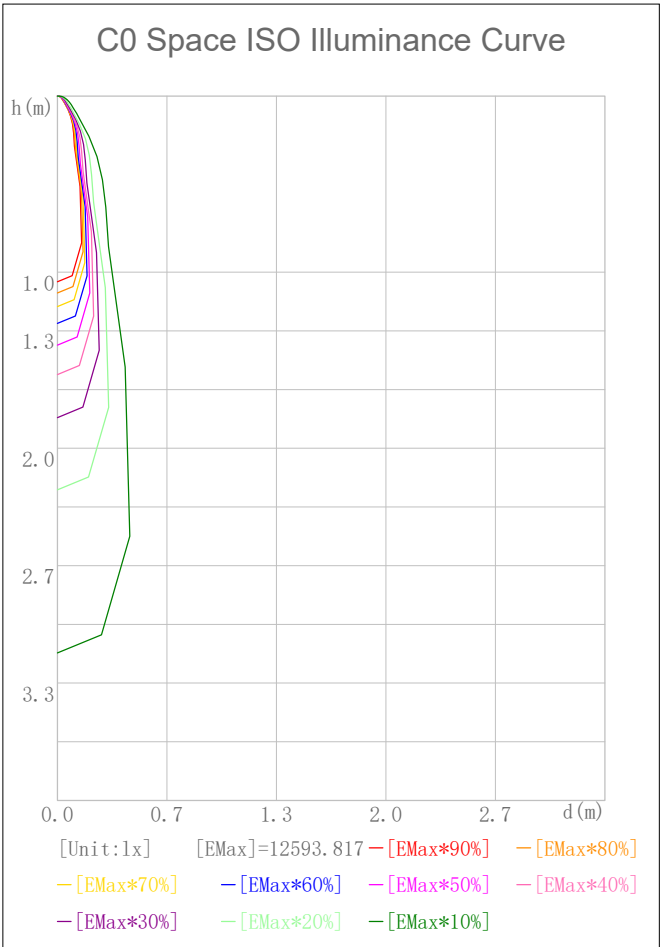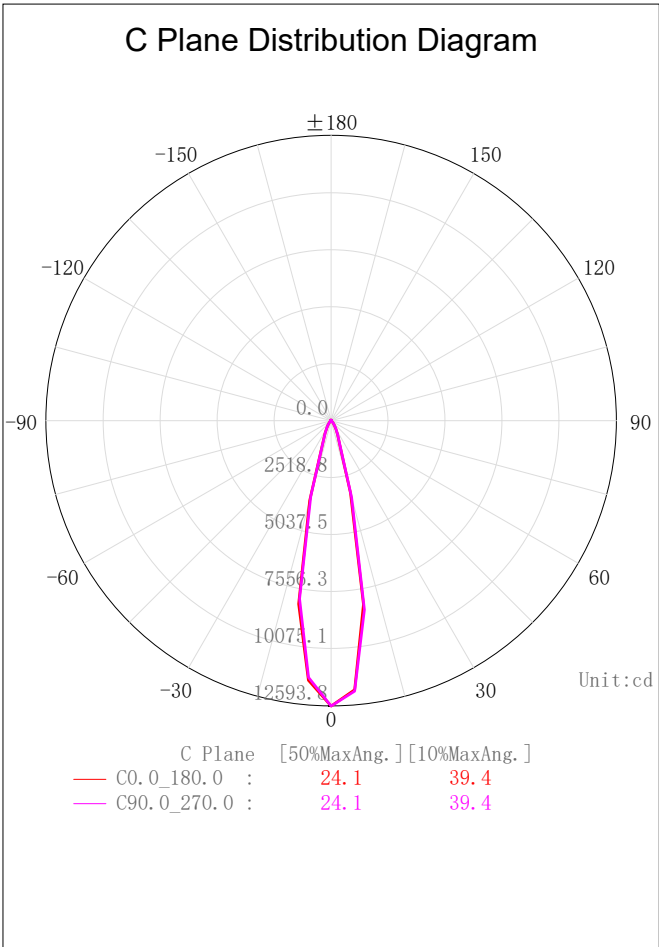

2D Plane Light Intensity Distribution Curve


Lum. Name: PD08-35-XX-01 3000K RA90 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/09/19

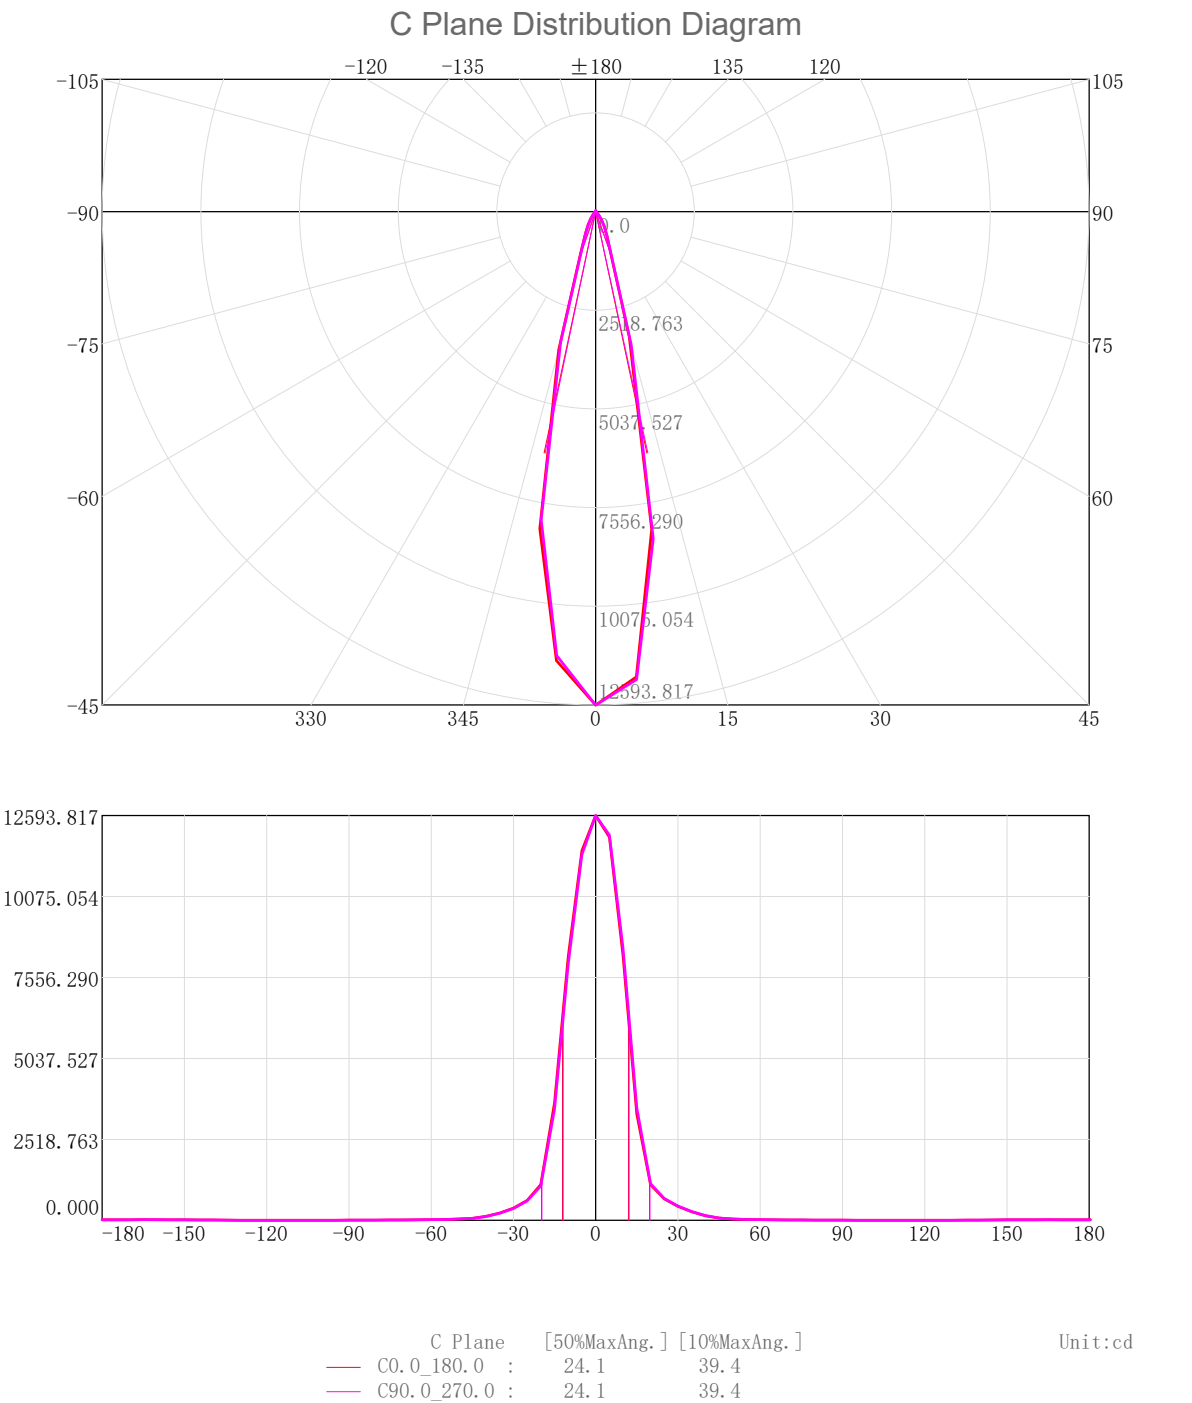

3D Light Intensity Distribution Modal

Lum. Name: PD08-35-XX-01 3000K RA90 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/09/19

3D Light Intensity Distribution Modal

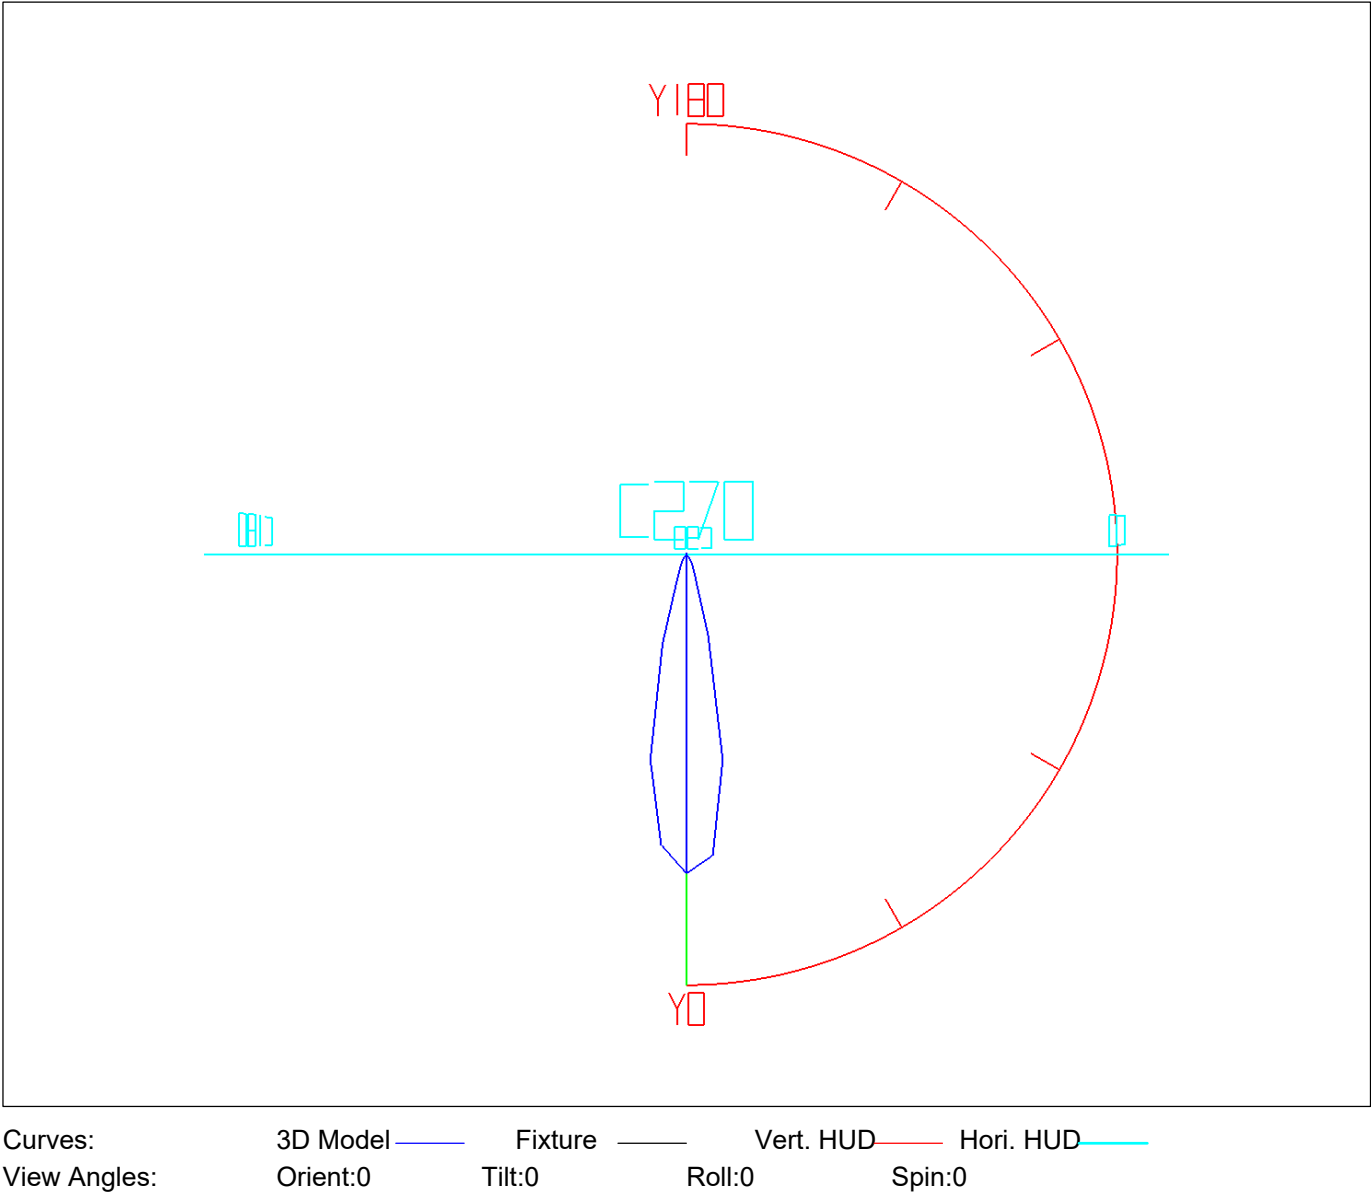


Zonal Flux Tabulation

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0. 0-5. 0	290. 38	290. 38	10. 56	10. 56
5. 0-10. 0	712. 79	1003. 17	25. 92	36. 48
10. 0-15. 0	694. 60	1697. 77	25. 26	61. 74
15. 0-20. 0	378. 26	2076. 03	13. 76	75. 50
20. 0-25. 0	184. 23	2260. 26	6. 70	82. 20
25. 0-30. 0	133. 65	2393. 91	4. 86	87. 06
30. 0-35. 0	97. 03	2490. 94	3. 53	90. 59
35. 0-40. 0	64. 63	2555. 57	2. 35	92. 94
40. 0-45. 0	38. 14	2593. 70	1. 39	94. 33
45. 0-50. 0	22. 96	2616. 66	0. 83	95. 16
50. 0-55. 0	16. 51	2633. 17	0. 60	95. 76
55. 0-60. 0	12. 63	2645. 81	0. 46	96. 22
60. 0-65. 0	10. 50	2656. 31	0. 38	96. 60
65. 0-70. 0	8. 92	2665. 22	0. 32	96. 93
70. 0-75. 0	7. 63	2672. 85	0. 28	97. 21
75. 0-80. 0	6. 54	2679. 39	0. 24	97. 44
80. 0-85. 0	5. 67	2685. 06	0. 21	97. 65
85. 0-90. 0	4. 86	2689. 93	0. 18	97. 83
90. 0-95. 0	4. 12	2694. 04	0. 15	97. 98
95. 0-100. 0	3. 60	2697. 64	0. 13	98. 11
100. 0-105. 0	3. 24	2700. 89	0. 12	98. 22
105. 0-110. 0	3. 07	2703. 95	0. 11	98. 34
110. 0-115. 0	2. 90	2706. 85	0. 11	98. 44
115. 0-120. 0	2. 68	2709. 53	0. 10	98. 54
120. 0-125. 0	2. 56	2712. 09	0. 09	98. 63
125. 0-130. 0	2. 71	2714. 80	0. 10	98. 73
130. 0-135. 0	3. 20	2718. 00	0. 12	98. 85
135. 0-140. 0	3. 95	2721. 95	0. 14	98. 99
140. 0-145. 0	4. 70	2726. 64	0. 17	99. 16
145. 0-150. 0	5. 13	2731. 78	0. 19	99. 35
150. 0-155. 0	5. 09	2736. 87	0. 19	99. 53
155. 0-160. 0	4. 55	2741. 41	0. 17	99. 70
160. 0-165. 0	3. 68	2745. 09	0. 13	99. 83
165. 0-170. 0	2. 61	2747. 71	0. 10	99. 93
170. 0-175. 0	1. 51	2749. 21	0. 05	99. 98
175. 0-180. 0	0. 49	2749. 70	0. 02	100. 00

Rectangle ISO Lighting Intensity Diagram


Lum. Name: PD08-35-XX-01 3000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/09/19

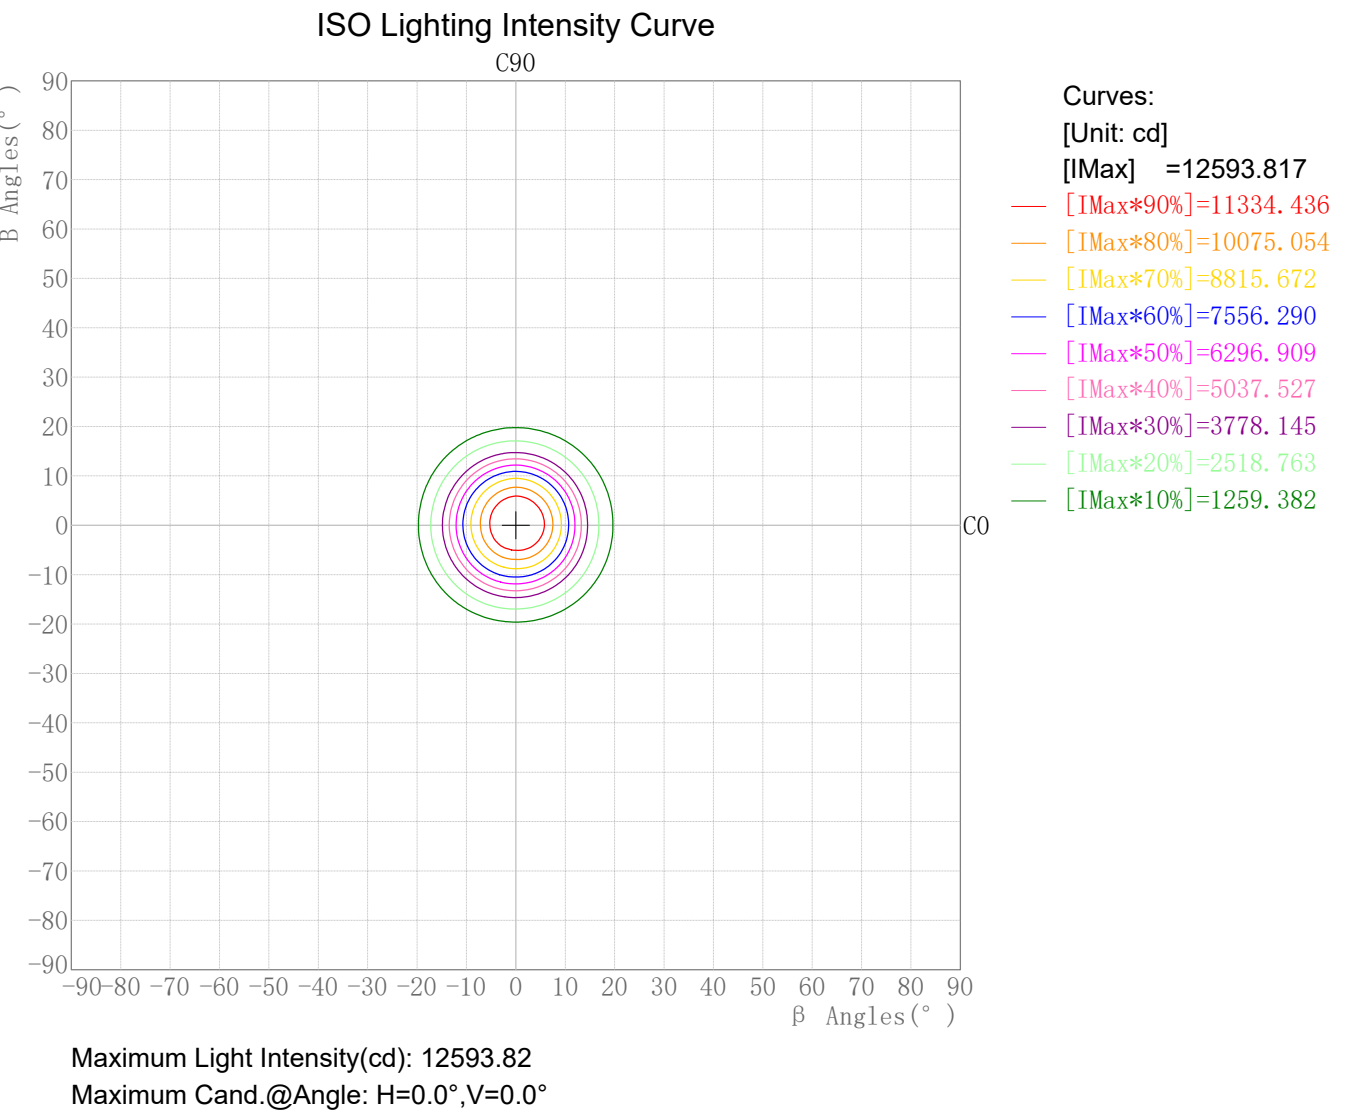

Plane ISO-Illuminance Diagram

Lum. Name: PD08-35-XX-01 3000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/09/19

Plane ISO-Illuminance Curve

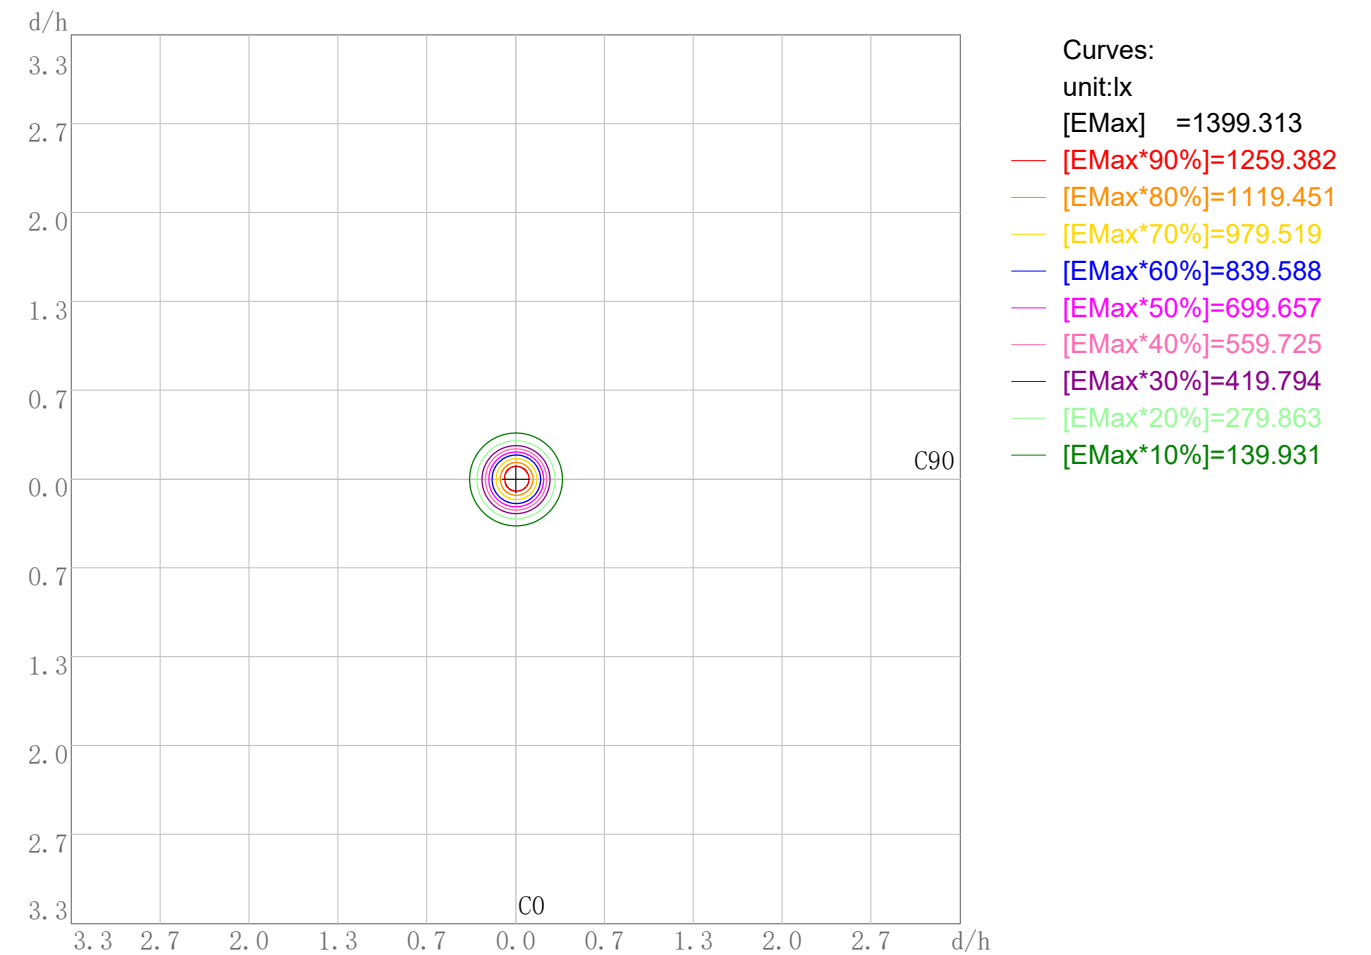


Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 1399.31
Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0

3D Plane ISO Illuminance Diagram

Lum. Name: PD08-35-XX-01 3000K RA90 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/09/19


3D Plane Illuminance Modal

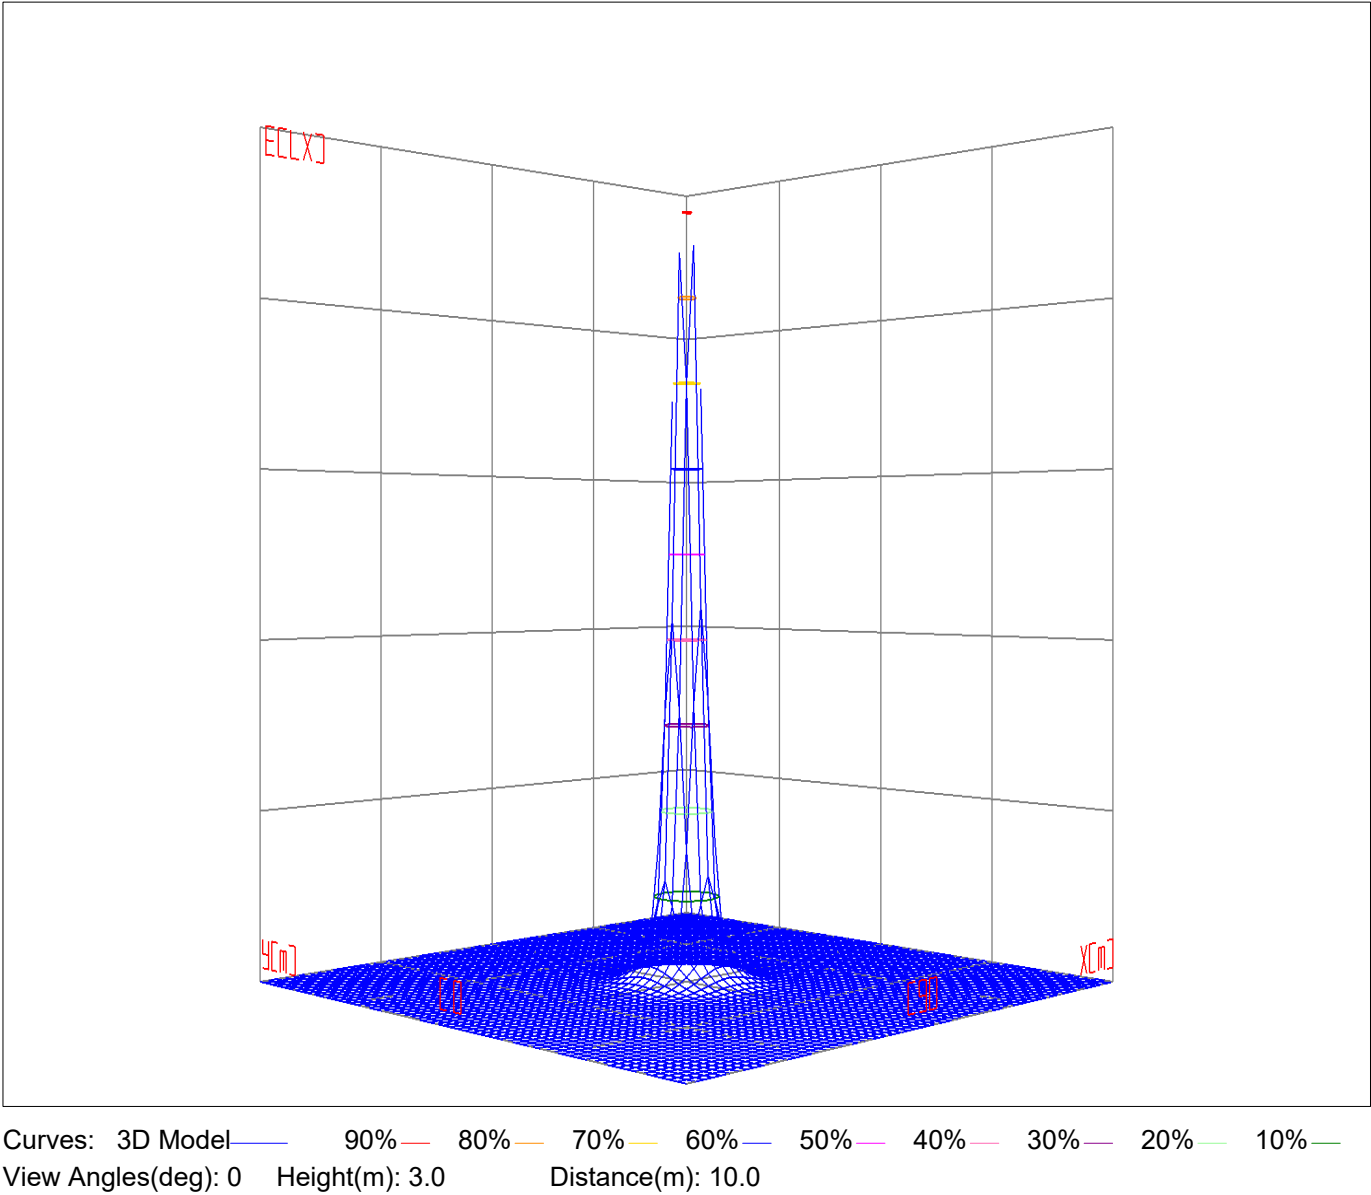

Space ISO Illuminance Diagram

Lum. Name: PD08-35-XX-01 3000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/09/19


Space ISO Illuminance Curve

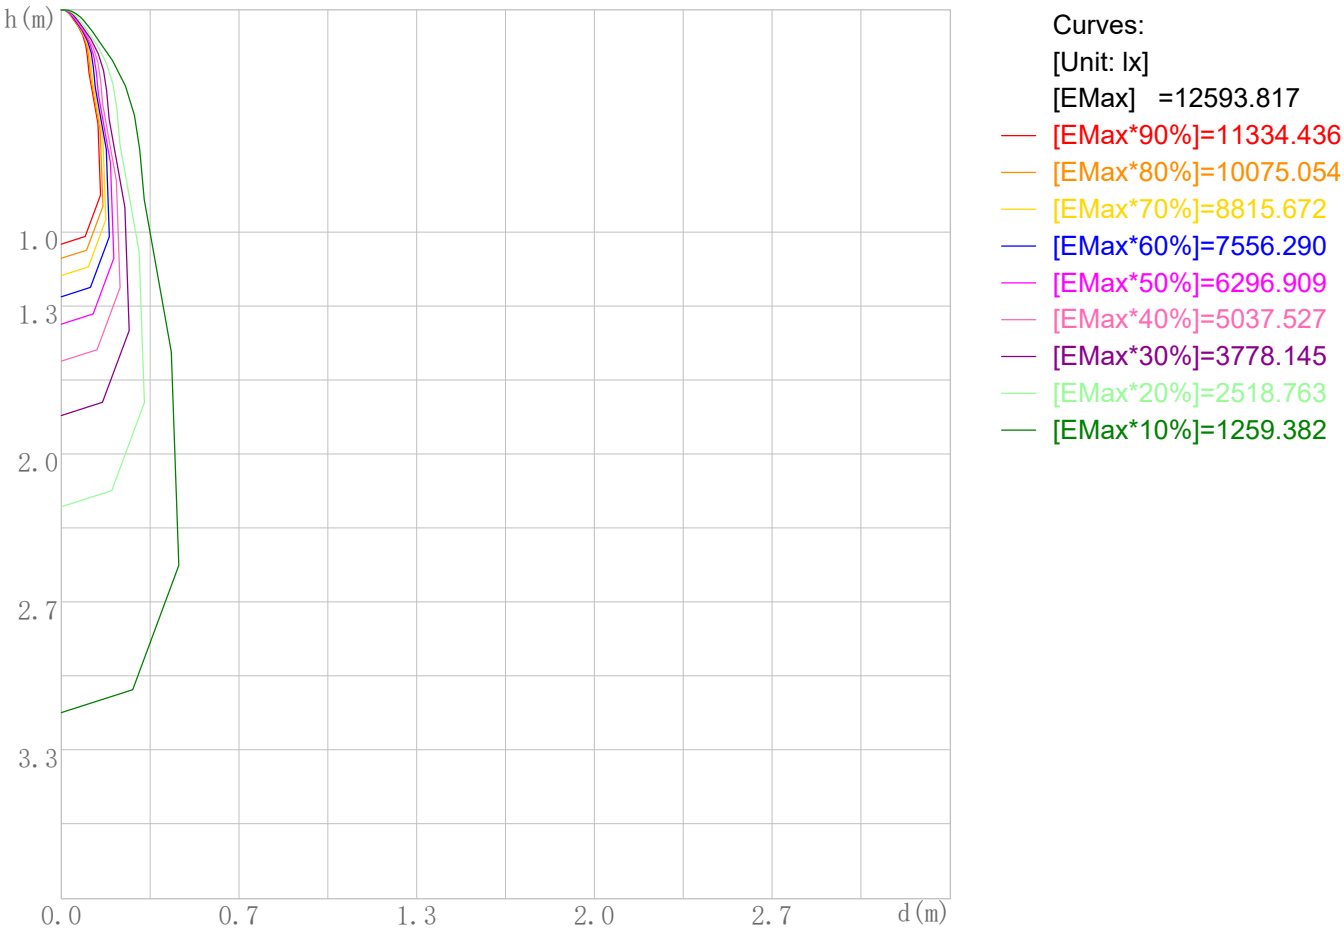

Space Plane Maximum Illuminance and @Angle:12593.82lx,0.0deg
Plane Maximum Lighting Intensity and @Angle:12593.817cd,0deg

Illuminance-Distance Diagram

Lum. Name: PD08-35-XX-01 3000K RA90 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/09/19

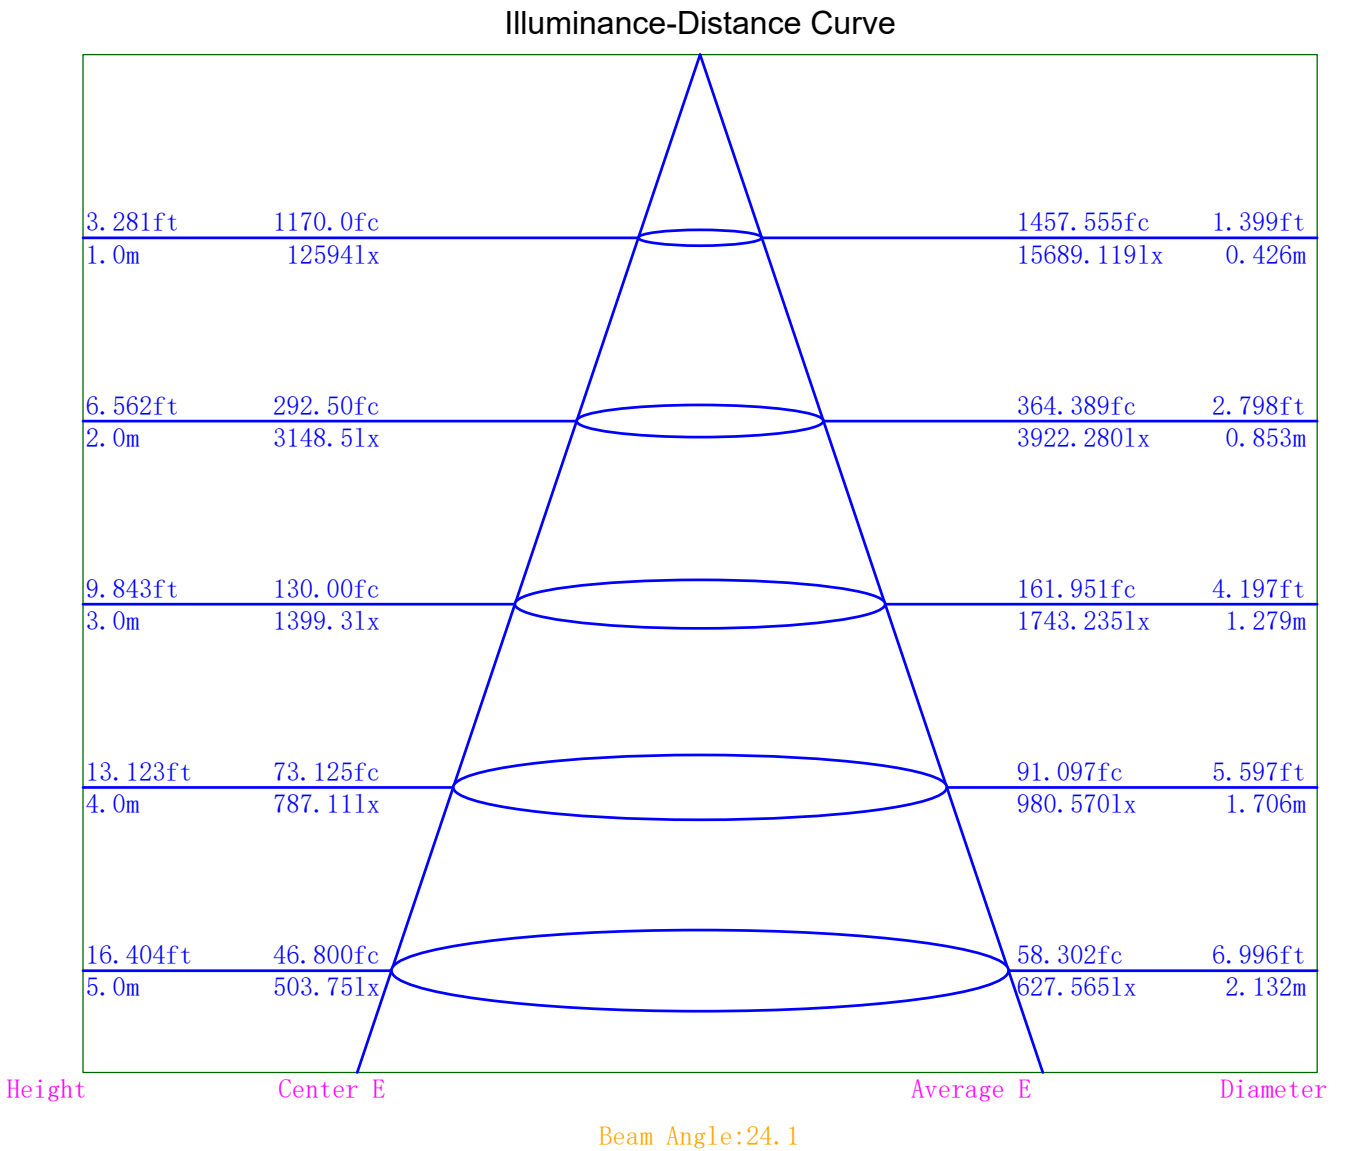

Indoor Luminance Limiting Curves

Lum. Name: PD08-35-XX-01 3000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/09/19


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	10743	7452	5643	4966	4745	4760	5267	6664	11740
C90	10976	7711	5774	5000	4739	4778	5276	6699	11758

Luminance Limiting Curve

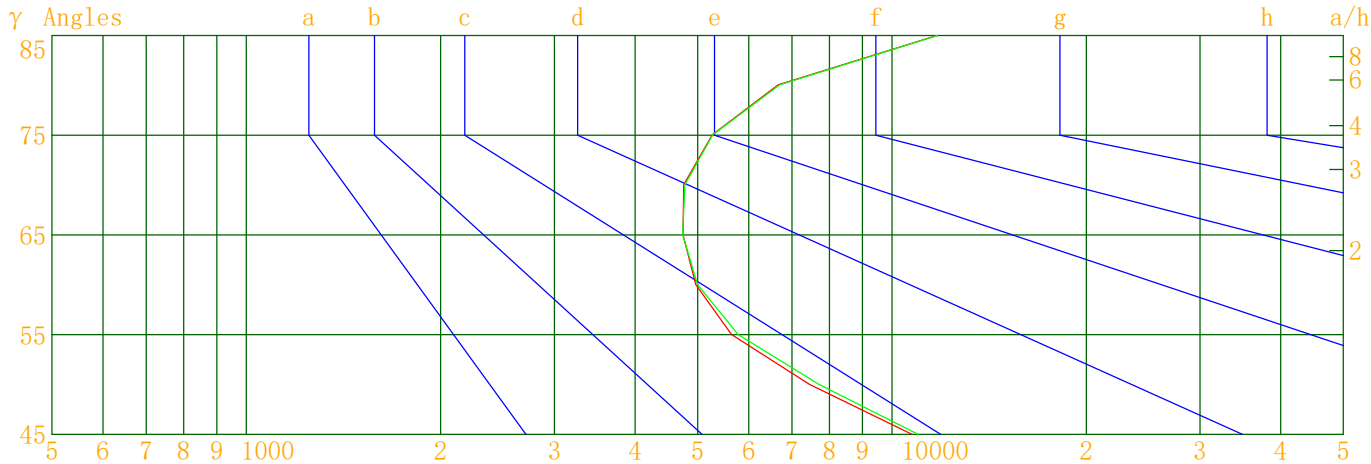


Luminous Size: Length(m)=-0.110 Width(m)=-0.110 Height(m)=0.000 Area(m^2)=0.009503

Luminous Type: Without Luminous Side

Luminous Curves: C0-C180 Color: C90-C270 Color:

Indoor Budgetary Estimate Table

Lum. Name: PD08-35-XX-01 3000K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/09/19

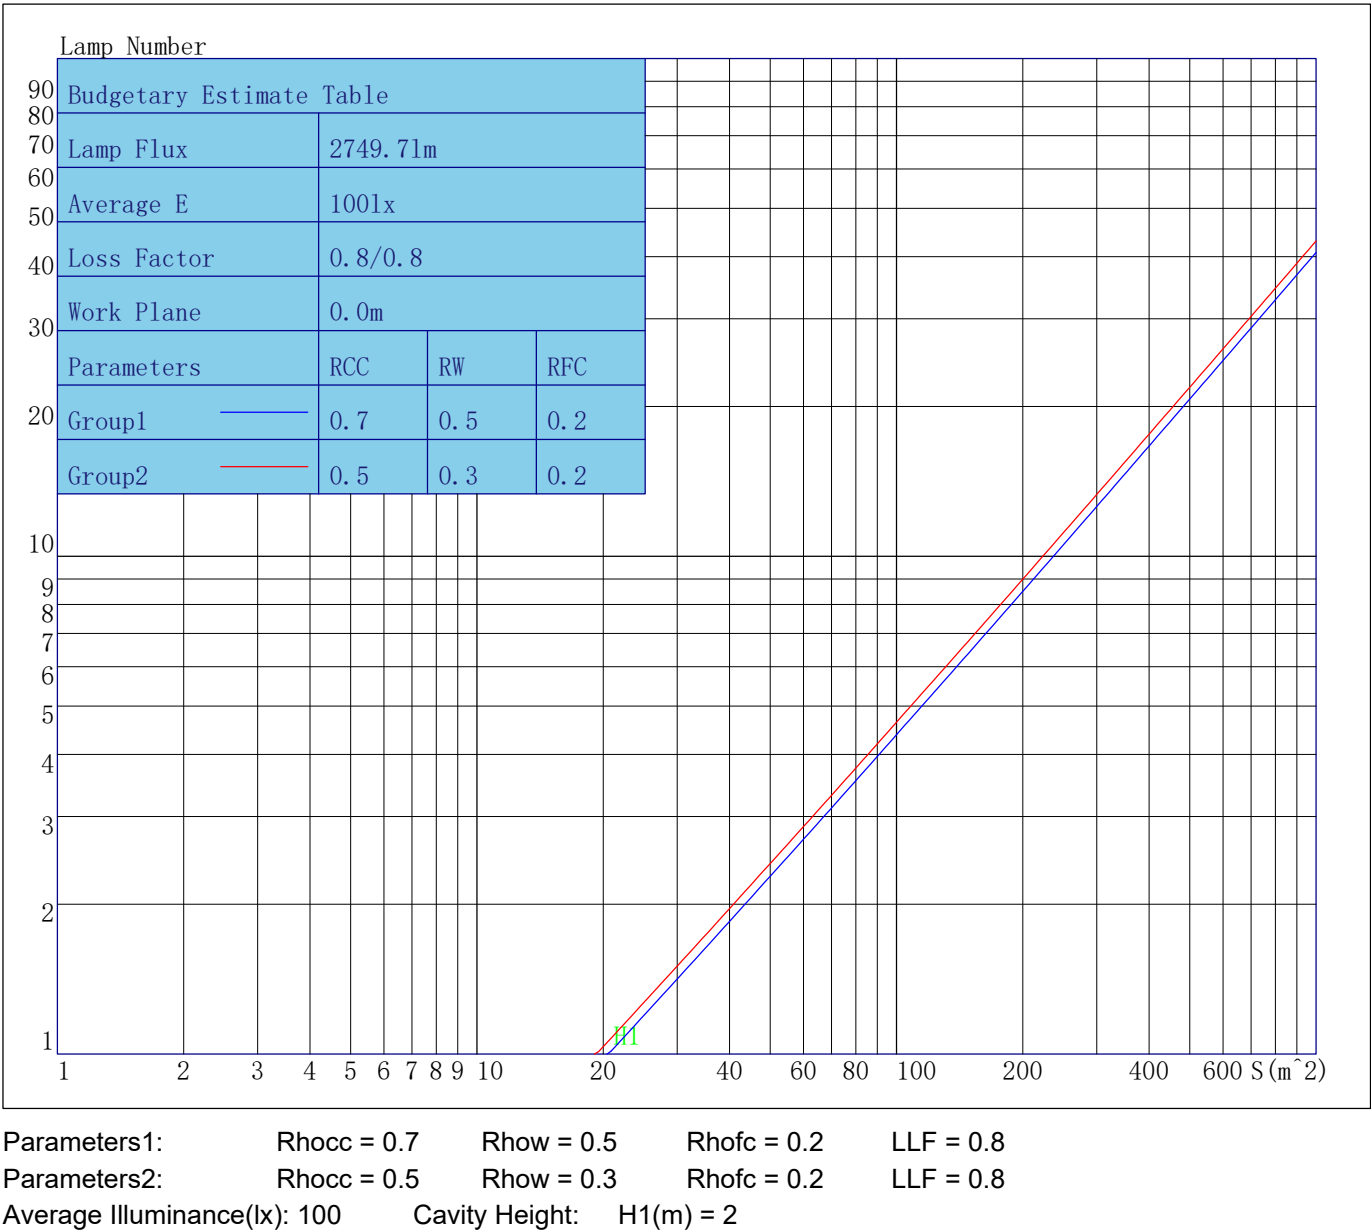

Indoor Coefficient of Utilization Table

Lum. Name: PD08-35-XX-01 3000K RA90 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/09/19

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	114	112	110	108	111	109	107	106	105	103	102	101	100	99	97	96	96	94
2	110	106	103	100	108	104	101	99	101	98	96	97	95	94	94	93	92	90
3	106	101	97	94	104	99	96	93	97	94	91	94	92	90	92	90	88	87
4	102	97	92	89	101	95	92	89	93	90	87	91	88	86	89	87	85	84
5	99	93	88	85	98	92	88	85	90	87	84	88	85	83	87	84	82	81
6	96	89	85	82	95	89	85	81	87	83	81	86	83	80	84	82	79	78
7	93	86	82	79	92	86	82	79	84	81	78	83	80	78	82	79	77	76
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74
9	88	81	77	74	87	81	77	74	80	76	74	79	76	73	78	75	73	72
10	86	79	75	72	85	78	74	72	78	74	72	77	74	71	76	73	71	70

Unified Glare Rating Table

Lum. Name: PD08-35-XX-01 3000K RA90 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/09/19

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size	Vewed crosswise					Vewed endwise				
X=2H Y=2H	13.4	14.4	13.9	14.7	15.1	13.6	14.5	14.0	14.9	15.2
	13.8	14.6	14.3	15.0	15.4	14.0	14.8	14.4	15.1	15.6
	14.1	14.9	14.6	15.3	15.7	14.2	15.0	14.7	15.4	15.8
	14.6	15.2	15.0	15.7	16.1	14.7	15.3	15.1	15.8	16.2
	14.8	15.5	15.3	15.9	16.4	14.9	15.6	15.4	16.0	16.5
	15.2	15.9	15.7	16.3	16.8	15.3	15.9	15.8	16.4	16.9
X=4H Y=2H	13.4	14.2	13.9	14.6	15.0	13.6	14.3	14.0	14.7	15.2
	14.0	14.6	14.5	15.1	15.5	14.1	14.7	14.6	15.2	15.7
	14.5	15.0	15.0	15.5	16.0	14.6	15.1	15.1	15.6	16.1
	15.1	15.6	15.6	16.1	16.6	15.2	15.7	15.7	16.2	16.7
	15.6	16.0	16.1	16.5	17.0	15.6	16.1	16.2	16.6	17.1
	16.1	16.5	16.7	17.0	17.6	16.2	16.6	16.7	17.1	17.6
X=8H Y=4H	14.6	15.1	15.1	15.6	16.1	14.7	15.2	15.2	15.6	16.2
	15.5	15.9	16.1	16.4	17.0	15.6	15.9	16.1	16.5	17.0
	16.1	16.4	16.7	17.0	17.5	16.2	16.5	16.8	17.1	17.6
	17.0	17.2	17.5	17.8	18.4	17.0	17.3	17.6	17.8	18.4
X=12H Y=4H	14.6	15.0	15.2	15.5	16.1	14.7	15.1	15.3	15.6	16.2
	15.6	15.9	16.2	16.4	17.0	15.7	16.0	16.3	16.5	17.1
	16.3	16.6	16.9	17.1	17.8	16.4	16.7	17.0	17.2	17.8
Variations with the objverver position at spacings										
S=1.0H	0.1/-0.1					0.1/-0.1				
S=1.5H	0.2/-0.2					0.2/-0.2				
S=2.0H	0.2/-0.2					0.2/-0.2				
Reduced UGR Table:										
Nordic Standard Table:	BK0					BK0				
Correction Value	2.5					2.5				

o the CIE Pub.117,data has been corrected,refers to the lamp's lumens 8.2flm.

IES Indoor Report
Photometric Filename:PD08-35-XX-01 3000K RA90 24D.IE

S
Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	12593.8	12593.8	12593.8	12593.8
γ 5.0	11922.2	11986.0	11500.9	11374.6
γ 10.0	8239.1	8474.0	8217.7	7986.6
γ 15.0	3309.8	3505.8	3651.9	3453.0
γ 20.0	1107.8	1147.2	1114.8	1068.5
γ 25.0	673.3	685.9	622.6	606.2
γ 30.0	437.8	446.7	381.2	370.7
γ 35.0	270.5	276.8	228.9	223.1
γ 40.0	146.5	155.2	127.7	120.7
γ 45.0	72.2	73.8	64.5	63.3
γ 50.0	45.5	47.1	44.8	43.3
γ 55.0	30.8	31.5	30.6	30.1
γ 60.0	23.6	23.8	24.5	23.8
γ 65.0	19.1	19.0	19.9	19.3
γ 70.0	15.5	15.5	16.5	16.1
γ 75.0	13.0	13.0	13.7	13.4
γ 80.0	11.0	11.1	11.4	11.2
γ 85.0	9.7	9.7	9.7	9.7
γ 90.0	7.9	8.2	8.1	8.0
γ 95.0	7.3	7.0	7.0	6.7
γ 100.0	6.8	6.5	6.0	5.7
γ 105.0	6.4	6.3	5.5	5.3
γ 110.0	6.1	6.2	5.3	5.9
γ 115.0	5.7	5.5	5.7	5.4
γ 120.0	5.3	5.0	5.5	5.9
γ 125.0	5.0	5.2	6.2	6.3
γ 130.0	6.5	6.2	7.3	7.4
γ 135.0	8.5	8.2	9.7	9.7
γ 140.0	11.8	11.1	13.1	13.2
γ 145.0	15.3	14.9	16.7	16.5
γ 150.0	18.5	18.2	19.9	19.5
γ 155.0	20.8	20.7	21.8	21.6
γ 160.0	21.8	21.8	22.4	22.4
γ 165.0	22.1	22.5	23.1	22.4
γ 170.0	21.2	21.4	22.1	21.6
γ 175.0	20.5	20.5	21.0	20.0
γ 180.0	20.5	20.5	20.5	20.5