



Indoor Luminaire Photometric Data

Description Information

Luminary Name:SD01-08-XX-01 2700K RA90 36D		Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Date: 2021/04/29
Manufacture: Shenzhen Norming Lighting Co.Ltd		Shld.Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department		Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.050m*0.000m*0.000m		Lum. Area (m2):0.002	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=1.0	Temp. (°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 610.890	Luminary Flux(lm): 610.890	Field Angle(10%Imax): 60.2(°)	
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 607.549lm 99.45%	
Rated Voltage(V):	Luminary EER(lm/W): 78.119	Up Lumens&Percent: 3.341lm 0.55%	
Tested Power(W): 7.820	Max. Candela(cd): 1442.383	S/MH: C0_a180=0.621 C90_270=0.618	
Lamps' Inside: 1	Max Cand@Ang. (°): C=0.0 γ=5.0	CIE Type: Semi-Direct	
Tested Electrics (V, A, pf):240.3, 0.035, 0.908	Beam Angle(50%Imax): 36.4(°)	ErP ϕ use(90°): 588.211lm	
Lamp Size (W*L*H):0.050m*0.000m*0.000m	Left=-18.7°, Right=17.7°	IRF(%): 505.530	

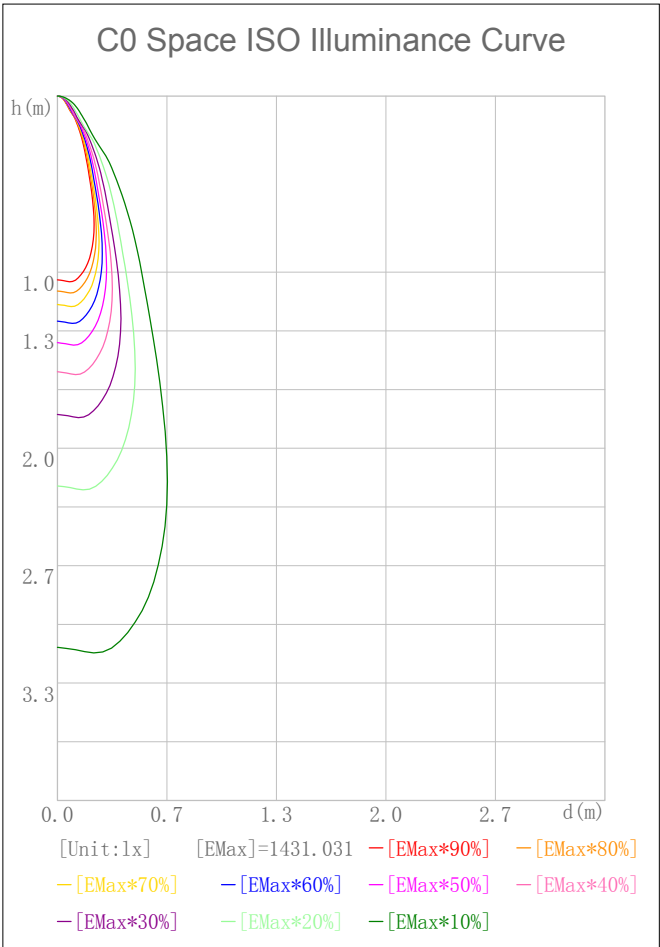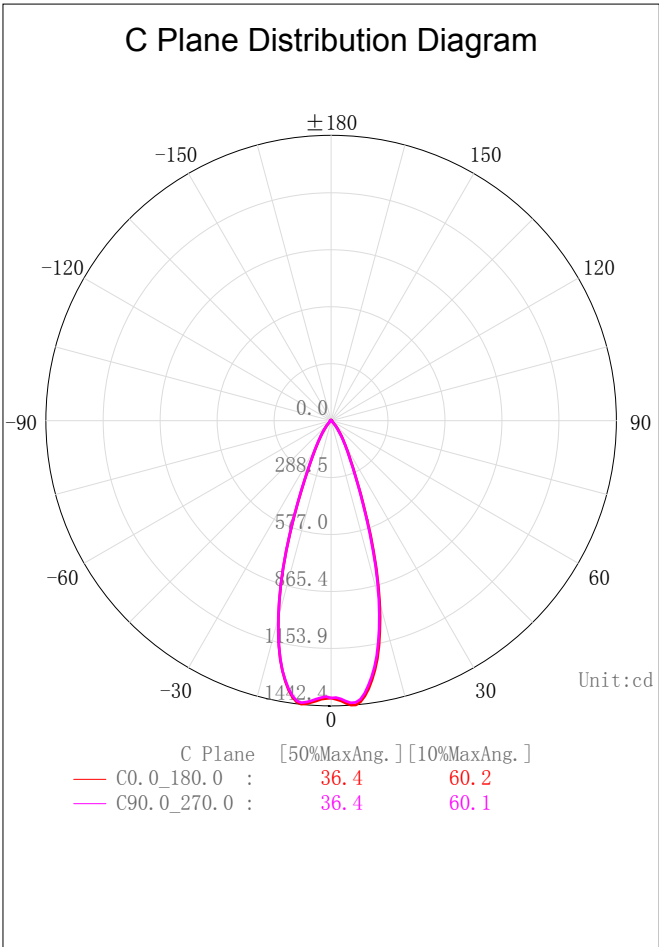

2D Plane Light Intensity Distribution Curve


Lum. Name: SD01-08-XX-01 2700K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co.Ltd	Test Machine:GON-2000	Test Date: 2021/04/29

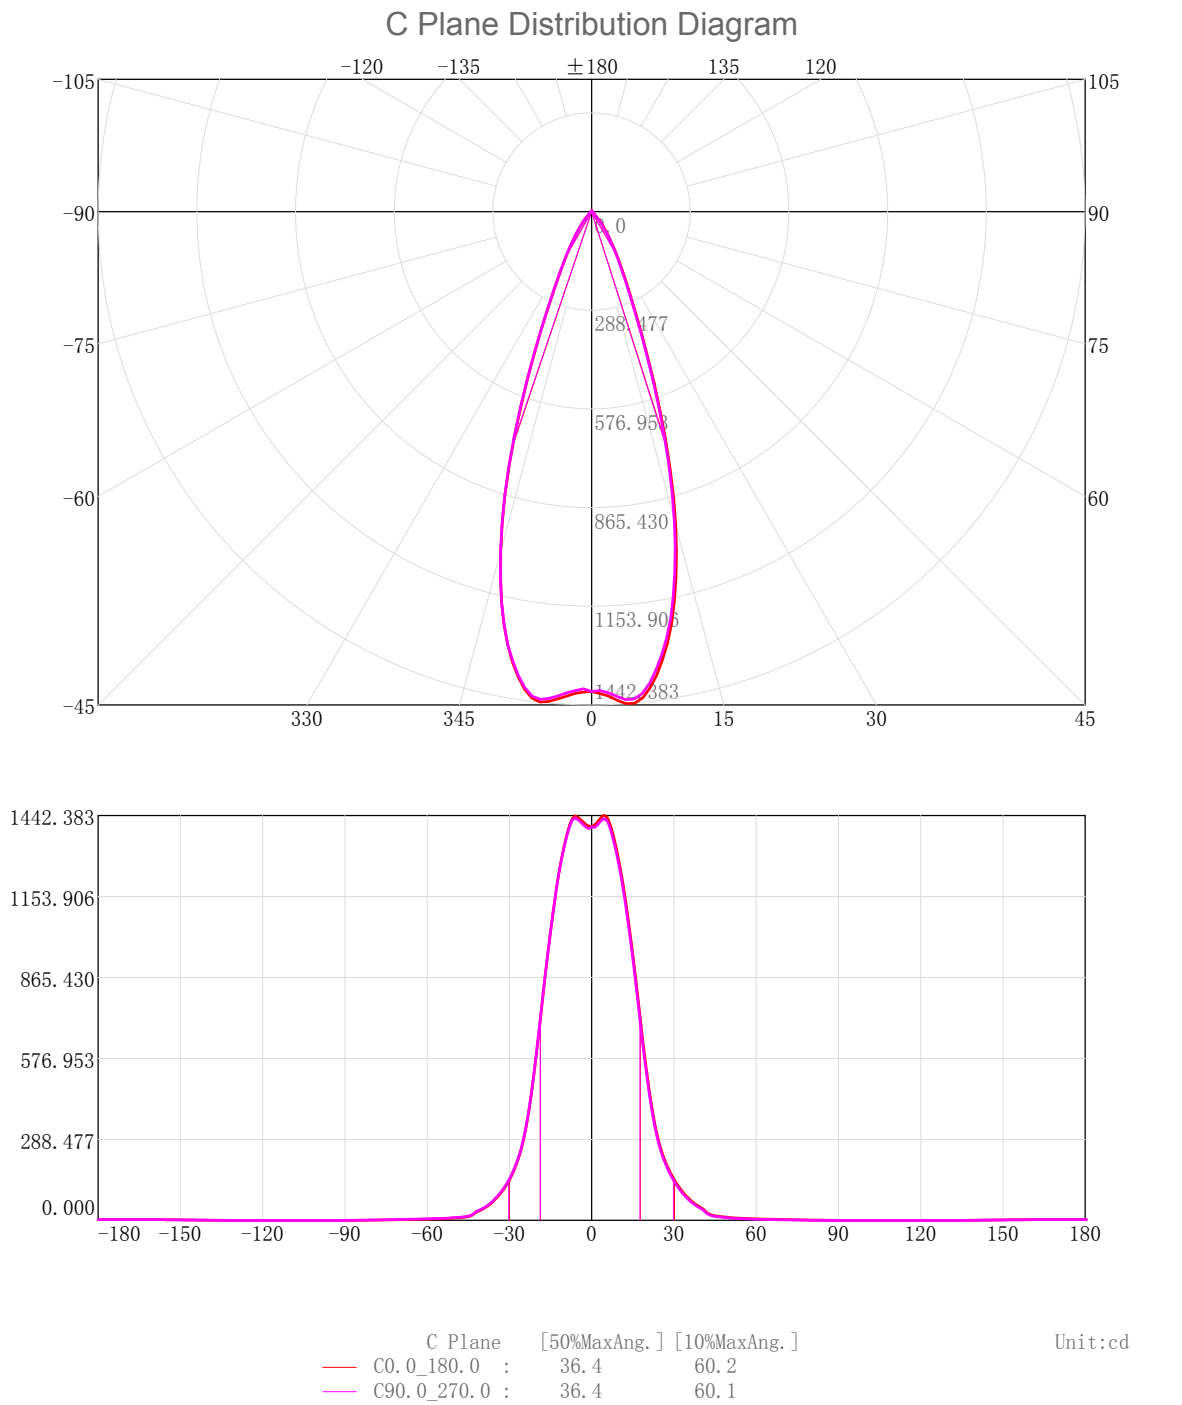

3D Light Intensity Distribution Modal

Lum. Name: SD01-08-XX-01 2700K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co.Ltd	Test Machine:GON-2000	Test Date: 2021/04/29

3D Light Intensity Distribution Modal

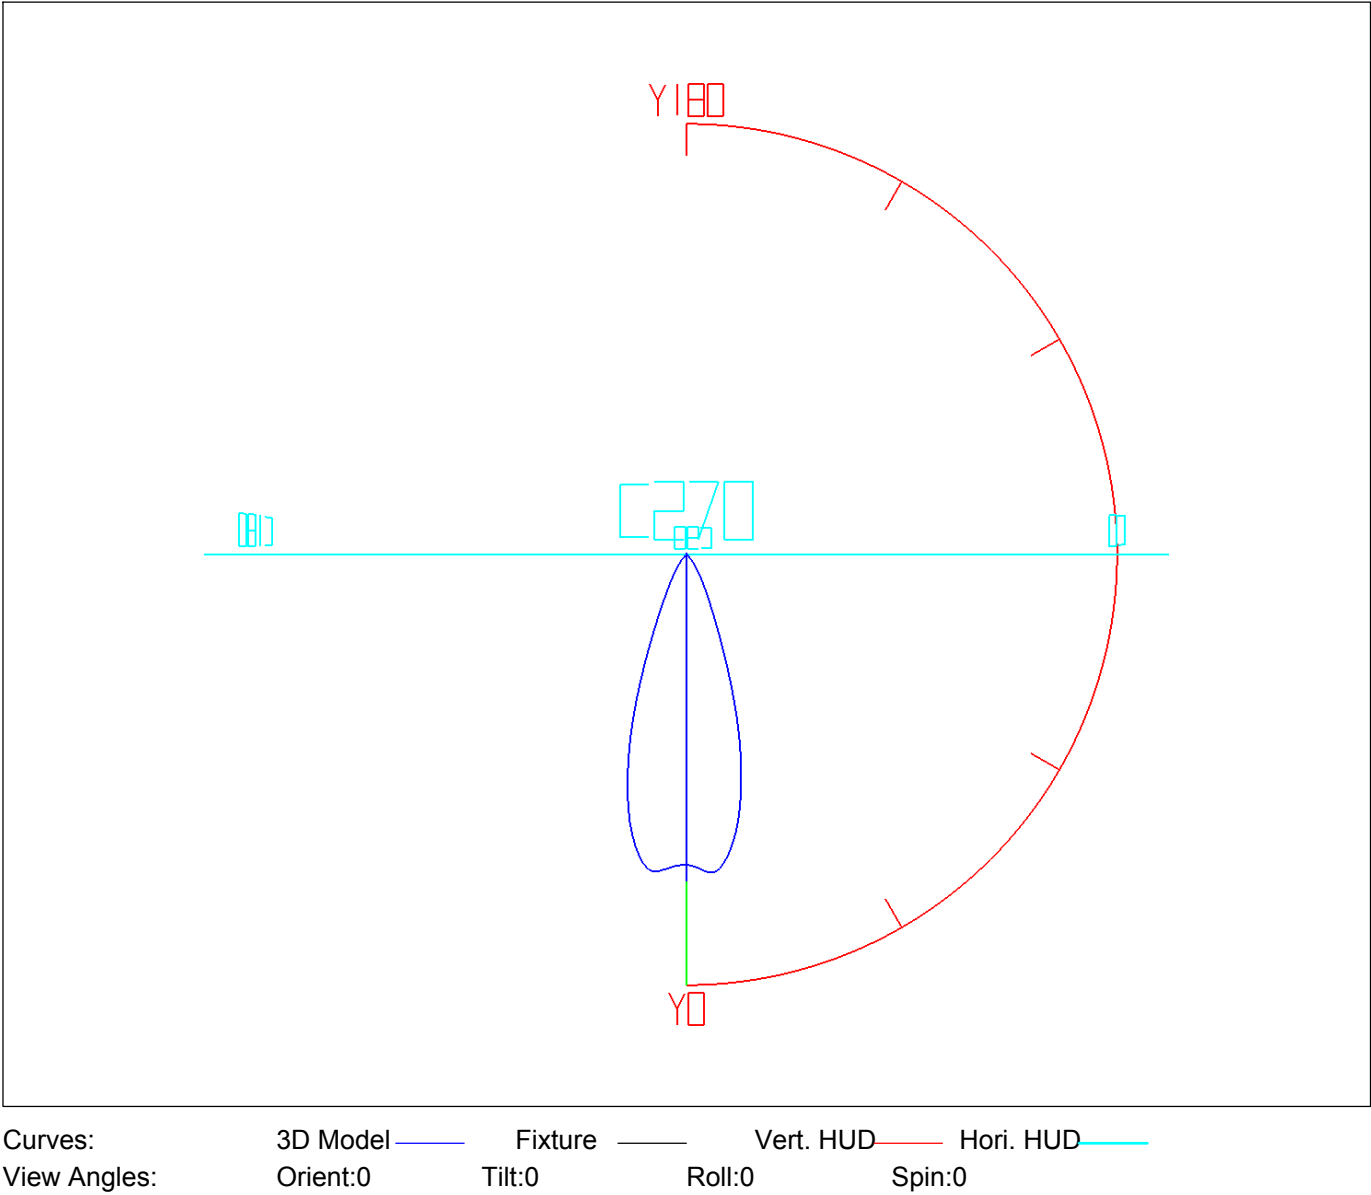

IES Indoor Report

Photometric Filename:SD01-08-XX-01 2700K RA90 36D.IES

Zonal Flux Tabulation


Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	1.34	1.34	0.22	0.22	47.0-48.0	0.95	592.81	0.16	97.04
1.0-2.0	4.03	5.38	0.66	0.88	48.0-49.0	0.90	593.71	0.15	97.19
2.0-3.0	6.76	12.14	1.11	1.99	49.0-50.0	0.85	594.55	0.14	97.33
3.0-4.0	9.54	21.68	1.56	3.55	50.0-51.0	0.79	595.34	0.13	97.46
4.0-5.0	12.32	34.00	2.02	5.57	51.0-52.0	0.73	596.07	0.12	97.57
5.0-6.0	15.05	49.05	2.46	8.03	52.0-53.0	0.68	596.76	0.11	97.69
6.0-7.0	17.65	66.70	2.89	10.92	53.0-54.0	0.64	597.40	0.11	97.79
7.0-8.0	20.01	86.71	3.28	14.19	54.0-55.0	0.61	598.01	0.10	97.89
8.0-9.0	22.12	108.83	3.62	17.81	55.0-56.0	0.59	598.60	0.10	97.99
9.0-10.0	23.97	132.80	3.92	21.74	56.0-57.0	0.56	599.16	0.09	98.08
10.0-11.0	25.54	158.34	4.18	25.92	57.0-58.0	0.54	599.70	0.09	98.17
11.0-12.0	26.75	185.09	4.38	30.30	58.0-59.0	0.52	600.22	0.09	98.25
12.0-13.0	27.58	212.67	4.51	34.81	59.0-60.0	0.50	600.72	0.08	98.34
13.0-14.0	28.01	240.68	4.59	39.40	60.0-61.0	0.48	601.20	0.08	98.41
14.0-15.0	28.05	268.73	4.59	43.99	61.0-62.0	0.46	601.66	0.08	98.49
15.0-16.0	27.68	296.41	4.53	48.52	62.0-63.0	0.44	602.10	0.07	98.56
16.0-17.0	26.91	323.32	4.41	52.93	63.0-64.0	0.42	602.53	0.07	98.63
17.0-18.0	25.71	349.03	4.21	57.14	64.0-65.0	0.41	602.93	0.07	98.70
18.0-19.0	24.12	373.16	3.95	61.08	65.0-66.0	0.39	603.32	0.06	98.76
19.0-20.0	22.28	395.44	3.65	64.73	66.0-67.0	0.37	603.69	0.06	98.82
20.0-21.0	20.31	415.75	3.32	68.06	67.0-68.0	0.35	604.05	0.06	98.88
21.0-22.0	18.34	434.09	3.00	71.06	68.0-69.0	0.34	604.38	0.06	98.93
22.0-23.0	16.47	450.56	2.70	73.76	69.0-70.0	0.32	604.70	0.05	98.99
23.0-24.0	14.76	465.33	2.42	76.17	70.0-71.0	0.30	605.00	0.05	99.04
24.0-25.0	13.26	478.59	2.17	78.34	71.0-72.0	0.28	605.29	0.05	99.08
25.0-26.0	11.97	490.56	1.96	80.30	72.0-73.0	0.26	605.55	0.04	99.13
26.0-27.0	10.88	501.43	1.78	82.08	73.0-74.0	0.24	605.79	0.04	99.17
27.0-28.0	9.93	511.36	1.63	83.71	74.0-75.0	0.23	606.02	0.04	99.20
28.0-29.0	9.08	520.45	1.49	85.19	75.0-76.0	0.21	606.23	0.03	99.24
29.0-30.0	8.32	528.76	1.36	86.56	76.0-77.0	0.19	606.42	0.03	99.27
30.0-31.0	7.61	536.38	1.25	87.80	77.0-78.0	0.17	606.59	0.03	99.30
31.0-32.0	6.96	543.33	1.14	88.94	78.0-79.0	0.16	606.75	0.03	99.32
32.0-33.0	6.34	549.68	1.04	89.98	79.0-80.0	0.14	606.89	0.02	99.35
33.0-34.0	5.77	555.44	0.94	90.92	80.0-81.0	0.13	607.02	0.02	99.37
34.0-35.0	5.23	560.67	0.86	91.78	81.0-82.0	0.11	607.13	0.02	99.38
35.0-36.0	4.72	565.39	0.77	92.55	82.0-83.0	0.10	607.22	0.02	99.40
36.0-37.0	4.24	569.63	0.69	93.25	83.0-84.0	0.08	607.30	0.01	99.41
37.0-38.0	3.81	573.44	0.62	93.87	84.0-85.0	0.07	607.37	0.01	99.42
38.0-39.0	3.44	576.88	0.56	94.43	85.0-86.0	0.06	607.43	0.01	99.43
39.0-40.0	3.10	579.98	0.51	94.94	86.0-87.0	0.04	607.47	0.01	99.44
40.0-41.0	2.77	582.75	0.45	95.39	87.0-88.0	0.03	607.51	0.01	99.45
41.0-42.0	2.35	585.10	0.39	95.78	88.0-89.0	0.03	607.53	0.00	99.45
42.0-43.0	1.88	586.98	0.31	96.09	89.0-90.0	0.02	607.55	0.00	99.45
43.0-44.0	1.49	588.47	0.24	96.33	90.0-91.0	0.01	607.56	0.00	99.46
44.0-45.0	1.25	589.71	0.20	96.53	91.0-92.0	0.01	607.58	0.00	99.46
45.0-46.0	1.11	590.83	0.18	96.72	92.0-93.0	0.01	607.58	0.00	99.46
46.0-47.0	1.02	591.85	0.17	96.88	93.0-94.0	0.01	607.59	0.00	99.46

Zonal Flux Tabulation - (Cont.)

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	607.59	0.00	99.46	141.0-142.0	0.07	607.97	0.01	99.52
95.0-96.0	0.00	607.59	0.00	99.46	142.0-143.0	0.07	608.04	0.01	99.53
96.0-97.0	0.00	607.59	0.00	99.46	143.0-144.0	0.08	608.12	0.01	99.55
97.0-98.0	0.00	607.59	0.00	99.46	144.0-145.0	0.09	608.21	0.01	99.56
98.0-99.0	0.00	607.59	0.00	99.46	145.0-146.0	0.09	608.30	0.01	99.58
99.0-100.0	0.00	607.59	0.00	99.46	146.0-147.0	0.10	608.40	0.02	99.59
100.0-101.0	0.00	607.59	0.00	99.46	147.0-148.0	0.10	608.49	0.02	99.61
101.0-102.0	0.00	607.59	0.00	99.46	148.0-149.0	0.10	608.60	0.02	99.62
102.0-103.0	0.00	607.59	0.00	99.46	149.0-150.0	0.11	608.70	0.02	99.64
103.0-104.0	0.00	607.59	0.00	99.46	150.0-151.0	0.11	608.81	0.02	99.66
104.0-105.0	0.00	607.59	0.00	99.46	151.0-152.0	0.11	608.92	0.02	99.68
105.0-106.0	0.00	607.59	0.00	99.46	152.0-153.0	0.11	609.04	0.02	99.70
106.0-107.0	0.00	607.59	0.00	99.46	153.0-154.0	0.11	609.15	0.02	99.71
107.0-108.0	0.00	607.59	0.00	99.46	154.0-155.0	0.11	609.26	0.02	99.73
108.0-109.0	0.00	607.59	0.00	99.46	155.0-156.0	0.11	609.37	0.02	99.75
109.0-110.0	0.00	607.59	0.00	99.46	156.0-157.0	0.11	609.48	0.02	99.77
110.0-111.0	0.00	607.59	0.00	99.46	157.0-158.0	0.11	609.59	0.02	99.79
111.0-112.0	0.00	607.59	0.00	99.46	158.0-159.0	0.11	609.70	0.02	99.81
112.0-113.0	0.00	607.59	0.00	99.46	159.0-160.0	0.10	609.80	0.02	99.82
113.0-114.0	0.00	607.59	0.00	99.46	160.0-161.0	0.10	609.91	0.02	99.84
114.0-115.0	0.00	607.59	0.00	99.46	161.0-162.0	0.10	610.00	0.02	99.85
115.0-116.0	0.00	607.59	0.00	99.46	162.0-163.0	0.09	610.10	0.02	99.87
116.0-117.0	0.00	607.59	0.00	99.46	163.0-164.0	0.09	610.19	0.01	99.88
117.0-118.0	0.00	607.59	0.00	99.46	164.0-165.0	0.08	610.27	0.01	99.90
118.0-119.0	0.00	607.59	0.00	99.46	165.0-166.0	0.08	610.35	0.01	99.91
119.0-120.0	0.00	607.59	0.00	99.46	166.0-167.0	0.07	610.42	0.01	99.92
120.0-121.0	0.00	607.59	0.00	99.46	167.0-168.0	0.07	610.49	0.01	99.93
121.0-122.0	0.00	607.59	0.00	99.46	168.0-169.0	0.06	610.55	0.01	99.94
122.0-123.0	0.00	607.59	0.00	99.46	169.0-170.0	0.06	610.61	0.01	99.95
123.0-124.0	0.00	607.59	0.00	99.46	170.0-171.0	0.05	610.66	0.01	99.96
124.0-125.0	0.00	607.59	0.00	99.46	171.0-172.0	0.05	610.71	0.01	99.97
125.0-126.0	0.00	607.59	0.00	99.46	172.0-173.0	0.04	610.75	0.01	99.98
126.0-127.0	0.00	607.59	0.00	99.46	173.0-174.0	0.04	610.79	0.01	99.98
127.0-128.0	0.00	607.59	0.00	99.46	174.0-175.0	0.03	610.82	0.01	99.99
128.0-129.0	0.00	607.59	0.00	99.46	175.0-176.0	0.03	610.84	0.00	99.99
129.0-130.0	0.00	607.59	0.00	99.46	176.0-177.0	0.02	610.86	0.00	100.00
130.0-131.0	0.00	607.59	0.00	99.46	177.0-178.0	0.01	610.88	0.00	100.00
131.0-132.0	0.00	607.60	0.00	99.46	178.0-179.0	0.01	610.89	0.00	100.00
132.0-133.0	0.01	607.60	0.00	99.46	179.0-180.0	0.00	610.89	0.00	100.00
133.0-134.0	0.01	607.62	0.00	99.46					
134.0-135.0	0.02	607.63	0.00	99.47					
135.0-136.0	0.03	607.66	0.00	99.47					
136.0-137.0	0.03	607.69	0.01	99.48					
137.0-138.0	0.04	607.73	0.01	99.48					
138.0-139.0	0.05	607.78	0.01	99.49					
139.0-140.0	0.06	607.84	0.01	99.50					
140.0-141.0	0.06	607.90	0.01	99.51					

Rectangle ISO Lighting Intensity Diagram


Lum. Name: SD01-08-XX-01 2700K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co.Ltd	Test Machine:GON-2000	Test Date: 2021/04/29

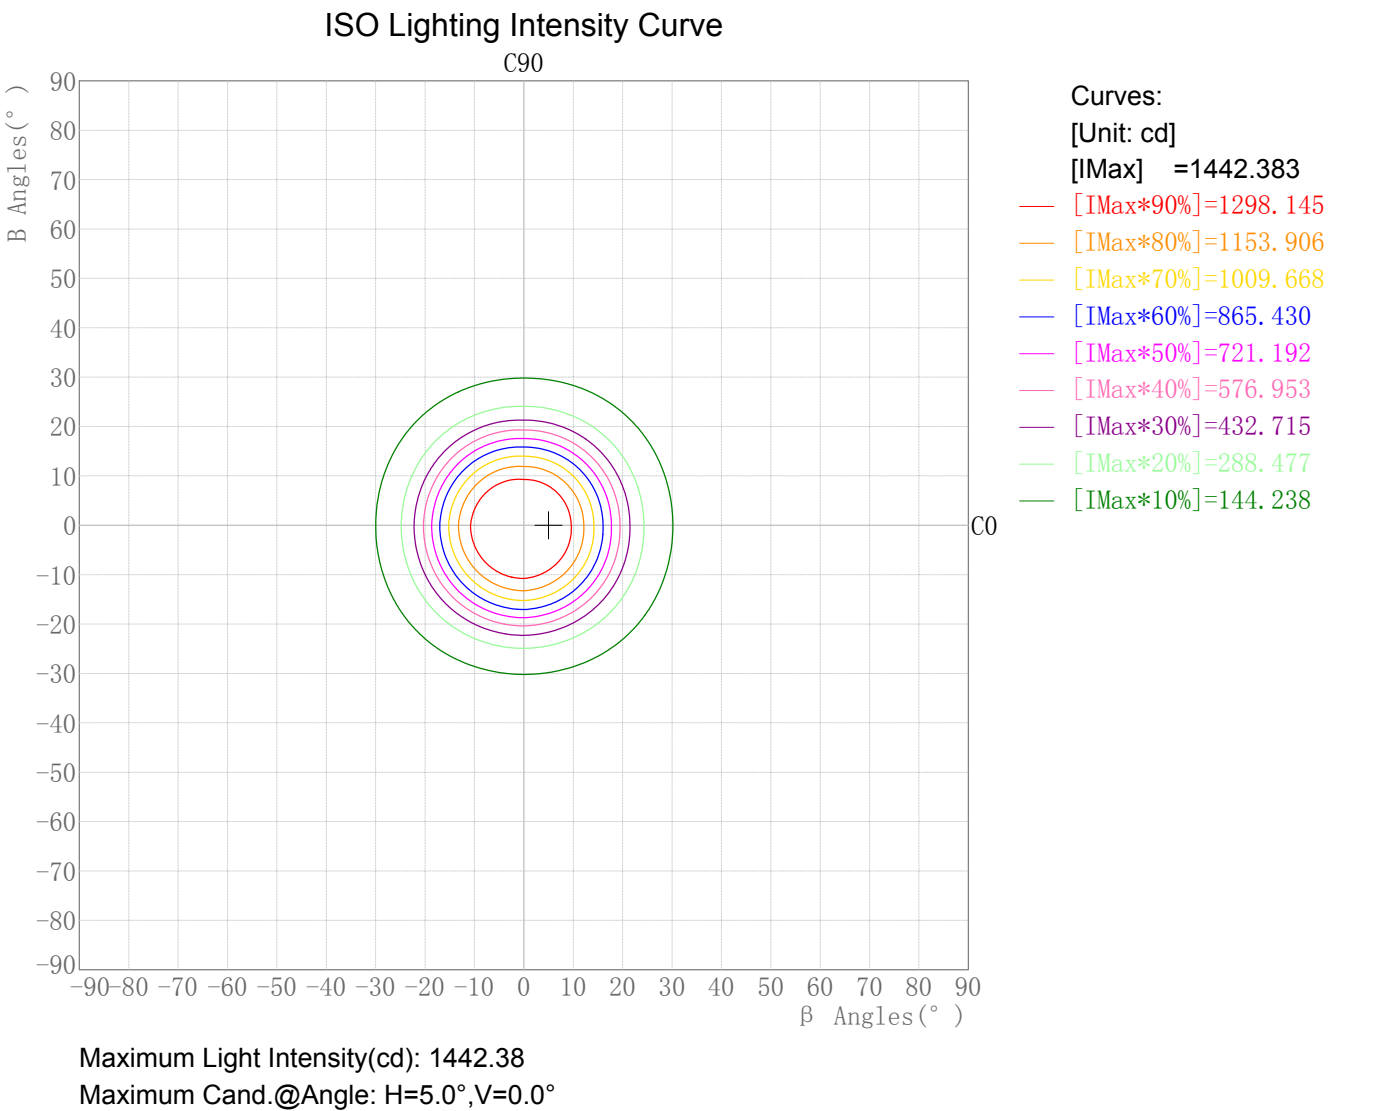

Plane ISO-Illuminance Diagram

Lum. Name: SD01-08-XX-01 2700K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co.Ltd	Test Machine:GON-2000	Test Date: 2021/04/29

Plane ISO-Illuminance Curve

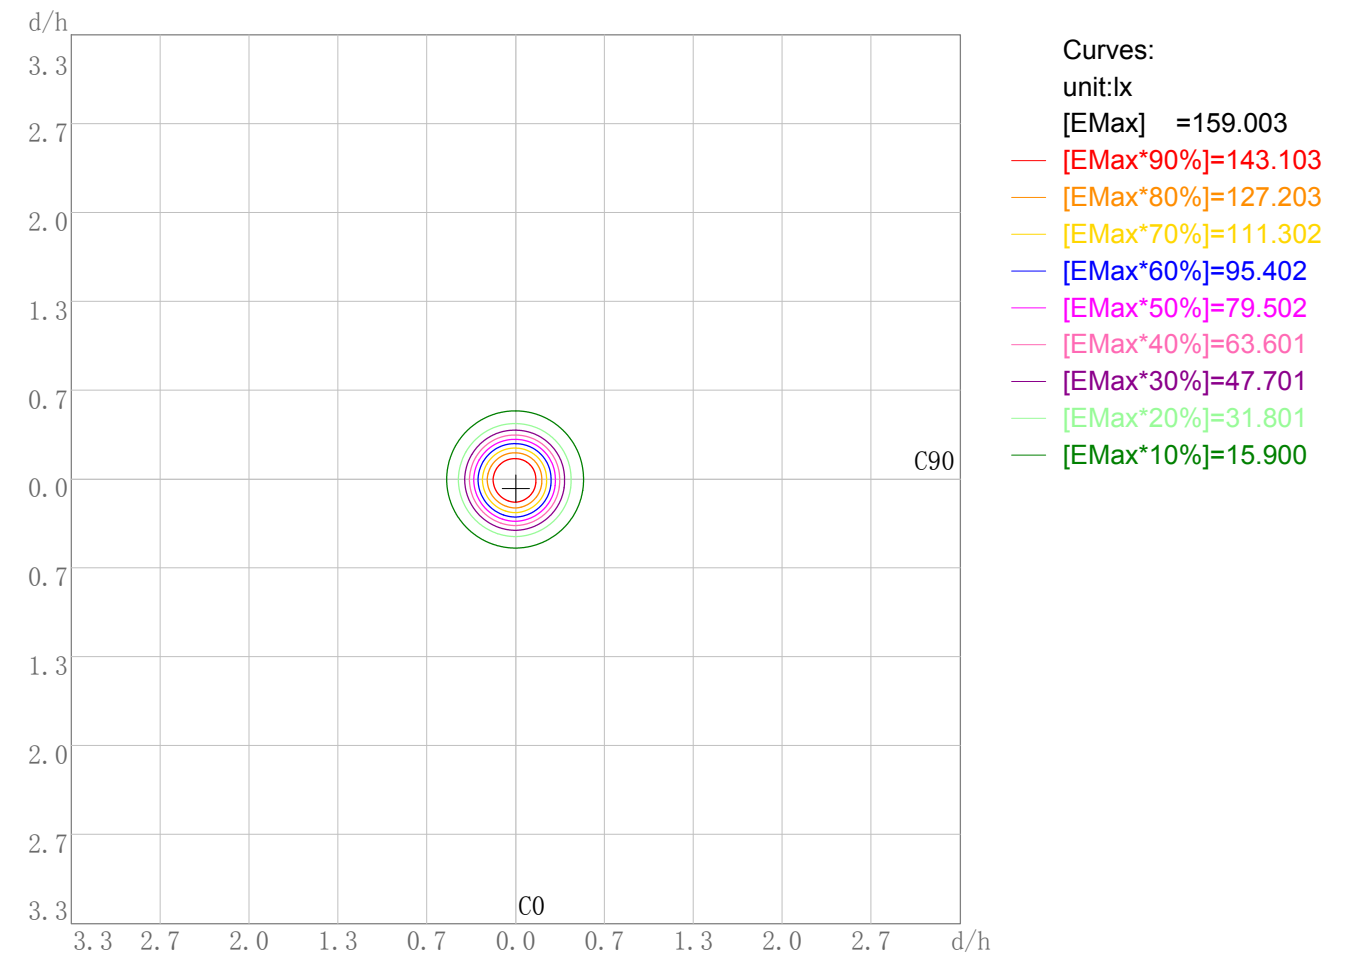

Working Plane Luminaire Mounting Height(m): 3.00

Working Plane Maximum Illuminance(lx): 159.00

Working Plane Maximum Illuminance Position(d/h):H0.0 V0.1


IES Indoor Report

Photometric Filename:SD01-08-XX-01 2700K RA90 36D.IES

3D Plane ISO Illuminance Diagram

Lum. Name: SD01-08-XX-01 2700K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co.Ltd	Test Machine:GON-2000	Test Date: 2021/04/29

3D Plane Illuminance Modal

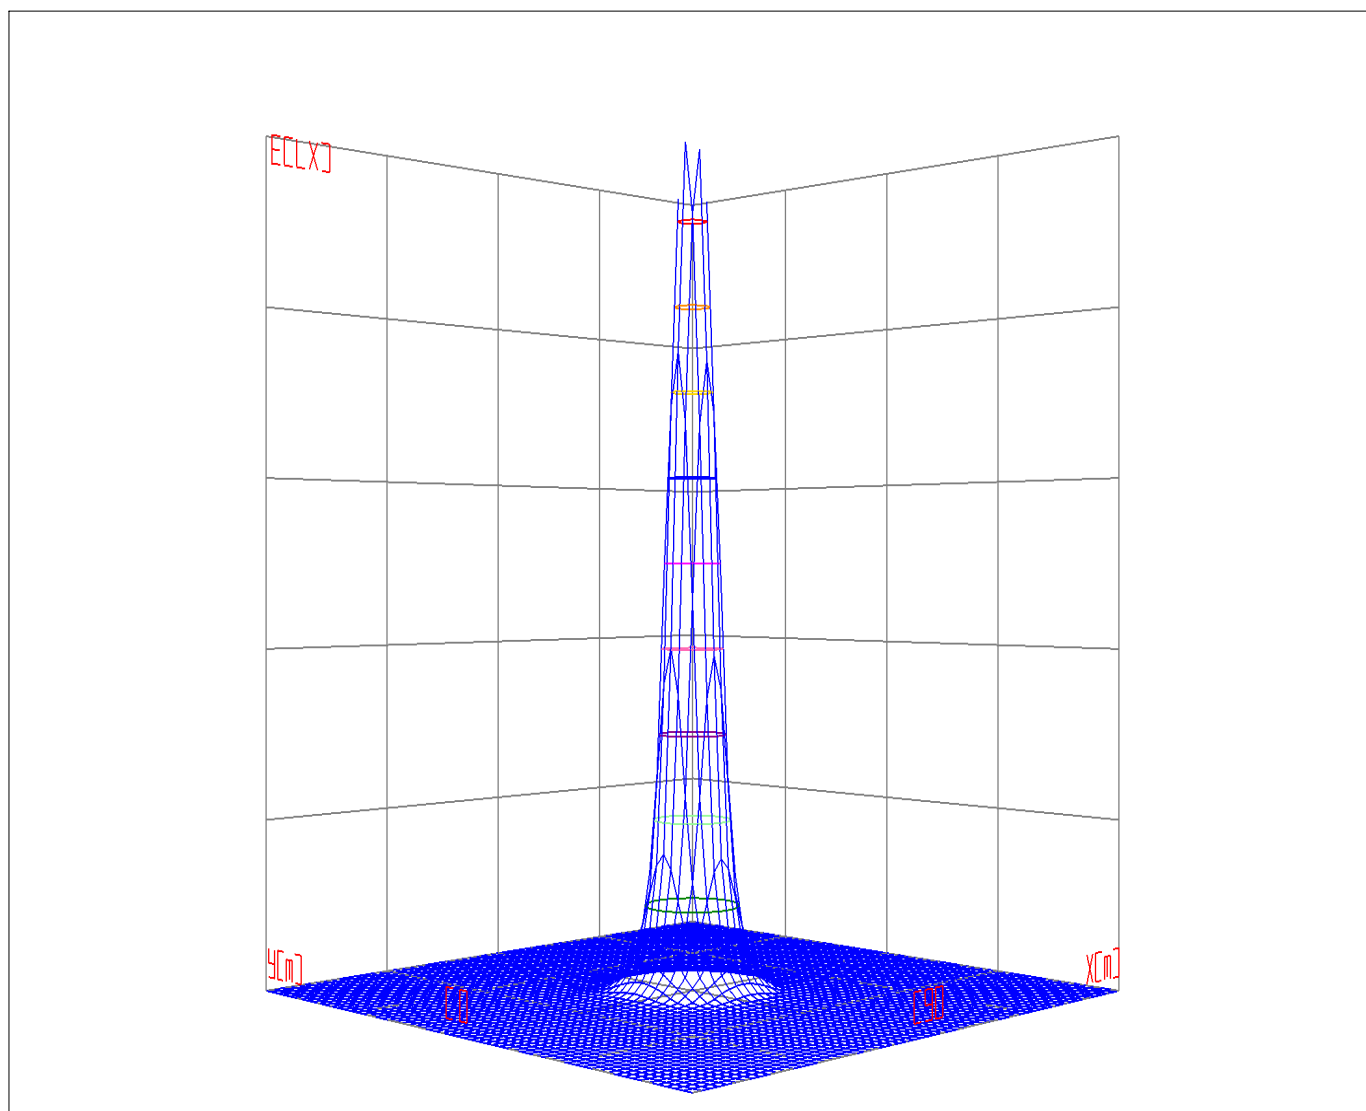


Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0

Space ISO Illuminance Diagram

Lum. Name: SD01-08-XX-01 2700K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co.Ltd	Test Machine:GON-2000	Test Date: 2021/04/29


Space ISO Illuminance Curve

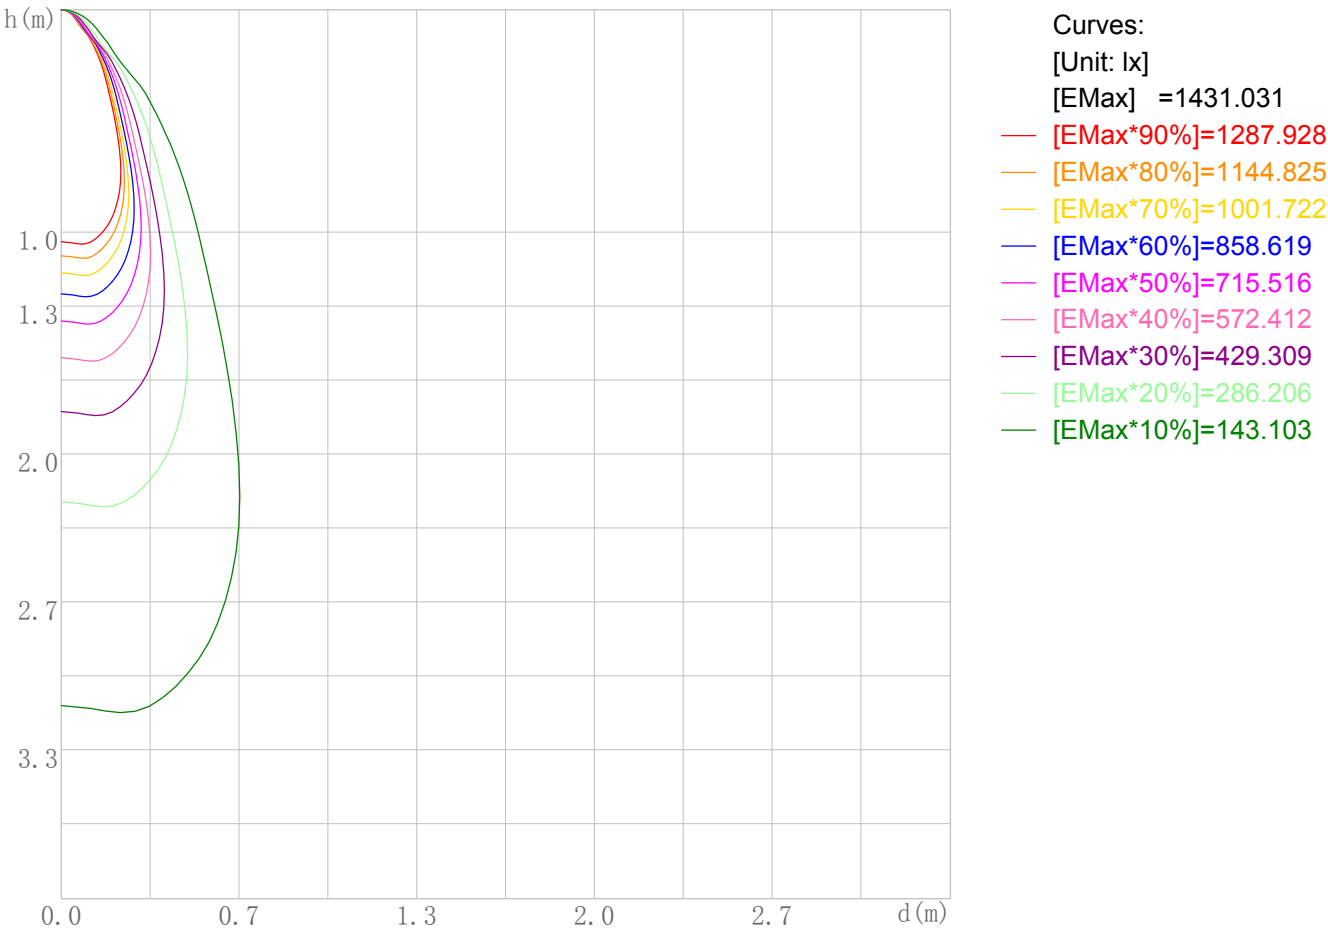

Space Plane Maximum Illuminance and @Angle:1431.03lx,4.0deg
Plane Maximum Lighting Intensity and @Angle:1442.383cd,0deg

Illuminance-Distance Diagram

Lum. Name: SD01-08-XX-01 2700K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co.Ltd	Test Machine:GON-2000	Test Date: 2021/04/29

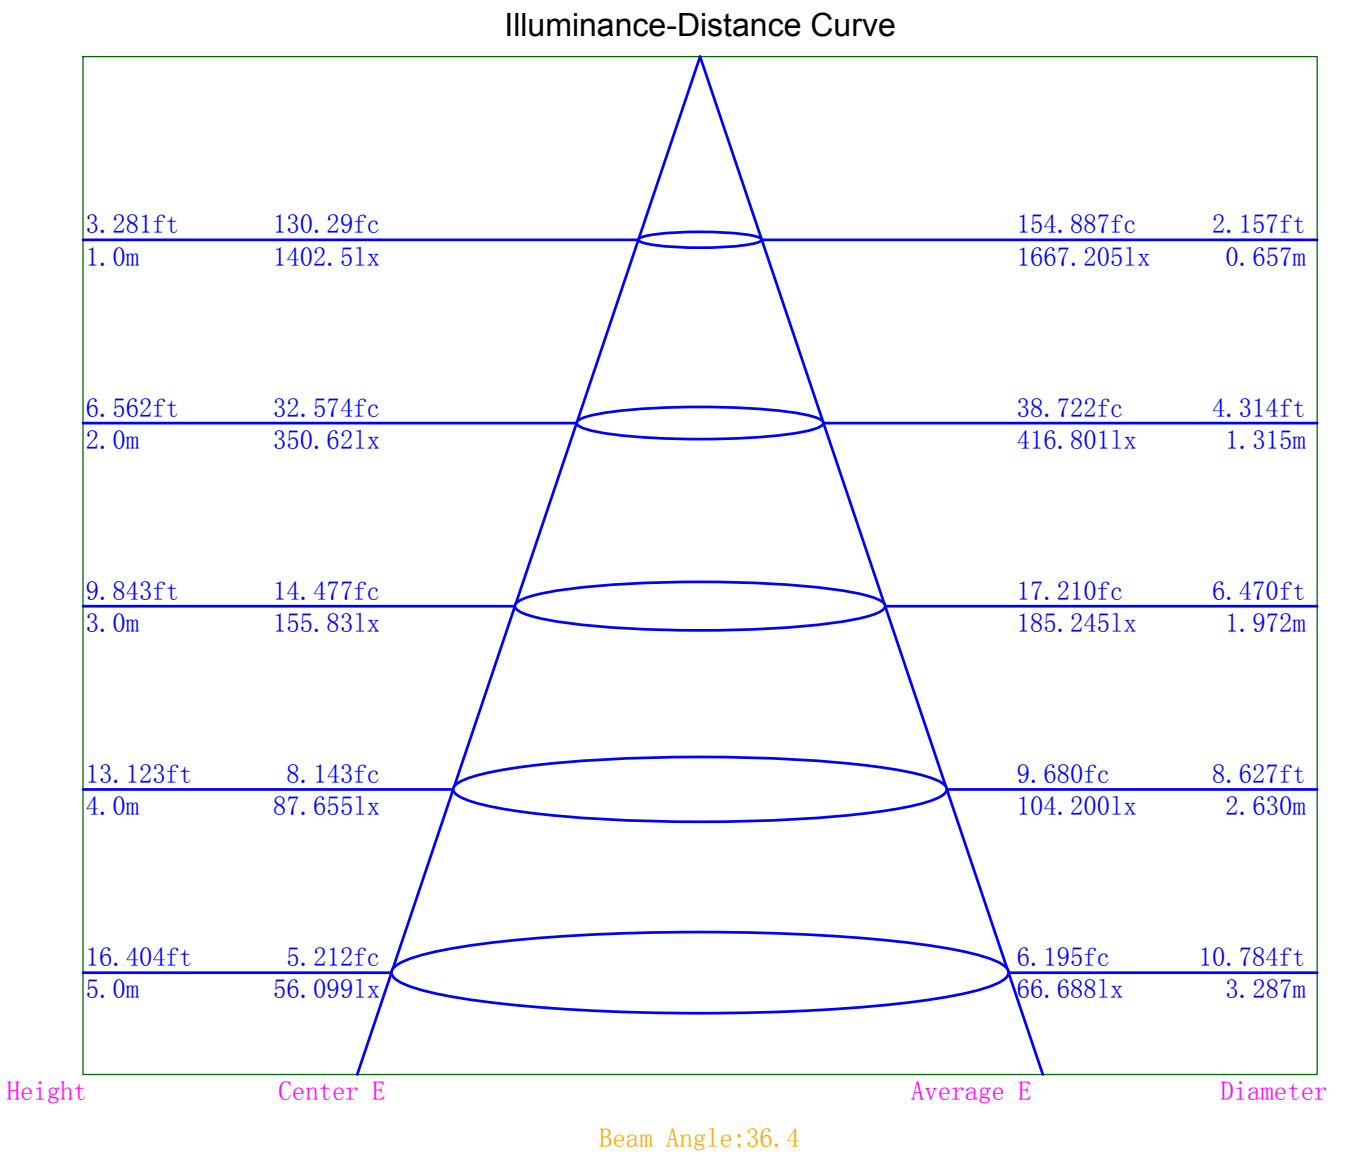

Indoor Luminance Limiting Curves

Lum. Name: SD01-08-XX-01 2700K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co.Ltd	Test Machine:GON-2000	Test Date: 2021/04/29


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	12052	8657	6617	5752	5190	4804	4378	4121	4447
C90	10349	7261	5374	4558	3986	3489	2828	2120	894

Luminance Limiting Curve

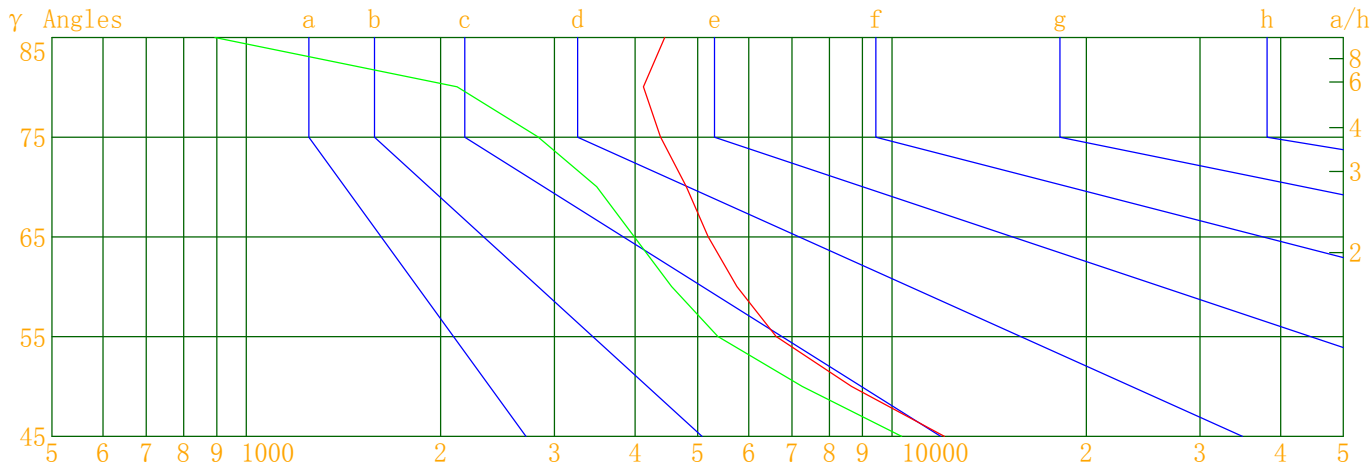

Luminous Size:

Length(m)=0.000

Width(m)=-0.050

Height(m)=0.000

Area(m^2)=0.001963

Luminous Type:

Without Luminous Side


Luminous Curves:

C0-C180 Color: —

C90-C270 Color: —

Indoor Budgetary Estimate Table

Lum. Name: SD01-08-XX-01 2700K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co.Ltd	Test Machine:GON-2000	Test Date: 2021/04/29

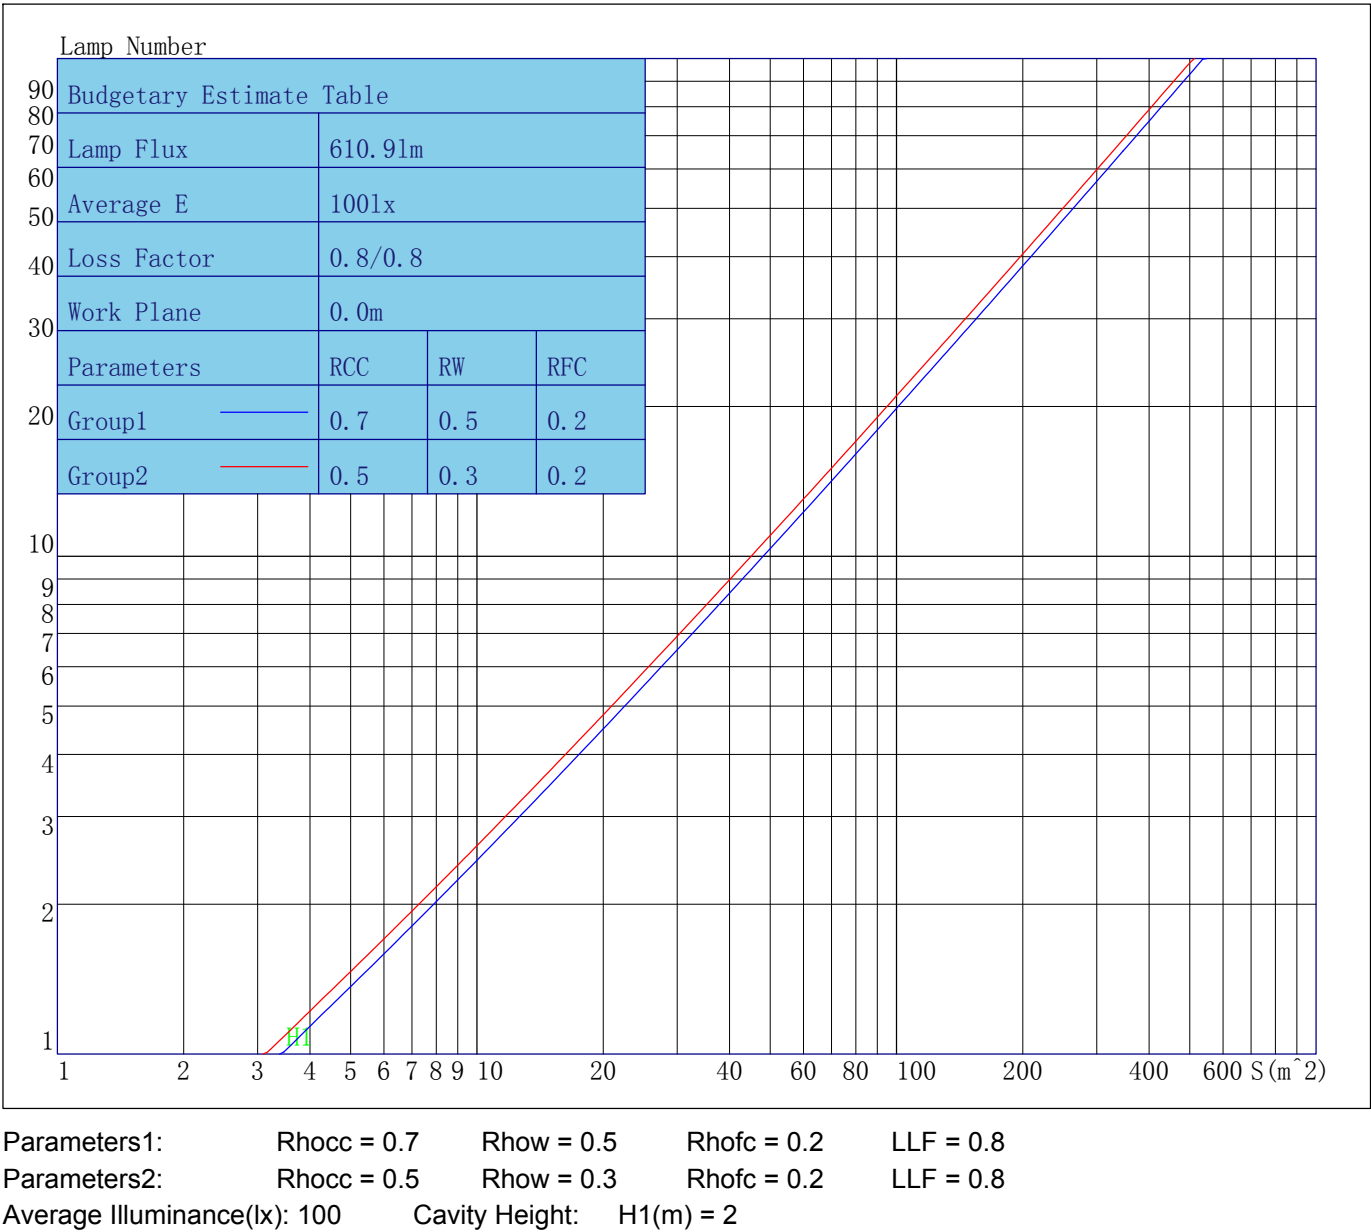

Indoor Coefficient of Utilization Table

Lum. Name: SD01-08-XX-01 2700K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co.Ltd	Test Machine:GON-2000	Test Date: 2021/04/29

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	99
1	114	112	109	107	112	109	108	106	105	104	102	102	100	99	98	97	96	95
2	109	105	102	99	107	104	100	98	100	98	95	97	95	93	94	93	91	90
3	105	100	95	92	103	98	94	91	96	92	90	93	91	88	91	89	87	85
4	101	95	90	86	99	93	89	86	91	88	85	89	86	84	88	85	83	81
5	97	90	85	82	96	89	85	81	87	84	81	86	82	80	84	81	79	78
6	93	86	81	78	92	85	81	77	84	80	77	82	79	76	81	78	76	74
7	90	82	77	74	89	82	77	74	81	76	73	79	76	73	78	75	73	71
8	87	79	74	71	86	78	74	71	77	73	70	76	73	70	76	72	70	68
9	84	76	71	68	83	75	71	68	75	70	67	74	70	67	73	69	67	66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	70	67	64	63

Unified Glare Rating Table

Lum. Name: SD01-08-XX-01 2700K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co.Ltd	Test Machine:GON-2000	Test Date: 2021/04/29

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size	Vewed crosswise					Vewed endwise				
X=2H Y=2H	15.3	16.2	15.6	16.5	16.8	14.7	15.7	15.1	16.0	16.3
	15.4	16.2	15.8	16.6	17.0	14.8	15.6	15.2	16.0	16.3
	15.5	16.2	15.9	16.6	17.0	14.8	15.6	15.2	15.9	16.3
	15.5	16.2	16.0	16.6	17.0	14.8	15.5	15.2	15.8	16.2
	15.6	16.2	16.0	16.6	17.0	14.7	15.4	15.2	15.8	16.2
	15.6	16.2	16.0	16.6	17.0	14.7	15.3	15.1	15.7	16.1
X=4H Y=2H	15.1	15.9	15.5	16.3	16.7	14.6	15.4	15.0	15.7	16.1
	15.4	16.0	15.8	16.4	16.9	14.7	15.4	15.2	15.8	16.2
	15.5	16.1	16.0	16.5	17.0	14.8	15.3	15.2	15.8	16.2
	15.7	16.2	16.2	16.6	17.1	14.8	15.3	15.3	15.7	16.2
	15.7	16.2	16.2	16.6	17.1	14.7	15.2	15.2	15.7	16.1
	15.8	16.1	16.3	16.6	17.1	14.7	15.1	15.2	15.6	16.1
X=8H Y=4H	15.5	15.9	16.0	16.4	16.9	14.7	15.2	15.2	15.6	16.1
	15.7	16.1	16.2	16.6	17.1	14.8	15.1	15.3	15.6	16.1
	15.8	16.1	16.3	16.6	17.2	14.7	15.0	15.3	15.6	16.1
	15.9	16.2	16.4	16.7	17.3	14.7	15.0	15.2	15.5	16.1
X=12H Y=4H	15.4	15.8	15.9	16.3	16.8	14.7	15.0	15.2	15.5	16.0
	15.7	16.0	16.2	16.5	17.0	14.7	15.0	15.3	15.5	16.1
	15.8	16.1	16.3	16.6	17.2	14.7	15.0	15.3	15.5	16.1
Variations with the objerver position at spacings										
S=1.0H	0.4/-0.4					0.7/-0.8				
S=1.5H	0.8/-0.9					1.2/-1.4				
S=2.0H	1.0/-1.1					1.6/-2.0				
Reduced UGR Table:										
Nordic Standard Table:	BK0					BK0				
Correction Value	0.9					0.6				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

IES Indoor Report

Photometric Filename:SD01-08-XX-01 2700K RA90 36D.IES

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	1402.49	1402.49	1402.49	1402.49
γ 1.0	1408.81	1399.91	1404.58	1394.93
γ 2.0	1417.15	1407.41	1409.17	1400.91
γ 3.0	1430.46	1419.26	1418.66	1408.84
γ 4.0	1441.54	1430.09	1427.43	1419.19
γ 5.0	1442.38	1429.82	1436.89	1428.40
γ 6.0	1429.18	1416.47	1441.20	1433.58
γ 7.0	1402.32	1389.25	1432.32	1426.86
γ 8.0	1367.69	1352.28	1409.68	1404.67
γ 9.0	1325.41	1311.16	1376.06	1371.74
γ 10.0	1279.04	1263.95	1336.00	1331.70
γ 11.0	1225.47	1210.49	1288.33	1288.29
γ 12.0	1163.61	1147.54	1234.18	1231.80
γ 13.0	1095.37	1079.92	1170.88	1171.13
γ 14.0	1024.01	1008.76	1101.02	1102.24
γ 15.0	948.14	933.12	1026.71	1028.82
γ 16.0	868.24	852.39	948.90	950.88
γ 17.0	784.54	769.26	867.83	870.41
γ 18.0	697.67	682.89	780.25	784.39
γ 19.0	613.86	600.11	691.04	696.16
γ 20.0	534.41	522.15	603.90	608.24
γ 21.0	462.62	451.02	522.34	526.41
γ 22.0	399.75	389.54	447.70	451.69
γ 23.0	345.71	335.58	382.86	387.24
γ 24.0	300.07	291.43	327.04	331.25
γ 25.0	262.96	254.60	280.47	284.47
γ 26.0	232.33	224.73	242.25	246.37
γ 27.0	206.66	199.28	211.32	215.40
γ 28.0	184.30	177.55	185.27	189.07
γ 29.0	164.71	158.03	163.13	166.91
γ 30.0	147.05	140.87	143.90	147.64
γ 31.0	131.31	125.49	127.11	130.69
γ 32.0	117.28	111.63	112.16	115.78
γ 33.0	104.11	98.77	99.12	102.46
γ 34.0	92.63	87.58	87.14	90.37
γ 35.0	81.87	77.22	76.70	79.78
γ 36.0	72.49	68.01	66.81	69.74
γ 37.0	64.32	60.16	57.65	60.54
γ 38.0	57.11	53.23	50.47	53.25
γ 39.0	50.66	46.95	44.27	46.94
γ 40.0	44.99	41.43	38.96	41.53
γ 41.0	38.27	34.94	34.25	36.74
γ 42.0	27.83	24.77	30.01	32.44
γ 43.0	22.06	19.31	22.18	24.25
γ 44.0	18.94	16.42	16.15	18.23
γ 45.0	16.73	14.37	13.56	15.50
γ 46.0	15.16	12.96	11.89	13.77

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	13.93	11.84	10.79	12.54
γ 48.0	12.89	10.93	9.94	11.61
γ 49.0	11.97	10.09	9.30	10.89
γ 50.0	10.93	9.16	8.74	10.23
γ 51.0	9.85	8.17	8.12	9.55
γ 52.0	9.10	7.49	7.23	8.61
γ 53.0	8.45	6.92	6.72	8.04
γ 54.0	7.91	6.45	6.30	7.57
γ 55.0	7.45	6.05	5.95	7.18
γ 56.0	7.04	5.68	5.71	6.87
γ 57.0	6.66	5.34	5.44	6.57
γ 58.0	6.29	5.03	5.20	6.29
γ 59.0	5.95	4.73	4.96	6.01
γ 60.0	5.65	4.47	4.75	5.75
γ 61.0	5.37	4.22	4.53	5.52
γ 62.0	5.08	3.97	4.33	5.28
γ 63.0	4.80	3.72	4.13	5.05
γ 64.0	4.55	3.51	3.93	4.83
γ 65.0	4.31	3.31	3.73	4.61
γ 66.0	4.07	3.10	3.56	4.40
γ 67.0	3.85	2.90	3.38	4.20
γ 68.0	3.64	2.72	3.22	4.01
γ 69.0	3.43	2.53	3.04	3.81
γ 70.0	3.23	2.34	2.87	3.62
γ 71.0	3.01	2.15	2.69	3.43
γ 72.0	2.80	1.96	2.49	3.22
γ 73.0	2.60	1.77	2.31	3.02
γ 74.0	2.40	1.60	2.11	2.81
γ 75.0	2.22	1.44	1.93	2.61
γ 76.0	2.04	1.29	1.75	2.41
γ 77.0	1.87	1.14	1.58	2.23
γ 78.0	1.71	0.99	1.41	2.05
γ 79.0	1.55	0.85	1.25	1.87
γ 80.0	1.40	0.72	1.10	1.70
γ 81.0	1.27	0.59	0.95	1.54
γ 82.0	1.14	0.47	0.81	1.38
γ 83.0	1.01	0.36	0.66	1.23
γ 84.0	0.88	0.25	0.54	1.08
γ 85.0	0.76	0.15	0.40	0.94
γ 86.0	0.65	0.06	0.28	0.80
γ 87.0	0.54	0.00	0.17	0.69
γ 88.0	0.43	0.00	0.06	0.56
γ 89.0	0.34	0.00	0.00	0.44
γ 90.0	0.28	0.00	0.00	0.34
γ 91.0	0.22	0.00	0.00	0.26
γ 92.0	0.17	0.00	0.00	0.21
γ 93.0	0.11	0.00	0.00	0.14

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	0.07	0.00	0.00	0.09
γ 95.0	0.02	0.00	0.00	0.04
γ 96.0	0.00	0.00	0.00	0.00
γ 97.0	0.00	0.00	0.00	0.00
γ 98.0	0.00	0.00	0.00	0.00
γ 99.0	0.00	0.00	0.00	0.00
γ 100.0	0.00	0.00	0.00	0.00
γ 101.0	0.00	0.00	0.00	0.00
γ 102.0	0.00	0.00	0.00	0.00
γ 103.0	0.00	0.00	0.00	0.00
γ 104.0	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00
γ 106.0	0.00	0.00	0.00	0.00
γ 107.0	0.00	0.00	0.00	0.00
γ 108.0	0.00	0.00	0.00	0.00
γ 109.0	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00
γ 111.0	0.00	0.00	0.00	0.00
γ 112.0	0.00	0.00	0.00	0.00
γ 113.0	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.00
γ 122.0	0.00	0.00	0.00	0.00
γ 123.0	0.00	0.00	0.00	0.00
γ 124.0	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00
γ 126.0	0.00	0.00	0.00	0.00
γ 127.0	0.00	0.00	0.00	0.00
γ 128.0	0.00	0.00	0.00	0.00
γ 129.0	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00
γ 131.0	0.00	0.00	0.00	0.06
γ 132.0	0.00	0.00	0.05	0.14
γ 133.0	0.07	0.00	0.15	0.23
γ 134.0	0.16	0.01	0.24	0.32
γ 135.0	0.26	0.12	0.34	0.41
γ 136.0	0.36	0.23	0.46	0.52
γ 137.0	0.46	0.33	0.56	0.62
γ 138.0	0.58	0.44	0.67	0.72
γ 139.0	0.69	0.55	0.78	0.83
γ 140.0	0.81	0.68	0.90	0.95

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	0.92	0.80	1.02	1.05
γ 142.0	1.03	0.92	1.14	1.16
γ 143.0	1.14	1.03	1.26	1.27
γ 144.0	1.26	1.15	1.37	1.39
γ 145.0	1.37	1.27	1.49	1.50
γ 146.0	1.49	1.38	1.61	1.62
γ 147.0	1.60	1.49	1.71	1.72
γ 148.0	1.71	1.60	1.84	1.84
γ 149.0	1.81	1.71	1.94	1.94
γ 150.0	1.93	1.82	2.05	2.06
γ 151.0	2.02	1.93	2.15	2.15
γ 152.0	2.12	2.03	2.26	2.24
γ 153.0	2.21	2.12	2.35	2.34
γ 154.0	2.30	2.20	2.43	2.42
γ 155.0	2.38	2.28	2.52	2.51
γ 156.0	2.46	2.36	2.60	2.60
γ 157.0	2.52	2.43	2.67	2.65
γ 158.0	2.60	2.48	2.75	2.73
γ 159.0	2.65	2.54	2.81	2.79
γ 160.0	2.71	2.60	2.85	2.84
γ 161.0	2.74	2.64	2.90	2.87
γ 162.0	2.77	2.67	2.92	2.92
γ 163.0	2.79	2.70	2.96	2.94
γ 164.0	2.81	2.71	2.98	2.95
γ 165.0	2.83	2.72	2.99	2.96
γ 166.0	2.84	2.73	2.99	2.97
γ 167.0	2.84	2.73	2.99	2.96
γ 168.0	2.85	2.74	2.99	2.97
γ 169.0	2.85	2.75	2.99	2.97
γ 170.0	2.86	2.76	2.99	2.96
γ 171.0	2.87	2.77	2.99	2.96
γ 172.0	2.88	2.78	2.99	2.95
γ 173.0	2.89	2.80	2.99	2.96
γ 174.0	2.91	2.82	3.00	2.96
γ 175.0	2.93	2.83	3.01	2.96
γ 176.0	2.95	2.86	3.01	2.97
γ 177.0	2.96	2.87	3.02	2.97
γ 178.0	2.99	2.90	3.03	2.98
γ 179.0	3.01	2.92	3.03	2.99
γ 180.0	3.00	3.00	3.00	3.00
