





Finish

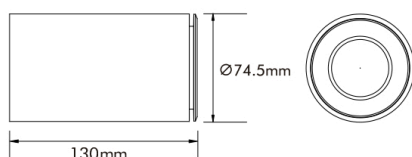

Reflector



## Packaging

Box Dimensions	L156 x W82 x H81mm
Box Net Weight	0.48Kg
Box Gross Weight	0.536Kg
Carton Dimensions	L425 x W325 x H345 mm/40 PCS
Carton Net Weight	19.2Kg
Carton Gross Weight	22.5Kg

## FEATURES

- Modular design, with replaceable LED light source inside.
- There are four color anti-glare reflectors optional.
- Gimbal.
- 5-year guarantee.

## Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC34V/180mA
Power	8W
Rated Input Current	0.04A
PF value	>0.9
THD	<20%
Ingress Protection	IP20
Operating Temperature	-10–40°C
Dimmability	Triac dimmable with <b>DIMMATE</b> driver

## Optical Data

LED Brand	Bridgelux COB LED
CRI	Ra> 80, Ra> 90
Colour temperature	2700K/3000K/4000K
System luminous efficacy	up to 102lm/W



Model	CCT		Beam Angle	Lumen	Efficacy		Beam Angle	Lumen	Efficacy
SD01-08-XX-01	2700K	CRI 80+	15°	645lm	84lm/W	CRI 90+	15°	596lm	75lm/W
			24°	677lm	88lm/W		24°	595lm	76lm/W
			36°	679lm	88lm/W		36°	610lm	78lm/W
			60°	633lm	81lm/W		60°	564lm	72lm/W
SD01-08-XX-01	3000K		15°	716lm	89lm/W		15°	601lm	76lm/W
			24°	734lm	93lm/W		24°	625lm	80lm/W
			36°	784lm	99lm/W		36°	654lm	82lm/W
			60°	723lm	92lm/W		60°	610lm	76lm/W
SD01-08-XX-01	4000K		15°	761lm	97lm/W		15°	665lm	84lm/W
			24°	798lm	102lm/W		24°	618lm	79lm/W
			36°	802lm	102lm/W		36°	679lm	87lm/W
			60°	760lm	96lm/W		60°	634lm	81lm/W

## ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04  
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS