





Finish

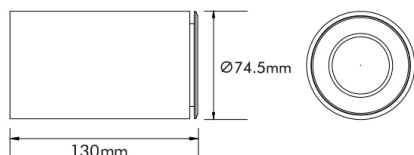

Reflector



Packaging

Box Dimensions	L156 x W82 x H81mm
Box Net Weight	0.486Kg
Box Gross Weight	0.54Kg
Carton Dimensions	L425 x W325 x H345 mm/40 PCS
Carton Net Weight	19.44Kg
Carton Gross Weight	22.17Kg

FEATURES

- Modular design, with replaceable LED light source inside.
- There are four color anti-glare reflectors optional.
- 5-year guarantee.

Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC18V/270mA
Power	6W
Rated Input Current	0.03A
PF value	>0.85
Ingress Protection	IP20
Operating Temperature	-10—40℃
Dimmability	Triac dimmable with DIMMATE driver

Optical Data

LED Brand	Bridgelux COB LED
CRI	Ra> 95
Colour temperature	2000K-3000K
System luminous efficacy up to	60lm/W



Model	CCT	Beam Angle	Lumen	Efficacy
SD04-06-DW-01	3000K	CRI 95+	15°	329lm
			24°	335lm
			36°	349lm
			60°	327lm
				56lm/W
				58lm/W
				60lm/W
				55lm/W

ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS