




## FEATURES

- Modular Design.
- System power up to 20W.
- Interchangeable anti-glare reflector.
- 5-year guarantee.

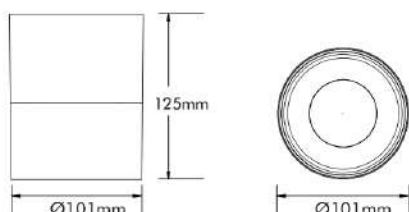

## Technical Data

|                        |                                |
|------------------------|--------------------------------|
| Input Voltage/Hz       | AC200-240V 50/60Hz             |
| Output Voltage/Current | DC36V/350mA                    |
| Power                  | 14W                            |
| Rated Input Current    | 0.07A                          |
| PF value               | >0.9                           |
| THD                    | <35%                           |
| Ingress Protection     | IP20                           |
| Operating Temperature  | -10-40°C                       |
| Dimmability            | Non-dimmable with AcTEC driver |

## Optical Data

|                                |                                                    |
|--------------------------------|----------------------------------------------------|
| LED Brand                      | Bridgelux SMD LED                                  |
| CRI                            | Ra > 92                                            |
| Beam Angle                     | 60°                                                |
| Colour temperature             | 2700k/3000K/4000K/5000K<br>2500k/2700K/3500K/4500K |
| System luminous efficacy up to | 88.7lm/W                                           |

## Packaging

|                     |                              |
|---------------------|------------------------------|
| Box Dimensions      | L105 x W105 x H170mm         |
| Box Net Weight      | 0.72Kg                       |
| Box Gross Weight    | 0.82Kg                       |
| Carton Dimensions   | L435 x W330 x H365 mm/24 PCS |
| Carton Net Weight   | 17.28Kg                      |
| Carton Gross Weight | 20.5Kg                       |



| Model         | CCT   |         | Beam Angle | Lumen  | Efficacy | Lumen  | Efficacy |
|---------------|-------|---------|------------|--------|----------|--------|----------|
| SD07-15-XX-01 | 2700K | CRI 92+ | 60°        | 1112lm | 80.4lm/W | 876lm  | 63.2lm/W |
| SD07-15-XX-01 | 3000K |         | 60°        | 1242lm | 88.7lm/W | 1033lm | 70.6lm/W |
| SD07-15-XX-01 | 4000K |         | 60°        | 1196lm | 86lm/W   | 946lm  | 67.7lm/W |
| SD07-15-XX-01 | 5000K |         | 60°        | 1205lm | 87.2lm/W | 947lm  | 68.7lm/W |

Reflector



| Model         | CCT   |         | Beam Angle | Lumen  | Efficacy |
|---------------|-------|---------|------------|--------|----------|
| SD07-15-XX-01 | 2500K | CRI 92+ | 60°        | 955lm  | 69lm/W   |
| SD07-15-XX-01 | 2700K |         | 60°        | 1040lm | 76.4lm/W |
| SD07-15-XX-01 | 3500K |         | 60°        | 1041lm | 73.3lm/W |
| SD07-15-XX-01 | 4500K |         | 60°        | 1026lm | 73.8lm/W |

Reflector



## ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04  
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS