



Indoor Luminaire Photometric Data

Description Information

Luminary Name: SD07-15-XX-01 3000K RA90 白色		Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Date: 2022/10/08
Manufacture: Shenzhen Norming Lightin		Shld. Ang(°):	Test Machine:GON-2000
Test Lab: Quality Departmnt		Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.055m*-0.055m*0.000m		Lum. Area (m2):0.002	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=1.0	Temp. (°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 1242.150	Luminary Flux(lm): 1242.151	Field Angle(10%Imax): 113.5(°)	
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 1187.852lm 95.63%	
Rated Voltage(V):	Luminary EER(lm/W): 88.725	Up Lumens&Percent: 54.299lm 4.37%	
Tested Power(W): 14.000	Max. Candela(cd): 907.908	S/MH: C0_a180=0.977 C90_270=0.971	
Lamps' Inside: 1	Max Cand@Ang. (°): C=180.0 γ=1.0	CIE Type: Semi-Direct	
Tested Electrics (V, A, pf):239.7, 0.063, 0.926	Beam Angle(50%Imax): 64.9(°)	ErP Φ use(90°): 916.732lm	
Lamp Size (W*L*H):0.055m*-0.055m*0.000m	Left=-32.0°, Right=32.9°	IRF(%): 190.279	

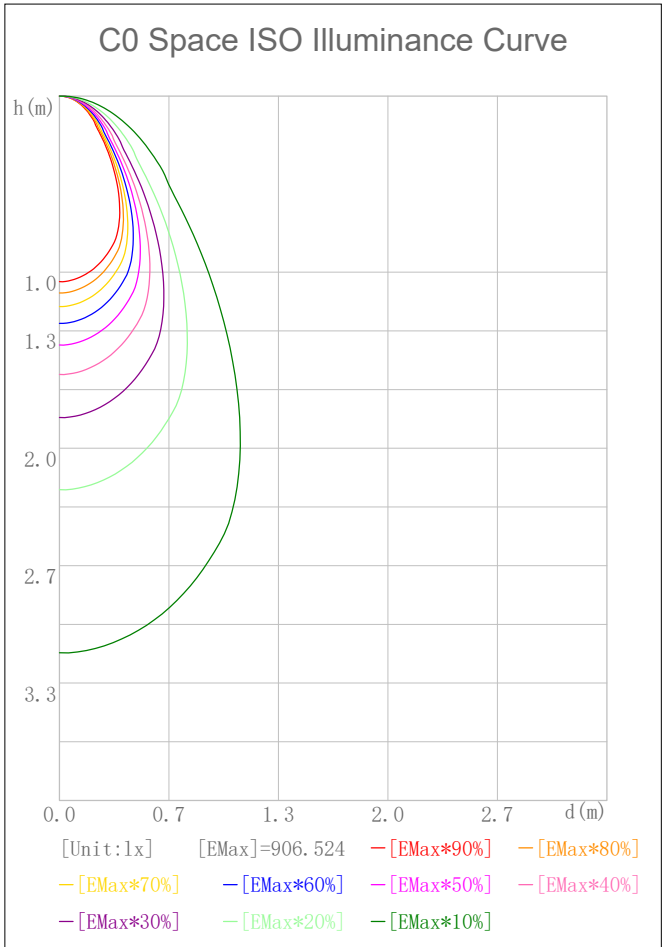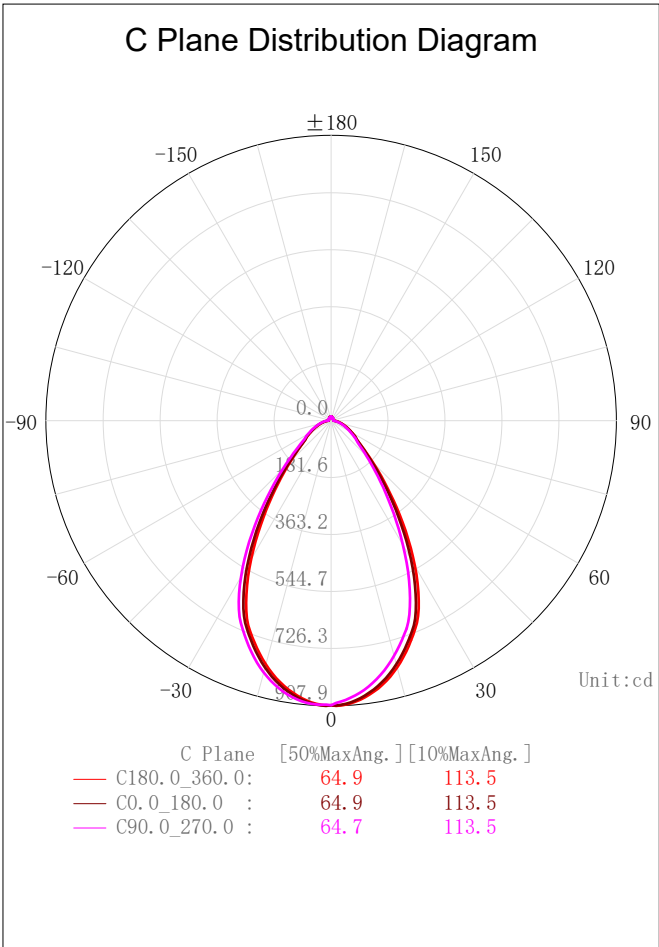

2D Plane Light Intensity Distribution Curve


Lum. Name:SD07-15-XX-01 3000K RA90 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Departmnt
Manufacture:Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date:2022/10/08

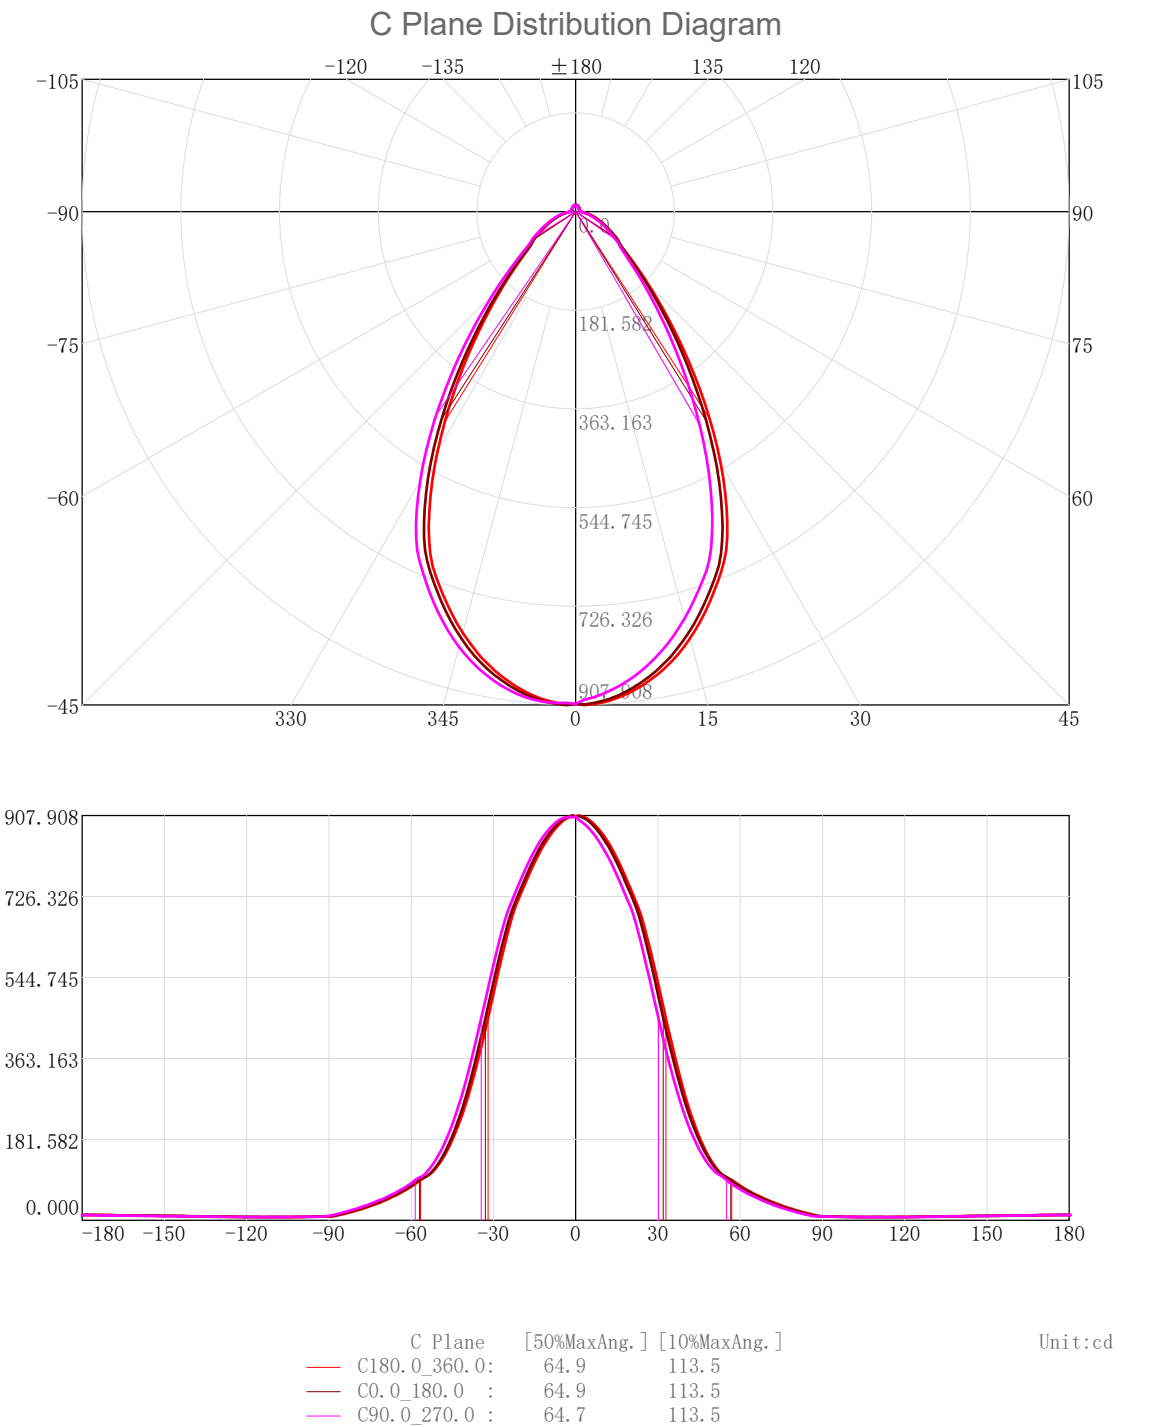

3D Light Intensity Distribution Modal

Lum. Name:SD07-15-XX-01 3000K RA90 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Departmnt
Manufacture:Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date:2022/10/08

3D Light Intensity Distribution Modal

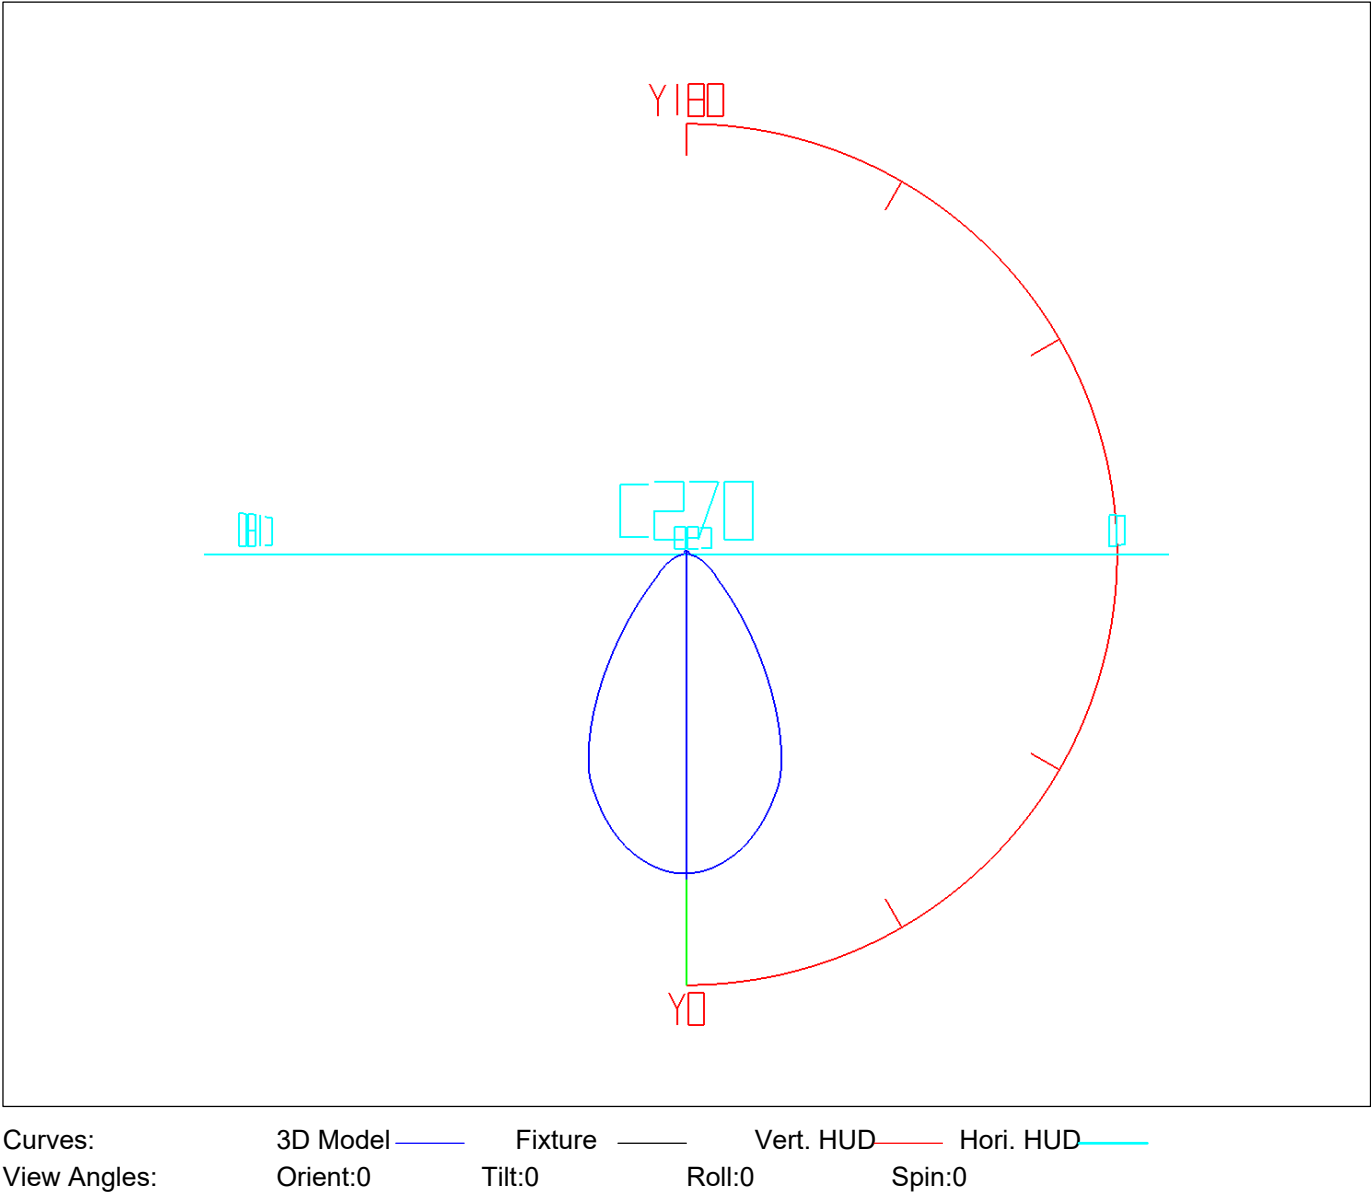

Zonal Flux Tabulation


Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.87	0.87	0.07	0.07	47.0-48.0	12.46	966.43	1.00	77.80
1.0-2.0	2.59	3.46	0.21	0.28	48.0-49.0	11.76	978.19	0.95	78.75
2.0-3.0	4.31	7.77	0.35	0.63	49.0-50.0	11.11	989.30	0.89	79.64
3.0-4.0	6.02	13.79	0.48	1.11	50.0-51.0	10.52	999.82	0.85	80.49
4.0-5.0	7.70	21.49	0.62	1.73	51.0-52.0	10.00	1009.81	0.80	81.30
5.0-6.0	9.35	30.84	0.75	2.48	52.0-53.0	9.56	1019.37	0.77	82.07
6.0-7.0	10.98	41.82	0.88	3.37	53.0-54.0	9.19	1028.56	0.74	82.81
7.0-8.0	12.56	54.38	1.01	4.38	54.0-55.0	8.87	1037.43	0.71	83.52
8.0-9.0	14.11	68.49	1.14	5.51	55.0-56.0	8.58	1046.02	0.69	84.21
9.0-10.0	15.61	84.10	1.26	6.77	56.0-57.0	8.33	1054.34	0.67	84.88
10.0-11.0	17.06	101.16	1.37	8.14	57.0-58.0	8.06	1062.40	0.65	85.53
11.0-12.0	18.45	119.61	1.49	9.63	58.0-59.0	7.75	1070.15	0.62	86.15
12.0-13.0	19.79	139.40	1.59	11.22	59.0-60.0	7.43	1077.58	0.60	86.75
13.0-14.0	21.06	160.46	1.70	12.92	60.0-61.0	7.12	1084.70	0.57	87.32
14.0-15.0	22.26	182.72	1.79	14.71	61.0-62.0	6.83	1091.53	0.55	87.87
15.0-16.0	23.40	206.12	1.88	16.59	62.0-63.0	6.55	1098.08	0.53	88.40
16.0-17.0	24.46	230.58	1.97	18.56	63.0-64.0	6.28	1104.36	0.51	88.91
17.0-18.0	25.45	256.03	2.05	20.61	64.0-65.0	6.00	1110.36	0.48	89.39
18.0-19.0	26.36	282.39	2.12	22.73	65.0-66.0	5.73	1116.09	0.46	89.85
19.0-20.0	27.21	309.60	2.19	24.92	66.0-67.0	5.48	1121.57	0.44	90.29
20.0-21.0	27.98	337.58	2.25	27.18	67.0-68.0	5.23	1126.80	0.42	90.71
21.0-22.0	28.64	366.22	2.31	29.48	68.0-69.0	4.97	1131.77	0.40	91.11
22.0-23.0	29.18	395.40	2.35	31.83	69.0-70.0	4.72	1136.50	0.38	91.49
23.0-24.0	29.59	424.99	2.38	34.21	70.0-71.0	4.48	1140.98	0.36	91.86
24.0-25.0	29.83	454.82	2.40	36.62	71.0-72.0	4.25	1145.23	0.34	92.20
25.0-26.0	29.90	484.72	2.41	39.02	72.0-73.0	4.03	1149.26	0.32	92.52
26.0-27.0	29.80	514.52	2.40	41.42	73.0-74.0	3.81	1153.07	0.31	92.83
27.0-28.0	29.55	544.07	2.38	43.80	74.0-75.0	3.59	1156.65	0.29	93.12
28.0-29.0	29.18	573.25	2.35	46.15	75.0-76.0	3.37	1160.02	0.27	93.39
29.0-30.0	28.68	601.93	2.31	48.46	76.0-77.0	3.16	1163.18	0.25	93.64
30.0-31.0	28.07	630.00	2.26	50.72	77.0-78.0	2.96	1166.14	0.24	93.88
31.0-32.0	27.36	657.36	2.20	52.92	78.0-79.0	2.76	1168.90	0.22	94.10
32.0-33.0	26.56	683.92	2.14	55.06	79.0-80.0	2.57	1171.47	0.21	94.31
33.0-34.0	25.69	709.61	2.07	57.13	80.0-81.0	2.37	1173.84	0.19	94.50
34.0-35.0	24.76	734.36	1.99	59.12	81.0-82.0	2.19	1176.03	0.18	94.68
35.0-36.0	23.78	758.14	1.91	61.03	82.0-83.0	2.02	1178.05	0.16	94.84
36.0-37.0	22.77	780.91	1.83	62.87	83.0-84.0	1.84	1179.89	0.15	94.99
37.0-38.0	21.74	802.66	1.75	64.62	84.0-85.0	1.68	1181.57	0.14	95.12
38.0-39.0	20.71	823.37	1.67	66.29	85.0-86.0	1.52	1183.08	0.12	95.24
39.0-40.0	19.68	843.05	1.58	67.87	86.0-87.0	1.36	1184.45	0.11	95.35
40.0-41.0	18.66	861.71	1.50	69.37	87.0-88.0	1.23	1185.67	0.10	95.45
41.0-42.0	17.67	879.37	1.42	70.79	88.0-89.0	1.13	1186.80	0.09	95.54
42.0-43.0	16.70	896.08	1.34	72.14	89.0-90.0	1.05	1187.85	0.08	95.63
43.0-44.0	15.77	911.85	1.27	73.41	90.0-91.0	1.00	1188.86	0.08	95.71
44.0-45.0	14.87	926.73	1.20	74.61	91.0-92.0	0.97	1189.83	0.08	95.79
45.0-46.0	14.02	940.75	1.13	75.74	92.0-93.0	0.95	1190.78	0.08	95.86
46.0-47.0	13.22	953.97	1.06	76.80	93.0-94.0	0.94	1191.73	0.08	95.94

Zonal Flux Tabulation - (Cont.)

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.93	1192.66	0.07	96.02	141.0-142.0	0.64	1228.14	0.05	98.87
95.0-96.0	0.91	1193.57	0.07	96.09	142.0-143.0	0.64	1228.78	0.05	98.92
96.0-97.0	0.90	1194.47	0.07	96.16	143.0-144.0	0.63	1229.41	0.05	98.97
97.0-98.0	0.90	1195.36	0.07	96.23	144.0-145.0	0.62	1230.03	0.05	99.02
98.0-99.0	0.88	1196.24	0.07	96.30	145.0-146.0	0.61	1230.63	0.05	99.07
99.0-100.0	0.86	1197.11	0.07	96.37	146.0-147.0	0.60	1231.23	0.05	99.12
100.0-101.0	0.86	1197.97	0.07	96.44	147.0-148.0	0.59	1231.82	0.05	99.17
101.0-102.0	0.85	1198.82	0.07	96.51	148.0-149.0	0.58	1232.40	0.05	99.21
102.0-103.0	0.83	1199.65	0.07	96.58	149.0-150.0	0.56	1232.96	0.05	99.26
103.0-104.0	0.82	1200.47	0.07	96.64	150.0-151.0	0.55	1233.50	0.04	99.30
104.0-105.0	0.81	1201.28	0.07	96.71	151.0-152.0	0.54	1234.04	0.04	99.35
105.0-106.0	0.81	1202.09	0.07	96.77	152.0-153.0	0.53	1234.57	0.04	99.39
106.0-107.0	0.80	1202.89	0.06	96.84	153.0-154.0	0.51	1235.07	0.04	99.43
107.0-108.0	0.79	1203.68	0.06	96.90	154.0-155.0	0.49	1235.57	0.04	99.47
108.0-109.0	0.79	1204.48	0.06	96.97	155.0-156.0	0.48	1236.05	0.04	99.51
109.0-110.0	0.79	1205.26	0.06	97.03	156.0-157.0	0.47	1236.52	0.04	99.55
110.0-111.0	0.78	1206.04	0.06	97.09	157.0-158.0	0.45	1236.97	0.04	99.58
111.0-112.0	0.77	1206.82	0.06	97.16	158.0-159.0	0.44	1237.40	0.04	99.62
112.0-113.0	0.77	1207.58	0.06	97.22	159.0-160.0	0.42	1237.82	0.03	99.65
113.0-114.0	0.76	1208.34	0.06	97.28	160.0-161.0	0.40	1238.22	0.03	99.68
114.0-115.0	0.76	1209.10	0.06	97.34	161.0-162.0	0.38	1238.60	0.03	99.71
115.0-116.0	0.76	1209.85	0.06	97.40	162.0-163.0	0.37	1238.97	0.03	99.74
116.0-117.0	0.75	1210.60	0.06	97.46	163.0-164.0	0.35	1239.32	0.03	99.77
117.0-118.0	0.74	1211.35	0.06	97.52	164.0-165.0	0.33	1239.65	0.03	99.80
118.0-119.0	0.74	1212.08	0.06	97.58	165.0-166.0	0.31	1239.96	0.02	99.82
119.0-120.0	0.73	1212.82	0.06	97.64	166.0-167.0	0.29	1240.25	0.02	99.85
120.0-121.0	0.73	1213.55	0.06	97.70	167.0-168.0	0.27	1240.53	0.02	99.87
121.0-122.0	0.72	1214.27	0.06	97.76	168.0-169.0	0.25	1240.78	0.02	99.89
122.0-123.0	0.73	1215.00	0.06	97.81	169.0-170.0	0.23	1241.01	0.02	99.91
123.0-124.0	0.73	1215.72	0.06	97.87	170.0-171.0	0.21	1241.23	0.02	99.93
124.0-125.0	0.72	1216.44	0.06	97.93	171.0-172.0	0.19	1241.42	0.02	99.94
125.0-126.0	0.72	1217.16	0.06	97.99	172.0-173.0	0.17	1241.59	0.01	99.95
126.0-127.0	0.72	1217.88	0.06	98.05	173.0-174.0	0.15	1241.74	0.01	99.97
127.0-128.0	0.72	1218.60	0.06	98.10	174.0-175.0	0.13	1241.86	0.01	99.98
128.0-129.0	0.72	1219.32	0.06	98.16	175.0-176.0	0.10	1241.96	0.01	99.99
129.0-130.0	0.70	1220.02	0.06	98.22	176.0-177.0	0.08	1242.05	0.01	99.99
130.0-131.0	0.70	1220.72	0.06	98.27	177.0-178.0	0.06	1242.10	0.00	100.00
131.0-132.0	0.70	1221.42	0.06	98.33	178.0-179.0	0.04	1242.14	0.00	100.00
132.0-133.0	0.70	1222.11	0.06	98.39	179.0-180.0	0.01	1242.15	0.00	100.00
133.0-134.0	0.69	1222.80	0.06	98.44					
134.0-135.0	0.68	1223.49	0.06	98.50					
135.0-136.0	0.69	1224.17	0.06	98.55					
136.0-137.0	0.68	1224.85	0.05	98.61					
137.0-138.0	0.67	1225.52	0.05	98.66					
138.0-139.0	0.67	1226.19	0.05	98.71					
139.0-140.0	0.66	1226.85	0.05	98.77					
140.0-141.0	0.65	1227.49	0.05	98.82					


Rectangle ISO Lighting Intensity Diagram

Lum. Name:SD07-15-XX-01 3000K RA90 白色	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Departmnt
Manufacture: Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date: 2022/10/08

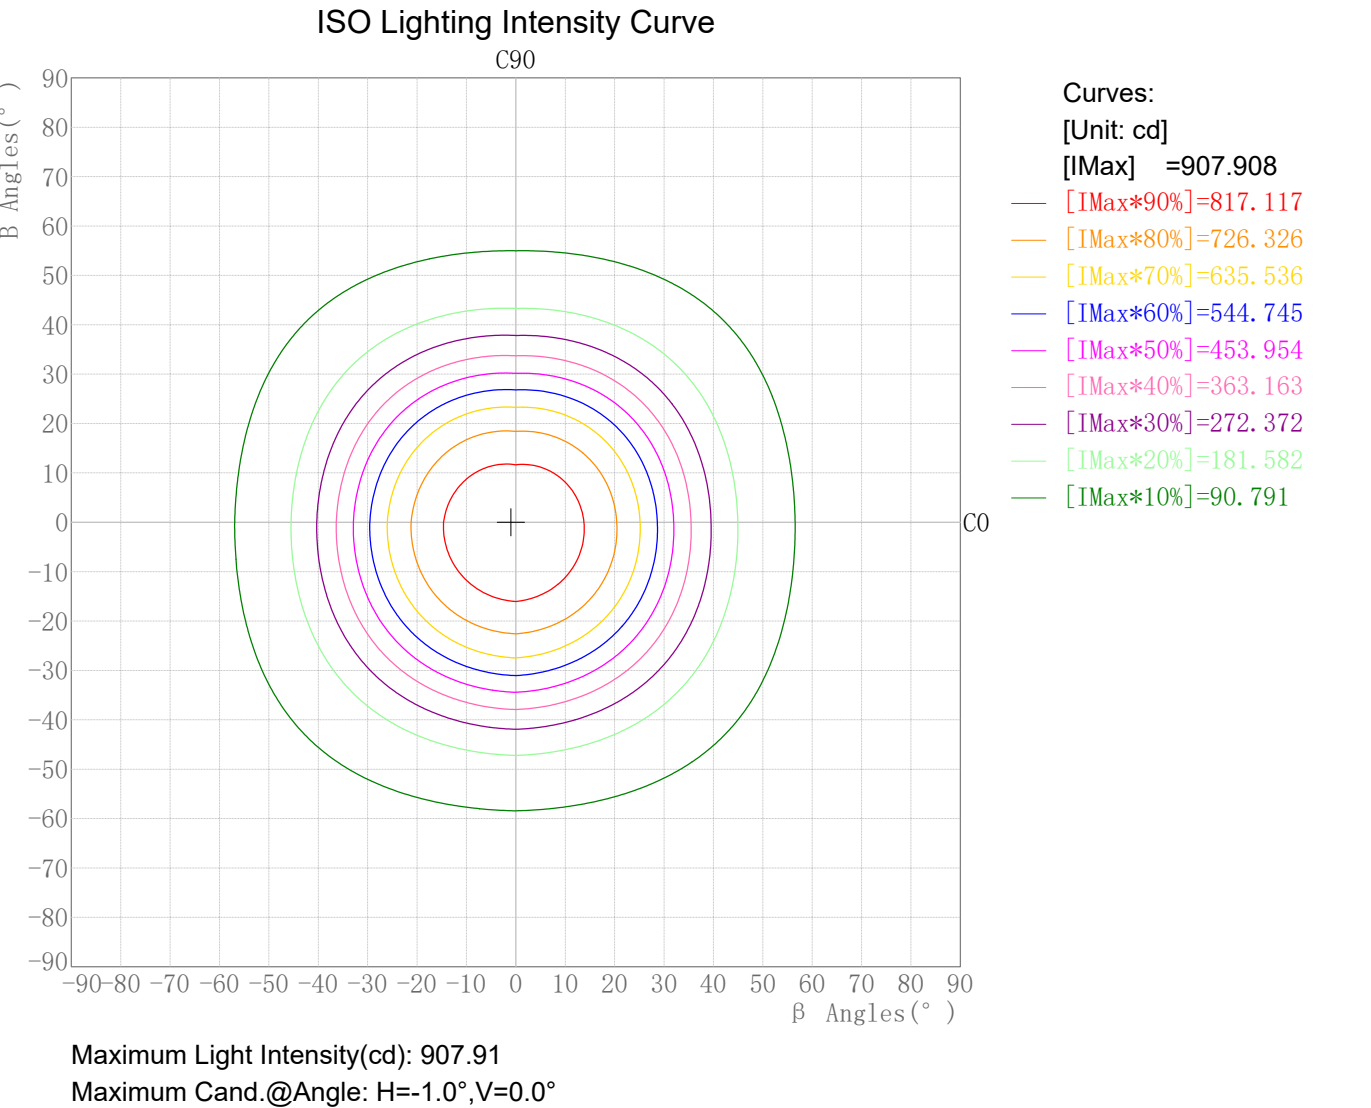

Photometric Filename:SD07-15-XX-01 3000K RA90 白色.IES

Lum. Name: SD07-15-XX-01 3000K RA90 白色	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine: GON-2000	Test Date: 2022/10/08

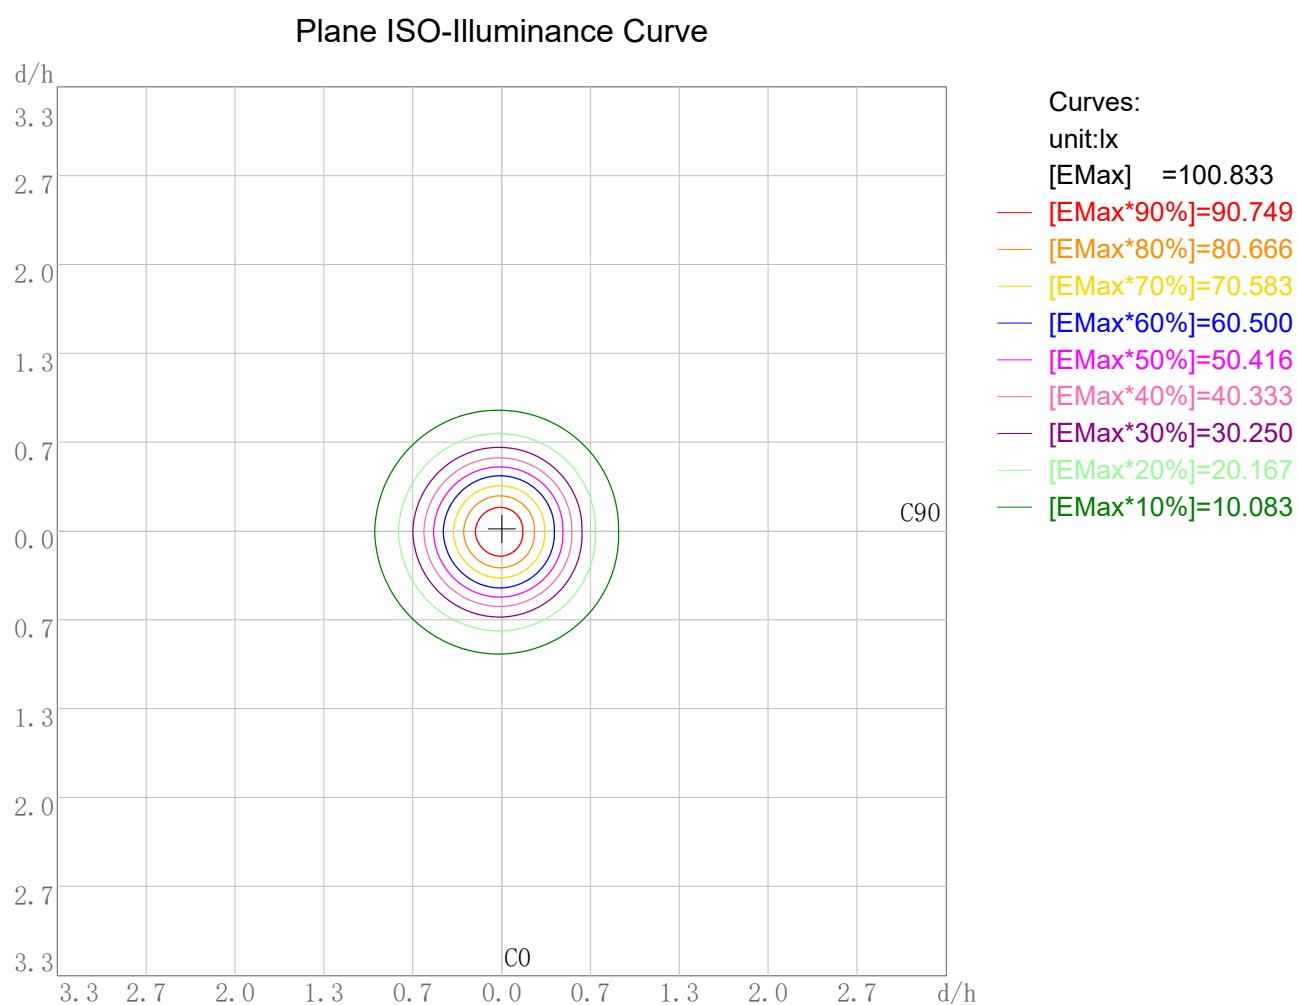


Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 100.83
Working Plane Maximum Illuminance Position(d/h):H0.0 V-0.0

3D Plane ISO Illuminance Diagram

Lum. Name:SD07-15-XX-01 3000K RA90 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Departmnt
Manufacture:Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date:2022/10/08


3D Plane Illuminance Modal

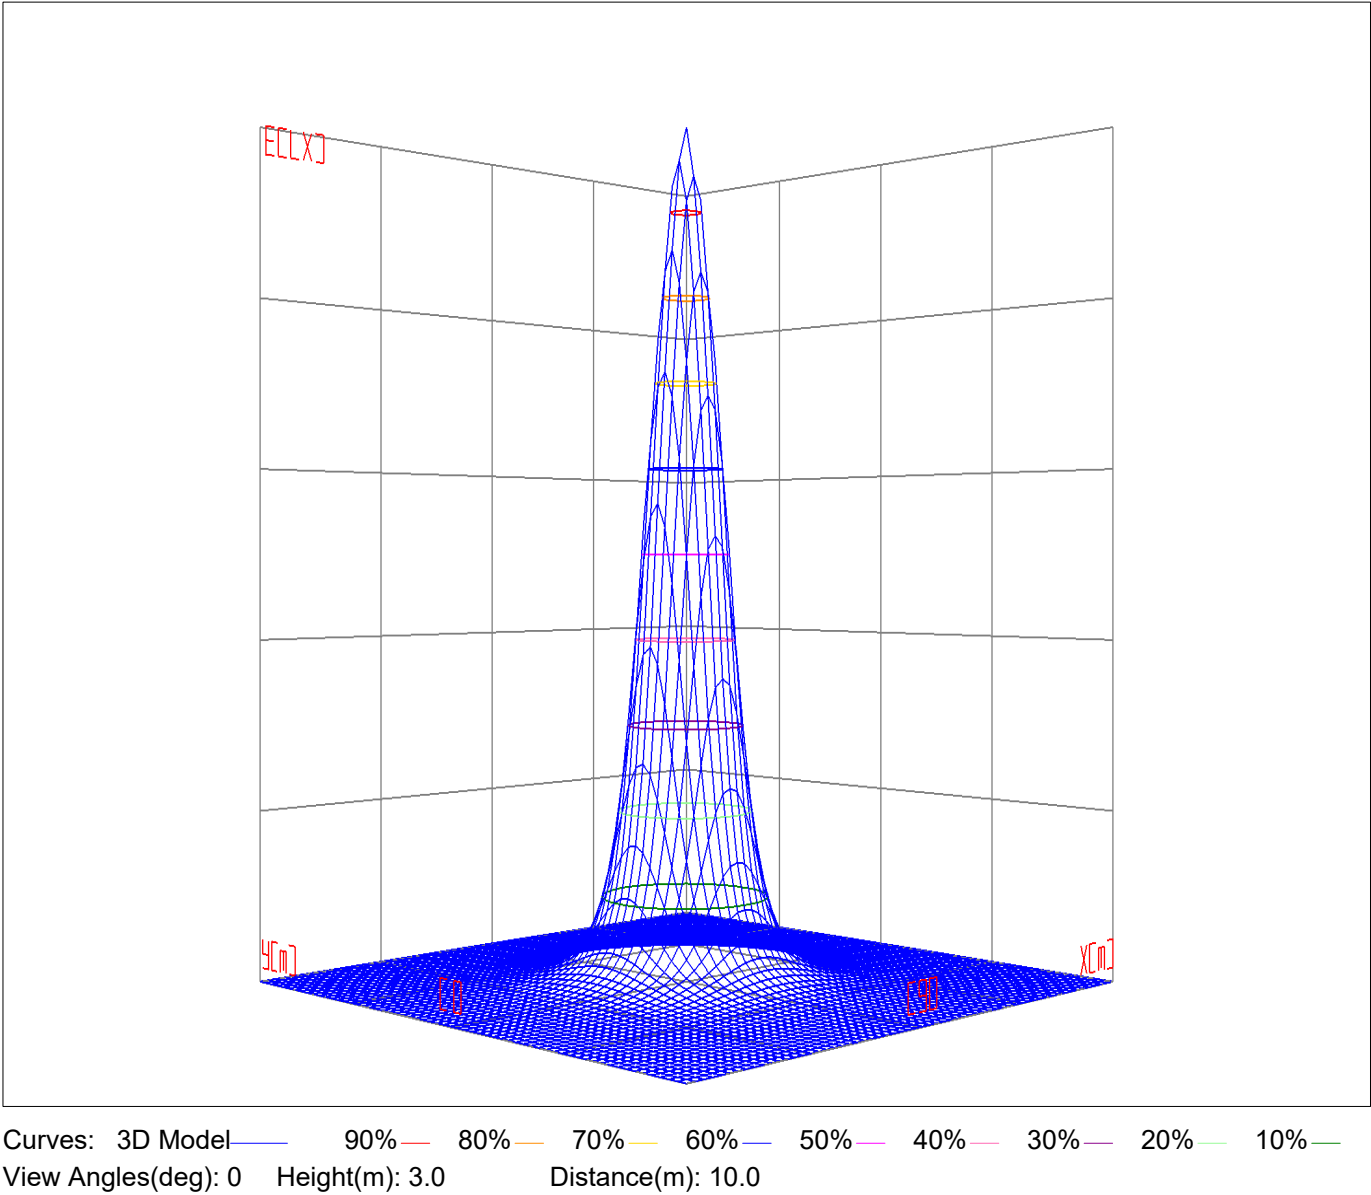

Space ISO Illuminance Diagram

Lum. Name:SD07-15-XX-01 3000K RA90 白色	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Departmnt
Manufacture: Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date: 2022/10/08


Space ISO Illuminance Curve

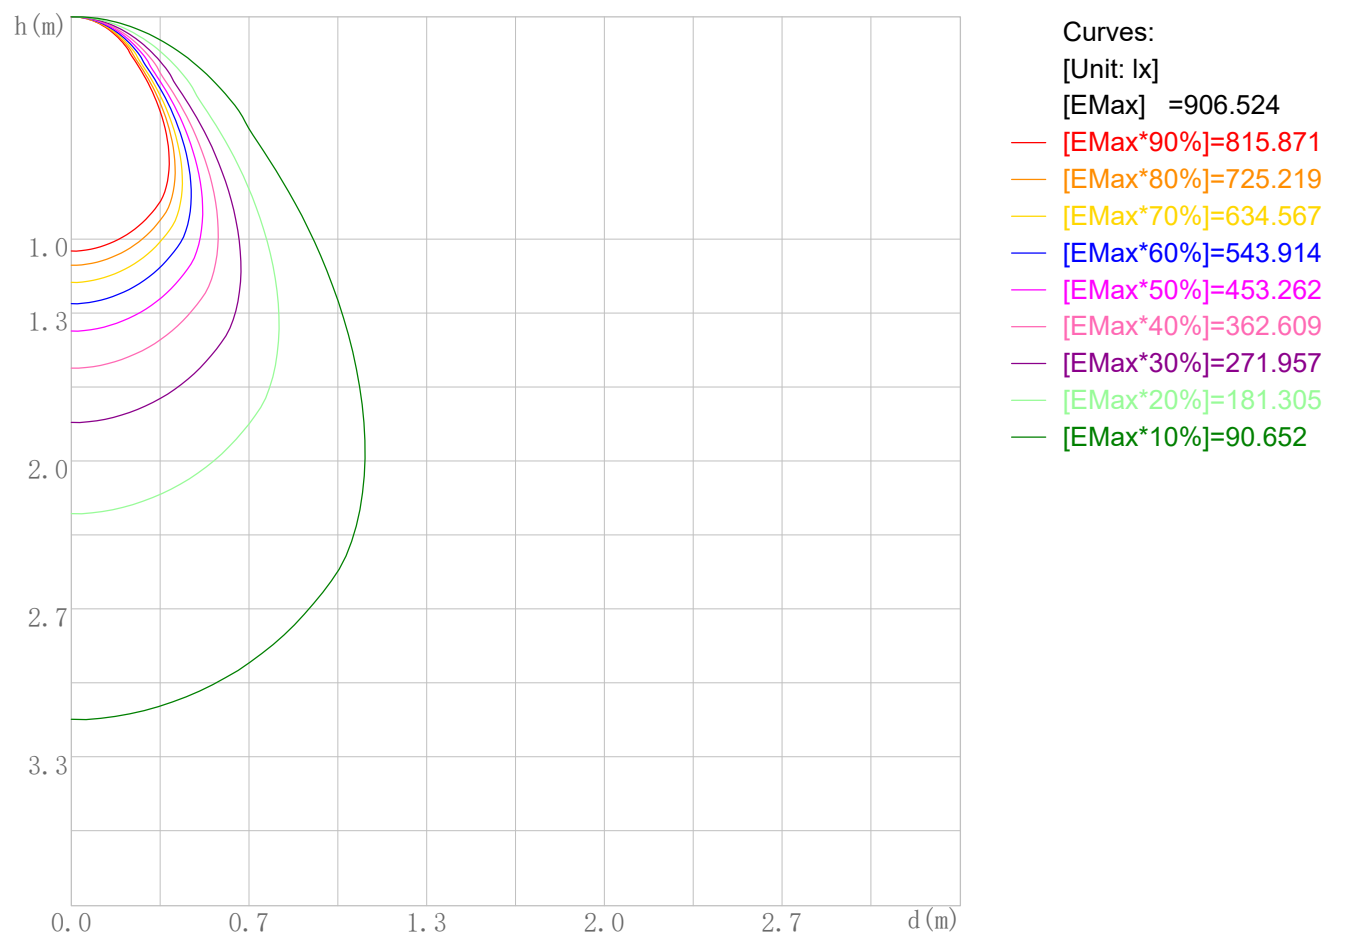

Space Plane Maximum Illuminance and @Angle:906.52lx,1.0deg
Plane Maximum Lighting Intensity and @Angle:906.938cd,0deg

Illuminance-Distance Diagram

Lum. Name:SD07-15-XX-01 3000K RA90 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Departmnt
Manufacture:Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date:2022/10/08

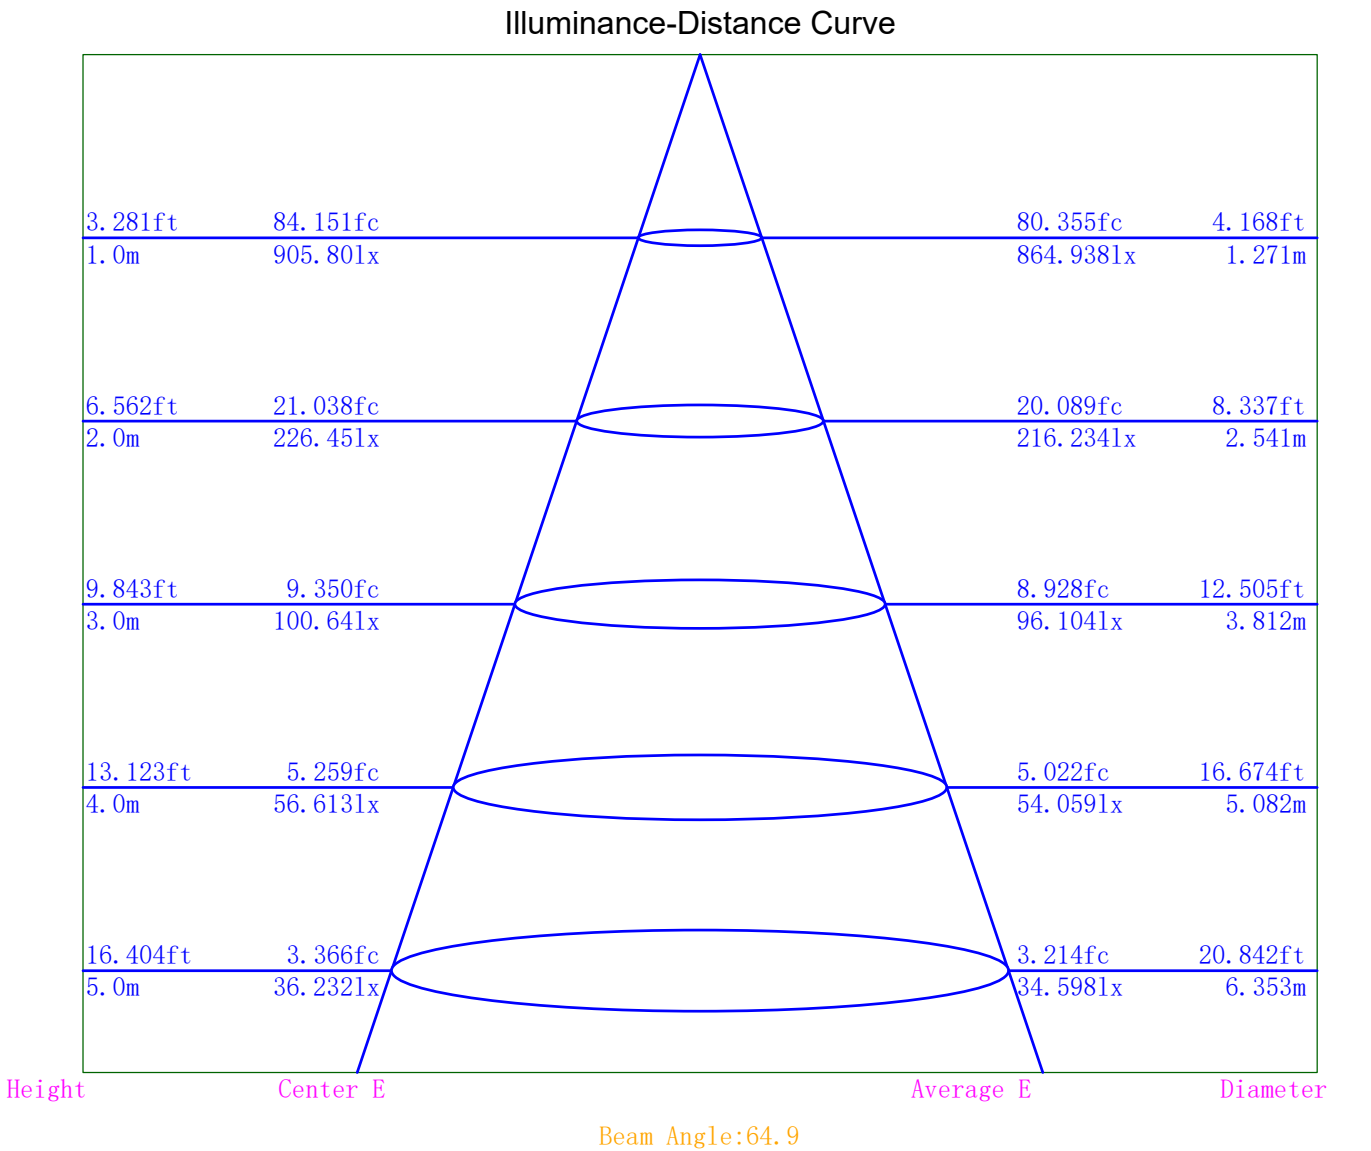

Indoor Luminance Limiting Curves

Lum. Name:SD07-15-XX-01 3000K RA90 白色	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date: 2022/10/08


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	107478	81869	71337	63790	57934	53891	51897	53408	66577
C90	95122	74792	66553	58591	53105	48842	46506	46624	57025

Luminance Limiting Curve

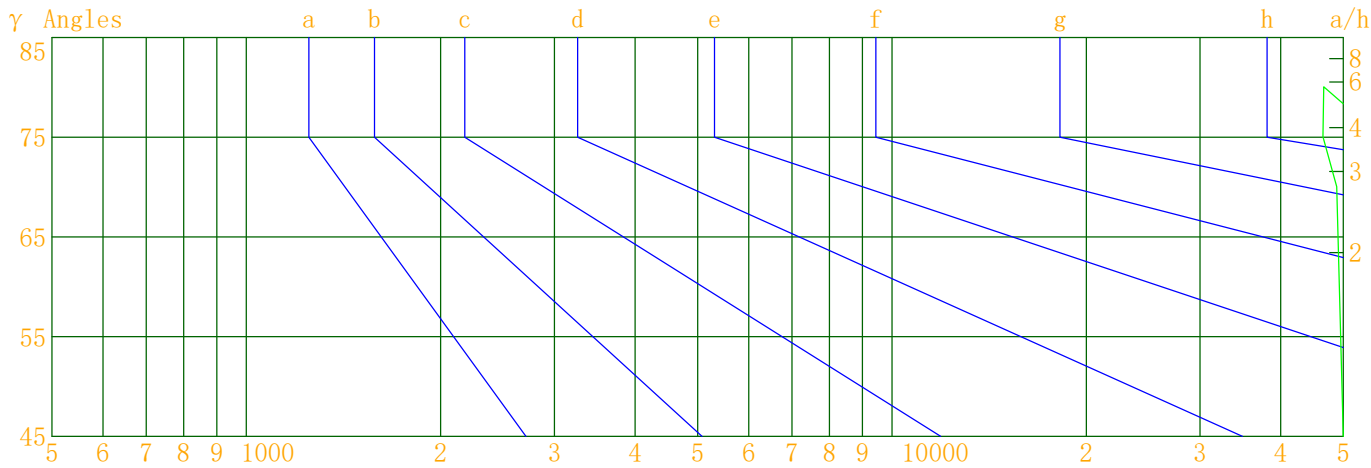


Luminous Size:Length(m)=-0.055Width(m)=-0.055Height(m)=0.000Area(m^2)=0.002376

Luminous Type:Without Luminous Side

Luminous Curves:C0-C180 Color: C90-C270 Color:

Indoor Budgetary Estimate Table

Lum. Name:SD07-15-XX-01 3000K RA90 白色	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date: 2022/10/08

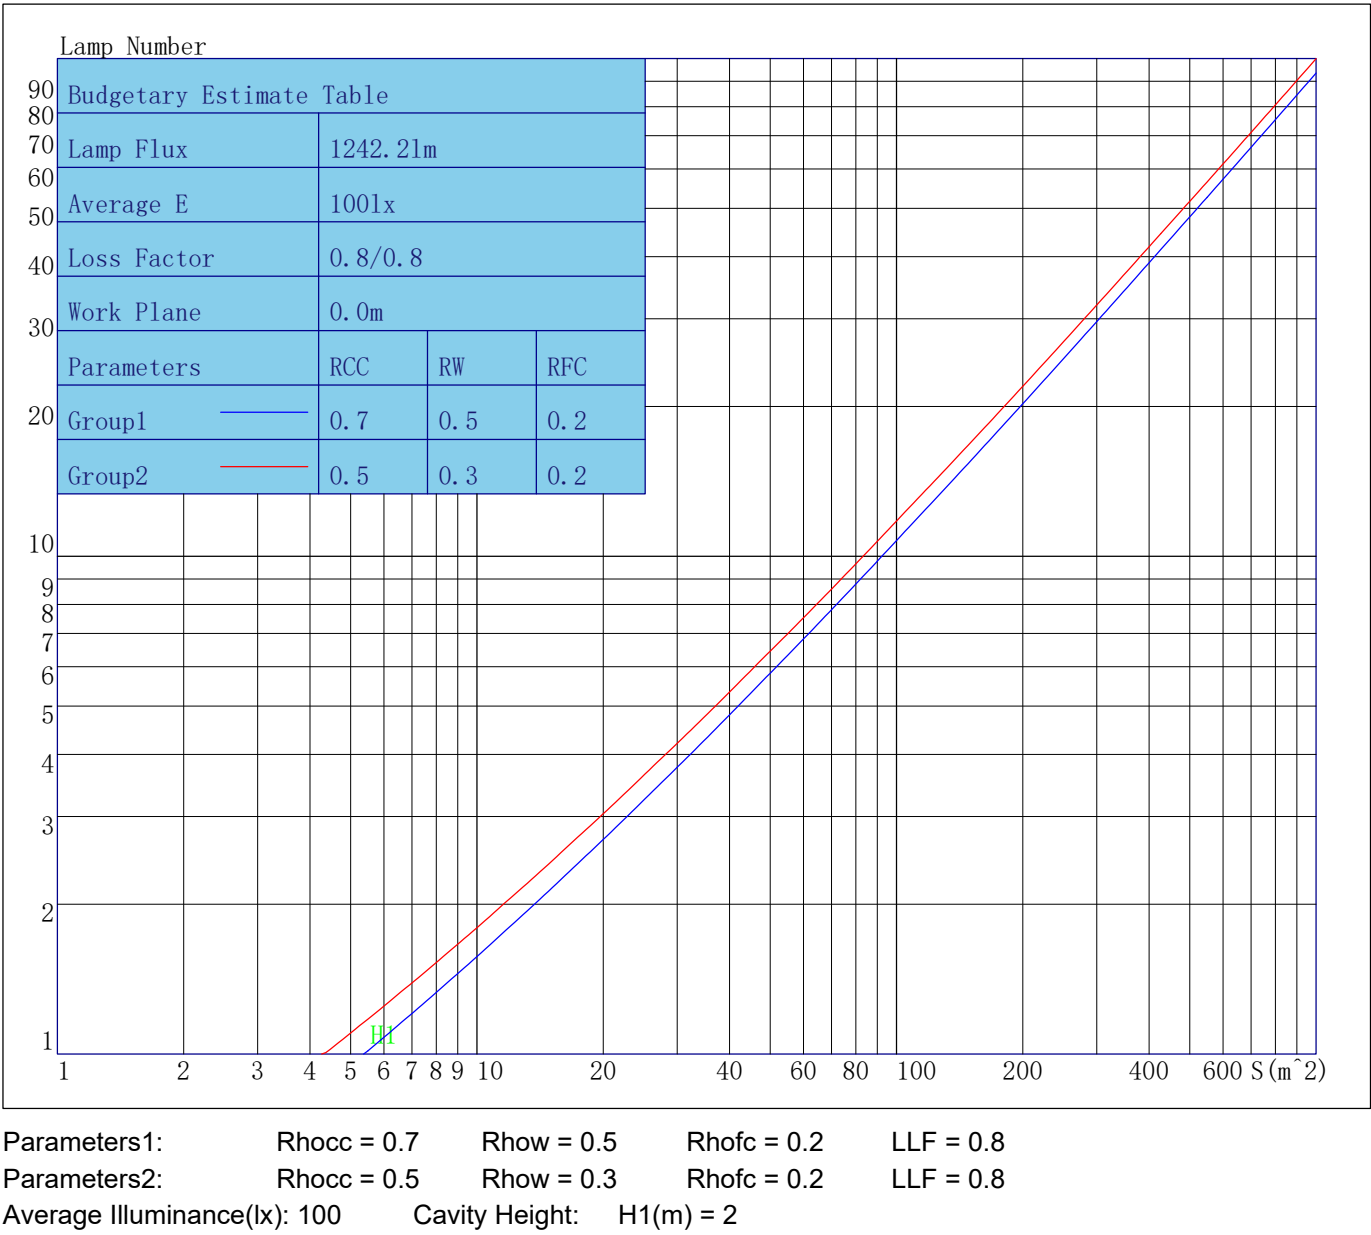

Indoor Coefficient of Utilization Table

Lum. Name:SD07-15-XX-01 3000K RA90 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Departmnt
Manufacture:Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date:2022/10/08

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	118	118	118	118	115	115	115	115	109	109	109	103	103	103	98	98	98	96
1	110	106	103	100	107	104	101	98	99	96	94	94	92	91	90	89	87	85
2	103	96	91	86	100	94	89	85	90	86	83	86	83	80	83	80	78	76
3	96	87	81	76	93	86	80	75	82	77	73	79	75	71	76	73	70	68
4	89	80	73	67	87	78	72	67	75	70	66	73	68	64	70	66	63	61
5	84	73	66	61	82	72	65	60	70	64	59	67	62	58	65	61	57	55
6	79	68	60	55	77	67	60	55	64	58	54	63	57	53	61	56	52	51
7	74	63	55	50	72	62	55	50	60	54	49	58	53	49	57	52	48	46
8	70	58	51	46	68	57	51	46	56	50	45	54	49	45	53	48	44	43
9	66	54	47	43	64	54	47	42	52	46	42	51	46	42	50	45	41	40
10	62	51	44	40	61	50	44	39	49	43	39	48	43	39	47	42	38	37

Unified Glare Rating Table

Lum. Name:SD07-15-XX-01 3000K RA90 白色	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Departmnt
Manufacture:Shenzhen Norming Lightin	Test Machine:GON-2000	Test Date:2022/10/08

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room Size	Vewed crosswise					Vewed endwise					
X=2H Y=2H	25.7	27.0	26.2	27.4	27.8	25.2	26.4	25.6	26.8	27.3	
	Y=3H	26.6	27.7	27.0	28.1	28.6	26.1	27.2	26.5	27.6	28.0
	Y=4H	27.0	28.0	27.5	28.5	29.0	26.4	27.5	26.9	27.9	28.4
	Y=6H	27.4	28.3	27.9	28.8	29.3	26.8	27.8	27.3	28.2	28.7
	Y=8H	27.6	28.5	28.1	28.9	29.5	27.0	27.9	27.5	28.3	28.9
	Y=12H	27.7	28.6	28.3	29.1	29.6	27.1	28.0	27.6	28.4	29.0
X=4H Y=2H	26.1	27.1	26.5	27.5	28.0	25.6	26.6	26.0	27.0	27.5	
	Y=3H	27.1	28.0	27.6	28.5	29.0	26.6	27.5	27.1	28.0	28.5
	Y=4H	27.7	28.5	28.2	29.0	29.5	27.2	27.9	27.7	28.4	29.0
	Y=6H	28.2	28.9	28.8	29.4	30.0	27.7	28.3	28.2	28.9	29.4
	Y=8H	28.5	29.1	29.0	29.6	30.2	27.9	28.5	28.4	29.0	29.6
	Y=12H	28.7	29.3	29.3	29.9	30.4	28.1	28.7	28.7	29.2	29.8
X=8H Y=4H	27.9	28.5	28.4	29.0	29.6	27.4	28.0	27.9	28.5	29.1	
	Y=6H	28.6	29.1	29.2	29.7	30.3	28.0	28.6	28.6	29.1	29.8
	Y=8H	28.9	29.4	29.5	30.0	30.6	28.4	28.8	29.0	29.4	30.0
	Y=12H	29.3	29.8	29.9	30.3	31.0	28.7	29.1	29.3	29.7	30.4
X=12H Y=4H	27.9	28.5	28.5	29.0	29.6	27.4	28.0	28.0	28.5	29.1	
	Y=6H	28.7	29.1	29.3	29.7	30.3	28.1	28.6	28.7	29.1	29.8
	Y=8H	29.1	29.5	29.7	30.1	30.7	28.5	28.9	29.1	29.5	30.2
Variations with the objverver position at spacings											
S=1.0H	0.3/-0.3					0.4/-0.4					
S=1.5H	0.6/-0.6					0.6/-0.7					
S=2.0H	0.8/-0.8					0.8/-0.9					
Reduced UGR Table:											
Nordic Standard Table:	BK0					BK0					
Correction Value	2.4					2.3					

o the CIE Pub.117,data has been corrected,refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	905.80	905.80	905.80	905.80
γ 1.0	906.94	898.46	907.91	903.83
γ 2.0	904.87	894.57	906.87	904.51
γ 3.0	902.17	889.88	904.68	904.48
γ 4.0	898.49	884.08	901.90	903.36
γ 5.0	893.75	878.11	897.42	901.06
γ 6.0	887.93	870.95	892.72	897.79
γ 7.0	881.39	863.53	886.78	893.55
γ 8.0	874.03	854.61	880.22	888.13
γ 9.0	866.13	845.20	872.76	882.23
γ 10.0	857.44	835.19	865.15	875.41
γ 11.0	847.63	824.40	856.16	867.67
γ 12.0	837.81	813.13	846.58	859.23
γ 13.0	826.26	800.90	836.26	849.79
γ 14.0	814.64	788.02	824.82	839.80
γ 15.0	802.39	774.58	812.74	829.10
γ 16.0	789.51	761.02	800.18	817.57
γ 17.0	775.77	746.55	786.96	805.28
γ 18.0	761.64	732.19	773.10	792.17
γ 19.0	747.12	717.73	758.78	778.70
γ 20.0	732.77	703.47	743.94	764.24
γ 21.0	717.88	686.08	729.35	749.95
γ 22.0	702.79	665.48	714.49	735.00
γ 23.0	684.42	642.40	698.89	720.14
γ 24.0	662.69	618.32	680.99	704.99
γ 25.0	639.35	592.54	659.87	689.07
γ 26.0	614.32	566.38	636.26	668.79
γ 27.0	588.33	539.60	611.82	646.40
γ 28.0	562.01	512.46	586.17	622.63
γ 29.0	535.03	485.13	560.00	597.88
γ 30.0	507.17	458.16	533.25	572.15
γ 31.0	479.94	431.64	506.11	546.04
γ 32.0	452.69	405.77	478.68	519.17
γ 33.0	425.94	380.44	451.18	492.16
γ 34.0	399.65	356.08	424.40	465.44
γ 35.0	374.32	332.62	397.91	438.56
γ 36.0	350.11	309.94	371.87	412.06
γ 37.0	326.33	288.98	347.11	386.29
γ 38.0	304.15	268.81	323.06	361.09
γ 39.0	282.71	249.92	300.14	336.94
γ 40.0	262.78	232.12	278.63	313.65
γ 41.0	243.87	215.46	258.18	291.54
γ 42.0	226.77	199.71	239.05	270.53
γ 43.0	210.00	185.49	221.24	251.04
γ 44.0	194.95	172.35	204.25	232.50
γ 45.0	180.56	159.80	188.67	215.13
γ 46.0	167.32	148.77	174.76	199.26

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	155.10	138.58	161.33	184.44
γ 48.0	144.28	129.20	149.35	170.56
γ 49.0	134.18	121.25	138.36	157.97
γ 50.0	125.03	114.22	128.28	146.63
γ 51.0	116.90	107.74	119.49	136.01
γ 52.0	109.97	103.56	111.91	126.16
γ 53.0	104.36	100.01	105.26	118.02
γ 54.0	100.34	95.73	100.02	110.44
γ 55.0	97.21	90.69	96.55	103.76
γ 56.0	93.08	85.41	94.00	99.04
γ 57.0	88.84	81.26	90.52	96.35
γ 58.0	83.92	77.17	86.00	92.85
γ 59.0	79.77	73.22	81.92	88.05
γ 60.0	75.78	69.60	77.82	83.15
γ 61.0	71.80	66.01	73.90	79.08
γ 62.0	68.30	62.65	70.12	75.09
γ 63.0	64.82	59.29	66.83	71.50
γ 64.0	61.41	56.27	63.39	68.04
γ 65.0	58.17	53.32	59.92	64.64
γ 66.0	55.02	50.50	56.94	61.13
γ 67.0	52.24	47.70	54.30	58.01
γ 68.0	49.24	44.71	51.48	55.15
γ 69.0	46.35	42.19	48.41	52.18
γ 70.0	43.79	39.69	45.98	49.29
γ 71.0	40.97	37.53	43.16	46.65
γ 72.0	38.53	34.94	40.91	44.42
γ 73.0	36.30	32.83	38.38	41.85
γ 74.0	33.97	30.50	36.38	39.44
γ 75.0	31.91	28.60	33.84	36.90
γ 76.0	29.75	26.69	31.57	34.53
γ 77.0	27.63	24.92	29.54	32.51
γ 78.0	25.64	22.75	27.49	30.43
γ 79.0	23.79	21.16	25.99	28.44
γ 80.0	22.03	19.24	23.69	26.33
γ 81.0	20.03	17.45	21.81	24.41
γ 82.0	18.77	16.08	20.03	22.93
γ 83.0	16.90	14.51	18.57	20.74
γ 84.0	15.46	13.07	16.83	19.17
γ 85.0	13.79	11.81	15.31	17.47
γ 86.0	12.44	10.42	14.01	15.87
γ 87.0	11.07	9.19	12.28	14.27
γ 88.0	9.74	9.23	10.98	12.87
γ 89.0	9.11	8.88	9.92	11.64
γ 90.0	8.99	8.85	9.03	10.20
γ 91.0	8.88	8.66	8.94	9.76
γ 92.0	9.00	8.44	8.71	8.72
γ 93.0	8.84	8.79	8.61	8.46

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	8.83	8.51	8.36	8.45
γ 95.0	8.83	8.29	8.47	8.23
γ 96.0	8.19	8.16	8.36	8.30
γ 97.0	8.28	7.92	8.23	8.62
γ 98.0	8.32	8.13	8.20	8.34
γ 99.0	8.02	7.78	7.94	7.99
γ 100.0	7.84	8.21	8.15	8.05
γ 101.0	7.74	7.82	7.99	8.28
γ 102.0	7.73	7.58	7.87	8.09
γ 103.0	7.62	7.46	8.04	7.75
γ 104.0	7.45	7.49	7.89	7.63
γ 105.0	7.60	7.75	7.64	7.75
γ 106.0	7.48	7.46	8.00	7.54
γ 107.0	7.35	7.34	7.81	7.91
γ 108.0	7.27	7.53	8.15	7.40
γ 109.0	7.40	7.61	8.01	7.69
γ 110.0	7.48	7.54	7.79	7.51
γ 111.0	7.41	7.53	7.76	7.56
γ 112.0	7.72	7.68	7.55	7.51
γ 113.0	7.32	7.34	7.78	7.66
γ 114.0	7.33	7.49	7.70	7.65
γ 115.0	7.41	7.37	7.85	7.73
γ 116.0	7.36	7.66	7.84	7.81
γ 117.0	7.75	7.48	7.91	7.60
γ 118.0	7.47	7.37	7.82	7.68
γ 119.0	7.51	7.51	8.23	7.57
γ 120.0	7.55	7.67	7.80	7.77
γ 121.0	7.68	7.53	7.85	7.76
γ 122.0	7.86	7.45	8.03	7.75
γ 123.0	8.23	7.63	8.05	8.01
γ 124.0	8.09	7.72	8.07	7.79
γ 125.0	8.09	7.45	8.28	7.93
γ 126.0	8.13	8.15	8.39	7.87
γ 127.0	8.00	8.25	8.67	7.98
γ 128.0	8.11	8.33	8.68	8.45
γ 129.0	8.15	8.52	8.55	8.05
γ 130.0	8.15	8.38	8.41	8.20
γ 131.0	8.28	8.52	8.60	8.46
γ 132.0	8.43	8.60	8.73	8.32
γ 133.0	8.41	8.74	8.89	8.68
γ 134.0	8.54	8.61	8.84	8.55
γ 135.0	8.80	8.95	9.09	8.67
γ 136.0	8.86	8.90	9.27	8.85
γ 137.0	8.81	9.16	9.28	8.78
γ 138.0	8.99	9.18	9.19	8.84
γ 139.0	9.37	9.38	9.32	9.08
γ 140.0	9.03	9.35	9.49	9.01

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	9.45	9.51	9.47	9.04
γ 142.0	9.44	9.76	9.64	9.30
γ 143.0	9.83	9.52	9.96	9.24
γ 144.0	9.86	9.86	9.93	9.41
γ 145.0	9.68	9.67	9.93	9.26
γ 146.0	10.23	9.81	9.93	9.51
γ 147.0	10.25	9.85	10.11	9.53
γ 148.0	10.22	9.96	10.20	9.75
γ 149.0	10.10	10.04	10.36	9.76
γ 150.0	10.21	10.04	10.26	9.85
γ 151.0	10.02	10.28	10.37	9.85
γ 152.0	10.55	10.28	10.51	10.17
γ 153.0	10.22	10.30	10.95	10.16
γ 154.0	10.45	9.91	10.89	9.99
γ 155.0	10.71	10.56	10.86	10.34
γ 156.0	10.40	10.64	10.93	10.52
γ 157.0	10.57	10.86	11.05	10.22
γ 158.0	10.89	10.83	10.91	10.30
γ 159.0	10.95	11.07	11.16	10.53
γ 160.0	11.06	11.19	11.18	10.32
γ 161.0	10.91	10.95	11.16	10.56
γ 162.0	11.13	11.42	11.31	10.80
γ 163.0	11.41	11.18	11.51	10.68
γ 164.0	11.07	11.15	11.55	10.70
γ 165.0	11.36	11.21	11.50	10.84
γ 166.0	11.37	11.44	11.58	10.86
γ 167.0	11.49	11.69	11.51	11.61
γ 168.0	11.46	11.82	11.65	11.29
γ 169.0	11.75	11.85	12.16	11.25
γ 170.0	11.81	11.79	12.13	11.20
γ 171.0	11.83	11.96	12.07	11.37
γ 172.0	11.85	12.21	12.11	11.26
γ 173.0	11.73	11.77	12.30	11.50
γ 174.0	12.13	11.76	12.15	11.59
γ 175.0	11.69	12.06	12.41	11.67
γ 176.0	12.18	12.03	12.43	11.81
γ 177.0	12.11	12.28	12.24	11.75
γ 178.0	12.27	12.22	12.67	11.72
γ 179.0	12.06	12.19	12.46	11.99
γ 180.0	12.21	12.21	12.21	12.21