



FEATURES


- Modular Design.
- System power up to 40W.
- Interchangeable anti-glare reflector.
- 5-year guarantee.

Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC36V/850mA
Power	32.5W
Rated Input Current	0.1625A
PF value	>0.9
THD	<15%
Ingress Protection	IP20
Operating Temperature	-10-40°C
Dimmability	Non-dimmable with AcTEC driver

Optical Data

LED Brand	Bridgelux SMD LED
CRI	Ra > 92
Beam Angle	60°/70°
Colour temperature	2700k/3000K/4000K/5000K 2500k/2700K/3500K/4500K
System luminous efficacy up to	101.3lm/W

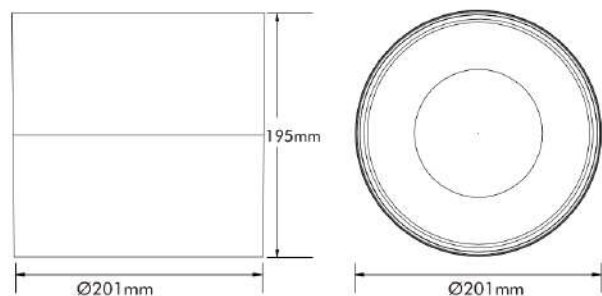

Packaging

Box Dimensions	L206 x W206 x H250mm
Box Net Weight	3.04Kg
Box Gross Weight	4.1Kg
Carton Dimensions	L430 x W430 x H275 mm/4 PCS
Carton Net Weight	12.16Kg
Carton Gross Weight	17.5Kg



Model	CCT		Beam Angle	Lumen	Efficacy	Beam Angle	Lumen	Efficacy
SD07-35-XX-01	2700K	CRI 92+	70°	3037lm	92lm/W	60°	2348lm	72.6lm/W
SD07-35-XX-01	3000K		70°	3192lm	101.3lm/W	60°	2501lm	79.5lm/W
SD07-35-XX-01	4000K		70°	3177lm	98.4lm/W	60°	2537lm	77.2lm/W
SD07-35-XX-01	5000K		70°	3305lm	97.8lm/W	60°	2521lm	78.1lm/W

Reflector



Model	CCT		Beam Angle	Lumen	Efficacy
SD07-35-XX-01	2500K	CRI 92+	70°	2568lm	78lm/W
SD07-35-XX-01	2700K		70°	2707lm	86lm/W
SD07-35-XX-01	3500K		70°	2706lm	83.4lm/W
SD07-35-XX-01	4500K		70°	2721lm	83.2lm/W

Reflector



ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS