



Indoor Luminaire Photometric Data

Description Information

Luminary Name: SD08-25-XX-01 2700K RA90 24D		Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Date: 2022/09/16
Manufacture: Shenzhen Norming Lighting		Shld. Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department		Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.083m*-0.083m*0.000m		Lum. Area (m2):0.005	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=5.0	Temp. (°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 2040.170	Luminary Flux(lm): 2040.168	Field Angle(10%Imax): 44.6(°)	
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 1995.938lm 97.83%	
Rated Voltage(V):	Luminary EER(lm/W): 89.915	Up Lumens&Percent: 44.230lm 2.17%	
Tested Power(W): 22.690	Max. Candela(cd): 8705.093	S/MH: C0_a180=0.394 C90_270=0.408	
Lamps' Inside: 1	Max Cand@Ang. (°): C=270.0 γ=5.0	CIE Type: Semi-Direct	
Tested Electrics (V, A, pf):239.9, 0.098, 0.957	Beam Angle(50%Imax): 23.4(°)	ErP Φ use(90°): 1806.979lm	
Lamp Size (W*L*H):0.083m*-0.083m*0.000m	Left=-8.8°, Right=14.5°	IRF(%): 951.404	

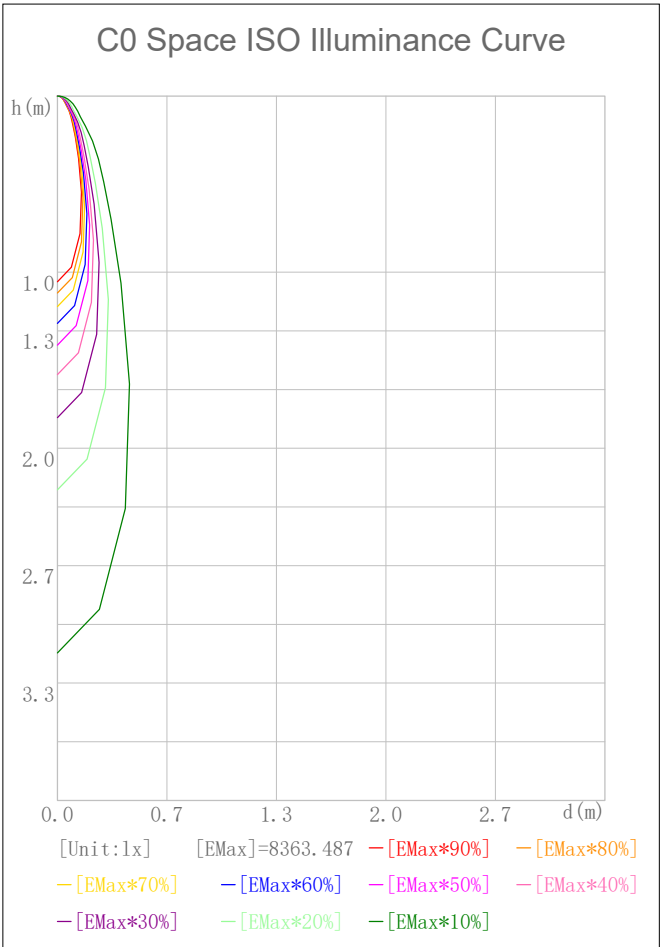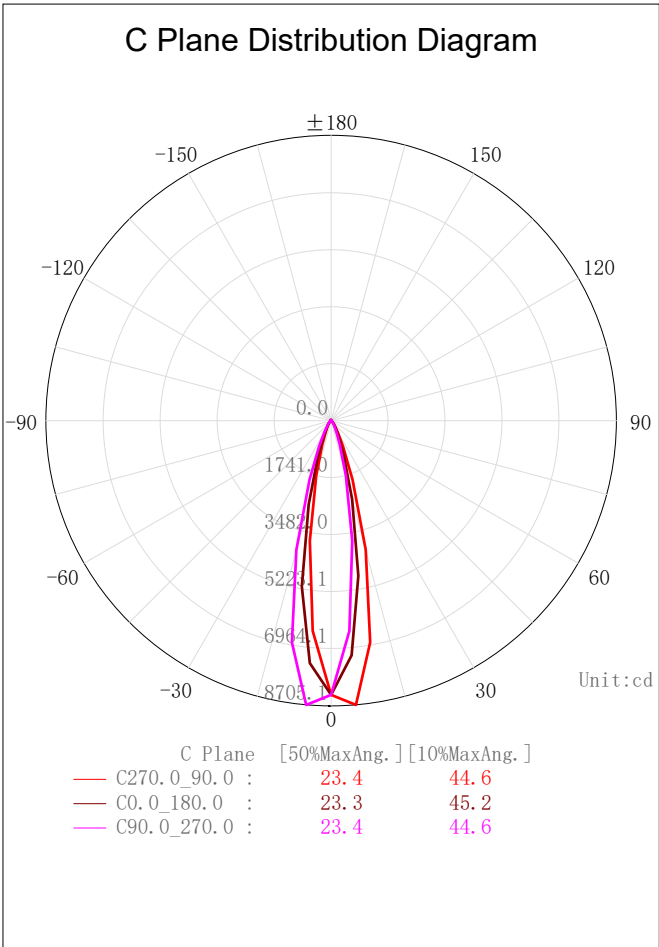

2D Plane Light Intensity Distribution Curve


Lum. Name:SD08-25-XX-01 2700K RA90 24D	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/09/16

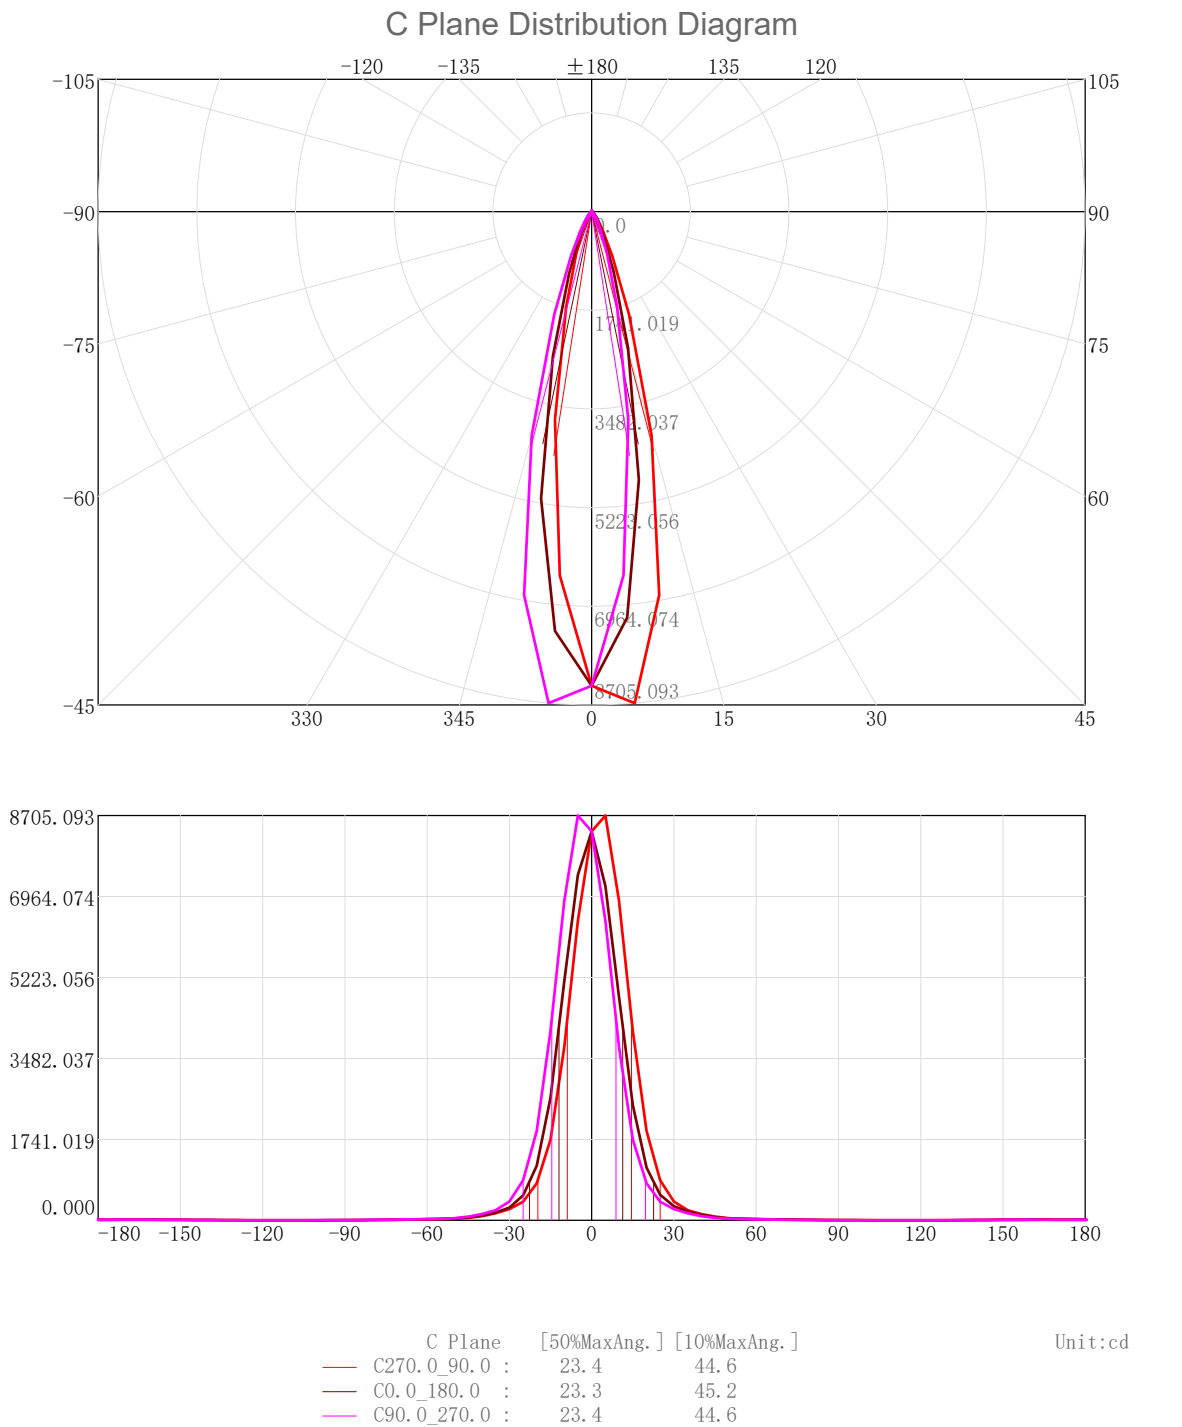

3D Light Intensity Distribution Modal

Lum. Name:SD08-25-XX-01 2700K RA90 24D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/09/16

3D Light Intensity Distribution Modal

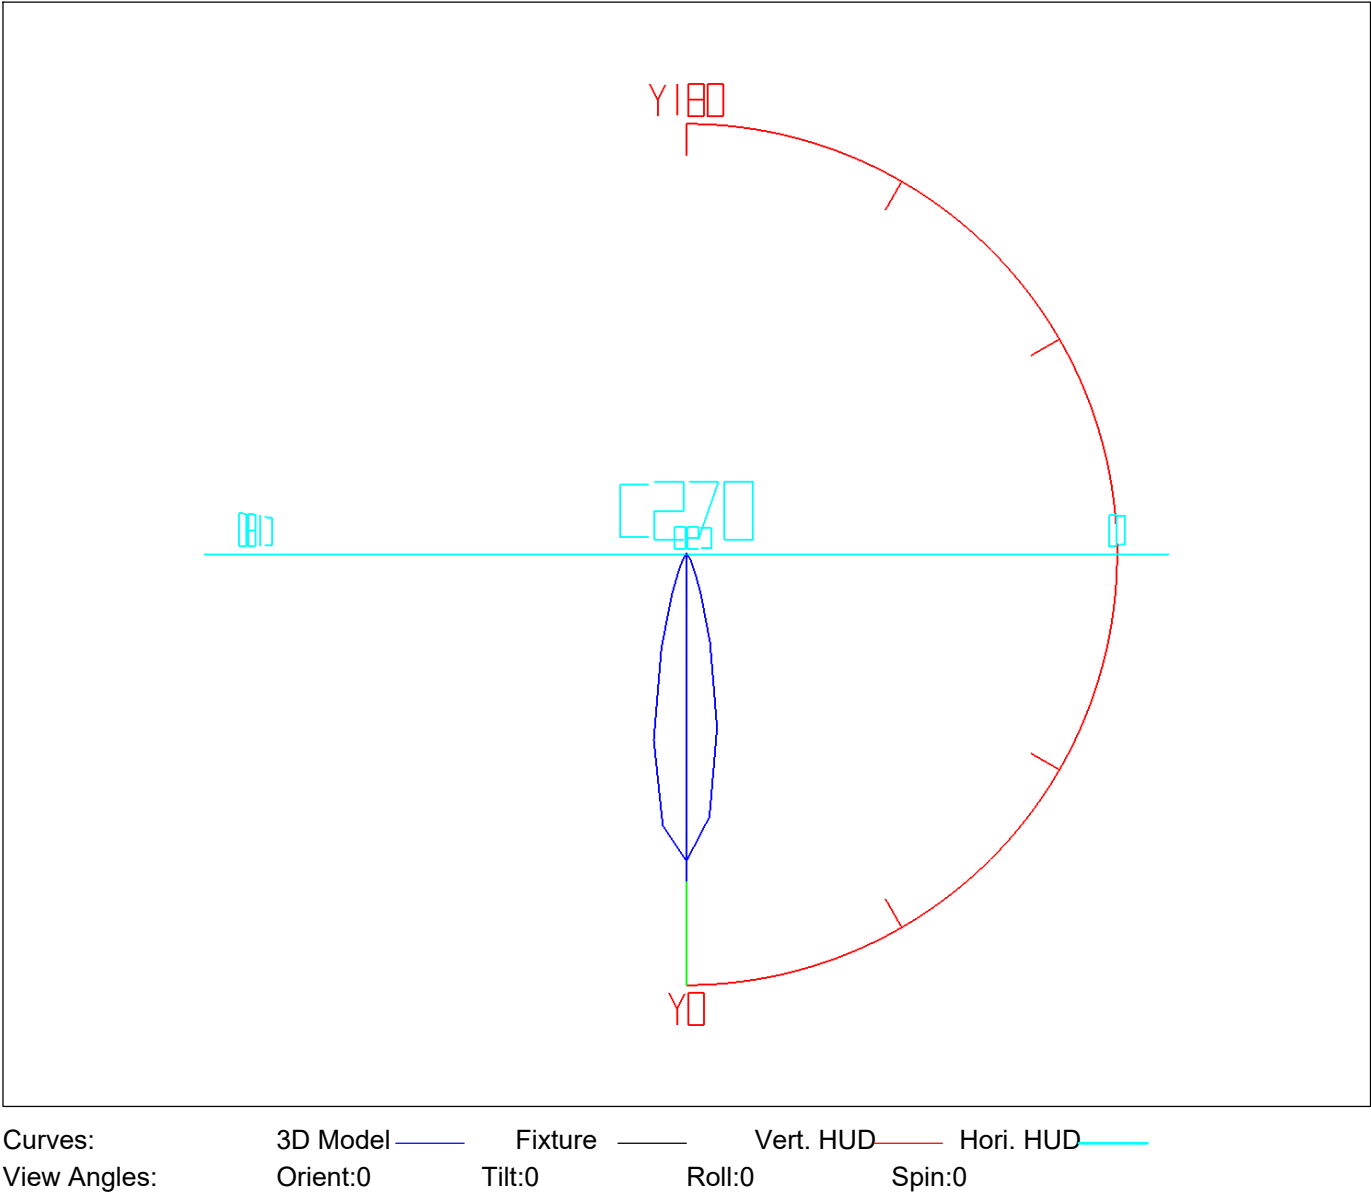


Zonal Flux Tabulation

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0. 0-5. 0	188. 93	188. 93	9. 26	9. 26
5. 0-10. 0	449. 84	638. 78	22. 05	31. 31
10. 0-15. 0	466. 76	1105. 53	22. 88	54. 19
15. 0-20. 0	329. 03	1434. 56	16. 13	70. 32
20. 0-25. 0	193. 82	1628. 38	9. 50	79. 82
25. 0-30. 0	113. 59	1741. 97	5. 57	85. 38
30. 0-35. 0	72. 49	1814. 46	3. 55	88. 94
35. 0-40. 0	49. 82	1864. 28	2. 44	91. 38
40. 0-45. 0	33. 73	1898. 00	1. 65	93. 03
45. 0-50. 0	22. 32	1920. 33	1. 09	94. 13
50. 0-55. 0	16. 24	1936. 56	0. 80	94. 92
55. 0-60. 0	13. 63	1950. 19	0. 67	95. 59
60. 0-65. 0	11. 73	1961. 92	0. 57	96. 16
65. 0-70. 0	9. 86	1971. 77	0. 48	96. 65
70. 0-75. 0	8. 16	1979. 93	0. 40	97. 05
75. 0-80. 0	6. 60	1986. 53	0. 32	97. 37
80. 0-85. 0	5. 24	1991. 77	0. 26	97. 63
85. 0-90. 0	4. 16	1995. 94	0. 20	97. 83
90. 0-95. 0	3. 40	1999. 34	0. 17	98. 00
95. 0-100. 0	2. 88	2002. 22	0. 14	98. 14
100. 0-105. 0	2. 54	2004. 76	0. 12	98. 26
105. 0-110. 0	2. 28	2007. 04	0. 11	98. 38
110. 0-115. 0	2. 09	2009. 13	0. 10	98. 48
115. 0-120. 0	2. 00	2011. 13	0. 10	98. 58
120. 0-125. 0	1. 97	2013. 10	0. 10	98. 67
125. 0-130. 0	2. 10	2015. 20	0. 10	98. 78
130. 0-135. 0	2. 43	2017. 63	0. 12	98. 90
135. 0-140. 0	2. 90	2020. 53	0. 14	99. 04
140. 0-145. 0	3. 38	2023. 91	0. 17	99. 20
145. 0-150. 0	3. 61	2027. 52	0. 18	99. 38
150. 0-155. 0	3. 53	2031. 05	0. 17	99. 55
155. 0-160. 0	3. 17	2034. 22	0. 16	99. 71
160. 0-165. 0	2. 60	2036. 82	0. 13	99. 84
165. 0-170. 0	1. 87	2038. 69	0. 09	99. 93
170. 0-175. 0	1. 11	2039. 80	0. 05	99. 98
175. 0-180. 0	0. 37	2040. 17	0. 02	100. 00

Rectangle ISO Lighting Intensity Diagram

Lum. Name:SD08-25-XX-01 2700K RA90 24D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/09/16

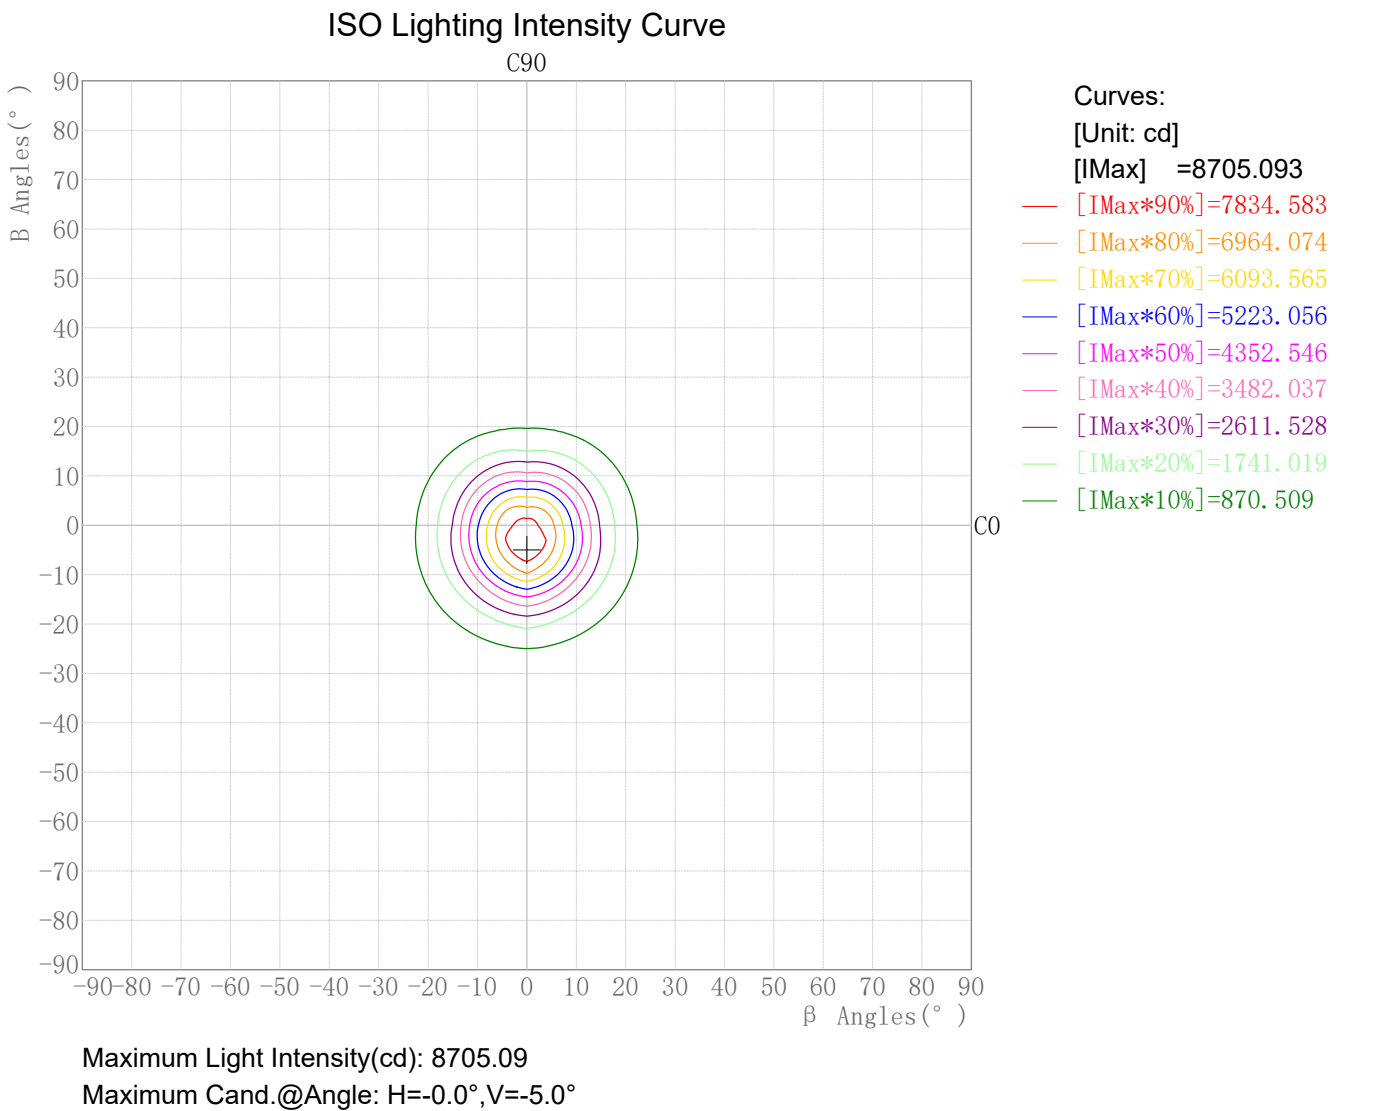


Photometric Filename:SD08-25-XX-01 2700K RA90 24D.IES

Plane ISO-Illuminance Diagram

Lum. Name: SD08-25-XX-01 2700K RA90 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine: GON-2000	Test Date: 2022/09/16

Plane ISO-Illuminance Curve

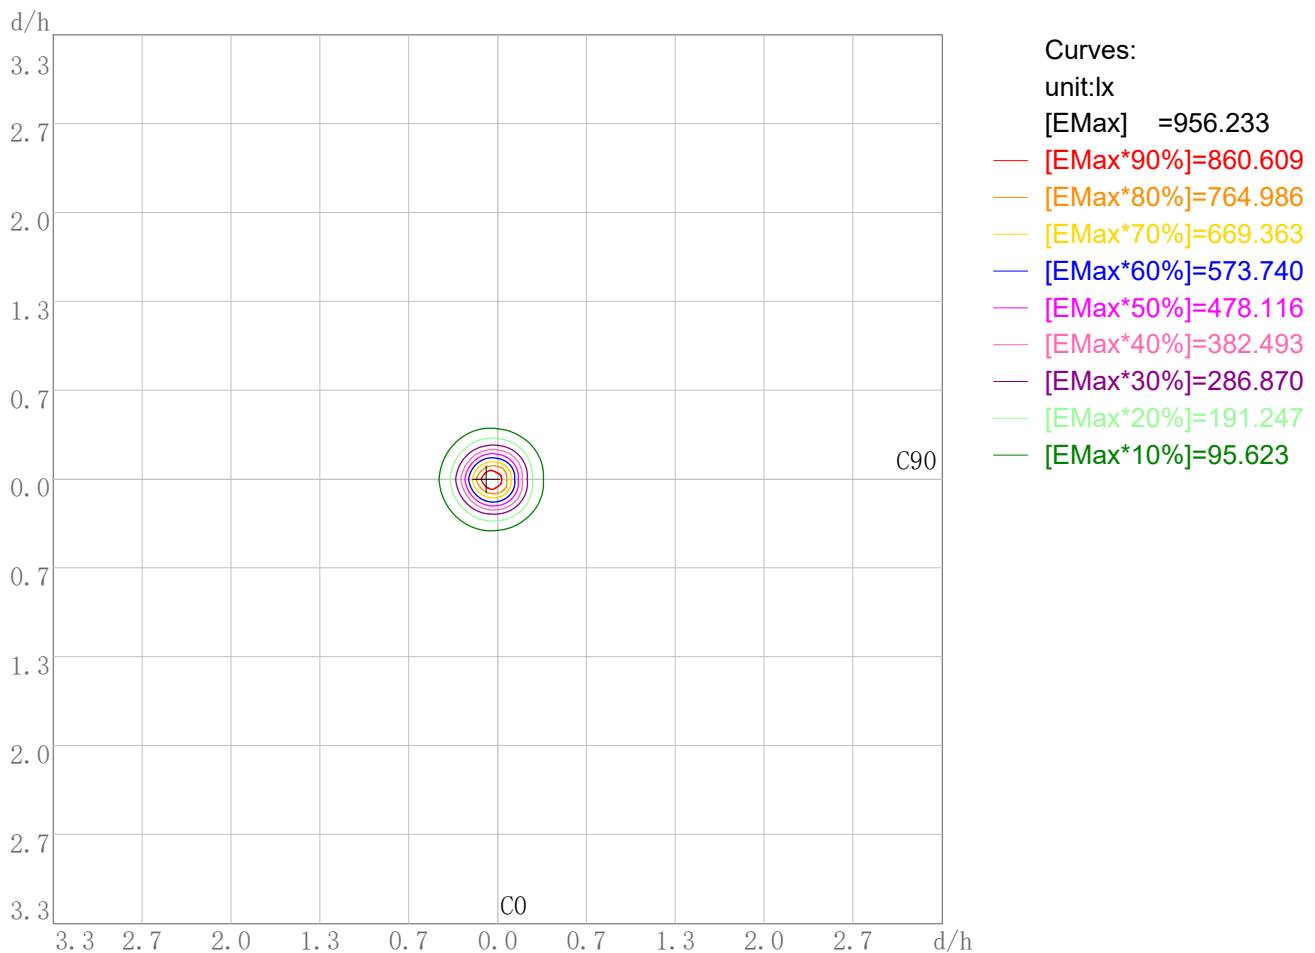

Working Plane Luminaire Mounting Height(m): 3.00


Working Plane Maximum Illuminance(lx): 956.23

Working Plane Maximum Illuminance Position(d/h):H-0.1 V-0.0

3D Plane ISO Illuminance Diagram

Lum. Name: SD08-25-XX-01 2700K RA90 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/09/16


3D Plane Illuminance Modal

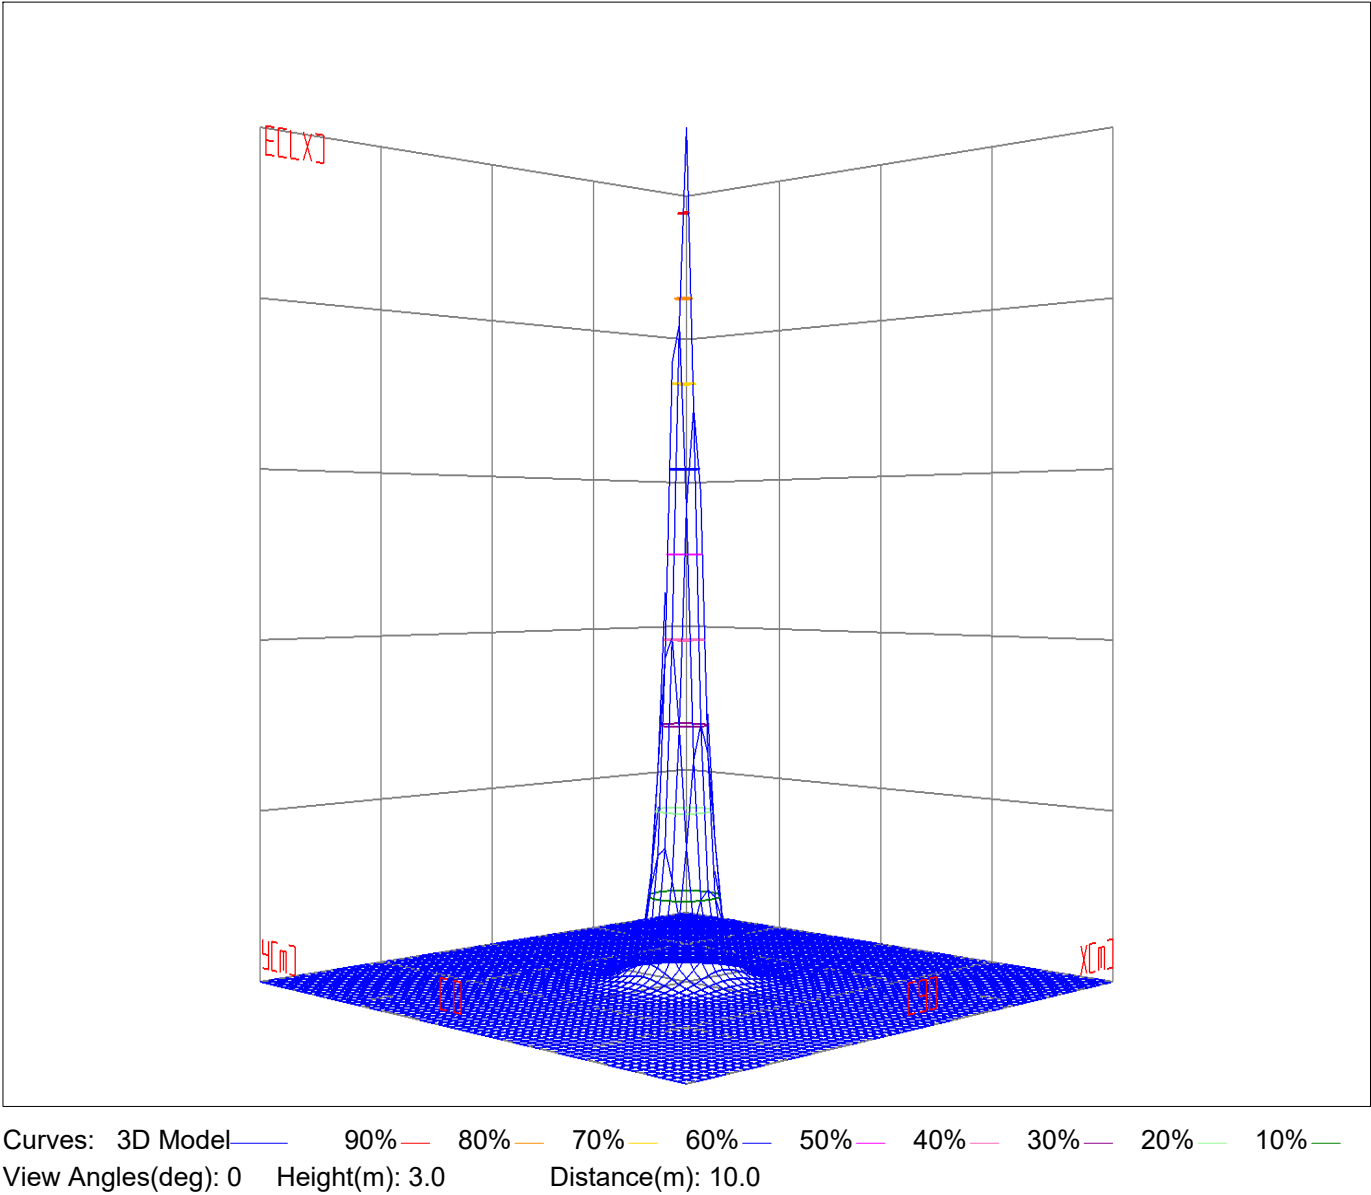

Space ISO Illuminance Diagram

Lum. Name:SD08-25-XX-01 2700K RA90 24D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/09/16


Space ISO Illuminance Curve

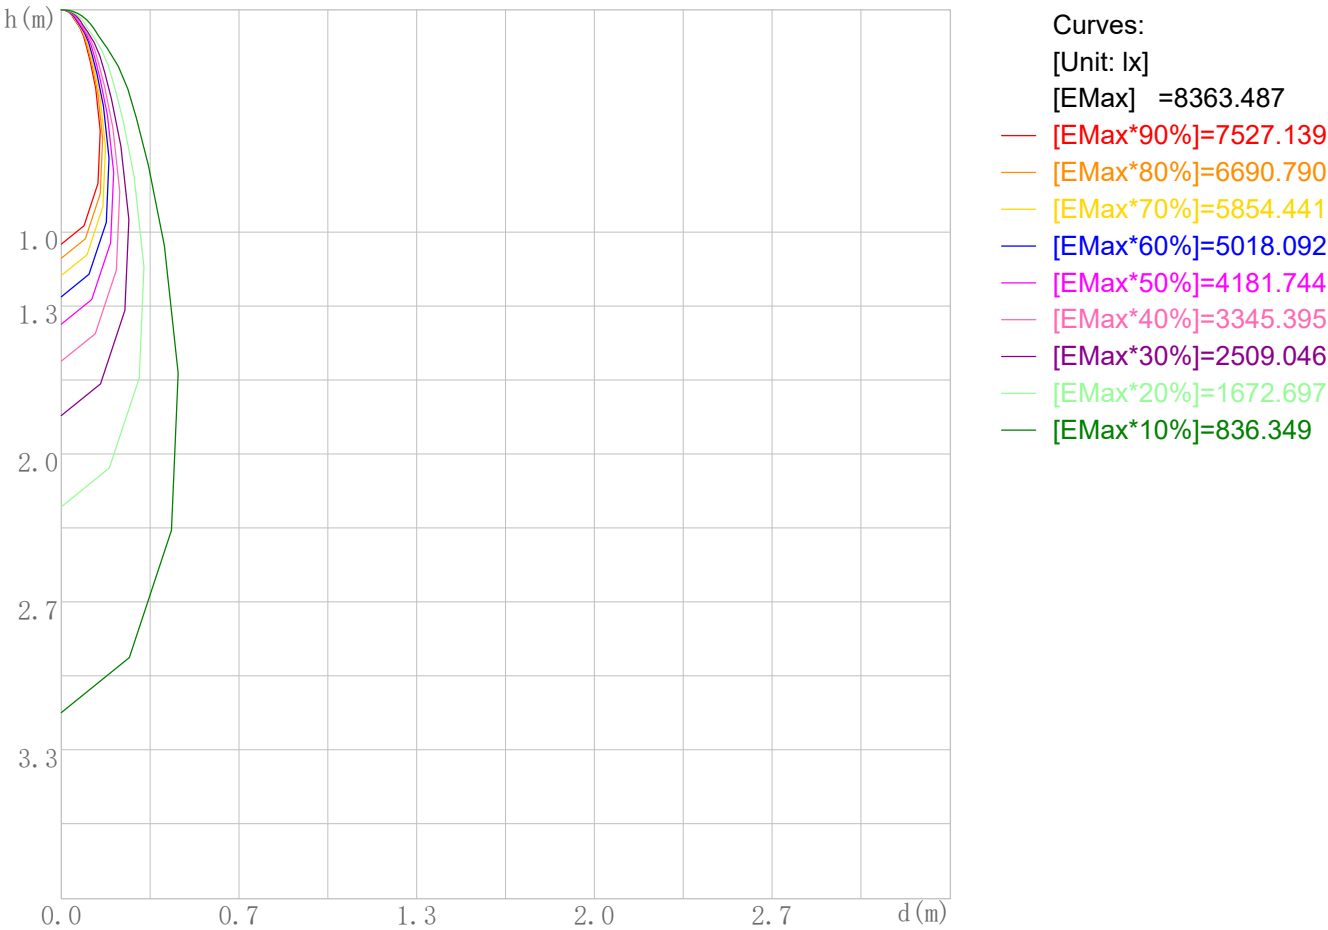

Space Plane Maximum Illuminance and @Angle:8363.49lx,0.0deg
Plane Maximum Lighting Intensity and @Angle:8363.487cd,0eg

Illuminance-Distance Diagram

Lum. Name:SD08-25-XX-01 2700K RA90 24D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/09/16

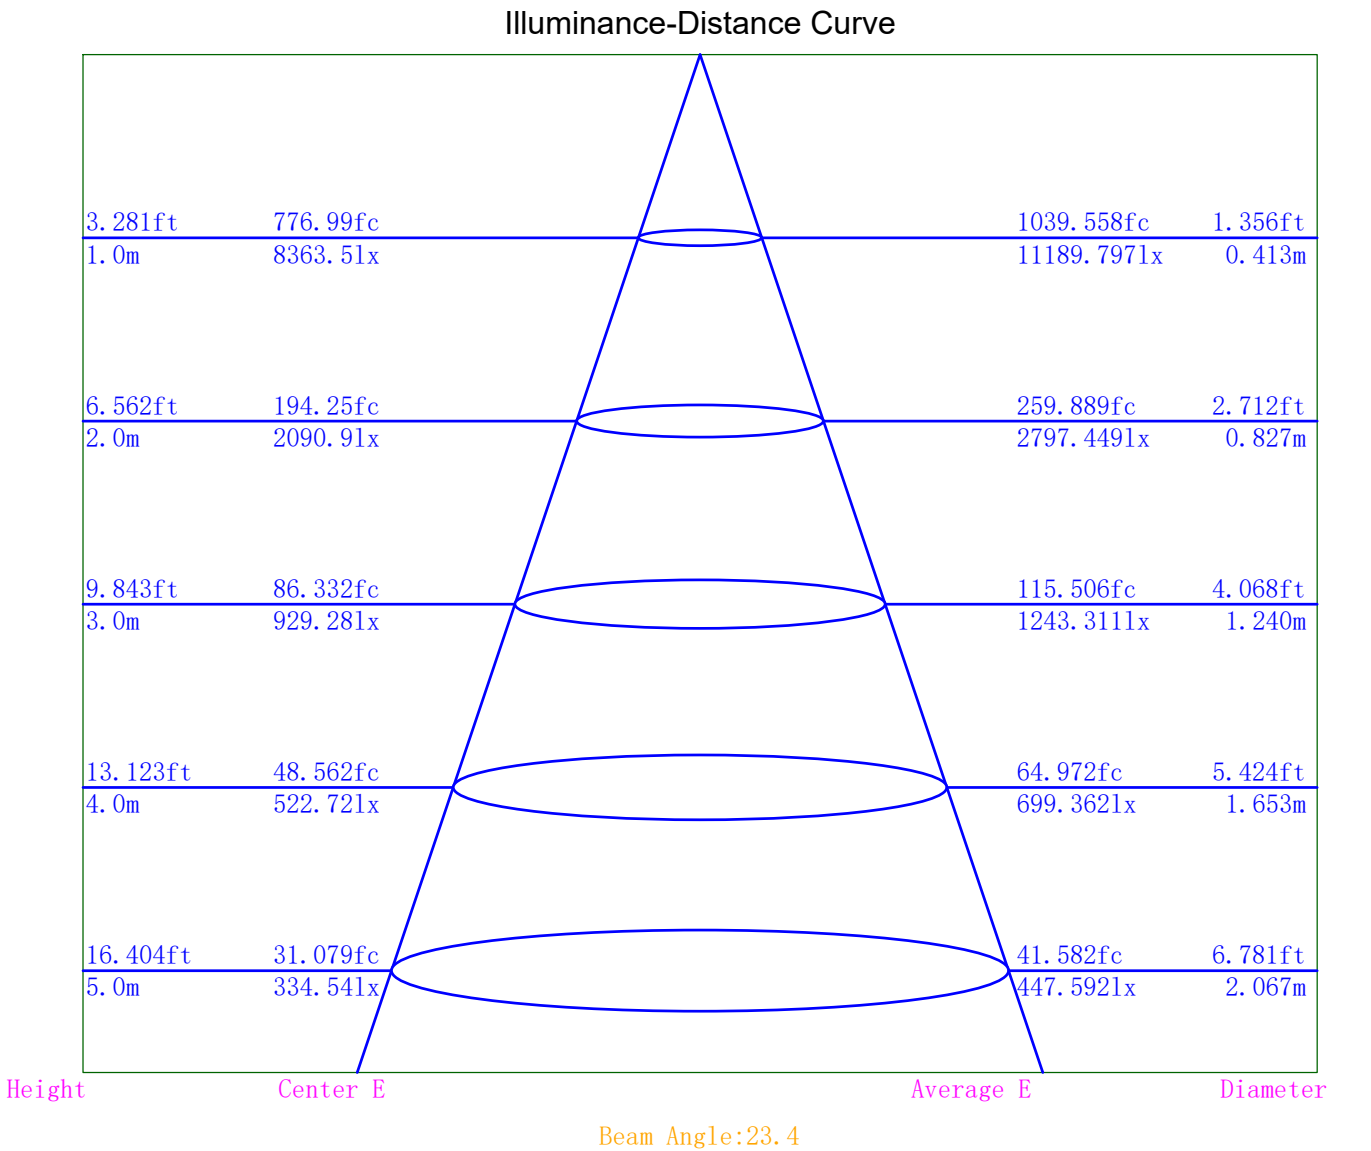

Indoor Luminance Limiting Curves

Lum. Name:SD08-25-XX-01 2700K RA90 24D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/09/16


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	18067	12359	10678	9874	9343	9138	9579	11084	17363
C90	14415	10700	9451	8840	8298	7983	8201	9881	14166

Luminance Limiting Curve

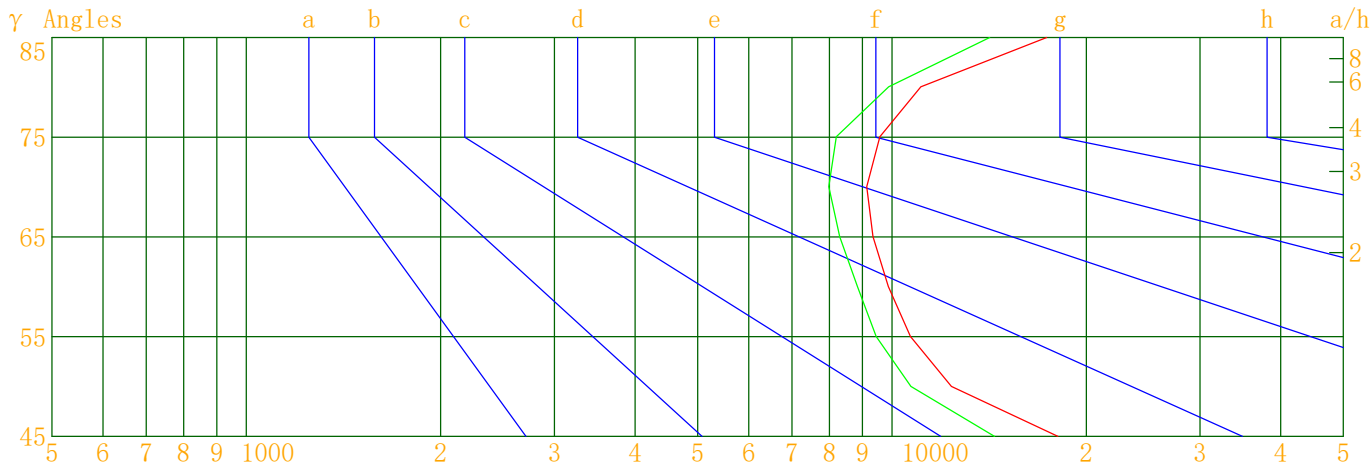


Luminous Size:Length(m)=-0.083Width(m)=-0.083Height(m)=0.000Area(m^2)=0.005411

Luminous Type:Without Luminous Side

Luminous Curves:C0-C180 Color: C90-C270 Color:

Indoor Budgetary Estimate Table

Lum. Name:SD08-25-XX-01 2700K RA90 24D	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/09/16

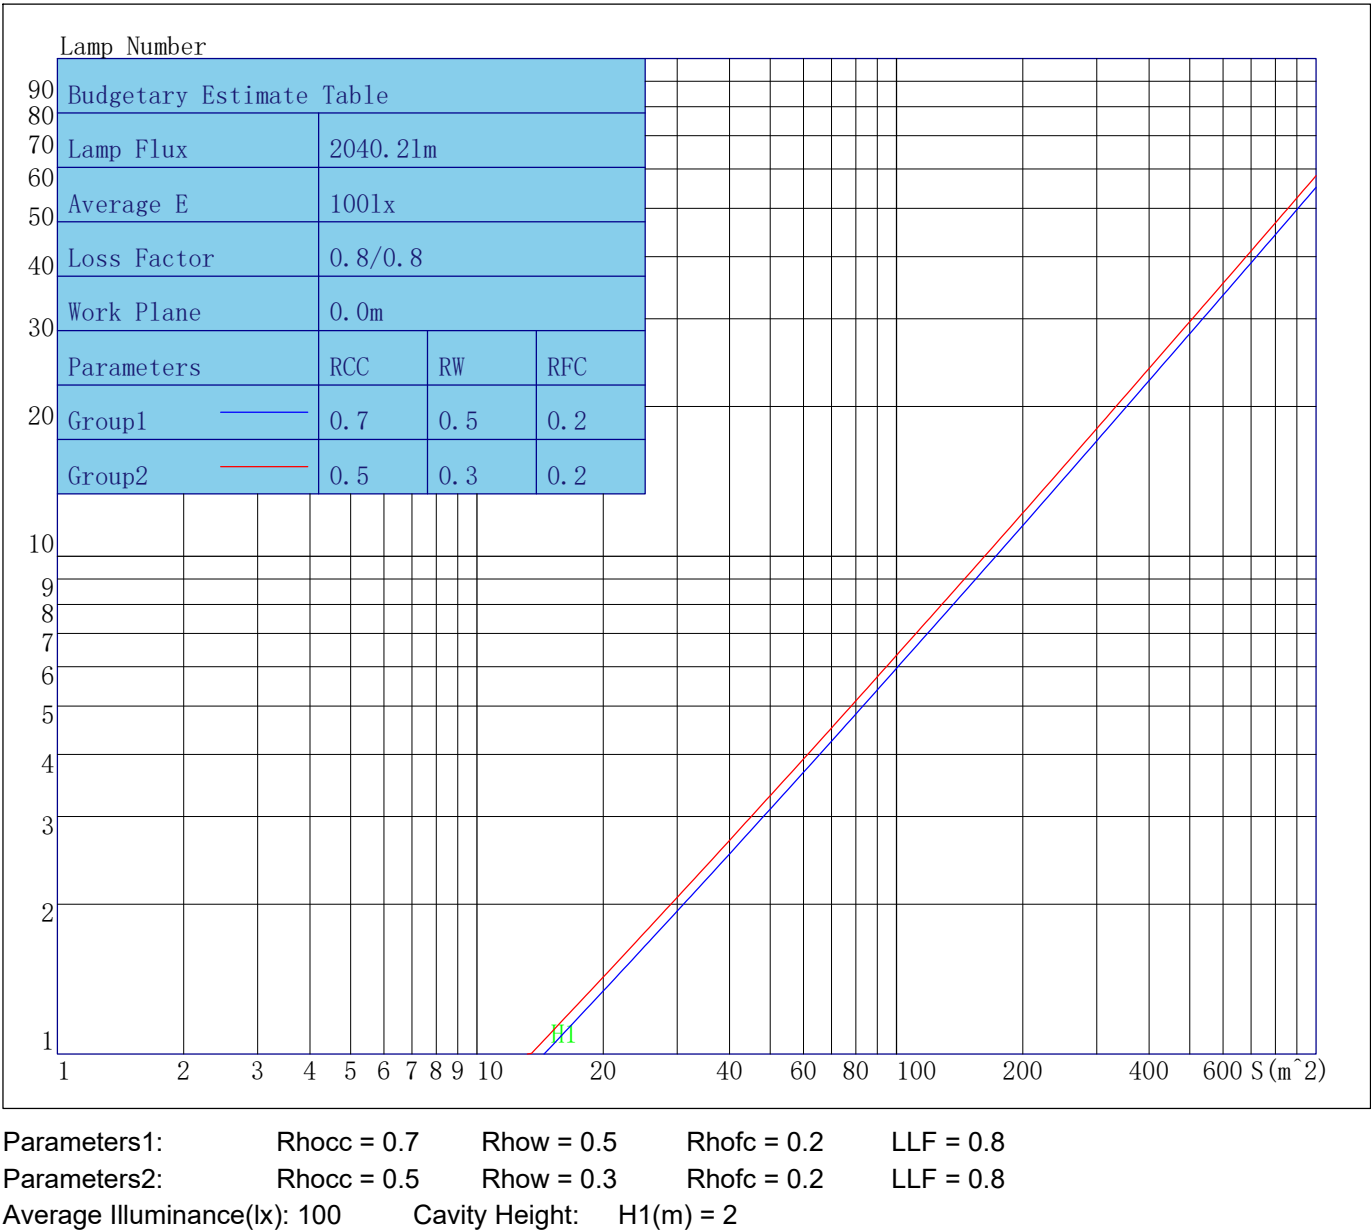

Indoor Coefficient of Utilization Table

Lum. Name:SD08-25-XX-01 2700K RA90 24D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/09/16

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	114	111	109	107	111	109	107	105	104	103	101	100	99	98	97	96	95	93
2	109	105	102	99	107	103	100	97	100	97	95	96	94	93	93	92	90	89
3	105	100	96	92	103	98	94	91	95	92	90	93	90	88	90	88	86	85
4	101	95	91	87	99	94	90	86	92	88	85	89	86	84	87	85	83	82
5	98	91	86	83	96	90	86	82	88	84	81	86	83	81	85	82	80	78
6	94	87	83	79	93	87	82	79	85	81	78	83	80	78	82	79	77	76
7	91	84	79	76	90	83	79	76	82	78	75	81	77	75	80	77	74	73
8	89	81	76	73	87	81	76	73	79	75	73	78	75	72	77	74	72	71
9	86	78	74	71	85	78	74	71	77	73	70	76	72	70	75	72	70	69
10	83	76	71	69	82	76	71	68	75	71	68	74	70	68	73	70	68	67

Unified Glare Rating Table

Lum. Name:SD08-25-XX-01 2700K RA90 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/09/16

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size	Vewed crosswise					Vewed endwise				
X=2H Y=2H	15.3	16.3	15.7	16.7	17.1	14.3	15.3	14.7	15.7	16.1
	16.0	16.9	16.4	17.3	17.7	15.1	16.0	15.5	16.4	16.8
	16.4	17.3	16.9	17.7	18.2	15.5	16.3	15.9	16.7	17.2
	16.9	17.7	17.4	18.2	18.6	16.0	16.8	16.4	17.2	17.7
	17.2	18.0	17.7	18.4	18.9	16.3	17.0	16.7	17.5	17.9
	17.6	18.3	18.0	18.7	19.2	16.6	17.3	17.0	17.7	18.2
X=4H Y=2H	15.5	16.3	15.9	16.7	17.2	14.5	15.4	15.0	15.8	16.2
	16.4	17.1	16.9	17.6	18.1	15.5	16.3	16.0	16.7	17.2
	17.0	17.7	17.5	18.1	18.6	16.1	16.8	16.6	17.2	17.7
	17.7	18.3	18.2	18.8	19.3	16.8	17.4	17.3	17.9	18.4
	18.1	18.6	18.6	19.1	19.7	17.2	17.8	17.7	18.2	18.8
	18.6	19.1	19.1	19.6	20.1	17.6	18.1	18.2	18.7	19.2
X=8H Y=4H	17.2	17.8	17.7	18.3	18.8	16.4	16.9	16.9	17.4	17.9
	18.1	18.6	18.7	19.1	19.7	17.3	17.8	17.8	18.3	18.9
	18.7	19.1	19.2	19.7	20.2	17.8	18.2	18.4	18.8	19.3
	19.4	19.7	19.9	20.3	20.9	18.5	18.8	19.0	19.4	20.0
X=12H Y=4H	17.3	17.7	17.8	18.3	18.8	16.4	16.9	16.9	17.4	17.9
	18.2	18.7	18.8	19.2	19.8	17.4	17.8	18.0	18.3	18.9
	18.9	19.3	19.4	19.8	20.4	18.0	18.4	18.6	19.0	19.6
Variations with the objerver position at spacings										
S=1.0H	0.2/-0.2					0.2/-0.2				
S=1.5H	0.3/-0.4					0.4/-0.4				
S=2.0H	0.4/-0.4					0.4/-0.5				
Reduced UGR Table:										
Nordic Standard Table:	BK0					BK0				
Correction Value	2.8					2.8				

o the CIE Pub.117,data has been corrected,refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	8363.49	8363.49	8363.49	8363.49
γ 5.0	7188.41	6441.46	7427.15	8705.09
γ 10.0	4804.44	3725.57	5138.86	6868.75
γ 15.0	2481.74	1736.12	2640.53	4078.06
γ 20.0	1136.91	798.50	1175.33	1922.28
γ 25.0	550.79	404.19	539.88	864.25
γ 30.0	305.89	243.58	276.71	404.90
γ 35.0	193.82	154.54	168.41	221.19
γ 40.0	120.39	93.89	105.93	136.17
γ 45.0	69.12	55.15	65.30	82.69
γ 50.0	42.98	37.21	40.72	48.73
γ 55.0	33.14	29.33	31.97	34.59
γ 60.0	26.71	23.92	26.85	29.36
γ 65.0	21.36	18.97	21.90	23.85
γ 70.0	16.91	14.77	17.46	20.47
γ 75.0	13.41	11.48	13.76	16.54
γ 80.0	10.41	9.28	10.75	13.05
γ 85.0	8.19	6.68	8.38	10.43
γ 90.0	6.62	5.72	6.58	8.24
γ 95.0	5.64	5.02	5.29	6.59
γ 100.0	5.06	4.37	4.75	5.61
γ 105.0	4.93	4.54	4.52	4.22
γ 110.0	4.52	4.02	4.33	3.83
γ 115.0	4.13	3.71	4.63	3.82
γ 120.0	4.14	4.03	4.43	4.04
γ 125.0	4.26	4.32	4.66	4.22
γ 130.0	5.00	5.35	5.81	5.08
γ 135.0	6.01	7.40	7.28	6.11
γ 140.0	8.70	9.72	9.57	7.93
γ 145.0	11.18	11.91	11.88	10.07
γ 150.0	12.90	13.63	13.99	12.48
γ 155.0	14.59	14.74	15.24	14.06
γ 160.0	15.67	15.23	16.17	15.30
γ 165.0	15.88	15.48	16.36	15.90
γ 170.0	15.42	15.24	16.16	15.97
γ 175.0	14.89	14.99	15.34	15.82
γ 180.0	15.37	15.37	15.37	15.37