



Road Luminaire Photometric Data

Description Information

Luminary Name:SD09-06-DW-01 RA95 2000K-3000K 24D		Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Date: 2021/11/08
Manufacture: Shenzhen Norming Lighting Co., Ltd		Shld.Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department		Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.076m*0.076m*0.000m		Lum. Area (m2):0.005	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=1.0	Temp. (°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 334.980	Luminary Flux(lm): 334.975	Down Lumens&Percent: 334.975lm 100.00%	
Rated Power(W):	Luminary Efficiency: 100.00%	Up Lumens&Percent: 0.000lm 0.00%	
Rated Voltage(V):	Luminary EER(lm/W): 56.091	76° Flash Area(m2):	
Tested Power(W): 5.972	Max. Candela(cd): 2355.352	SLI: 0.000	
Lamps' Inside: 1	Max Cand@Ang. (°): C=270.0 γ=2.0	IES Classification: Type I	
Tested Electrics (V, A, pf):241.2, 0.029, 0.837	Half Peak Angle(°): L=-7.7, R=12.1	Longitudinal Classfct: Very Short	
Lamp Size(W*L*H):0.076m*0.076m*0.000m	Field Angle(10%Imax): 34.8(°)	Cutoff Classification: Full Cutoff	

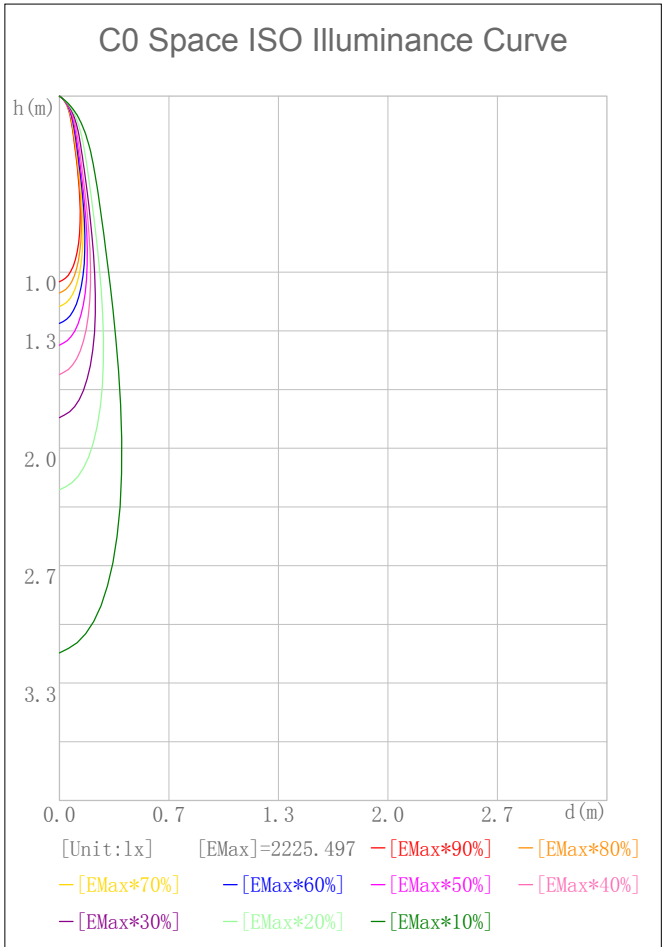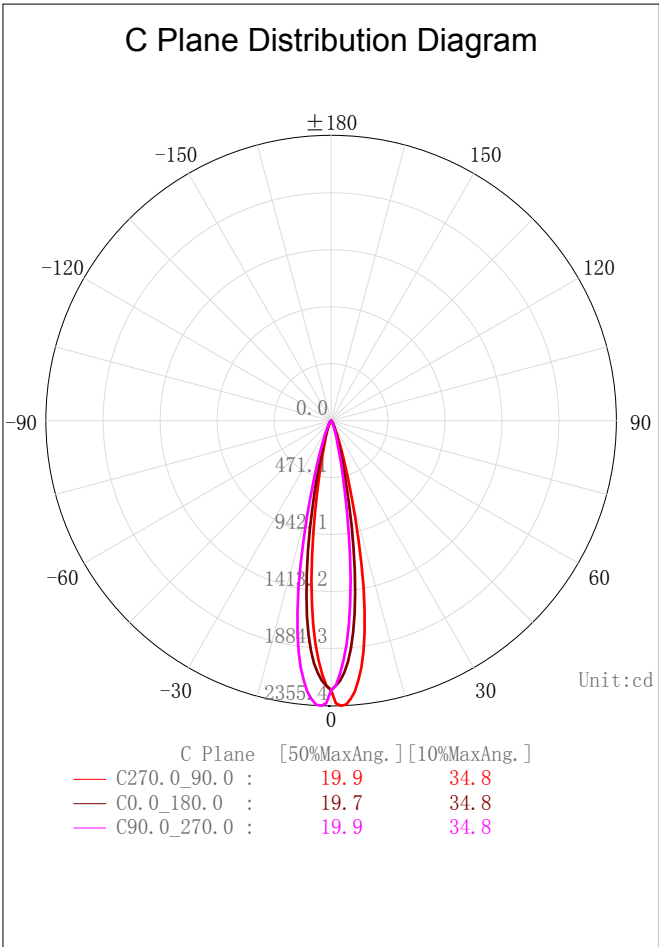

2D Plane Light Intensity Distribution Curve


Lum. Name: SD09-06-DW-01 RA95 2000K-3000K 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Deparment
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/11/08

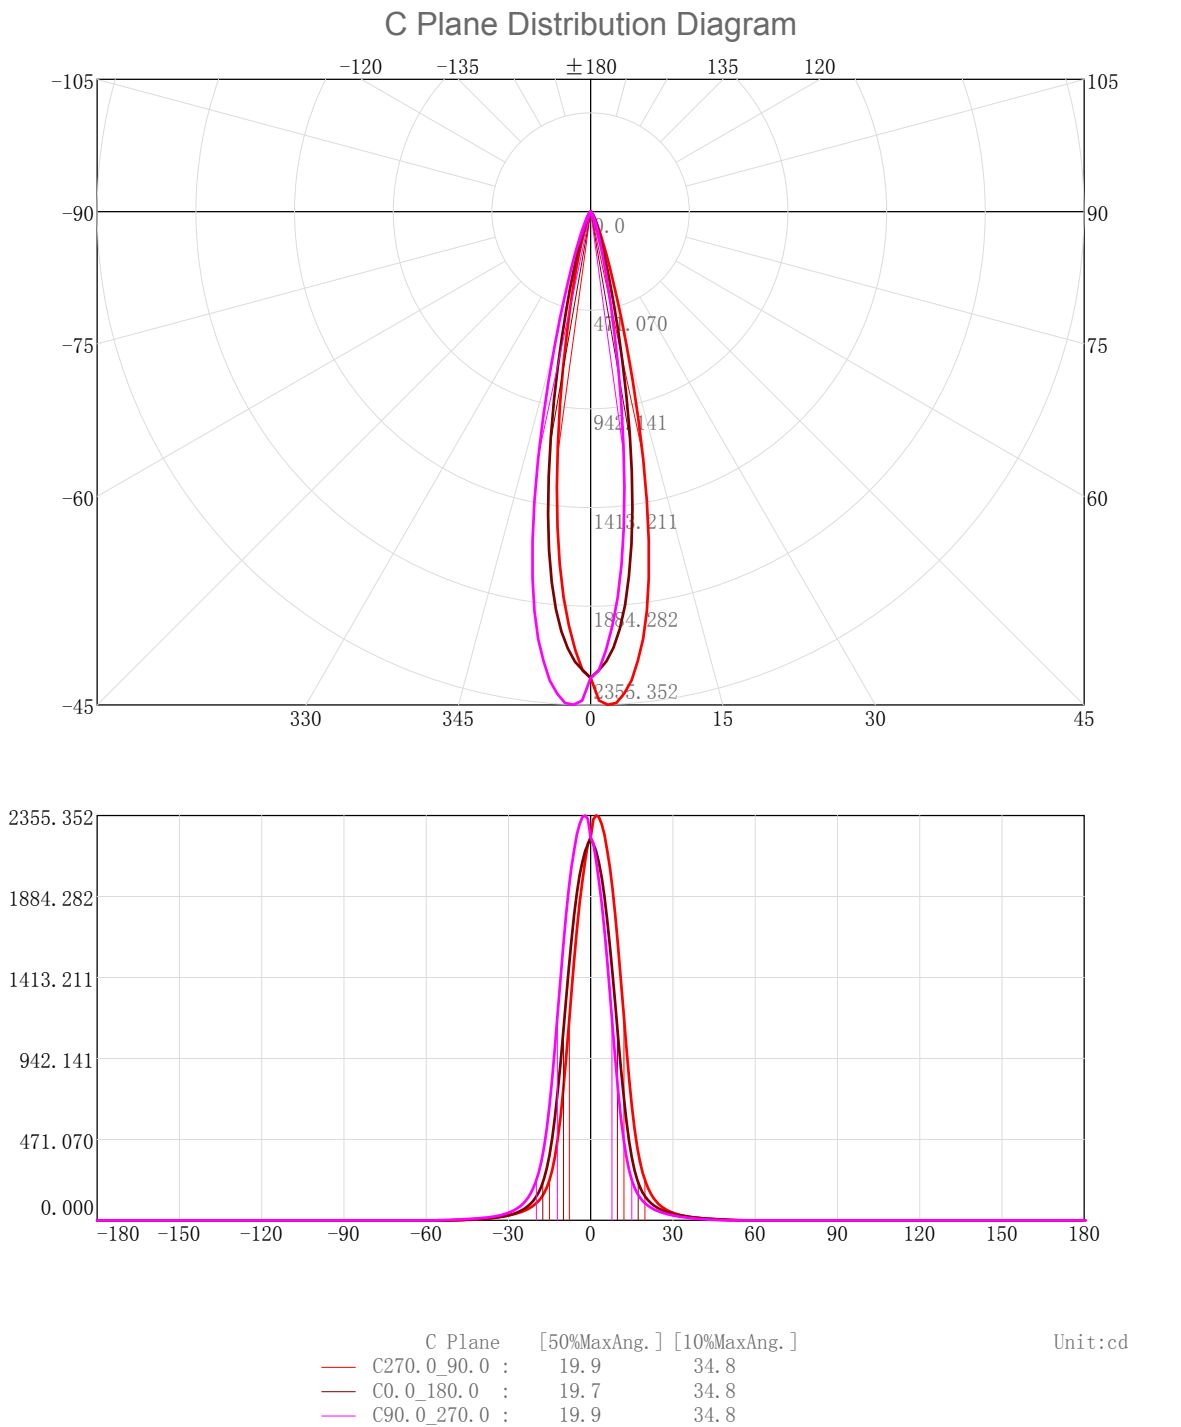

3D Light Intensity Distribution Modal

Lum. Name: SD09-06-DW-01 RA95 2000K-3000K 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Deparment
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/11/08

3D Light Intensity Distribution Modal

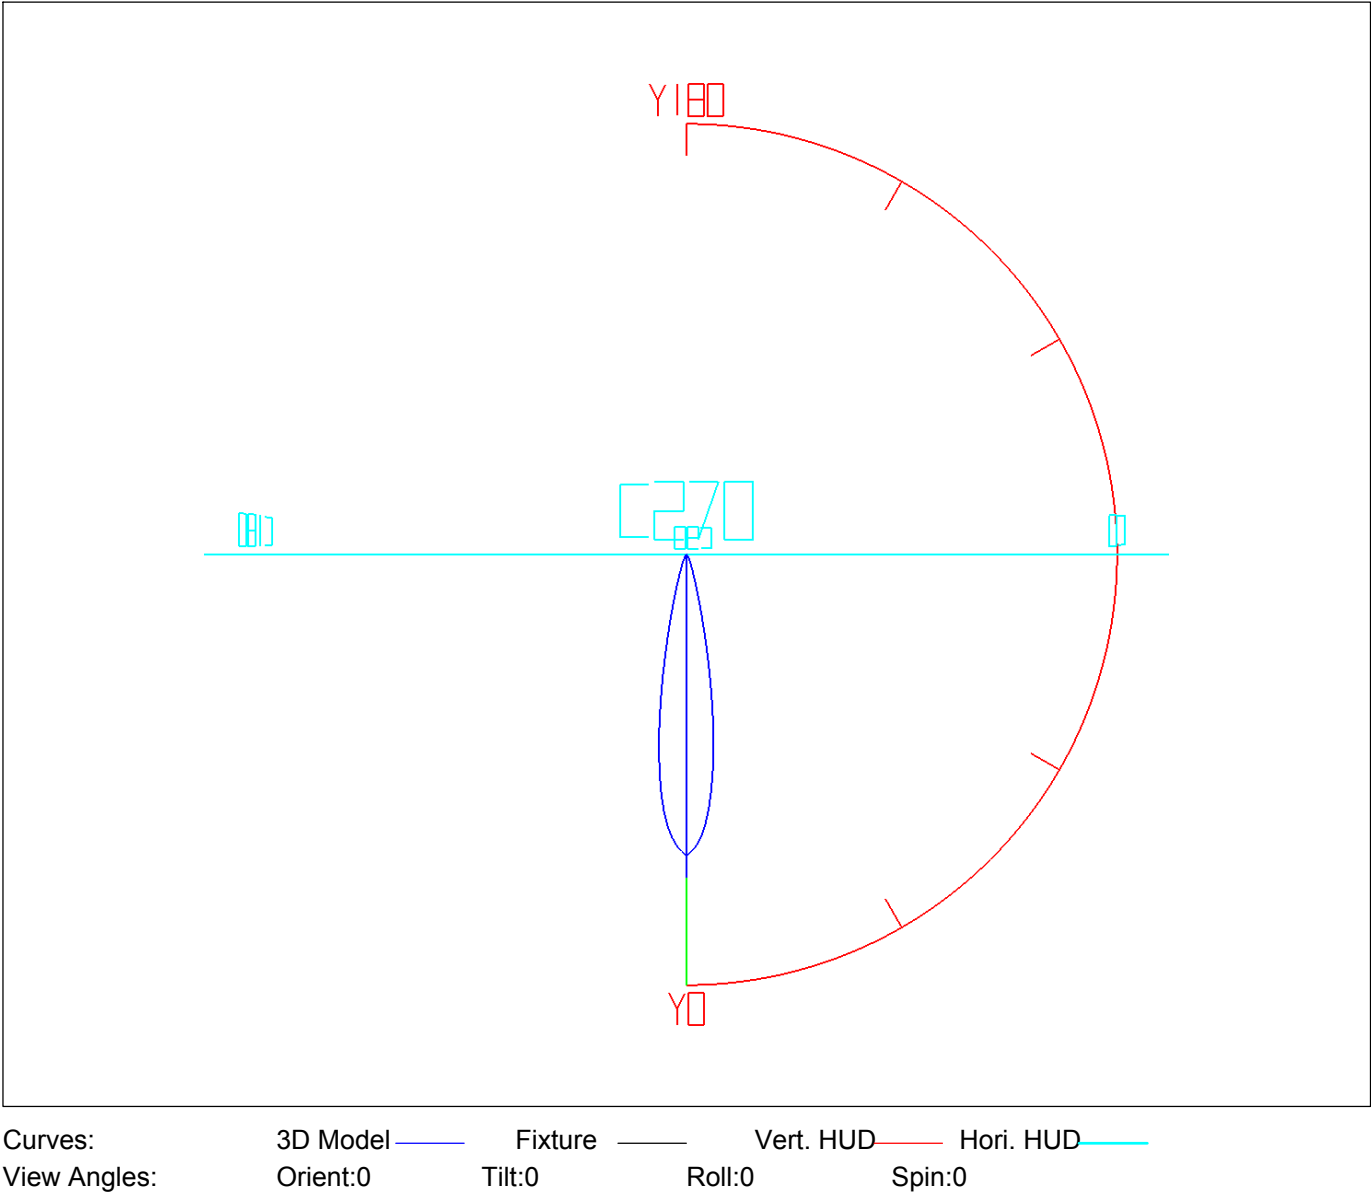

Zonal Flux Tabulation


Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	2.13	2.13	0.64	0.64	47.0-48.0	0.31	333.98	0.09	99.70
1.0-2.0	6.33	8.46	1.89	2.53	48.0-49.0	0.26	334.23	0.08	99.78
2.0-3.0	10.31	18.77	3.08	5.60	49.0-50.0	0.21	334.44	0.06	99.84
3.0-4.0	13.94	32.71	4.16	9.76	50.0-51.0	0.16	334.60	0.05	99.89
4.0-5.0	17.08	49.79	5.10	14.86	51.0-52.0	0.13	334.73	0.04	99.93
5.0-6.0	19.61	69.40	5.85	20.72	52.0-53.0	0.09	334.82	0.03	99.95
6.0-7.0	21.42	90.82	6.39	27.11	53.0-54.0	0.06	334.89	0.02	99.97
7.0-8.0	22.46	113.28	6.70	33.82	54.0-55.0	0.04	334.93	0.01	99.98
8.0-9.0	22.67	135.95	6.77	40.58	55.0-56.0	0.03	334.96	0.01	99.99
9.0-10.0	22.10	158.05	6.60	47.18	56.0-57.0	0.01	334.97	0.00	100.00
10.0-11.0	20.84	178.89	6.22	53.40	57.0-58.0	0.00	334.98	0.00	100.00
11.0-12.0	19.06	197.95	5.69	59.09	58.0-59.0	0.00	334.98	0.00	100.00
12.0-13.0	16.98	214.93	5.07	64.16	59.0-60.0	0.00	334.98	0.00	100.00
13.0-14.0	14.81	229.73	4.42	68.58	60.0-61.0	0.00	334.98	0.00	100.00
14.0-15.0	12.73	242.46	3.80	72.38	61.0-62.0	0.00	334.98	0.00	100.00
15.0-16.0	10.88	253.35	3.25	75.63	62.0-63.0	0.00	334.98	0.00	100.00
16.0-17.0	9.29	262.64	2.77	78.40	63.0-64.0	0.00	334.98	0.00	100.00
17.0-18.0	7.96	270.60	2.38	80.78	64.0-65.0	0.00	334.98	0.00	100.00
18.0-19.0	6.87	277.47	2.05	82.83	65.0-66.0	0.00	334.98	0.00	100.00
19.0-20.0	5.98	283.46	1.79	84.62	66.0-67.0	0.00	334.98	0.00	100.00
20.0-21.0	5.25	288.70	1.57	86.19	67.0-68.0	0.00	334.98	0.00	100.00
21.0-22.0	4.64	293.35	1.39	87.57	68.0-69.0	0.00	334.98	0.00	100.00
22.0-23.0	4.13	297.48	1.23	88.80	69.0-70.0	0.00	334.98	0.00	100.00
23.0-24.0	3.69	301.17	1.10	89.91	70.0-71.0	0.00	334.98	0.00	100.00
24.0-25.0	3.32	304.49	0.99	90.90	71.0-72.0	0.00	334.98	0.00	100.00
25.0-26.0	3.00	307.49	0.89	91.79	72.0-73.0	0.00	334.98	0.00	100.00
26.0-27.0	2.72	310.21	0.81	92.60	73.0-74.0	0.00	334.98	0.00	100.00
27.0-28.0	2.47	312.67	0.74	93.34	74.0-75.0	0.00	334.98	0.00	100.00
28.0-29.0	2.25	314.92	0.67	94.01	75.0-76.0	0.00	334.98	0.00	100.00
29.0-30.0	2.05	316.97	0.61	94.62	76.0-77.0	0.00	334.98	0.00	100.00
30.0-31.0	1.87	318.84	0.56	95.18	77.0-78.0	0.00	334.98	0.00	100.00
31.0-32.0	1.71	320.55	0.51	95.69	78.0-79.0	0.00	334.98	0.00	100.00
32.0-33.0	1.56	322.11	0.47	96.16	79.0-80.0	0.00	334.98	0.00	100.00
33.0-34.0	1.42	323.53	0.43	96.58	80.0-81.0	0.00	334.98	0.00	100.00
34.0-35.0	1.30	324.84	0.39	96.97	81.0-82.0	0.00	334.98	0.00	100.00
35.0-36.0	1.19	326.02	0.35	97.33	82.0-83.0	0.00	334.98	0.00	100.00
36.0-37.0	1.08	327.11	0.32	97.65	83.0-84.0	0.00	334.98	0.00	100.00
37.0-38.0	0.99	328.10	0.30	97.95	84.0-85.0	0.00	334.98	0.00	100.00
38.0-39.0	0.90	329.00	0.27	98.21	85.0-86.0	0.00	334.98	0.00	100.00
39.0-40.0	0.82	329.82	0.25	98.46	86.0-87.0	0.00	334.98	0.00	100.00
40.0-41.0	0.74	330.57	0.22	98.68	87.0-88.0	0.00	334.98	0.00	100.00
41.0-42.0	0.67	331.24	0.20	98.88	88.0-89.0	0.00	334.98	0.00	100.00
42.0-43.0	0.61	331.85	0.18	99.07	89.0-90.0	0.00	334.98	0.00	100.00
43.0-44.0	0.54	332.39	0.16	99.23	90.0-91.0	0.00	334.98	0.00	100.00
44.0-45.0	0.48	332.88	0.14	99.37	91.0-92.0	0.00	334.98	0.00	100.00
45.0-46.0	0.42	333.30	0.13	99.50	92.0-93.0	0.00	334.98	0.00	100.00
46.0-47.0	0.37	333.67	0.11	99.61	93.0-94.0	0.00	334.98	0.00	100.00

Zonal Flux Tabulation - (Cont.)

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	334.98	0.00	100.00	141.0-142.0	0.00	334.98	0.00	100.00
95.0-96.0	0.00	334.98	0.00	100.00	142.0-143.0	0.00	334.98	0.00	100.00
96.0-97.0	0.00	334.98	0.00	100.00	143.0-144.0	0.00	334.98	0.00	100.00
97.0-98.0	0.00	334.98	0.00	100.00	144.0-145.0	0.00	334.98	0.00	100.00
98.0-99.0	0.00	334.98	0.00	100.00	145.0-146.0	0.00	334.98	0.00	100.00
99.0-100.0	0.00	334.98	0.00	100.00	146.0-147.0	0.00	334.98	0.00	100.00
100.0-101.0	0.00	334.98	0.00	100.00	147.0-148.0	0.00	334.98	0.00	100.00
101.0-102.0	0.00	334.98	0.00	100.00	148.0-149.0	0.00	334.98	0.00	100.00
102.0-103.0	0.00	334.98	0.00	100.00	149.0-150.0	0.00	334.98	0.00	100.00
103.0-104.0	0.00	334.98	0.00	100.00	150.0-151.0	0.00	334.98	0.00	100.00
104.0-105.0	0.00	334.98	0.00	100.00	151.0-152.0	0.00	334.98	0.00	100.00
105.0-106.0	0.00	334.98	0.00	100.00	152.0-153.0	0.00	334.98	0.00	100.00
106.0-107.0	0.00	334.98	0.00	100.00	153.0-154.0	0.00	334.98	0.00	100.00
107.0-108.0	0.00	334.98	0.00	100.00	154.0-155.0	0.00	334.98	0.00	100.00
108.0-109.0	0.00	334.98	0.00	100.00	155.0-156.0	0.00	334.98	0.00	100.00
109.0-110.0	0.00	334.98	0.00	100.00	156.0-157.0	0.00	334.98	0.00	100.00
110.0-111.0	0.00	334.98	0.00	100.00	157.0-158.0	0.00	334.98	0.00	100.00
111.0-112.0	0.00	334.98	0.00	100.00	158.0-159.0	0.00	334.98	0.00	100.00
112.0-113.0	0.00	334.98	0.00	100.00	159.0-160.0	0.00	334.98	0.00	100.00
113.0-114.0	0.00	334.98	0.00	100.00	160.0-161.0	0.00	334.98	0.00	100.00
114.0-115.0	0.00	334.98	0.00	100.00	161.0-162.0	0.00	334.98	0.00	100.00
115.0-116.0	0.00	334.98	0.00	100.00	162.0-163.0	0.00	334.98	0.00	100.00
116.0-117.0	0.00	334.98	0.00	100.00	163.0-164.0	0.00	334.98	0.00	100.00
117.0-118.0	0.00	334.98	0.00	100.00	164.0-165.0	0.00	334.98	0.00	100.00
118.0-119.0	0.00	334.98	0.00	100.00	165.0-166.0	0.00	334.98	0.00	100.00
119.0-120.0	0.00	334.98	0.00	100.00	166.0-167.0	0.00	334.98	0.00	100.00
120.0-121.0	0.00	334.98	0.00	100.00	167.0-168.0	0.00	334.98	0.00	100.00
121.0-122.0	0.00	334.98	0.00	100.00	168.0-169.0	0.00	334.98	0.00	100.00
122.0-123.0	0.00	334.98	0.00	100.00	169.0-170.0	0.00	334.98	0.00	100.00
123.0-124.0	0.00	334.98	0.00	100.00	170.0-171.0	0.00	334.98	0.00	100.00
124.0-125.0	0.00	334.98	0.00	100.00	171.0-172.0	0.00	334.98	0.00	100.00
125.0-126.0	0.00	334.98	0.00	100.00	172.0-173.0	0.00	334.98	0.00	100.00
126.0-127.0	0.00	334.98	0.00	100.00	173.0-174.0	0.00	334.98	0.00	100.00
127.0-128.0	0.00	334.98	0.00	100.00	174.0-175.0	0.00	334.98	0.00	100.00
128.0-129.0	0.00	334.98	0.00	100.00	175.0-176.0	0.00	334.98	0.00	100.00
129.0-130.0	0.00	334.98	0.00	100.00	176.0-177.0	0.00	334.98	0.00	100.00
130.0-131.0	0.00	334.98	0.00	100.00	177.0-178.0	0.00	334.98	0.00	100.00
131.0-132.0	0.00	334.98	0.00	100.00	178.0-179.0	0.00	334.98	0.00	100.00
132.0-133.0	0.00	334.98	0.00	100.00	179.0-180.0	0.00	334.98	0.00	100.00
133.0-134.0	0.00	334.98	0.00	100.00					
134.0-135.0	0.00	334.98	0.00	100.00					
135.0-136.0	0.00	334.98	0.00	100.00					
136.0-137.0	0.00	334.98	0.00	100.00					
137.0-138.0	0.00	334.98	0.00	100.00					
138.0-139.0	0.00	334.98	0.00	100.00					
139.0-140.0	0.00	334.98	0.00	100.00					
140.0-141.0	0.00	334.98	0.00	100.00					


Rectangle ISO Lighting Intensity Diagram

Lum. Name:SD09-06-DW-01 RA95 2000K-3000K 24D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Deparment
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2021/11/08

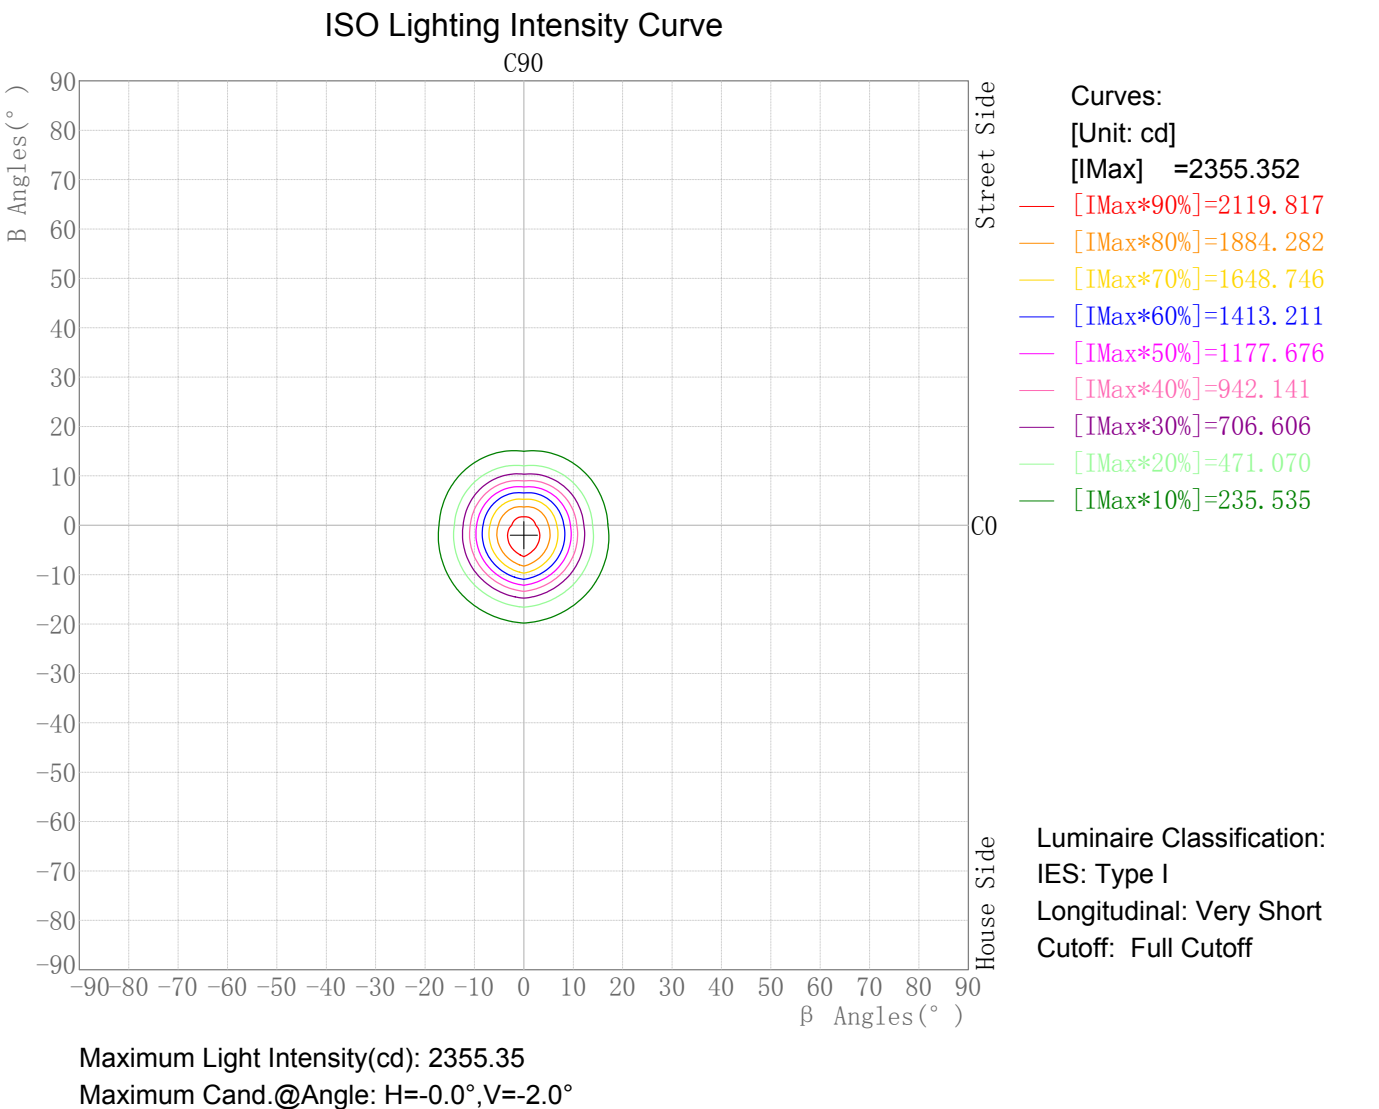

Round ISO Lighting Intensity Diagram


Lum. Name: SD09-06-DW-01 RA95 2000K-3000K 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/11/08

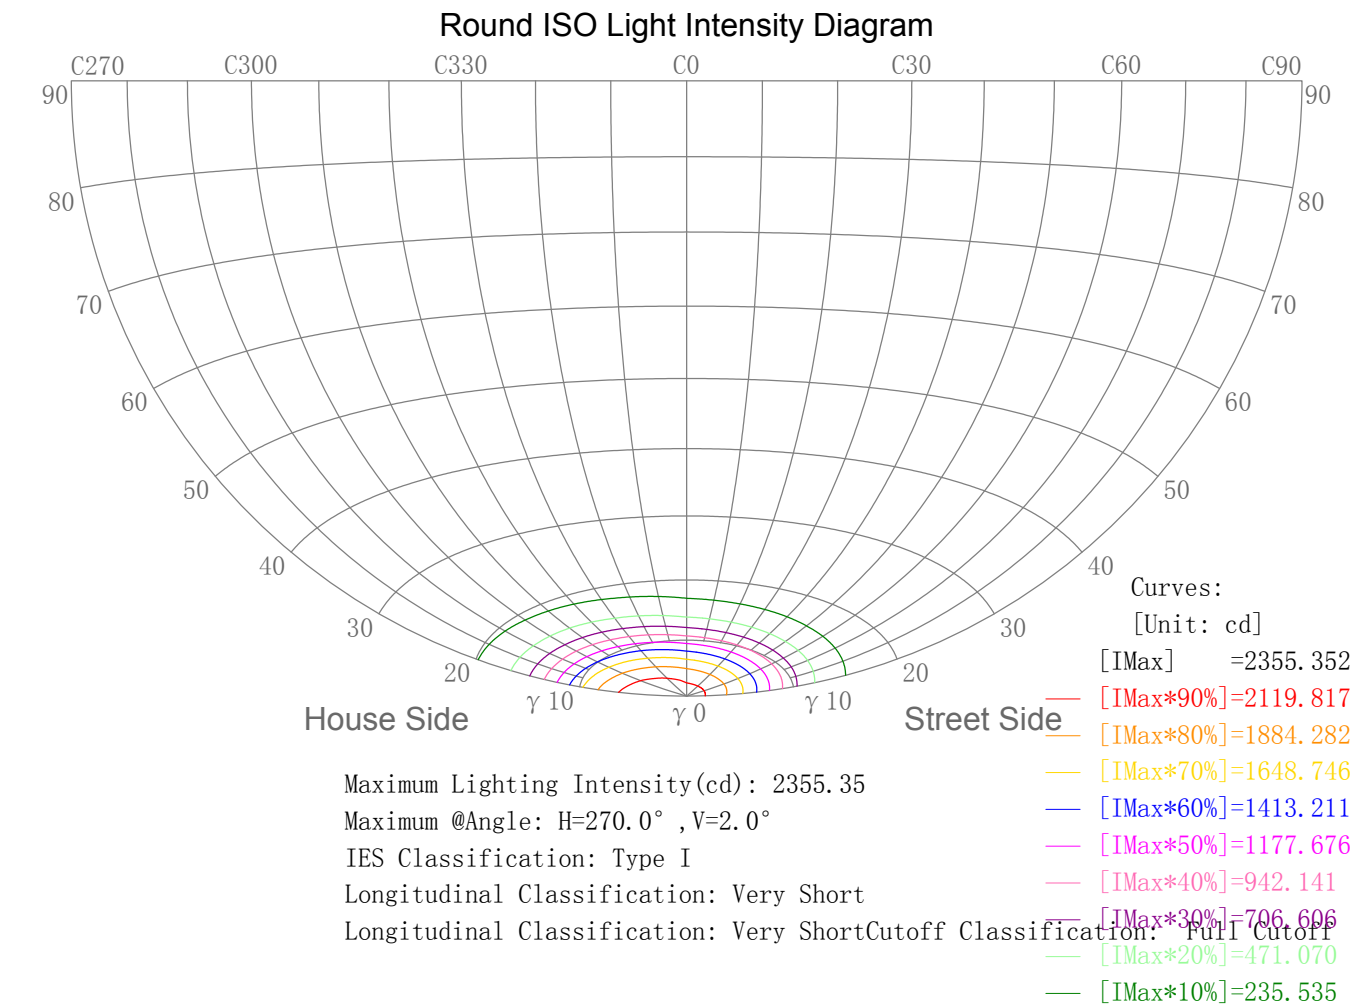

Plane ISO-Illuminance Diagram

Lum. Name: SD09-06-DW-01 RA95 2000K-3000K 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/11/08

Plane ISO-Illuminance Curve

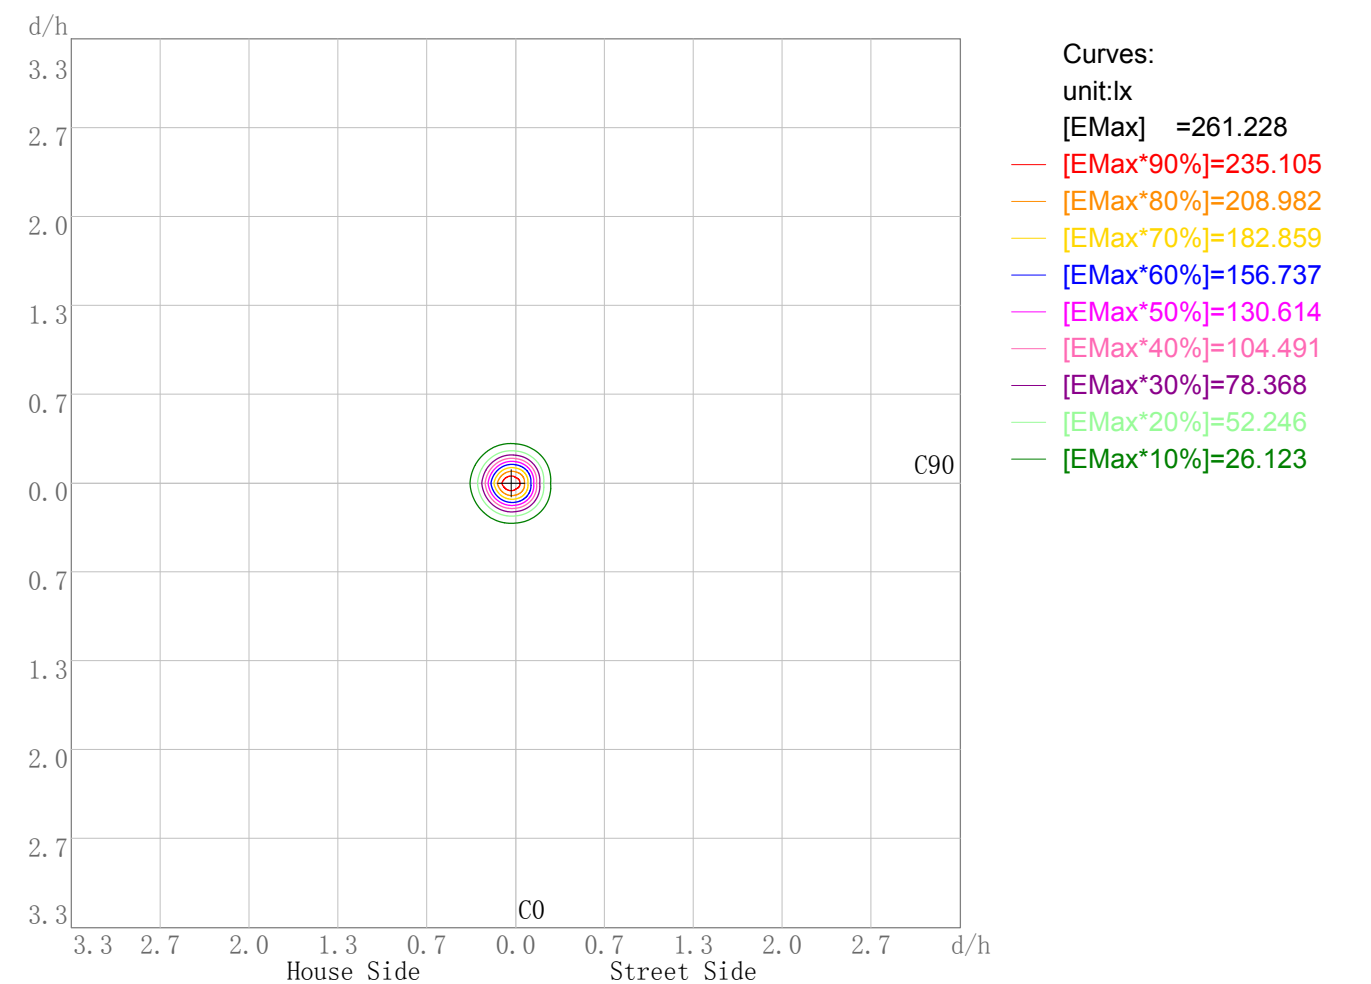

Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 261.23
Working Plane Maximum Illuminance Position(d/h):H-0.0 V-0.0


IES Road Report

Photometric Filename:SD09-06-DW-01 RA95 2000K-3000K 24D.IES

3D Plane ISO Illuminance Diagram

Lum. Name: SD09-06-DW-01 RA95 2000K-3000K 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/11/08

3D Plane Illuminance Modal

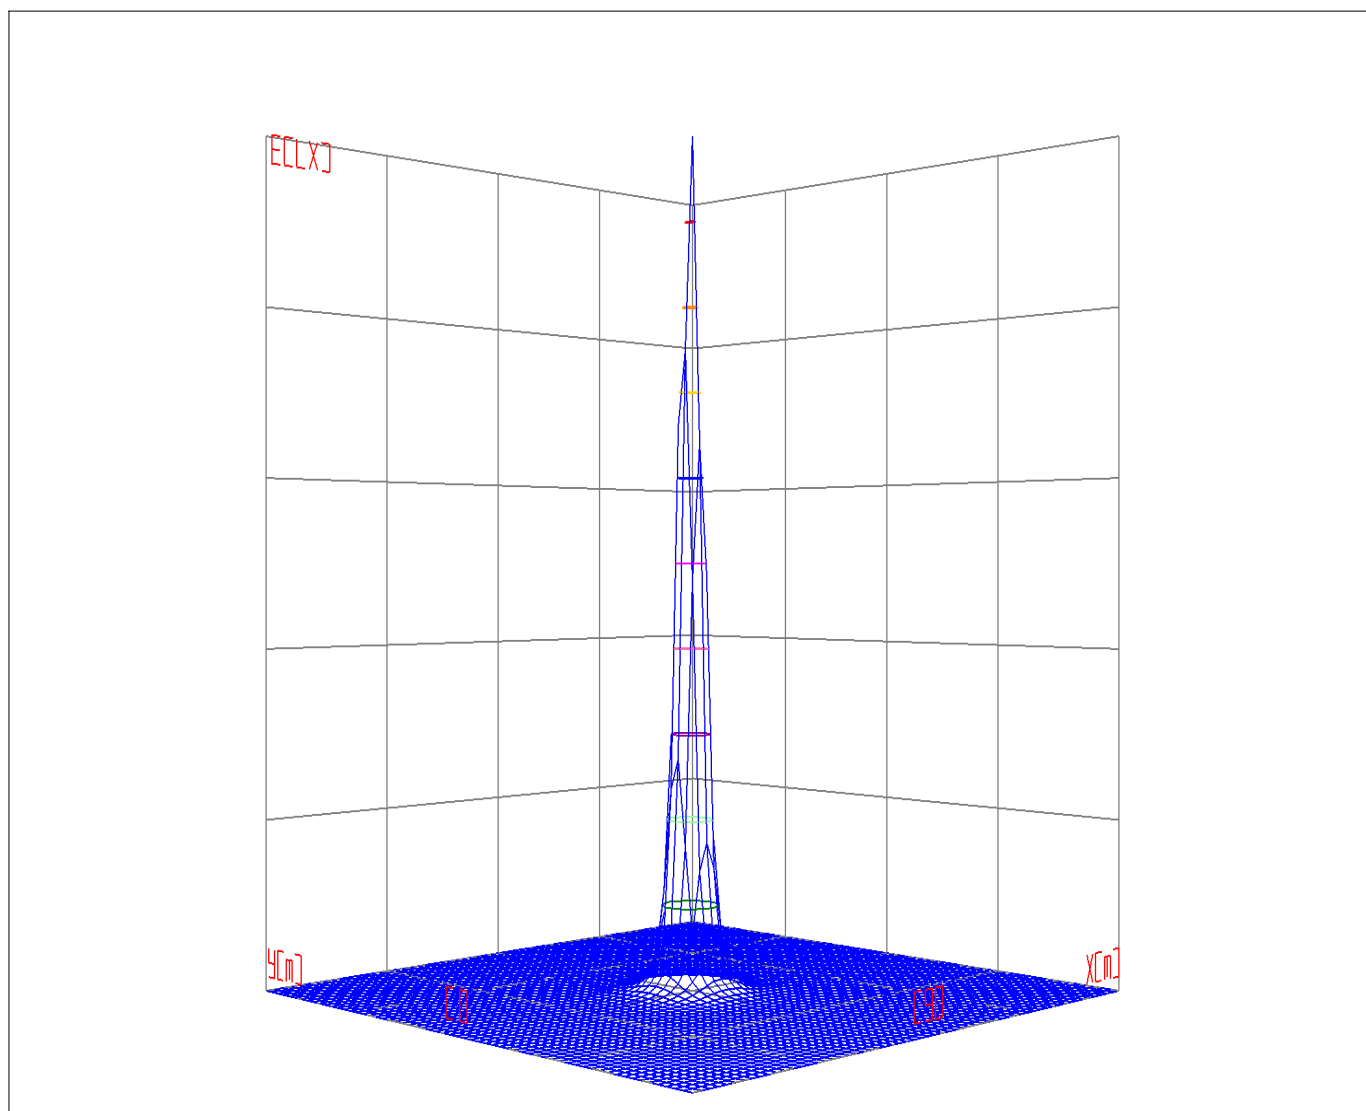


Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0

Space ISO Illuminance Diagram

Lum. Name: SD09-06-DW-01 RA95 2000K-3000K 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Deparment
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/11/08


Space ISO Illuminance Curve

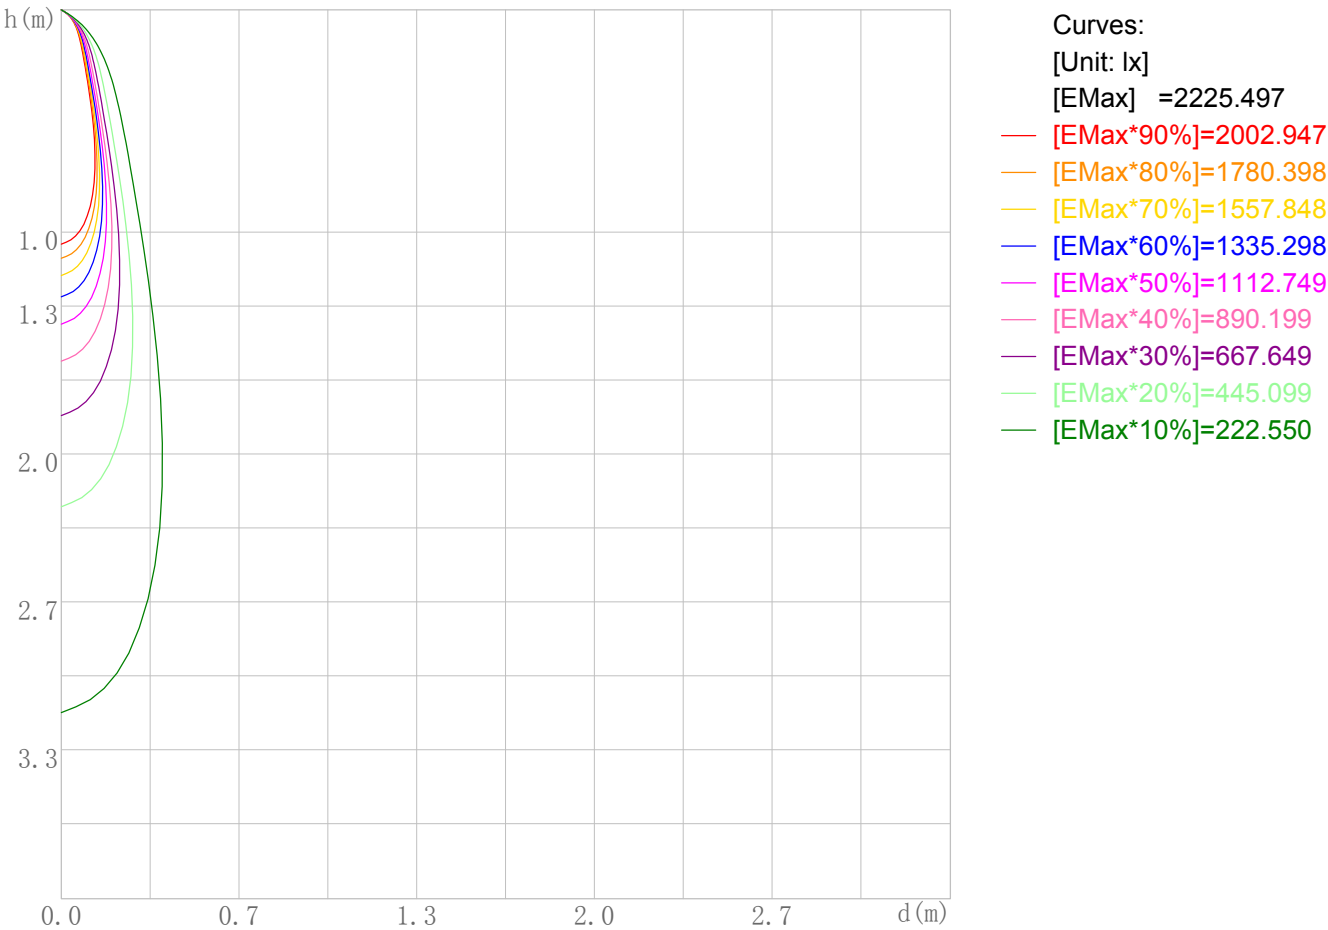

Space Plane Maximum Illuminance and @Angle:2225.50lx,0.0deg
Plane Maximum Lighting Intensity and @Angle:2225.497cd,0eg


Illuminance-Distance Diagram

Lum. Name: SD09-06-DW-01 RA95 2000K-3000K 24D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/11/08

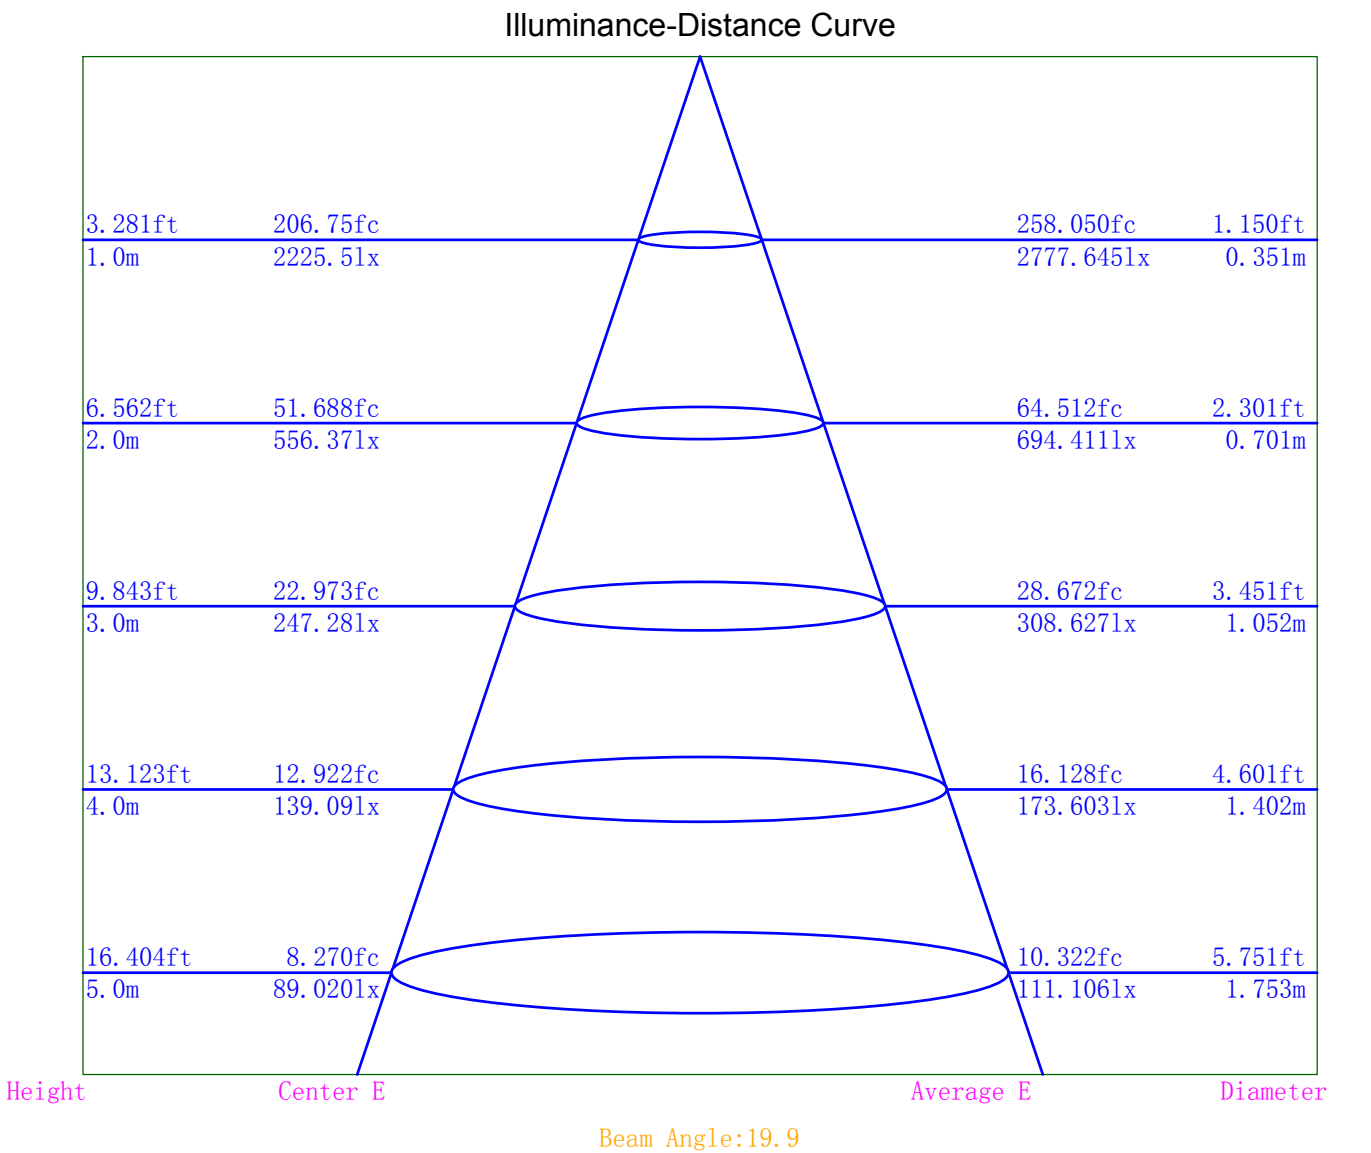

Road Coefficient of Utilization Curves

Lum. Name: SD09-06-DW-01 RA95 2000K-3000K 24D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Deparment
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/11/08

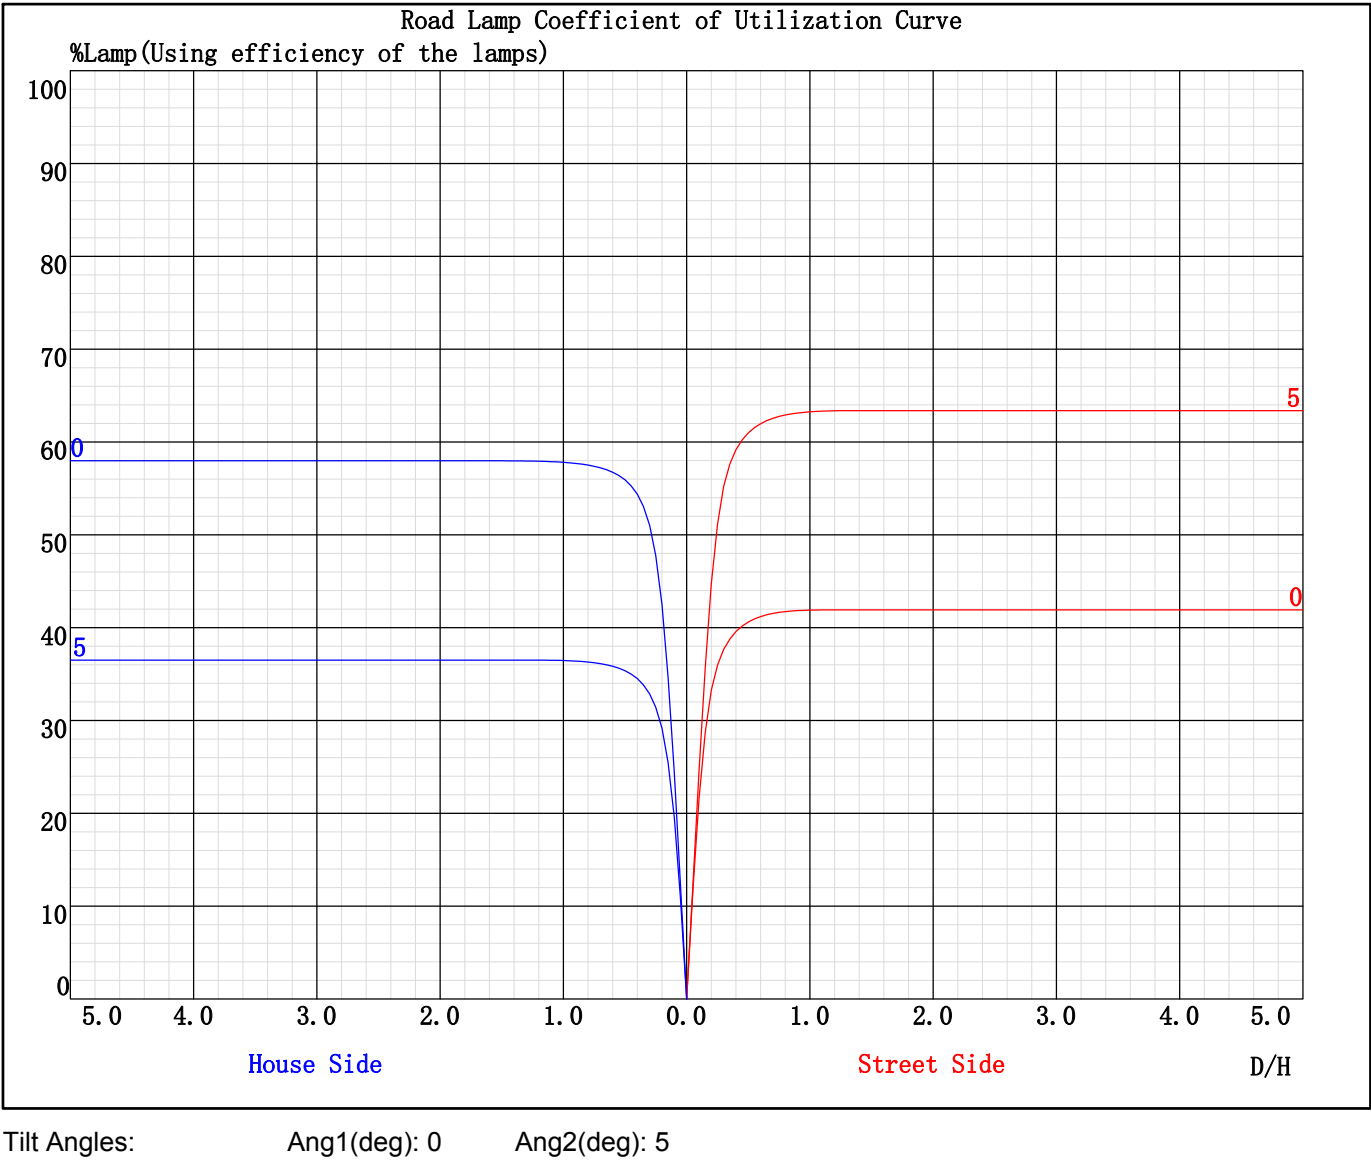

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	2225.50	2225.50	2225.50	2225.50
γ 1.0	2189.91	2191.05	2188.69	2334.11
γ 2.0	2148.37	2093.50	2149.32	2355.35
γ 3.0	2083.43	1978.10	2086.88	2347.77
γ 4.0	1996.44	1845.99	2008.31	2305.27
γ 5.0	1885.65	1690.47	1904.91	2245.34
γ 6.0	1749.80	1515.40	1778.76	2154.52
γ 7.0	1598.82	1325.38	1627.21	2054.42
γ 8.0	1431.53	1126.93	1461.16	1925.90
γ 9.0	1256.19	936.43	1280.42	1772.25
γ 10.0	1071.50	760.21	1095.89	1596.42
γ 11.0	893.98	602.15	915.89	1405.60
γ 12.0	728.44	472.85	749.68	1205.35
γ 13.0	582.96	371.14	601.98	1009.88
γ 14.0	461.63	293.69	478.11	827.38
γ 15.0	366.51	234.53	379.64	668.32
γ 16.0	292.51	191.62	303.25	534.28
γ 17.0	236.46	158.33	243.61	426.42
γ 18.0	193.74	133.14	197.68	342.37
γ 19.0	161.49	113.35	162.35	276.44
γ 20.0	136.29	97.84	134.57	224.99
γ 21.0	116.57	84.86	112.98	185.25
γ 22.0	100.82	74.07	95.77	153.82
γ 23.0	87.78	65.02	81.47	128.67
γ 24.0	76.97	57.49	69.86	108.61
γ 25.0	68.00	50.98	60.08	92.28
γ 26.0	60.40	45.34	51.89	78.90
γ 27.0	53.89	40.68	44.99	67.89
γ 28.0	48.20	36.39	39.27	58.69
γ 29.0	43.36	32.46	34.24	50.93
γ 30.0	39.09	29.16	29.97	44.43
γ 31.0	35.20	26.13	26.17	39.06
γ 32.0	31.62	23.25	22.97	34.19
γ 33.0	28.45	20.68	20.28	30.19
γ 34.0	25.68	18.43	17.87	26.64
γ 35.0	23.06	16.33	15.90	23.68
γ 36.0	20.74	14.40	13.98	21.09
γ 37.0	18.63	12.66	12.49	18.99
γ 38.0	16.63	11.04	11.13	16.97
γ 39.0	14.86	9.68	9.99	15.39
γ 40.0	13.24	8.34	8.91	13.83
γ 41.0	11.80	7.10	7.86	12.56
γ 42.0	10.45	6.06	7.02	11.43
γ 43.0	9.20	5.05	6.21	10.31
γ 44.0	8.00	4.11	5.42	9.36
γ 45.0	7.05	3.27	4.66	8.49
γ 46.0	6.00	2.51	3.91	7.53

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	5.13	1.75	3.23	6.72
γ 48.0	4.19	1.13	2.60	5.94
γ 49.0	3.54	0.47	1.96	5.13
γ 50.0	2.77	0.03	1.43	4.45
γ 51.0	2.19	0.00	0.88	3.79
γ 52.0	1.53	0.00	0.23	3.16
γ 53.0	0.99	0.00	0.00	2.53
γ 54.0	0.42	0.00	0.00	1.96
γ 55.0	0.00	0.00	0.00	1.43
γ 56.0	0.00	0.00	0.00	0.91
γ 57.0	0.00	0.00	0.00	0.39
γ 58.0	0.00	0.00	0.00	0.03
γ 59.0	0.00	0.00	0.00	0.00
γ 60.0	0.00	0.00	0.00	0.00
γ 61.0	0.00	0.00	0.00	0.00
γ 62.0	0.00	0.00	0.00	0.00
γ 63.0	0.00	0.00	0.00	0.00
γ 64.0	0.00	0.00	0.00	0.00
γ 65.0	0.00	0.00	0.00	0.00
γ 66.0	0.00	0.00	0.00	0.00
γ 67.0	0.00	0.00	0.00	0.00
γ 68.0	0.00	0.00	0.00	0.00
γ 69.0	0.00	0.00	0.00	0.00
γ 70.0	0.00	0.00	0.00	0.00
γ 71.0	0.00	0.00	0.00	0.00
γ 72.0	0.00	0.00	0.00	0.00
γ 73.0	0.00	0.00	0.00	0.00
γ 74.0	0.00	0.00	0.00	0.00
γ 75.0	0.00	0.00	0.00	0.00
γ 76.0	0.00	0.00	0.00	0.00
γ 77.0	0.00	0.00	0.00	0.00
γ 78.0	0.00	0.00	0.00	0.00
γ 79.0	0.00	0.00	0.00	0.00
γ 80.0	0.00	0.00	0.00	0.00
γ 81.0	0.00	0.00	0.00	0.00
γ 82.0	0.00	0.00	0.00	0.00
γ 83.0	0.00	0.00	0.00	0.00
γ 84.0	0.00	0.00	0.00	0.00
γ 85.0	0.00	0.00	0.00	0.00
γ 86.0	0.00	0.00	0.00	0.00
γ 87.0	0.00	0.00	0.00	0.00
γ 88.0	0.00	0.00	0.00	0.00
γ 89.0	0.00	0.00	0.00	0.00
γ 90.0	0.00	0.00	0.00	0.00
γ 91.0	0.00	0.00	0.00	0.00
γ 92.0	0.00	0.00	0.00	0.00
γ 93.0	0.00	0.00	0.00	0.00

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	0.00	0.00	0.00	0.00
γ 95.0	0.00	0.00	0.00	0.00
γ 96.0	0.00	0.00	0.00	0.00
γ 97.0	0.00	0.00	0.00	0.00
γ 98.0	0.00	0.00	0.00	0.00
γ 99.0	0.00	0.00	0.00	0.00
γ 100.0	0.00	0.00	0.00	0.00
γ 101.0	0.00	0.00	0.00	0.00
γ 102.0	0.00	0.00	0.00	0.00
γ 103.0	0.00	0.00	0.00	0.00
γ 104.0	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00
γ 106.0	0.00	0.00	0.00	0.00
γ 107.0	0.00	0.00	0.00	0.00
γ 108.0	0.00	0.00	0.00	0.00
γ 109.0	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00
γ 111.0	0.00	0.00	0.00	0.00
γ 112.0	0.00	0.00	0.00	0.00
γ 113.0	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.00
γ 122.0	0.00	0.00	0.00	0.00
γ 123.0	0.00	0.00	0.00	0.00
γ 124.0	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00
γ 126.0	0.00	0.00	0.00	0.00
γ 127.0	0.00	0.00	0.00	0.00
γ 128.0	0.00	0.00	0.00	0.00
γ 129.0	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00
γ 131.0	0.00	0.00	0.00	0.00
γ 132.0	0.00	0.00	0.00	0.00
γ 133.0	0.00	0.00	0.00	0.00
γ 134.0	0.00	0.00	0.00	0.00
γ 135.0	0.00	0.00	0.00	0.00
γ 136.0	0.00	0.00	0.00	0.00
γ 137.0	0.00	0.00	0.00	0.00
γ 138.0	0.00	0.00	0.00	0.00
γ 139.0	0.00	0.00	0.00	0.00
γ 140.0	0.00	0.00	0.00	0.00

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	0.00	0.00	0.00	0.00
γ 142.0	0.00	0.00	0.00	0.00
γ 143.0	0.00	0.00	0.00	0.00
γ 144.0	0.00	0.00	0.00	0.00
γ 145.0	0.00	0.00	0.00	0.00
γ 146.0	0.00	0.00	0.00	0.00
γ 147.0	0.00	0.00	0.00	0.00
γ 148.0	0.00	0.00	0.00	0.00
γ 149.0	0.00	0.00	0.00	0.00
γ 150.0	0.00	0.00	0.00	0.00
γ 151.0	0.00	0.00	0.00	0.00
γ 152.0	0.00	0.00	0.00	0.00
γ 153.0	0.00	0.00	0.00	0.00
γ 154.0	0.00	0.00	0.00	0.00
γ 155.0	0.00	0.00	0.00	0.00
γ 156.0	0.00	0.00	0.00	0.00
γ 157.0	0.00	0.00	0.00	0.00
γ 158.0	0.00	0.00	0.00	0.00
γ 159.0	0.00	0.00	0.00	0.00
γ 160.0	0.00	0.00	0.00	0.00
γ 161.0	0.00	0.00	0.00	0.00
γ 162.0	0.00	0.00	0.00	0.00
γ 163.0	0.00	0.00	0.00	0.00
γ 164.0	0.00	0.00	0.00	0.00
γ 165.0	0.00	0.00	0.00	0.00
γ 166.0	0.00	0.00	0.00	0.00
γ 167.0	0.00	0.00	0.00	0.00
γ 168.0	0.00	0.00	0.00	0.00
γ 169.0	0.00	0.00	0.00	0.00
γ 170.0	0.00	0.00	0.00	0.00
γ 171.0	0.00	0.00	0.00	0.00
γ 172.0	0.00	0.00	0.00	0.00
γ 173.0	0.00	0.00	0.00	0.00
γ 174.0	0.00	0.00	0.00	0.00
γ 175.0	0.00	0.00	0.00	0.00
γ 176.0	0.00	0.00	0.00	0.00
γ 177.0	0.00	0.00	0.00	0.00
γ 178.0	0.00	0.00	0.00	0.00
γ 179.0	0.00	0.00	0.00	0.00
γ 180.0	0.00	0.00	0.00	0.00