



## FEATURES


- Made of die-casting.
- Powder coating finish from AkzoNobel.
- Interchangeable faceplate with magnetic design.
- 3-CCT changeable.
- Compatible with leading and trailing edge phase cut dimmers.
- 3-year guarantee.

## Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC9V/230mA
Power	3W
Rated Input Current	0.014A
THD	<30%
PF value	>0.84
Ingress Protection	IP54
Operating Temperature	-10-40°C
Dimmability	Triac dimmable with <b>DIMMATE</b> driver

## Optical Data

LED Brand	EVERCORE COB LED
CRI	Ra>90
Colour temperatures	3000K/4000K/5000K(3-CCT Changeable)
System luminous efficacy up to	17lm/W

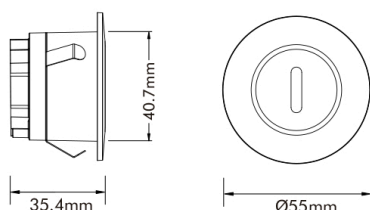

Cut-out: Ø45mm

## Packaging

Box Dimensions	L65 x W65 x H110mm
Box Net Weight	0.143Kg
Box Gross Weight	0.167Kg
Carton Dimensions	L340 x W340 x H240 mm/50 PCS
Carton Net Weight	7.175Kg
Carton Gross Weight	9.045Kg



**RoHS** (CE) (RoHS) (RoHS)

## Specifications (White)

CCT		Asymmetric Beam Angle	Lumen	Efficacy
3000K	CRI 90+	15°	41lm	13lm/W
4000K		15°	49lm	17lm/W
5000K		15°	47lm	15lm/W

## Specifications (Black)

CCT		Asymmetric Beam Angle	Lumen	Efficacy
3000K	CRI 90+	15°	17lm	5lm/W
4000K		15°	21lm	7lm/W
5000K		15°	20lm	6lm/W

## ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04  
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS