



FEATURES

- Flicker-free driver to creates healthy lighting environment that make people enjoy photograph in any commercial occasions.
- Top performance in technical level, THD<10, 90lm/W.
- Thoughtful friction on the track arm, get rid of loose track arm experience.
- Variety of optic options, make your choice flexible.
- Dimming capability. Suits triac dimmers including OPUS, Clipsal, HPM, Niko, Lumeo Domus, Lumeo Eco. The driver with CE, RCM and SAA certification.

Packaging

Box Dimensions	L95 x W70 x H219 mm
Box Net Weight	0.364Kg
Box Gross Weight	0.408Kg
Carton Dimensions	L490 x W365 x H240 mm/25 PCS
Carton Net Weight	9.1Kg
Carton Gross Weight	11.2Kg



Model	Power	Voltage	CRI	CCT	Beam Angle	Lumen	Efficacy	Dimmable	Colour
TR04-10-XX-01	10W	AC200-240V	80+	2700K	15°	840lm	83lm/W	Yes	Black/White
					24°	860lm	84lm/W		
					36°	810lm	81lm/W		
					60°	800lm	79lm/W		
TR04-10-XX-01	10W	AC200-240V	80+	3000K	15°	885lm	85lm/W	Yes	Black/White
					24°	890lm	86lm/W		
					36°	870lm	84lm/W		
					60°	850lm	83lm/W		
TR04-10-XX-01	10W	AC200-240V	80+	4000K	15°	875lm	87lm/W	Yes	Black/White
					24°	900lm	90lm/W		
					36°	910lm	90lm/W		
					60°	870lm	86lm/W		

Note: 1. The larger angle of the lens, the greater effect of the anti-glare ring on the light efficiency.

2. The light efficiency will be effected by the black anti-glare ring; the color temperature will be effected by the golden anti-glare ring.

ECLIPSE CONSEIL


Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS

Model	Power	Voltage	CRI	CCT	Beam Angle	Lumen	Efficacy	Dimmable	Colour
TR04-10-XX-01	10W	AC200-240V	90+	2700K	15°	735lm	72lm/W	Yes	Black/White
					24°	740lm	73lm/W		
					36°	710lm	70lm/W		
					60°	700lm	69lm/W		
TR04-10-XX-01	10W	AC200-240V	90+	3000K	15°	765lm	75lm/W	Yes	Black/White
					24°	770lm	76lm/W		
					36°	730lm	72lm/W		
					60°	720lm	71lm/W		
TR04-10-XX-01	10W	AC200-240V	90+	4000K	15°	850lm	84lm/W	Yes	Black/White
					24°	850lm	84lm/W		
					36°	820lm	81lm/W		
					60°	810lm	80lm/W		


Note: 1. The larger angle of the lens, the greater effect of the anti-glare ring on the light efficiency.
2. The light efficiency will be effected by the black anti-glare ring; the color temperature will be effected by the golden anti-glare ring.

Photometric Diagram


15°-3000K

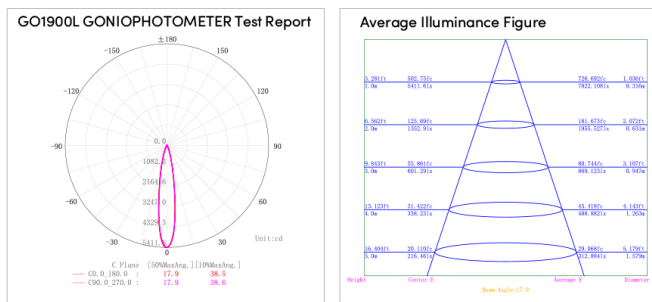


24°-3000K

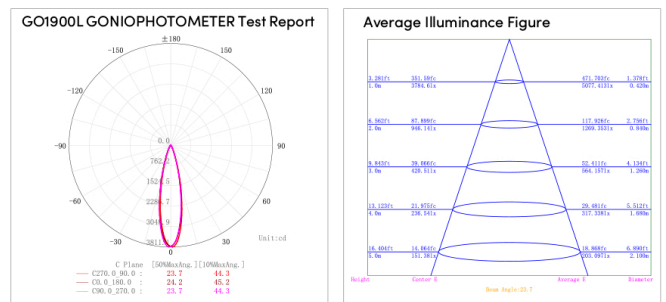

36°-3000K

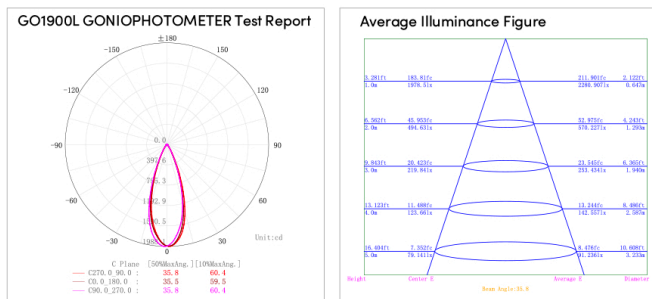

60°-3000K

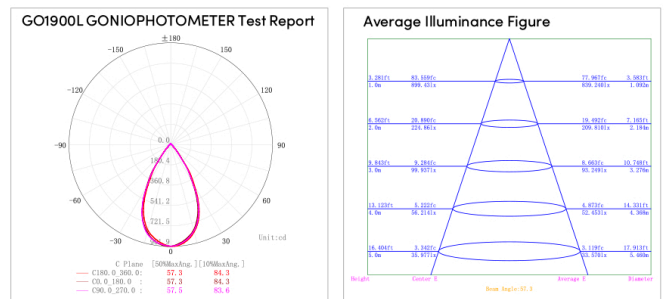

ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS