





1 Phase



3 Phase




## FEATURES

- Flicker-free driver to creates healthy lighting environment that make people enjoy photograph in any commercial occasions.
- Top performance in technical level, THD<10, 91lm/W.
- Thoughtful friction on the track arm, get rid of loose track arm experience.
- Variety of optic options, make your choice flexible.
- Dimming capability. Suits triac dimmers including OPUS, Clipsal, HPM, Niko, Lumeo Domus, Lumeo Eco. The driver with CE, RCM and SAA certification.

## Packaging

|                     |                              |
|---------------------|------------------------------|
| Box Dimensions      | L110 x W85 x H287mm          |
| Box Net Weight      | 0.7Kg                        |
| Box Gross Weight    | 0.75Kg                       |
| Carton Dimensions   | L440 x W345 x H310 mm/15 PCS |
| Carton Net Weight   | 10.5Kg                       |
| Carton Gross Weight | 12.0Kg                       |

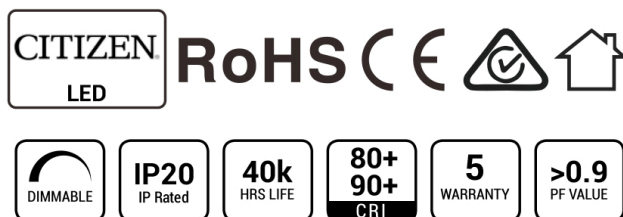

| Model         | Power | Voltage    | CRI | CCT   | Beam Angle | Lumen  | Efficacy | Dimmable | Colour      |
|---------------|-------|------------|-----|-------|------------|--------|----------|----------|-------------|
| TR04-25-XX-01 | 25W   | AC200-240V | 80+ | 2700K | 18°        | 2160lm | 85lm/W   | Yes      | Black/White |
|               |       |            |     |       | 24°        | 2100lm | 85lm/W   |          |             |
|               |       |            |     |       | 36°        | 2020lm | 82lm/W   |          |             |
|               |       |            |     |       | 60°        | 2025lm | 83lm/W   |          |             |
| TR04-25-XX-01 | 25W   | AC200-240V | 80+ | 3000K | 18°        | 2030lm | 85lm/W   | Yes      | Black/White |
|               |       |            |     |       | 24°        | 2030lm | 84m/W    |          |             |
|               |       |            |     |       | 36°        | 1990lm | 82lm/W   |          |             |
|               |       |            |     |       | 60°        | 2000lm | 83lm/W   |          |             |
| TR04-25-XX-01 | 25W   | AC200-240V | 80+ | 4000K | 18°        | 2290lm | 90lm/W   | Yes      | Black/White |
|               |       |            |     |       | 24°        | 2235lm | 91lm/W   |          |             |
|               |       |            |     |       | 36°        | 2170lm | 88lm/W   |          |             |
|               |       |            |     |       | 60°        | 2280lm | 89lm/W   |          |             |

Note: 1. The larger angle of the lens, the greater effect of the anti-glare ring on the light efficiency.

2. The light efficiency will be effected by the black anti-glare ring; the color temperature will be effected by the golden anti-glare ring.


## ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04  
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS

| Model         | Power | Voltage    | CRI | CCT   | Beam Angle | Lumen  | Efficacy | Dimmable | Colour      |
|---------------|-------|------------|-----|-------|------------|--------|----------|----------|-------------|
| TR04-25-XX-01 | 25W   | AC200-240V | 90+ | 2700K | 18°        | 1700lm | 71lm/W   | Yes      | Black/White |
|               |       |            |     |       | 24°        | 1700lm | 71lm/W   |          |             |
|               |       |            |     |       | 36°        | 1710lm | 71lm/W   |          |             |
|               |       |            |     |       | 60°        | 1700lm | 70lm/W   |          |             |
| TR04-25-XX-01 | 25W   | AC200-240V | 90+ | 3000K | 18°        | 1830lm | 75lm/W   | Yes      | Black/White |
|               |       |            |     |       | 24°        | 1820lm | 75lm/W   |          |             |
|               |       |            |     |       | 36°        | 1795lm | 74lm/W   |          |             |
|               |       |            |     |       | 60°        | 1835lm | 74lm/W   |          |             |
| TR04-25-XX-01 | 25W   | AC200-240V | 90+ | 4000K | 18°        | 1990lm | 77lm/W   | Yes      | Black/White |
|               |       |            |     |       | 24°        | 1980lm | 78lm/W   |          |             |
|               |       |            |     |       | 36°        | 1940lm | 79lm/W   |          |             |
|               |       |            |     |       | 60°        | 1980lm | 80lm/W   |          |             |

Note: 1. The larger angle of the lens, the greater effect of the anti-glare ring on the light efficiency.  
2. The light efficiency will be effected by the black anti-glare ring; the color temperature will be effected by the golden anti-glare ring.

## Photometric Diagram

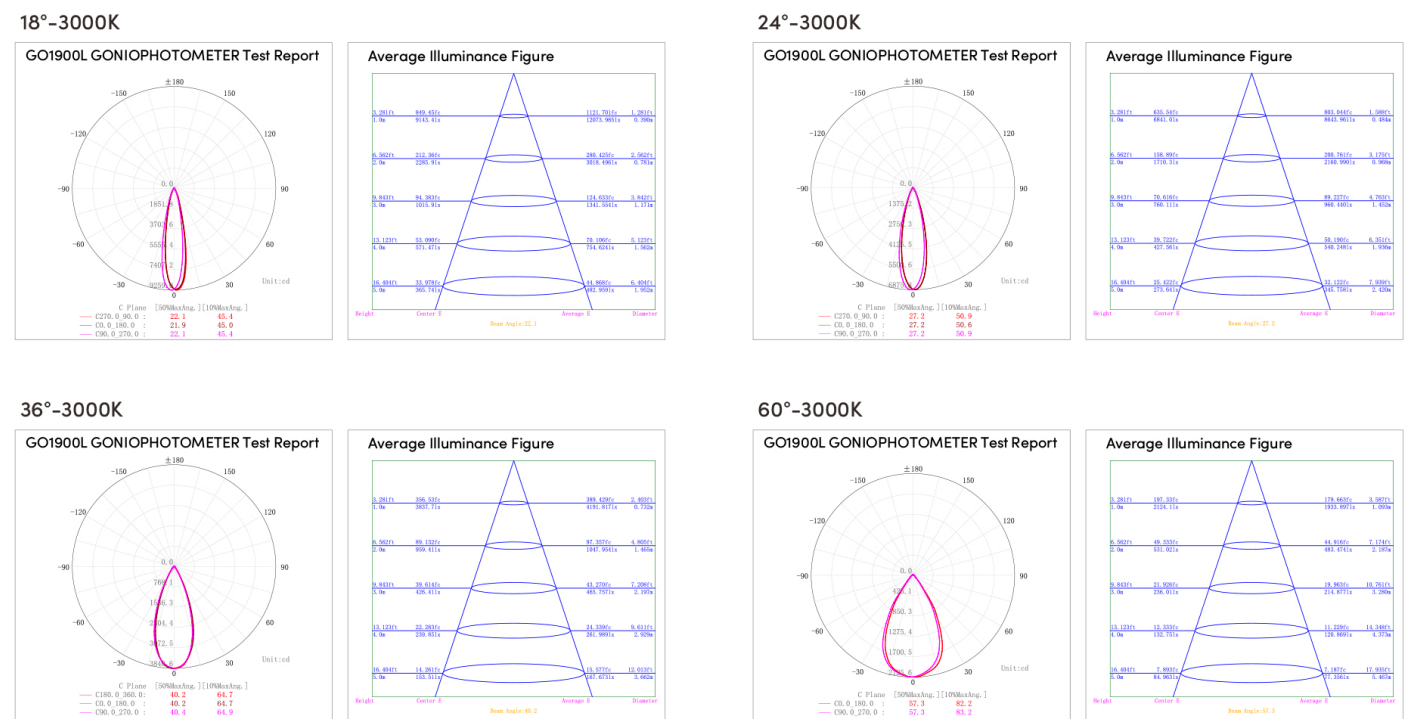

## ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04  
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS