




Honeycomb fliter

Black

White

Golden

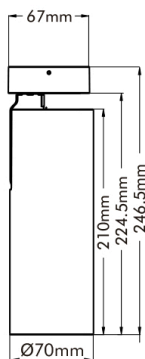

## FEATURES

- Flicker-free driver to create healthy lighting environment.
- Compatible with leading and trailing edge phase cut dimmers.
- Patented surface mounted box gives better friction on rotation and create pleasant gear noise.
- Variety of less-glare optic options.
- 5-year guarantee.

## Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC36V/710mA
Power	30W
Rated Input Current	0.150A
THD	<10%
PF value	>0.9
Ingress Protection	IP20
Operating Temperature	-10—40℃
Dimmability	Triac dimmable with <b>DIMMATE</b> driver

## Optical Data

LED Brand	bridgelux COB LED
CRI	Ra> 80,Ra> 90
Beam Angle	24°/36°/60°
Colour temperatures	2700K/3000K/4000K
System luminous efficacy up to	108lm/W

## Packaging

Box Dimensions	L113 x W97 x H312mm
Box Net Weight	1.028Kg
Box Gross Weight	1.123Kg
Carton Dimensions	L500 x W355 x H325 mm/15 PCS
Carton Net Weight	15.42Kg
Carton Gross Weight	17.65Kg



Model	CCT		Beam Angle	Lumen	Efficacy		Beam Angle	Lumen	Efficacy
TR05-30-XX-01	2700K	CRI 80+	24°	3130lm	101lm/W	CRI 90+	24°	2360lm	77lm/W
			36°	2970lm	97lm/W		36°	2300lm	75lm/W
			60°	2895lm	95lm/W		60°	2305lm	74lm/W
TR05-30-XX-01	3000K		24°	3160lm	107lm/W		24°	2515lm	83lm/W
			36°	3060lm	103lm/W		36°	2310lm	78lm/W
			60°	3040lm	102lm/W		60°	2395lm	78lm/W
TR05-30-XX-01	4000K		24°	3290lm	108lm/W		24°	2510lm	83lm/W
			36°	3080lm	102lm/W		36°	2420lm	80lm/W
			60°	2990lm	99lm/W		60°	2445lm	82lm/W

Note: 1. Wider angle of the lens influences the luminous efficacy.

2. The light efficiency will be effected by the black anti-glare ring; the color temperature will be effected by the golden anti-glare ring.

## ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04  
Siège social : 7 rue Prudent Neel 92500 Reuil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS