

6W 9W
POWER



Black / White



Specular



Black



White




Golden



1 Phase

3 Phase

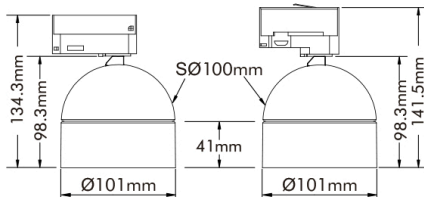

Packaging

Box Dimensions	L150 x W150 x H165mm
Box Net Weight	0.604Kg
Box Gross Weight	0.698Kg
Carton Dimensions	L465 x W465 x H350 mm/18 PCS
Carton Net Weight	10.87Kg
Carton Gross Weight	13.21Kg

FEATURES

- Maximum 45°vertical rotation can be created on the main body.
- Optic interchangeable.
- Power selectable.
- Flicker-free internal driver.
- Compatible with leading and trailing edge phase cut dimmers.
- 5-year guarantee.

Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC32.5V/210mA(8.2W) DC31.5V/145mA(6W)
Power	8.2W 6W
Rated Input Current	0.041A(8.2W) 0.030A(6W)
THD	<25%(8.2W) <35%(6W)
PF value	>0.9(8.2W) >0.8(6W)
Ingress Protection	IP20
Operating Temperature	-10-40°C
Dimmability	Triac dimmable with DIMMATE driver

Optical Data

LED Brand	Bridgelux COB LED
CRI	Ra> 90
Beam Angle	24°/28°/36°/60°
Colour temperatures	1800K-3000K
System luminous efficacy up to	68lm/W



RoHS CE



Model	CCT		Beam Angle	Lumen	Efficacy		Beam Angle	Lumen	Efficacy
TR08-09-DW-04	1800K-3000K	6W	24°	343lm	59lm/W	8.2W	24°	530lm	64lm/W
			28°	357lm	61lm/W		28°	553lm	66lm/W
			36°	362lm	62lm/W		36°	565lm	68lm/W
			60°	333lm	57lm/W		60°	514lm	62lm/W

Note: The light efficiency will be effected by the black anti-glare ring; the color temperature will be effected by the golden anti-glare ring.

ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS