

6W 9W
POWER

Black / White



Honeycomb filter

Black


White

Golden



1 Phase

3 Phase

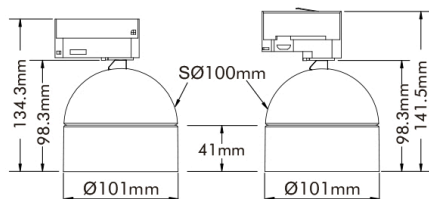

FEATURES

- Maximum 45° vertical rotation can be created on the main body.
- Optic interchangeable.
- Power selectable.
- Flicker-free internal driver.
- Compatible with leading and trailing edge phase cut dimmers.
- 5-year guarantee.

Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC34V/210mA(9W) DC33V/145mA(6W)
Power	9W 6W
Rated Input Current	0.045A
THD	<25%(9W) <35%(6W)
PF value	>0.9(9W) >0.8(6W)
Ingress Protection	IP20
Operating Temperature	-10—40°C
Dimmability	Triac dimmable with DIMMATE driver

Optical Data

LED Brand	Bridgelux COB LED
CRI	Ra > 90
Beam Angle	15°/24°/36°/60°
Colour temperatures	2700K/3000K/4000K
System luminous efficacy up to	92lm/W

Packaging

Box Dimensions	L150 x W150 x H165mm
Box Net Weight	0.604Kg
Box Gross Weight	0.698Kg
Carton Dimensions	L465 x W465 x H350 mm/18 PCS
Carton Net Weight	10.87Kg
Carton Gross Weight	13.21Kg



RoHS   

Model	CCT		Beam Angle	Lumen	Efficacy		Beam Angle	Lumen	Efficacy
TR08-09-XX-04	2700K	6W	15°	468lm	75lm/W	9W	15°	669lm	75lm/W
			24°	486lm	78lm/W		24°	692lm	78lm/W
			36°	511lm	82lm/W		36°	731lm	82lm/W
			60°	475lm	76lm/W		60°	674lm	75lm/W
TR08-09-XX-04	3000K		15°	486lm	77lm/W		15°	693lm	78lm/W
			24°	505lm	80lm/W		24°	723lm	80lm/W
			36°	531lm	85lm/W		36°	766lm	84lm/W
			60°	492lm	78lm/W		60°	712lm	79lm/W
TR08-09-XX-04	4000K		15°	524lm	84lm/W		15°	742lm	84lm/W
			24°	541lm	87lm/W		24°	773lm	87lm/W
			36°	569lm	92lm/W		36°	809lm	91lm/W
			60°	521lm	84lm/W		60°	745lm	84lm/W

Note: The light efficiency will be effected by the black anti-glare ring; the color temperature will be effected by the golden anti-glare ring.

ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS