


6W 9W  
POWER

Black / White



Specular  
Black  
White  
Golden

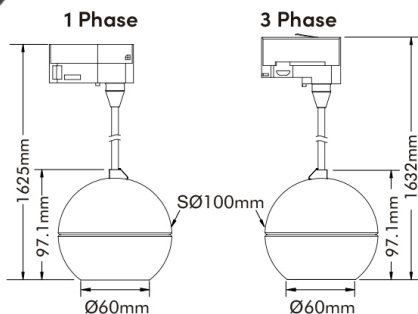

## Packaging

Box Dimensions	L150 x W150 x H165mm
Box Net Weight	0.648Kg
Box Gross Weight	0.734Kg
Carton Dimensions	L465 x W465 x H350 mm/18 PCS
Carton Net Weight	11.66Kg
Carton Gross Weight	14.02Kg

## FEATURES

- Maximum 45° vertical rotation can be created on the main body.
- Optic interchangeable.
- Power selectable.
- Flicker-free internal driver.
- Compatible with leading and trailing edge phase cut dimmers.
- 5-year guarantee.

## Technical Data

Input Voltage/Hz	AC200-240V 50/60Hz
Output Voltage/Current	DC32.5V/210mA(8.2W) DC31.5V/145mA(6W)
Power	8.2W 6W
Rated Input Current	0.041A(8.2W)   0.030A(6W)
THD	<25%(8.2W)   <35%(6W)
PF value	>0.9(8.2W)   >0.8(6W)
Ingress Protection	IP20
Operating Temperature	-10—40℃
Dimmability	Triac dimmable with <b>DIMMATE</b> driver

## Optical Data

LED Brand	Bridgelux COB LED
CRI	Ra> 90
Beam Angle	24°/28°/45°/50°
Colour temperatures	1800K-3000K
System luminous efficacy up to	74lm/W



Model	CCT	Beam Angle	Lumen	Efficacy	Beam Angle	Lumen	Efficacy
TR09-09-DW-02	1800K-3000K	24°	397lm	68lm/W	24°	615lm	74lm/W
		28°	385lm	66lm/W	28°	569lm	72lm/W
		45°	388lm	66lm/W	45°	569lm	72lm/W
		50°	323lm	55lm/W	50°	519lm	62lm/W

Note: The light efficiency will be effected by the black anti-glare ring; the color temperature will be effected by the golden anti-glare ring.

## ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04  
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS