



Indoor Luminaire Photometric Data

Description Information

Luminary Name:TR09-09-DW-04 1800-3000K RA90 36D		Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Date: 2022/08/29
Manufacture: Shenzhen Norming Lighting		Shld. Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department		Frequency (Hz):	Lamp CCT(K): Ra:
Lum. Size (W*L*H):0.038m*0.038m*0.000m		Lum. Area (m2):0.001	Lum. W(kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=5.0	Temp. (°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 565.110	Luminary Flux(lm): 565.113	Field Angle(10%Imax): 71.9(°)	
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 558.086lm 98.76%	
Rated Voltage(V):	Luminary EER(lm/W): 68.267	Up Lumens&Percent: 7.027lm 1.24%	
Tested Power(W): 8.278	Max. Candela(cd): 1026.751	S/MH: C0_a180=0.641 C90_270=0.627	
Lamps' Inside: 1	Max Cand@Ang. (°): C=0.0 γ=0.0	CIE Type: Semi-Direct	
Tested Electrics (V, A, pf):240.1, 0.038, 0.892	Beam Angle(50%Imax): 38.8(°)	ErP Φ use(90°): 528.915lm	
Lamp Size (W*L*H):0.038m*0.038m*0.000m	Left=-17.6°, Right=21.3°	IRF(%): 376.444	

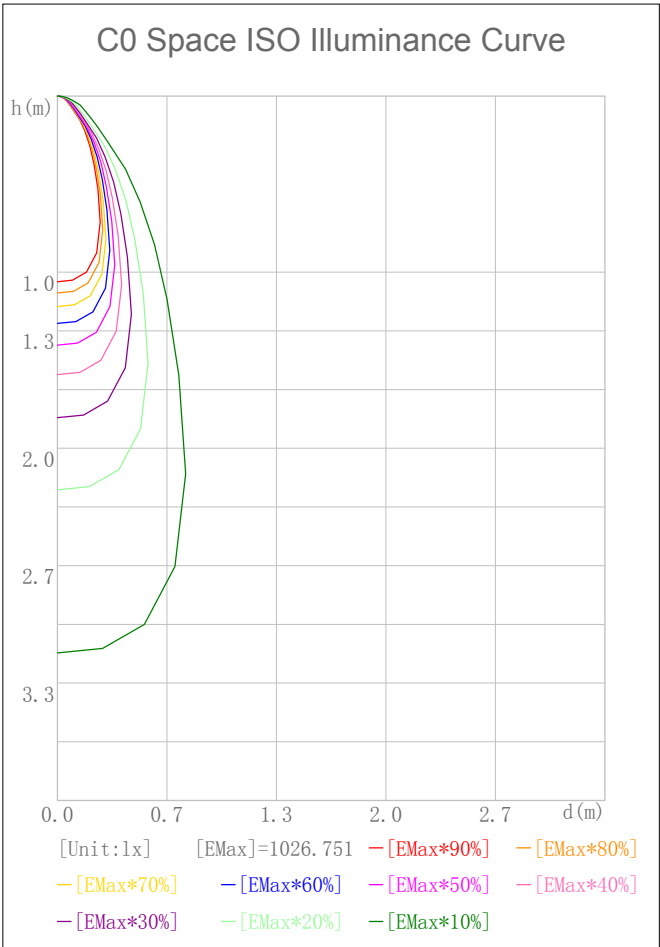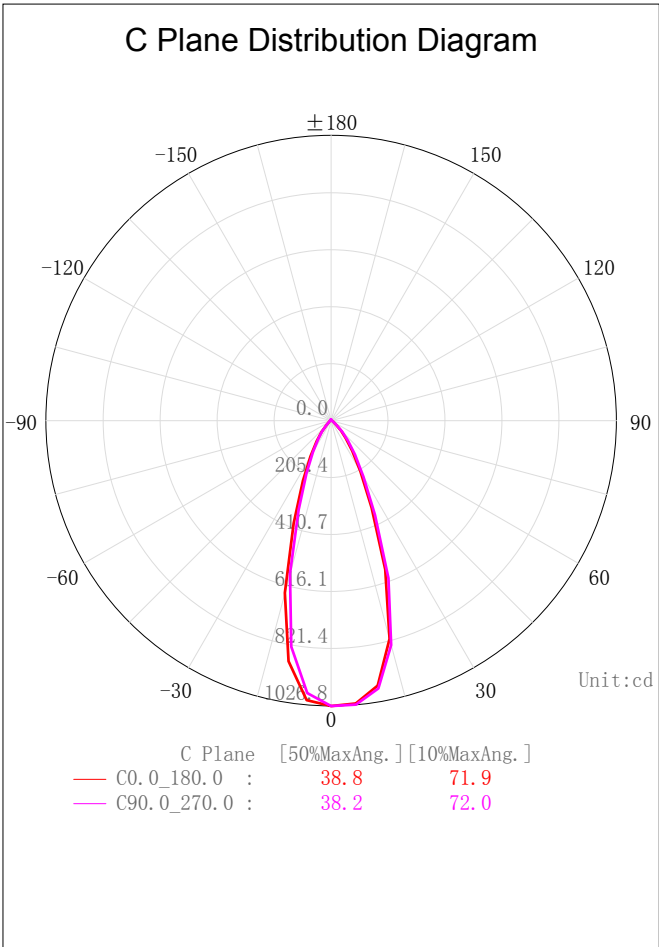

2D Plane Light Intensity Distribution Curve


Lum. Name:TR09-09-DW-04 1800-3000K RA90 36D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/29

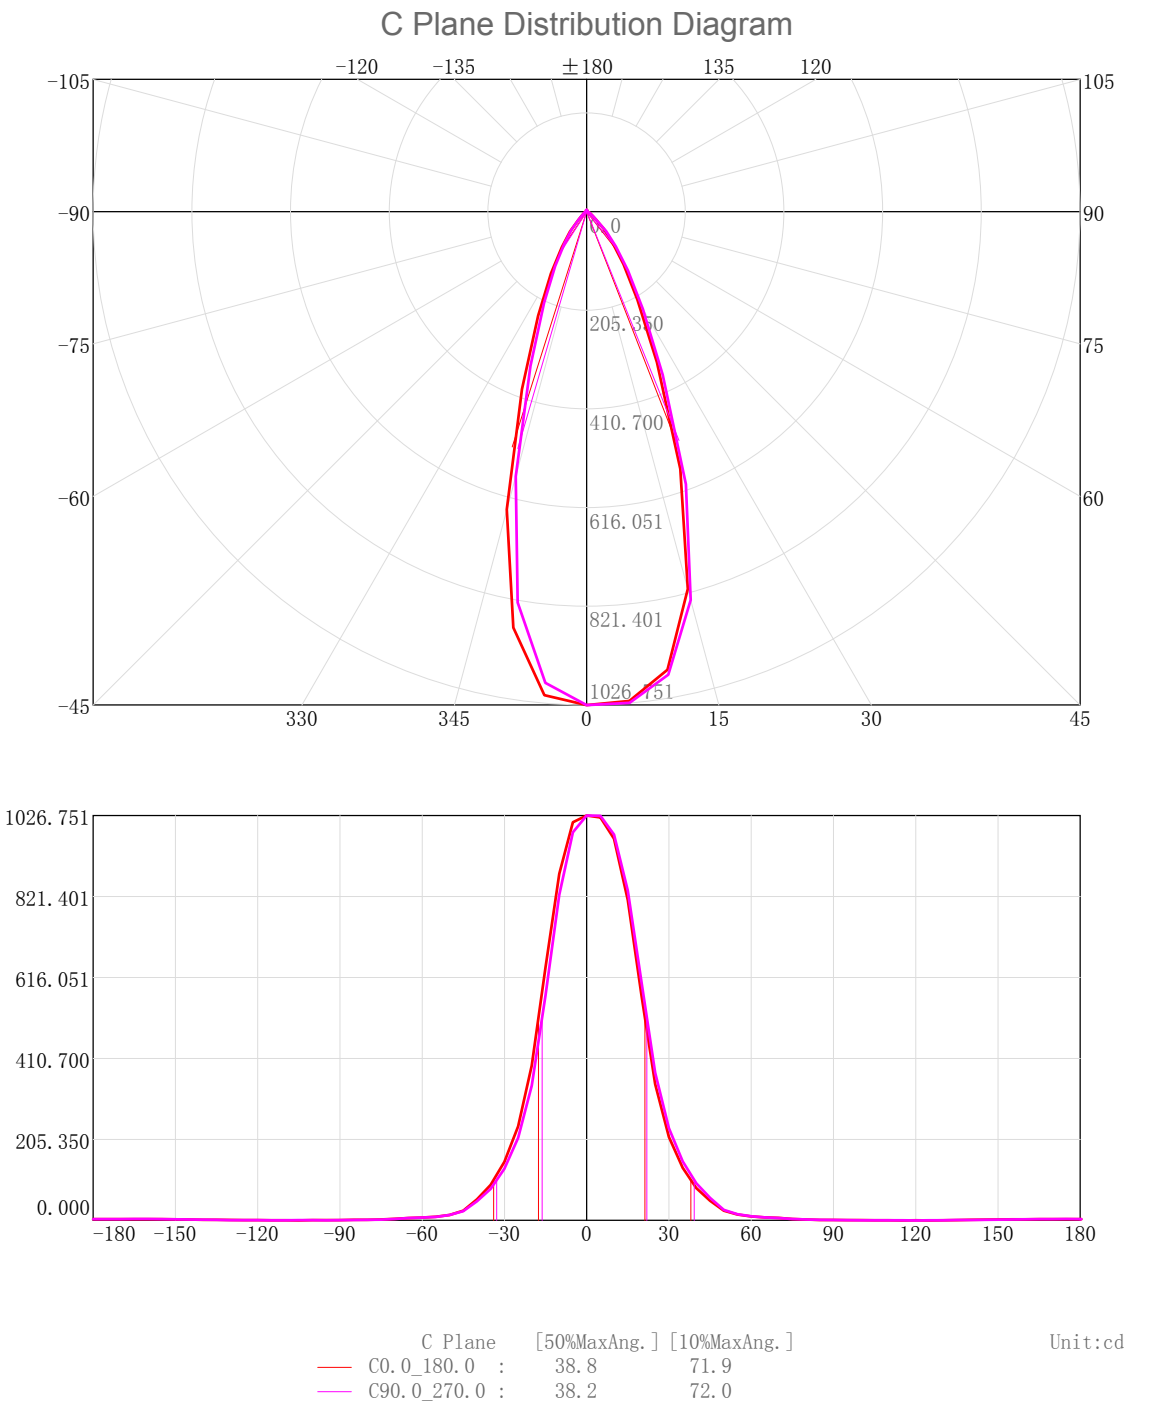

3D Light Intensity Distribution Modal

Lum. Name: TR09-09-DW-04 1800-3000K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/29

3D Light Intensity Distribution Modal

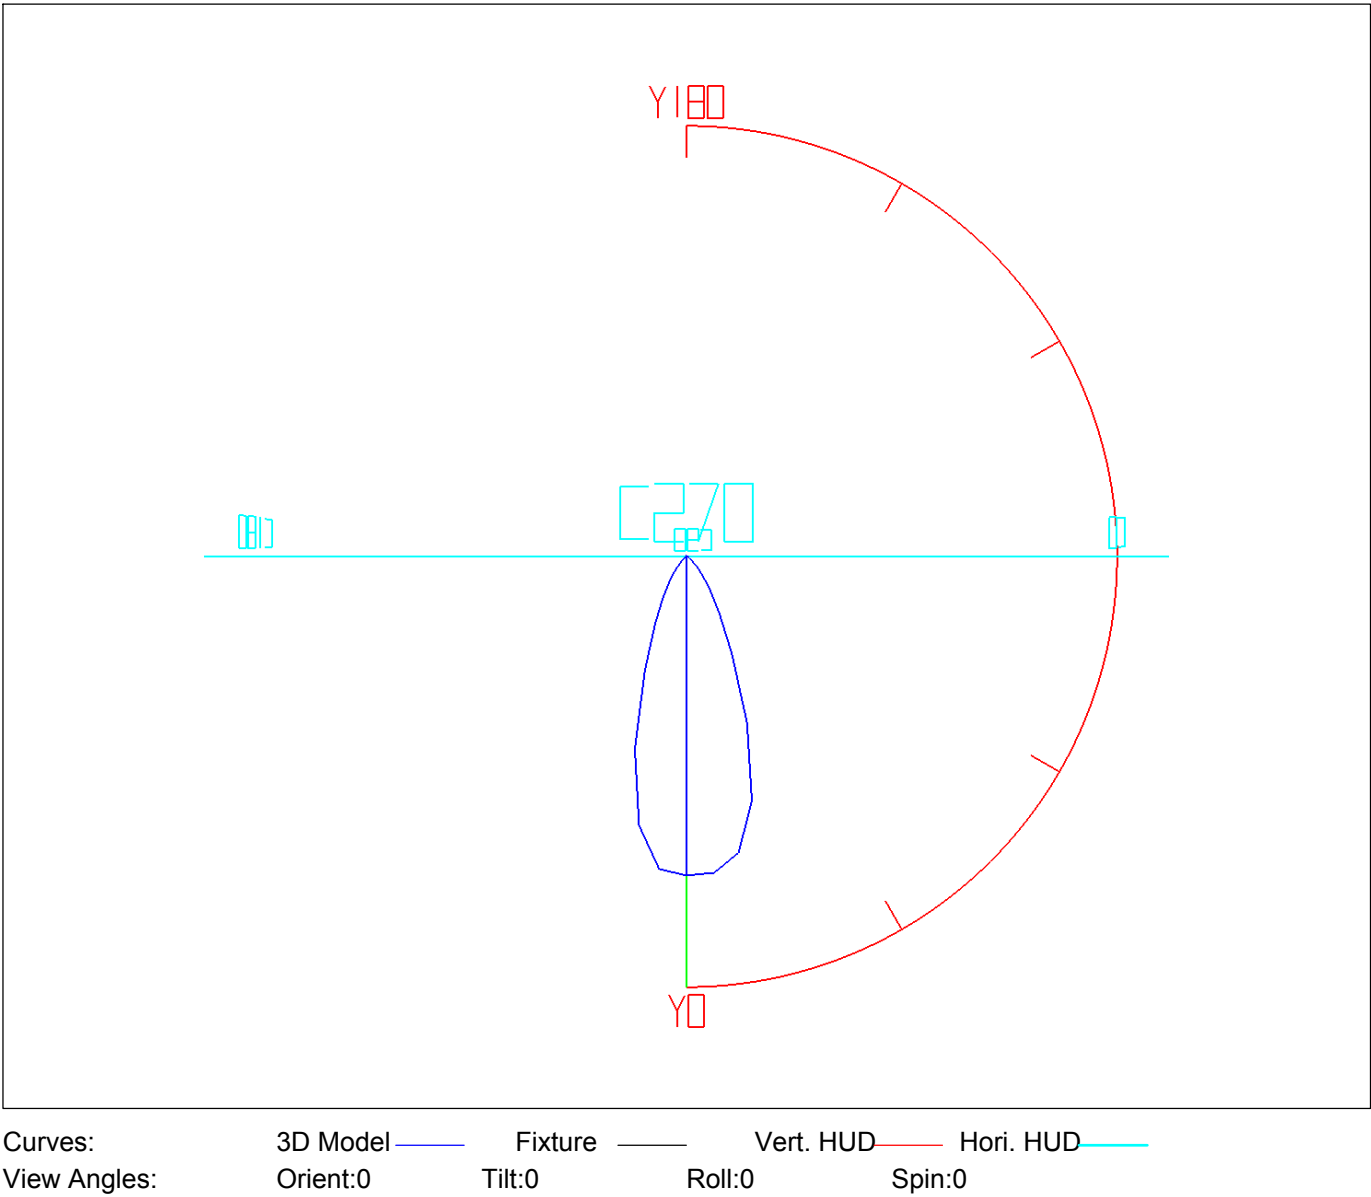


Zonal Flux Tabulation

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0. 0-5. 0	24. 35	24. 35	4. 31	4. 31
5. 0-10. 0	68. 80	93. 15	12. 17	16. 48
10. 0-15. 0	96. 57	189. 72	17. 09	33. 57
15. 0-20. 0	98. 25	287. 97	17. 39	50. 96
20. 0-25. 0	80. 65	368. 62	14. 27	65. 23
25. 0-30. 0	59. 89	428. 51	10. 60	75. 83
30. 0-35. 0	43. 36	471. 87	7. 67	83. 50
35. 0-40. 0	30. 54	502. 40	5. 40	88. 90
40. 0-45. 0	20. 09	522. 49	3. 55	92. 46
45. 0-50. 0	11. 84	534. 33	2. 09	94. 55
50. 0-55. 0	7. 00	541. 33	1. 24	95. 79
55. 0-60. 0	4. 92	546. 25	0. 87	96. 66
60. 0-65. 0	3. 82	550. 07	0. 68	97. 34
65. 0-70. 0	2. 99	553. 06	0. 53	97. 87
70. 0-75. 0	2. 08	555. 14	0. 37	98. 24
75. 0-80. 0	1. 35	556. 49	0. 24	98. 47
80. 0-85. 0	0. 95	557. 44	0. 17	98. 64
85. 0-90. 0	0. 65	558. 09	0. 11	98. 76
90. 0-95. 0	0. 48	558. 56	0. 08	98. 84
95. 0-100. 0	0. 40	558. 96	0. 07	98. 91
100. 0-105. 0	0. 30	559. 26	0. 05	98. 97
105. 0-110. 0	0. 20	559. 46	0. 04	99. 00
110. 0-115. 0	0. 17	559. 64	0. 03	99. 03
115. 0-120. 0	0. 18	559. 81	0. 03	99. 06
120. 0-125. 0	0. 22	560. 03	0. 04	99. 10
125. 0-130. 0	0. 30	560. 32	0. 05	99. 15
130. 0-135. 0	0. 44	560. 76	0. 08	99. 23
135. 0-140. 0	0. 54	561. 31	0. 10	99. 33
140. 0-145. 0	0. 61	561. 92	0. 11	99. 43
145. 0-150. 0	0. 68	562. 59	0. 12	99. 55
150. 0-155. 0	0. 67	563. 26	0. 12	99. 67
155. 0-160. 0	0. 62	563. 88	0. 11	99. 78
160. 0-165. 0	0. 53	564. 40	0. 09	99. 87
165. 0-170. 0	0. 39	564. 79	0. 07	99. 94
170. 0-175. 0	0. 24	565. 03	0. 04	99. 99
175. 0-180. 0	0. 08	565. 11	0. 01	100. 00

Rectangle ISO Lighting Intensity Diagram


Lum. Name: TR09-09-DW-04 1800-3000K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/29

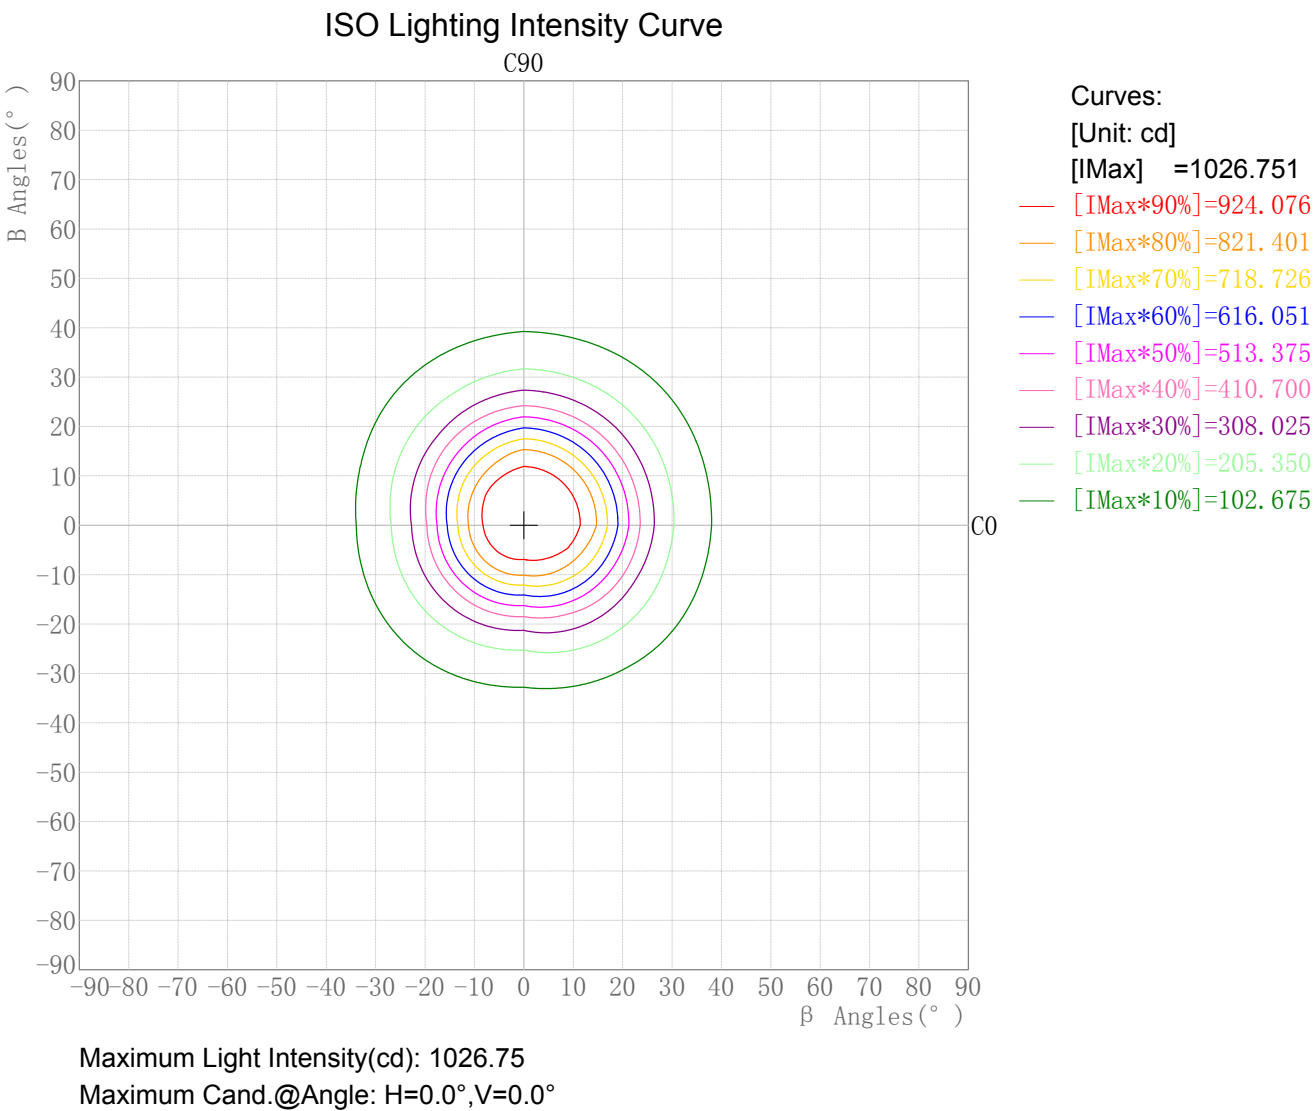

Plane ISO-Illuminance Diagram

Lum. Name: TR09-09-DW-04 1800-3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/29

Plane ISO-Illuminance Curve

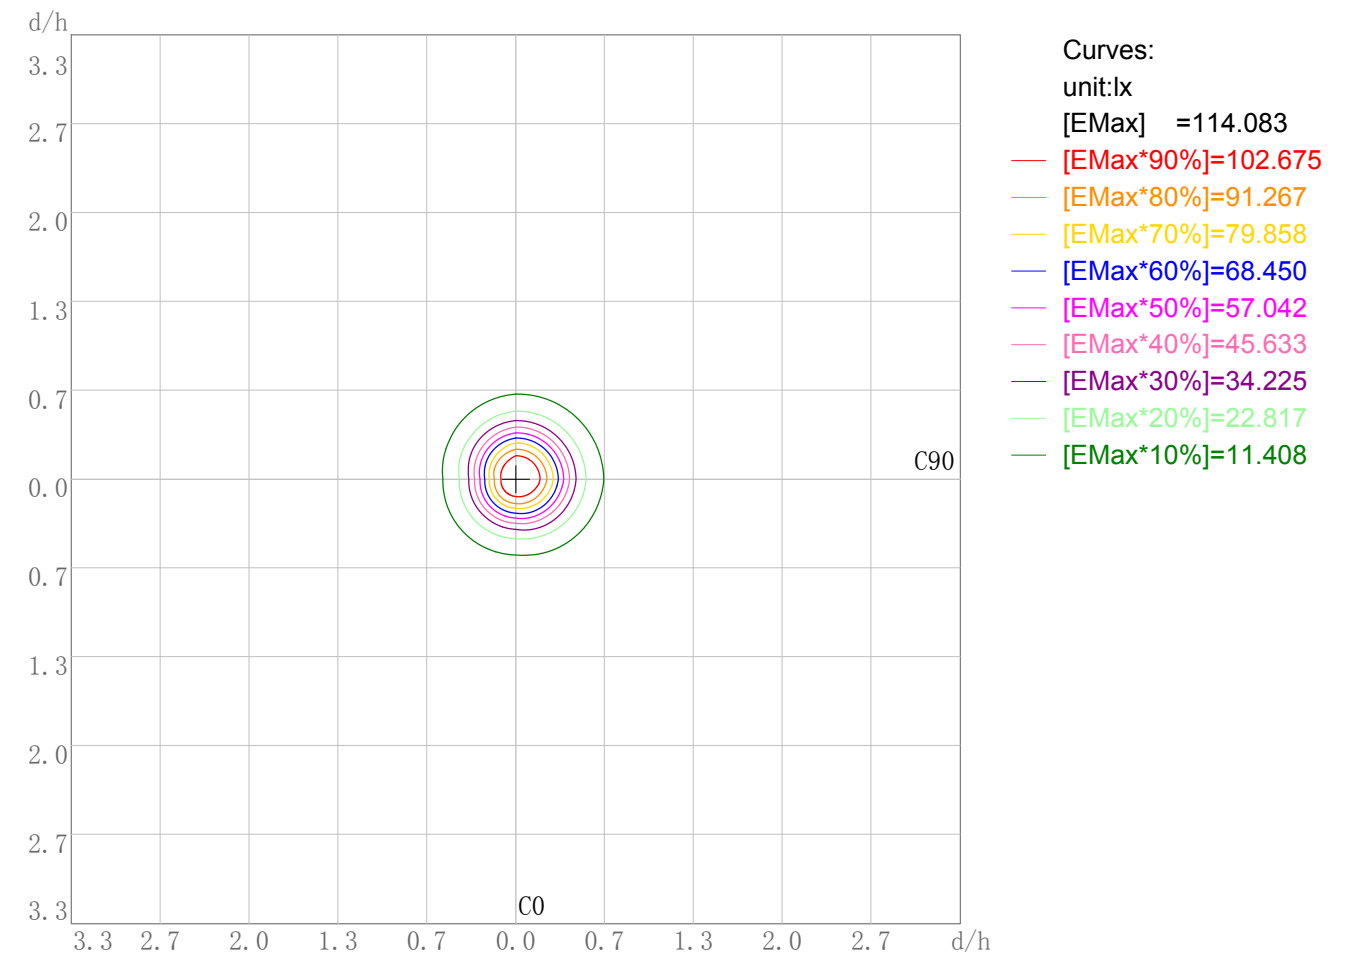


Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 114.08
Working Plane Maximum Illuminance Position(d/h):H0.0 V0.0

3D Plane ISO Illuminance Diagram

Lum. Name: TR09-09-DW-04 1800-3000K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/29


3D Plane Illuminance Modal

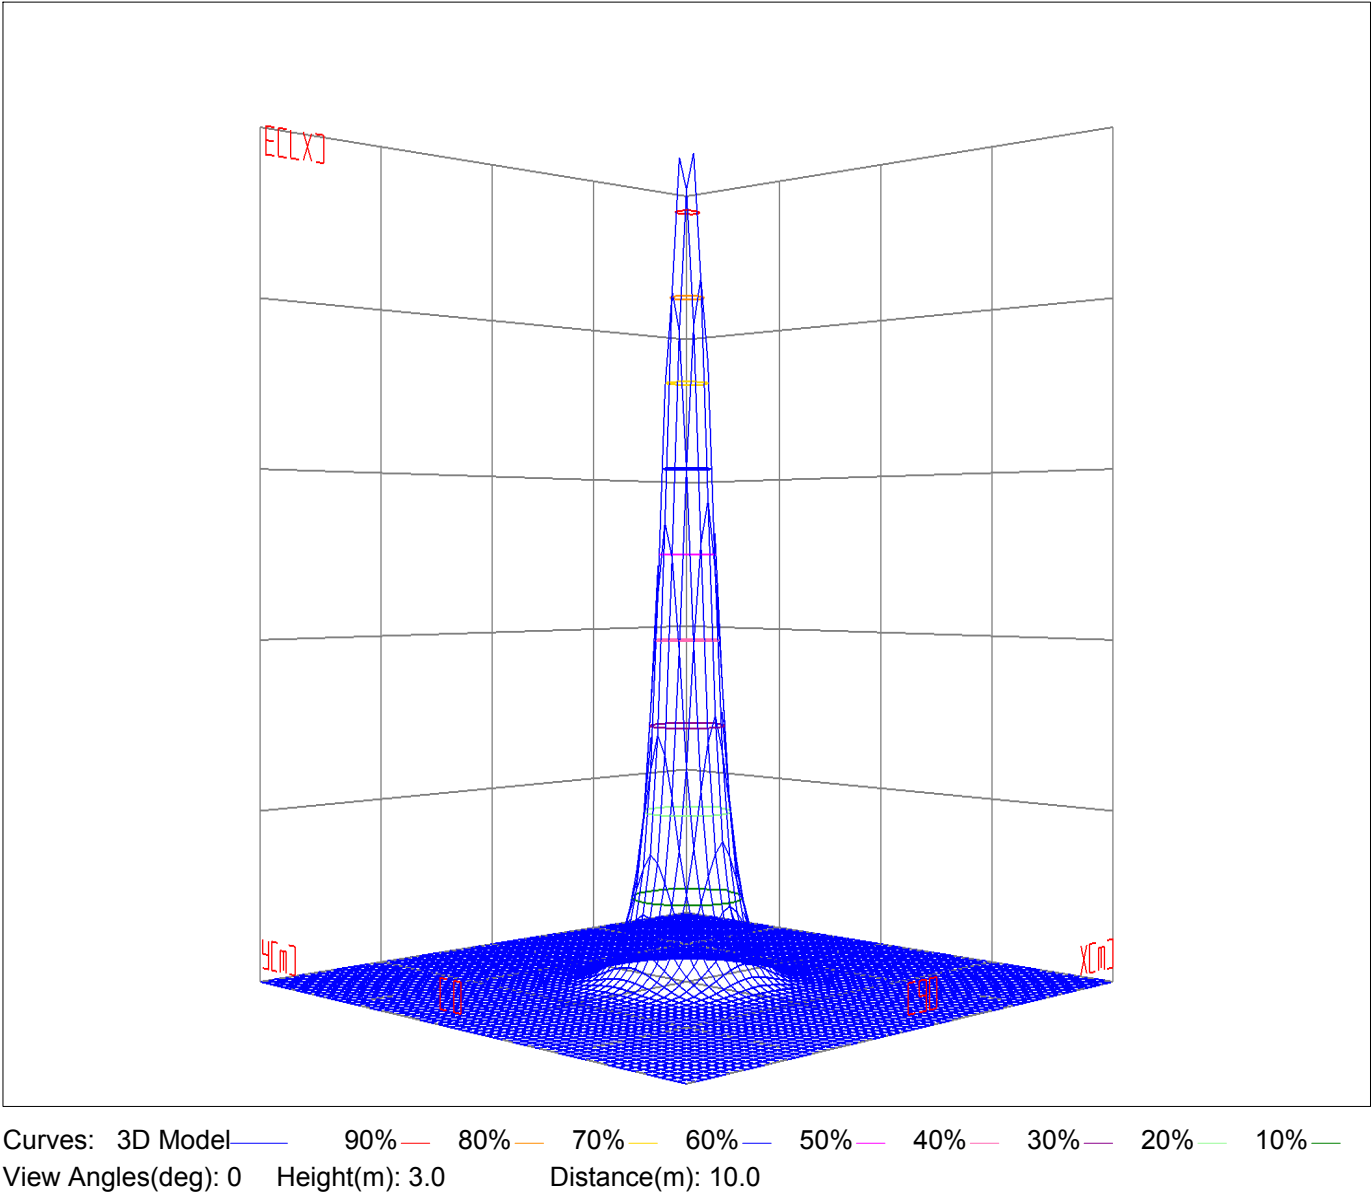

Space ISO Illuminance Diagram

Lum. Name: TR09-09-DW-04 1800-3000K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/29


Space ISO Illuminance Curve

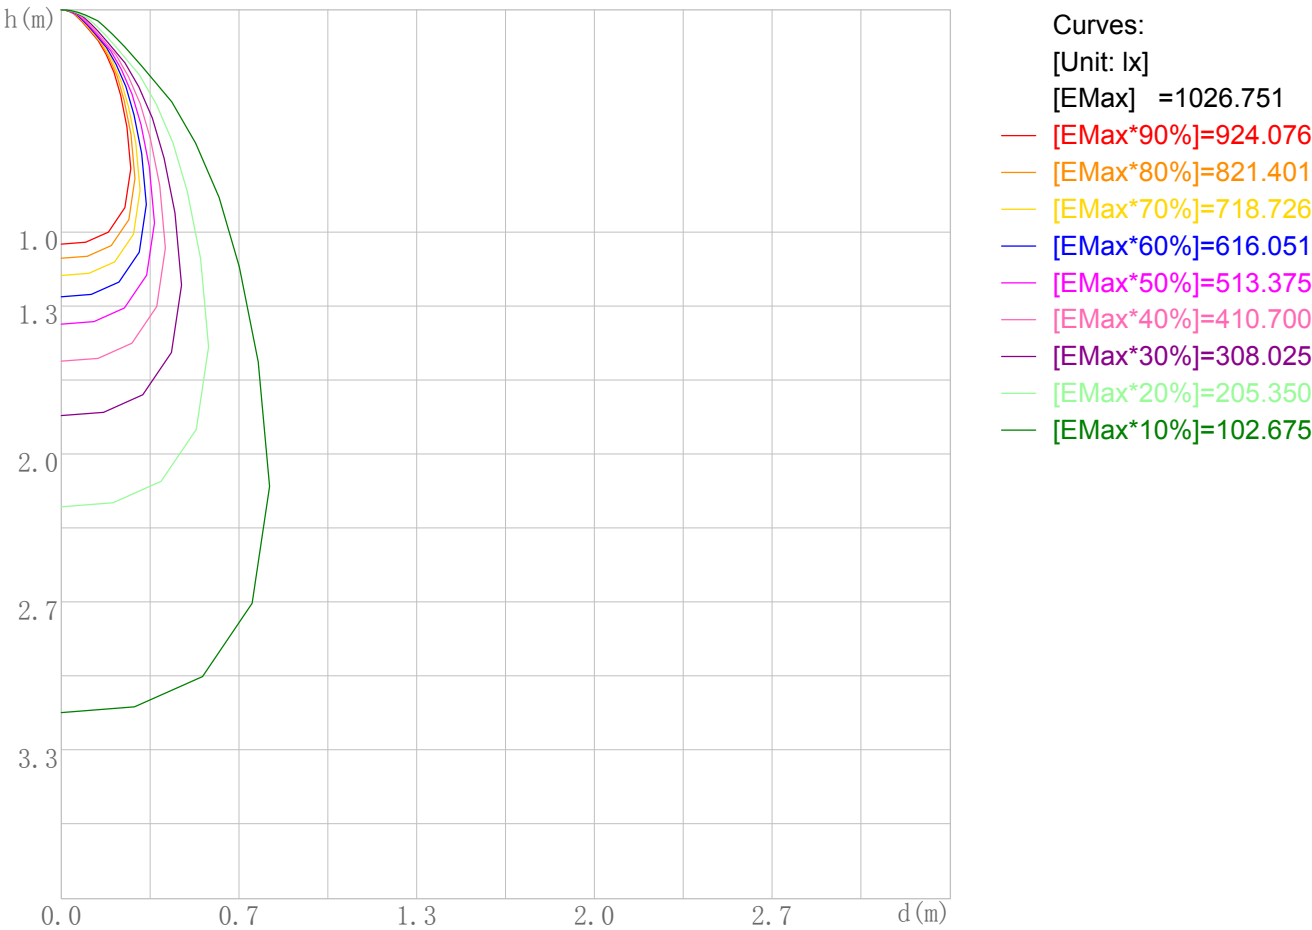

Space Plane Maximum Illuminance and @Angle:1026.75lx,0.0deg
Plane Maximum Lighting Intensity and @Angle:1026.751cd,0eg

Illuminance-Distance Diagram

Lum. Name:TR09-09-DW-04 1800-3000K RA90 36D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date:2022/08/29

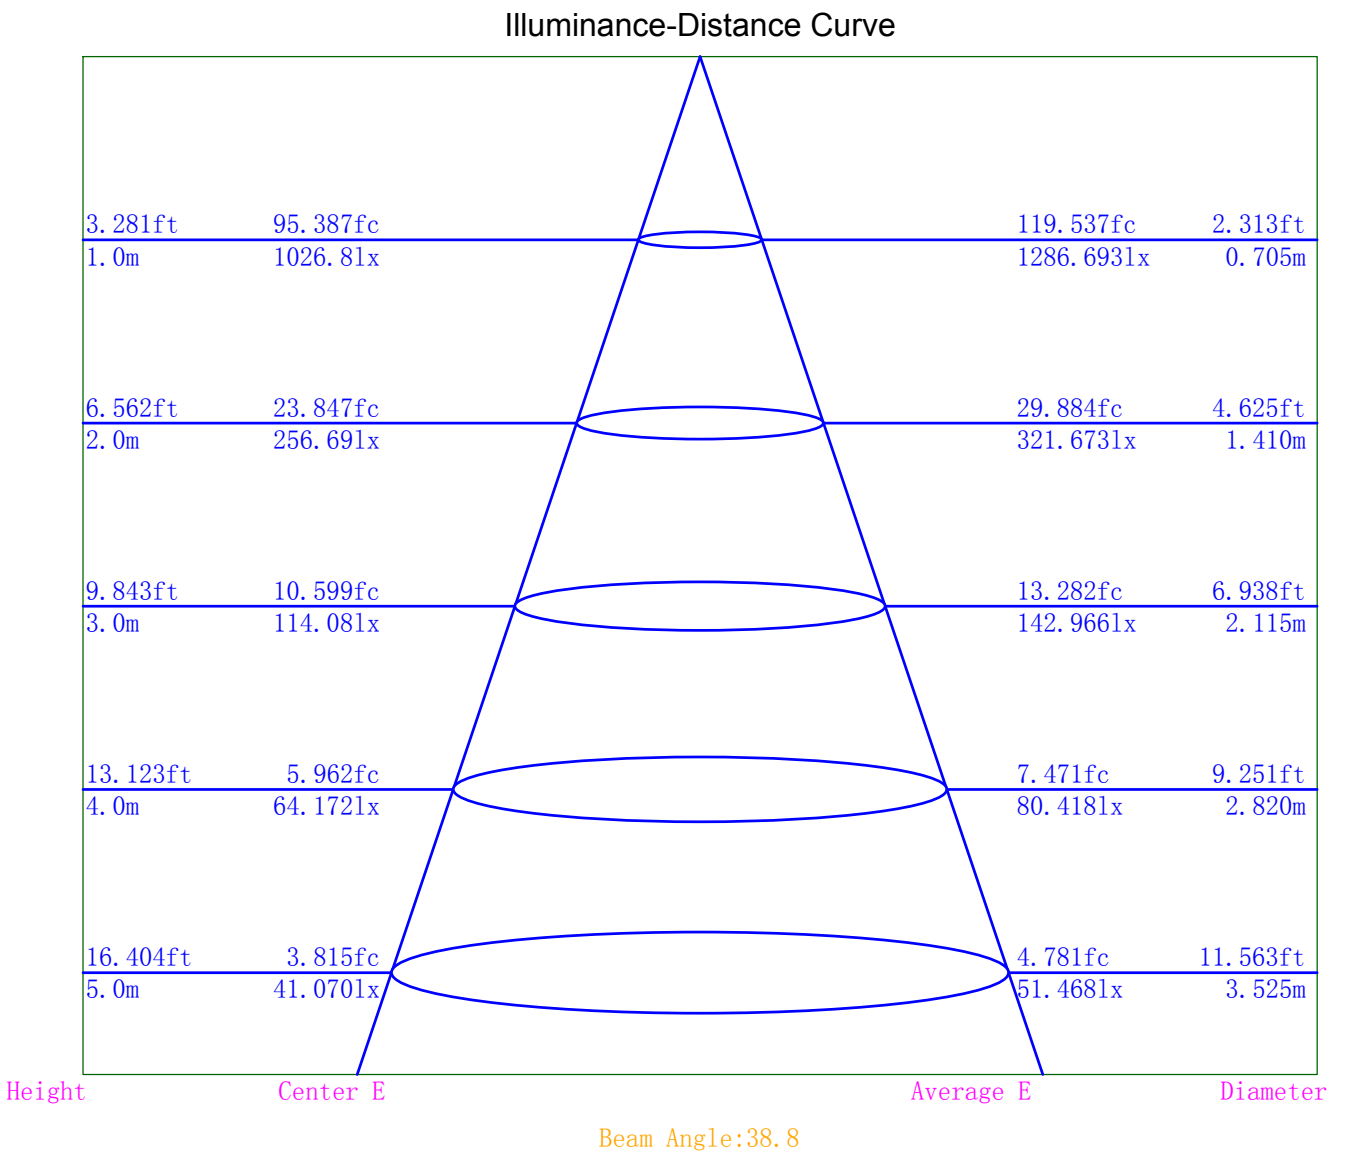

Indoor Luminance Limiting Curves

Lum. Name: TR09-09-DW-04 1800-3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/29


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	48775	26607	18202	14126	12575	12924	9686	9779	10743
C90	56183	28793	19249	14589	12506	12491	9833	10433	12459

Luminance Limiting Curve

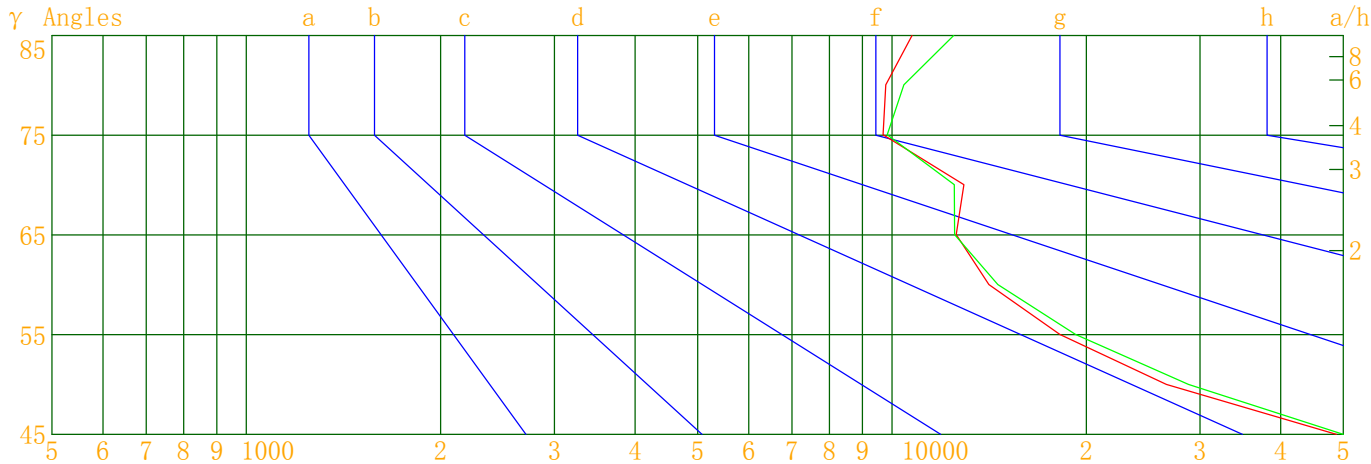

Luminous Size:

Length(m)=0.038

Width(m)=0.038

Height(m)=0.000

Area(m^2)=0.001444

Luminous Type:

Without Luminous Side


Luminous Curves:

C0-C180 Color: —

C90-C270 Color: —

Indoor Budgetary Estimate Table

Lum. Name: TR09-09-DW-04 1800-3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/29

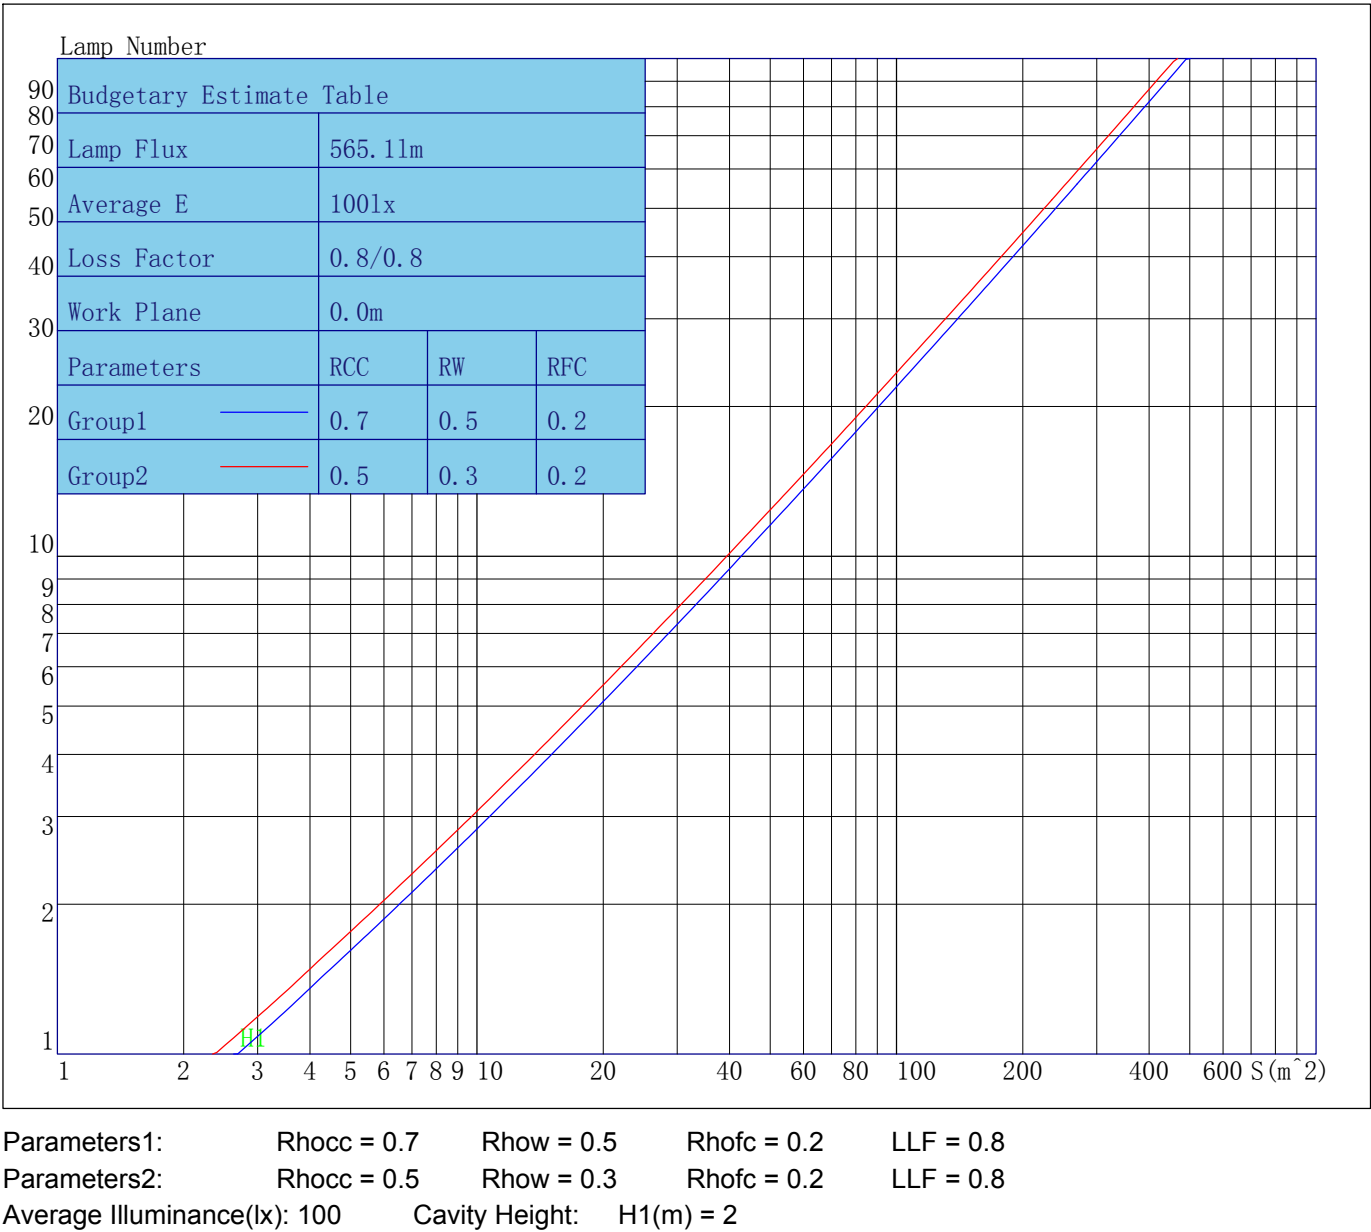

Indoor Coefficient of Utilization Table

Lum. Name: TR09-09-DW-04 1800-3000K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/29

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	101	101	101	99
1	113	111	108	106	111	108	106	104	104	102	101	100	99	97	96	95	94	93
2	108	103	99	96	106	101	98	95	98	95	92	95	92	90	92	90	88	87
3	103	97	92	88	101	95	91	87	92	89	86	90	87	84	87	85	83	81
4	98	91	86	81	96	90	85	81	87	83	80	85	82	79	83	80	78	76
5	94	86	80	76	92	85	79	76	83	78	75	81	77	74	79	76	73	72
6	89	81	75	71	88	80	75	71	79	74	70	77	73	70	76	72	69	68
7	85	77	71	67	84	76	71	67	75	70	67	73	69	66	72	69	66	64
8	82	73	67	64	81	72	67	63	71	66	63	70	66	63	69	65	62	61
9	79	70	64	60	77	69	64	60	68	63	60	67	63	60	66	62	59	58
10	75	66	61	57	74	66	61	57	65	60	57	64	60	57	63	60	57	55

Unified Glare Rating Table

Lum. Name: TR09-09-DW-04 1800-3000K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting	Test Machine:GON-2000	Test Date: 2022/08/29

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size	Vewed crosswise					Vewed endwise				
X=2H Y=2H	20.8	21.8	21.2	22.1	22.5	21.3	22.3	21.7	22.7	23.0
	21.0	21.8	21.4	22.2	22.6	21.4	22.3	21.9	22.7	23.1
	21.0	21.8	21.5	22.2	22.6	21.5	22.3	21.9	22.7	23.1
	21.1	21.8	21.5	22.2	22.6	21.5	22.2	22.0	22.6	23.1
	21.1	21.7	21.5	22.2	22.6	21.5	22.2	22.0	22.6	23.1
	21.1	21.7	21.5	22.1	22.6	21.5	22.2	22.0	22.6	23.1
X=4H Y=2H	20.7	21.5	21.1	21.8	22.3	21.2	22.0	21.6	22.4	22.8
	21.0	21.6	21.4	22.0	22.5	21.4	22.0	21.8	22.5	22.9
	21.1	21.6	21.5	22.1	22.6	21.5	22.1	22.0	22.5	23.0
	21.2	21.7	21.7	22.1	22.6	21.6	22.1	22.1	22.6	23.1
	21.2	21.7	21.7	22.1	22.6	21.6	22.1	22.1	22.6	23.1
	21.3	21.6	21.8	22.2	22.7	21.7	22.1	22.2	22.6	23.1
X=8H Y=4H	21.0	21.5	21.5	21.9	22.4	21.4	21.9	21.9	22.3	22.8
	21.2	21.5	21.7	22.1	22.6	21.6	21.9	22.1	22.5	23.0
	21.3	21.6	21.8	22.1	22.7	21.7	22.0	22.2	22.5	23.1
	21.4	21.7	21.9	22.2	22.8	21.8	22.1	22.4	22.6	23.2
X=12H Y=4H	21.0	21.3	21.5	21.9	22.4	21.4	21.8	21.9	22.3	22.8
	21.2	21.5	21.7	22.0	22.5	21.6	21.9	22.1	22.4	22.9
	21.3	21.5	21.8	22.1	22.7	21.7	22.0	22.2	22.5	23.1
Variations with the objverver position at spacings										
S=1.0H	0.3/-0.3					0.3/-0.3				
S=1.5H	0.8/-0.8					0.7/-0.6				
S=2.0H	1.0/-1.3					0.9/-1.1				
Reduced UGR Table:										
Nordic Standard Table:	BK0					BK0				
Correction Value	0.9					0.8				

o the CIE Pub.117, data has been corrected, refers to the lamp’s lumens 8.2flm.

IES Indoor Report

Photometric Filename:TR09-09-DW-04 1800-3000K RA90 36D.IES

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	1026.75	1026.75	1026.75	1026.75
γ 5.0	1021.87	1025.94	1009.85	984.14
γ 10.0	967.87	978.38	878.89	825.68
γ 15.0	812.66	836.39	641.54	570.46
γ 20.0	569.37	603.40	392.93	341.65
γ 25.0	345.82	374.60	238.68	209.33
γ 30.0	211.42	233.76	148.36	131.04
γ 35.0	133.41	149.60	90.11	80.13
γ 40.0	82.17	94.26	53.73	48.69
γ 45.0	49.80	57.37	24.56	23.40
γ 50.0	24.70	26.73	13.82	13.98
γ 55.0	15.08	15.94	9.45	9.12
γ 60.0	10.20	10.53	7.36	7.46
γ 65.0	7.67	7.63	6.04	5.91
γ 70.0	6.38	6.17	3.90	3.60
γ 75.0	3.62	3.67	2.39	2.07
γ 80.0	2.45	2.62	1.73	1.63
γ 85.0	1.35	1.57	1.42	1.15
γ 90.0	1.26	1.10	0.73	0.89
γ 95.0	0.75	0.86	0.78	0.60
γ 100.0	0.77	0.39	0.91	0.82
γ 105.0	0.21	0.49	0.20	0.70
γ 110.0	0.25	0.52	0.29	0.41
γ 115.0	0.12	0.34	0.34	0.44
γ 120.0	0.27	0.10	0.65	0.62
γ 125.0	0.16	0.23	0.93	0.77
γ 130.0	0.51	0.52	1.39	0.94
γ 135.0	0.89	1.02	1.81	1.67
γ 140.0	1.61	1.03	1.81	1.85
γ 145.0	1.93	1.79	2.33	2.27
γ 150.0	2.38	2.23	2.72	2.69
γ 155.0	2.68	2.29	3.05	3.09
γ 160.0	2.89	2.86	3.12	3.51
γ 165.0	3.36	3.08	3.14	3.58
γ 170.0	3.27	3.38	3.31	3.29
γ 175.0	3.40	3.56	3.26	3.20
γ 180.0	3.41	3.41	3.41	3.41