



Indoor Luminaire Photometric Data

Description Information

Luminary Name:TR09-09-XX-01 2700K RA90 60DTR09-09-XX-01 2700K RA		Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Date: 2021/10/22
Manufacture: Shenzhen Norming Lighting Co., Ltd		Shld. Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department		Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.076m*0.076m*0.000m		Lum. Area (m2):0.005	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=1.0	Temp. (°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 746.920	Luminary Flux(lm): 746.918	Field Angle(10%Imax): 83.9(°)	
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 742.178lm 99.37%	
Rated Voltage(V):	Luminary EER(lm/W): 84.131	Up Lumens&Percent: 4.740lm 0.63%	
Tested Power(W): 8.878	Max. Candela(cd): 775.335	S/MH: C0_a180=0.961 C90_270=0.955	
Lamps' Inside: 1	Max Cand@Ang. (°): C=0.0 γ=1.0	CIE Type: Semi-Direct	
Tested Electrics (V, A, pf):240.9, 0.041, 0.898	Beam Angle(50%Imax): 59.4(°)	ErP ϕ use(90°): 662.117lm	
Lamp Size (W*L*H):0.076m*0.076m*0.000m	Left=-29.2°, Right=30.3°	IRF(%): 224.279	

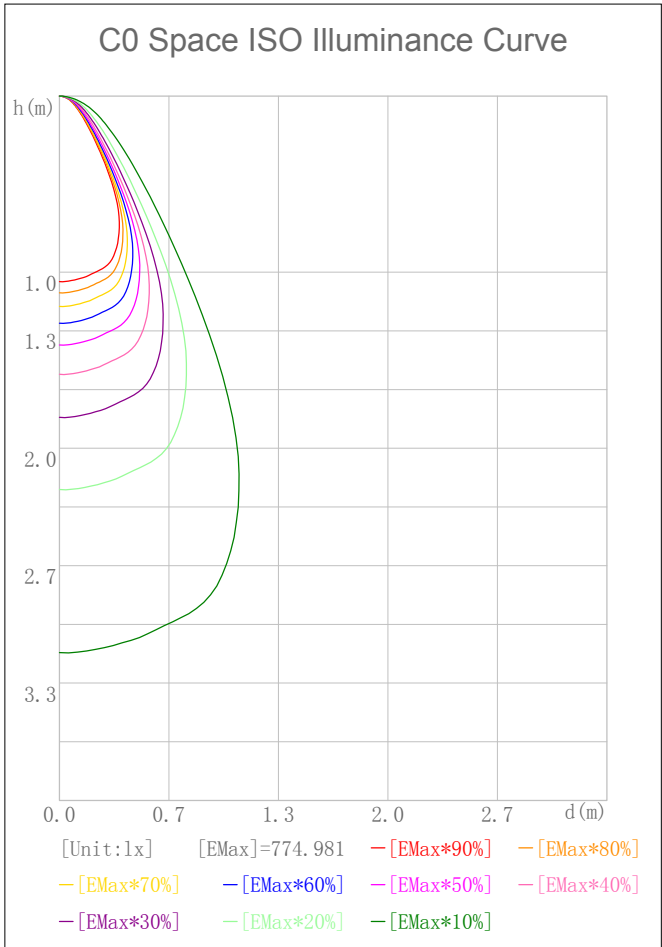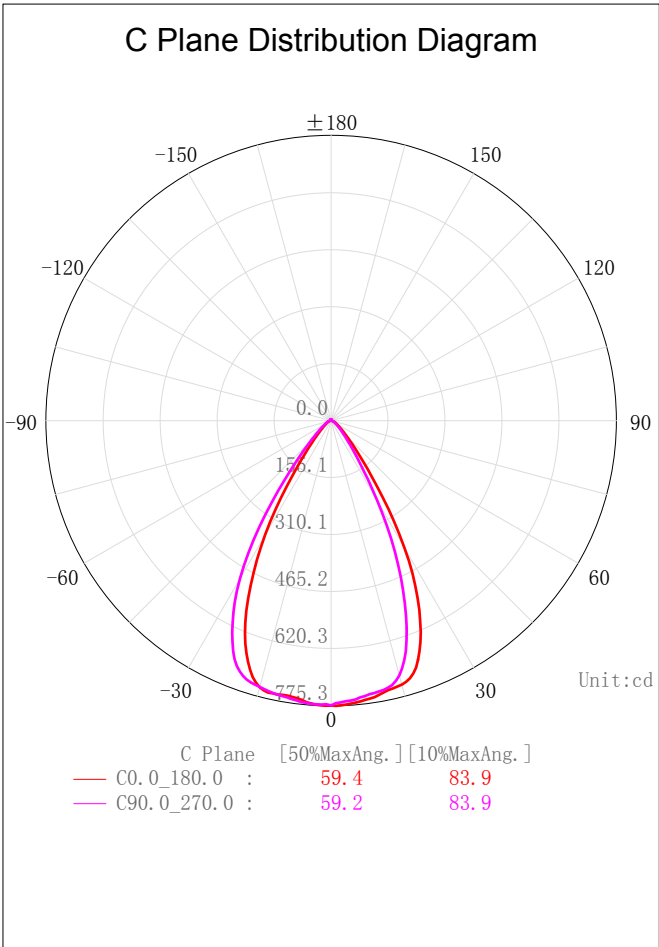

2D Plane Light Intensity Distribution Curve


Lum. Name:TR09-09-XX-01 2700K RA90 60D	Lum. Catalog:TR09-09-XX-01 2700K RA90	Test ID:01
Lamp Name:	Lamp Catalog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2021/10/22

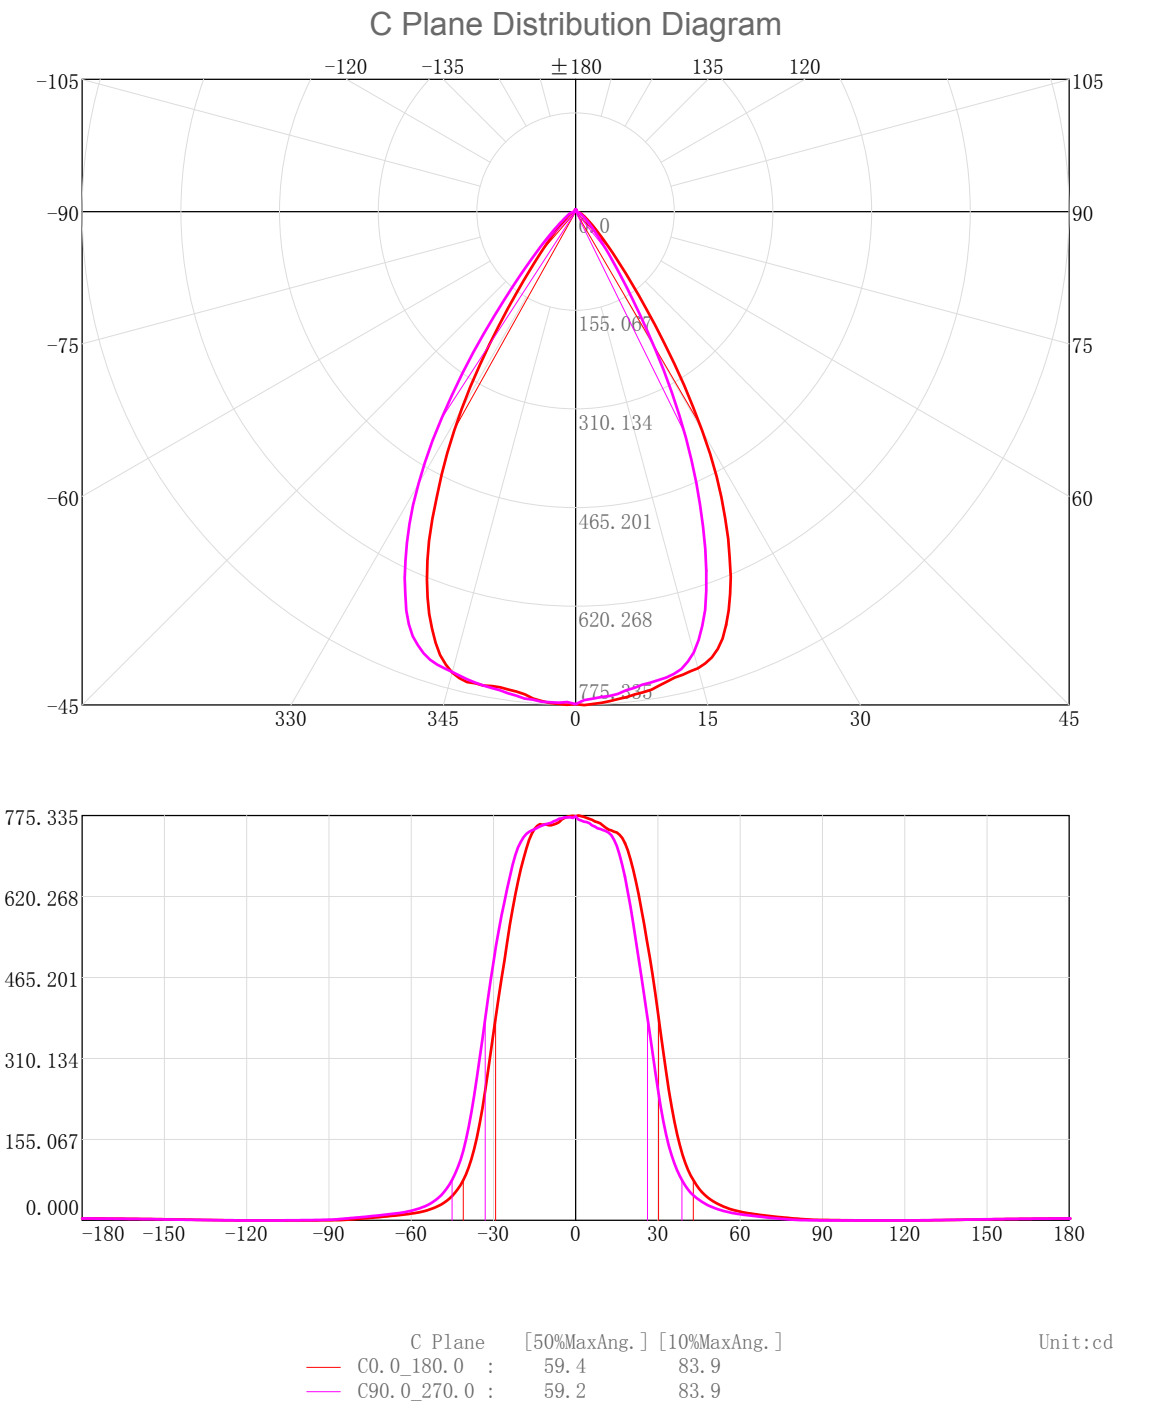

3D Light Intensity Distribution Modal

Lum. Name:TR09-09-XX-01 2700K RA90 60DTR09-09-XX-01 2700K RA90	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2021/10/22

3D Light Intensity Distribution Modal

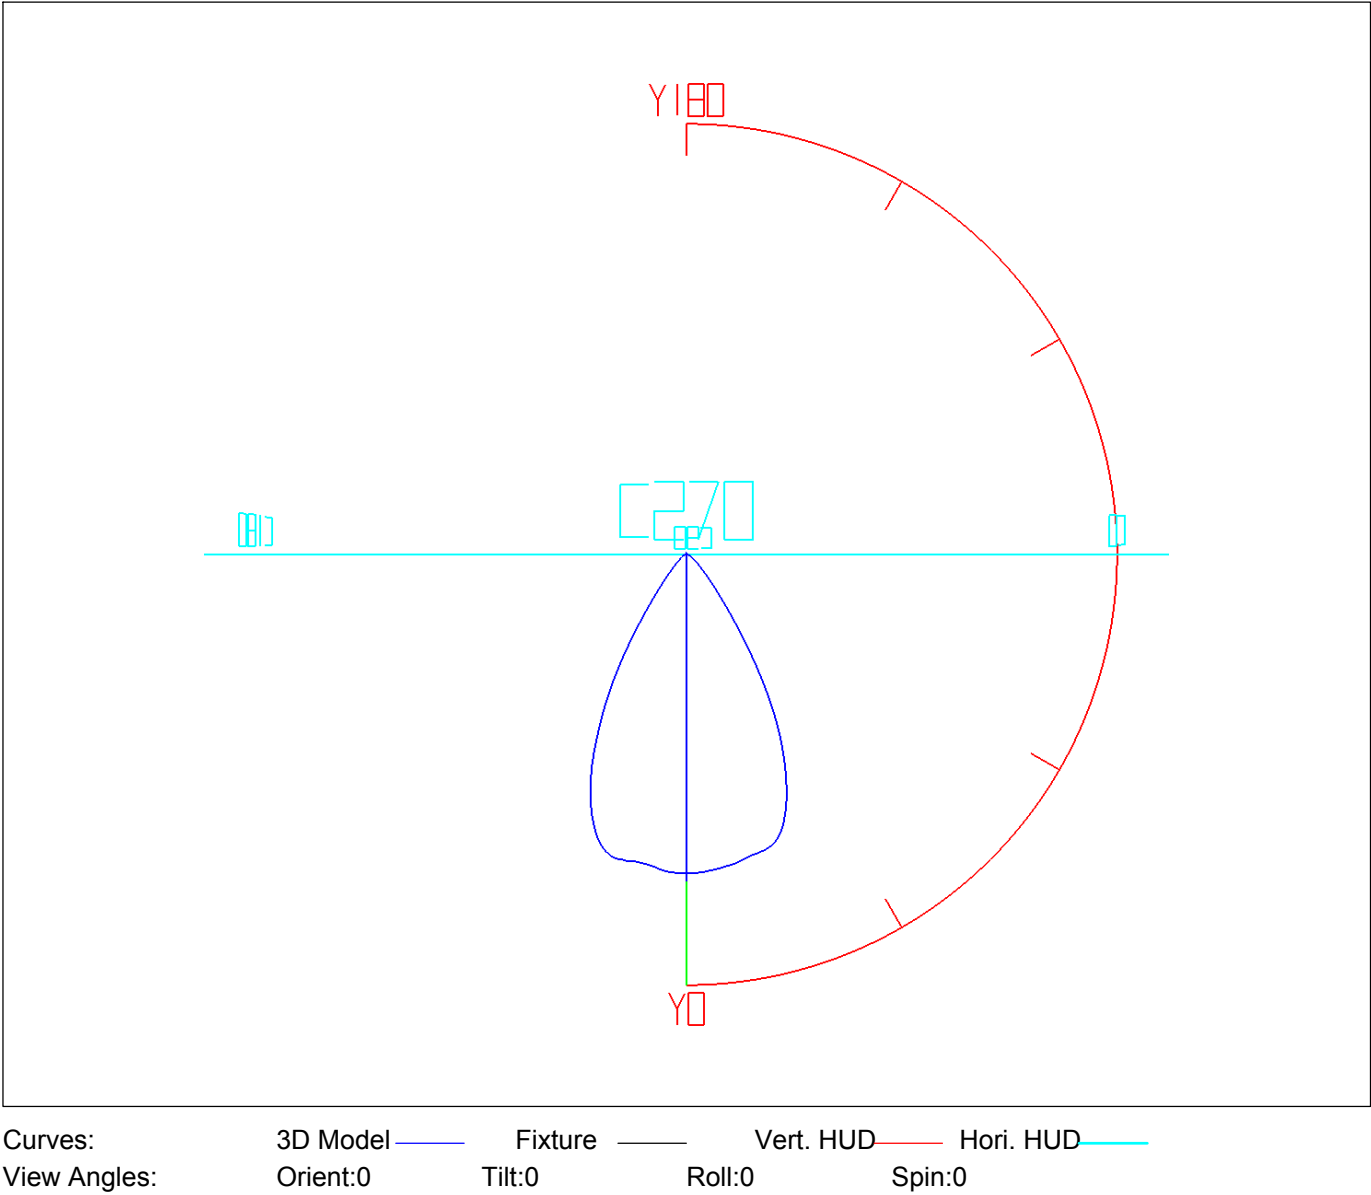

IES Indoor Report

Photometric Filename:TR09-09-XX-01 2700K RA90 60D.IES

Zonal Flux Tabulation

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.74	0.74	0.10	0.10	47.0-48.0	3.47	697.23	0.47	93.35
1.0-2.0	2.22	2.96	0.30	0.40	48.0-49.0	3.19	700.42	0.43	93.77
2.0-3.0	3.69	6.64	0.49	0.89	49.0-50.0	2.93	703.35	0.39	94.17
3.0-4.0	5.15	11.80	0.69	1.58	50.0-51.0	2.70	706.05	0.36	94.53
4.0-5.0	6.61	18.40	0.88	2.46	51.0-52.0	2.50	708.55	0.33	94.86
5.0-6.0	8.04	26.45	1.08	3.54	52.0-53.0	2.32	710.87	0.31	95.17
6.0-7.0	9.46	35.91	1.27	4.81	53.0-54.0	2.16	713.03	0.29	95.46
7.0-8.0	10.88	46.79	1.46	6.26	54.0-55.0	2.01	715.04	0.27	95.73
8.0-9.0	12.29	59.08	1.64	7.91	55.0-56.0	1.88	716.92	0.25	95.98
9.0-10.0	13.68	72.76	1.83	9.74	56.0-57.0	1.76	718.69	0.24	96.22
10.0-11.0	15.08	87.84	2.02	11.76	57.0-58.0	1.66	720.34	0.22	96.44
11.0-12.0	16.45	104.29	2.20	13.96	58.0-59.0	1.56	721.90	0.21	96.65
12.0-13.0	17.81	122.10	2.38	16.35	59.0-60.0	1.47	723.37	0.20	96.85
13.0-14.0	19.13	141.23	2.56	18.91	60.0-61.0	1.39	724.76	0.19	97.03
14.0-15.0	20.38	161.61	2.73	21.64	61.0-62.0	1.32	726.08	0.18	97.21
15.0-16.0	21.56	183.16	2.89	24.52	62.0-63.0	1.25	727.34	0.17	97.38
16.0-17.0	22.63	205.79	3.03	27.55	63.0-64.0	1.19	728.53	0.16	97.54
17.0-18.0	23.57	229.36	3.16	30.71	64.0-65.0	1.13	729.66	0.15	97.69
18.0-19.0	24.36	253.72	3.26	33.97	65.0-66.0	1.08	730.73	0.14	97.83
19.0-20.0	24.96	278.68	3.34	37.31	66.0-67.0	1.02	731.76	0.14	97.97
20.0-21.0	25.40	304.08	3.40	40.71	67.0-68.0	0.97	732.72	0.13	98.10
21.0-22.0	25.66	329.74	3.44	44.15	68.0-69.0	0.91	733.64	0.12	98.22
22.0-23.0	25.73	355.48	3.45	47.59	69.0-70.0	0.86	734.50	0.12	98.34
23.0-24.0	25.61	381.09	3.43	51.02	70.0-71.0	0.81	735.31	0.11	98.45
24.0-25.0	25.31	406.40	3.39	54.41	71.0-72.0	0.76	736.06	0.10	98.55
25.0-26.0	24.81	431.21	3.32	57.73	72.0-73.0	0.70	736.77	0.09	98.64
26.0-27.0	24.15	455.36	3.23	60.96	73.0-74.0	0.65	737.42	0.09	98.73
27.0-28.0	23.35	478.71	3.13	64.09	74.0-75.0	0.60	738.03	0.08	98.81
28.0-29.0	22.38	501.09	3.00	67.09	75.0-76.0	0.56	738.58	0.07	98.88
29.0-30.0	21.21	522.30	2.84	69.93	76.0-77.0	0.51	739.09	0.07	98.95
30.0-31.0	19.89	542.18	2.66	72.59	77.0-78.0	0.46	739.55	0.06	99.01
31.0-32.0	18.47	560.65	2.47	75.06	78.0-79.0	0.41	739.96	0.06	99.07
32.0-33.0	16.97	577.62	2.27	77.33	79.0-80.0	0.37	740.33	0.05	99.12
33.0-34.0	15.43	593.06	2.07	79.40	80.0-81.0	0.33	740.66	0.04	99.16
34.0-35.0	13.91	606.97	1.86	81.26	81.0-82.0	0.29	740.95	0.04	99.20
35.0-36.0	12.48	619.44	1.67	82.93	82.0-83.0	0.25	741.20	0.03	99.23
36.0-37.0	11.15	630.59	1.49	84.43	83.0-84.0	0.21	741.41	0.03	99.26
37.0-38.0	9.93	640.53	1.33	85.76	84.0-85.0	0.19	741.60	0.02	99.29
38.0-39.0	8.84	649.36	1.18	86.94	85.0-86.0	0.16	741.75	0.02	99.31
39.0-40.0	7.86	657.22	1.05	87.99	86.0-87.0	0.13	741.88	0.02	99.33
40.0-41.0	7.00	664.22	0.94	88.93	87.0-88.0	0.11	742.00	0.02	99.34
41.0-42.0	6.26	670.48	0.84	89.77	88.0-89.0	0.10	742.09	0.01	99.35
42.0-43.0	5.62	676.11	0.75	90.52	89.0-90.0	0.08	742.18	0.01	99.37
43.0-44.0	5.08	681.18	0.68	91.20	90.0-91.0	0.07	742.25	0.01	99.37
44.0-45.0	4.60	685.78	0.62	91.81	91.0-92.0	0.06	742.31	0.01	99.38
45.0-46.0	4.17	689.96	0.56	92.37	92.0-93.0	0.06	742.37	0.01	99.39
46.0-47.0	3.80	693.76	0.51	92.88	93.0-94.0	0.05	742.42	0.01	99.40

IES Indoor Report


Photometric Filename:TR09-09-XX-01 2700K RA90 60D.IES

Zonal Flux Tabulation - (Cont.)

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.04	742.46	0.01	99.40	141.0-142.0	0.10	743.68	0.01	99.57
95.0-96.0	0.04	742.50	0.00	99.41	142.0-143.0	0.10	743.78	0.01	99.58
96.0-97.0	0.03	742.53	0.00	99.41	143.0-144.0	0.10	743.88	0.01	99.59
97.0-98.0	0.03	742.56	0.00	99.42	144.0-145.0	0.11	743.99	0.01	99.61
98.0-99.0	0.02	742.58	0.00	99.42	145.0-146.0	0.11	744.10	0.01	99.62
99.0-100.0	0.02	742.60	0.00	99.42	146.0-147.0	0.11	744.21	0.01	99.64
100.0-101.0	0.02	742.62	0.00	99.42	147.0-148.0	0.11	744.33	0.02	99.65
101.0-102.0	0.01	742.63	0.00	99.43	148.0-149.0	0.12	744.44	0.02	99.67
102.0-103.0	0.01	742.64	0.00	99.43	149.0-150.0	0.12	744.56	0.02	99.68
103.0-104.0	0.01	742.65	0.00	99.43	150.0-151.0	0.12	744.68	0.02	99.70
104.0-105.0	0.01	742.66	0.00	99.43	151.0-152.0	0.12	744.79	0.02	99.72
105.0-106.0	0.01	742.66	0.00	99.43	152.0-153.0	0.12	744.91	0.02	99.73
106.0-107.0	0.00	742.67	0.00	99.43	153.0-154.0	0.12	745.03	0.02	99.75
107.0-108.0	0.00	742.67	0.00	99.43	154.0-155.0	0.12	745.15	0.02	99.76
108.0-109.0	0.00	742.67	0.00	99.43	155.0-156.0	0.12	745.26	0.02	99.78
109.0-110.0	0.00	742.68	0.00	99.43	156.0-157.0	0.11	745.38	0.02	99.79
110.0-111.0	0.00	742.68	0.00	99.43	157.0-158.0	0.11	745.49	0.01	99.81
111.0-112.0	0.00	742.68	0.00	99.43	158.0-159.0	0.11	745.60	0.01	99.82
112.0-113.0	0.00	742.68	0.00	99.43	159.0-160.0	0.11	745.70	0.01	99.84
113.0-114.0	0.00	742.68	0.00	99.43	160.0-161.0	0.10	745.81	0.01	99.85
114.0-115.0	0.00	742.68	0.00	99.43	161.0-162.0	0.10	745.91	0.01	99.86
115.0-116.0	0.00	742.68	0.00	99.43	162.0-163.0	0.10	746.01	0.01	99.88
116.0-117.0	0.00	742.68	0.00	99.43	163.0-164.0	0.09	746.10	0.01	99.89
117.0-118.0	0.00	742.68	0.00	99.43	164.0-165.0	0.09	746.20	0.01	99.90
118.0-119.0	0.00	742.68	0.00	99.43	165.0-166.0	0.09	746.28	0.01	99.91
119.0-120.0	0.00	742.68	0.00	99.43	166.0-167.0	0.08	746.36	0.01	99.93
120.0-121.0	0.00	742.68	0.00	99.43	167.0-168.0	0.08	746.44	0.01	99.94
121.0-122.0	0.00	742.68	0.00	99.43	168.0-169.0	0.07	746.51	0.01	99.95
122.0-123.0	0.00	742.68	0.00	99.43	169.0-170.0	0.07	746.58	0.01	99.95
123.0-124.0	0.01	742.68	0.00	99.43	170.0-171.0	0.06	746.64	0.01	99.96
124.0-125.0	0.01	742.69	0.00	99.43	171.0-172.0	0.06	746.70	0.01	99.97
125.0-126.0	0.02	742.71	0.00	99.44	172.0-173.0	0.05	746.75	0.01	99.98
126.0-127.0	0.02	742.73	0.00	99.44	173.0-174.0	0.04	746.79	0.01	99.98
127.0-128.0	0.03	742.76	0.00	99.44	174.0-175.0	0.04	746.83	0.01	99.99
128.0-129.0	0.03	742.79	0.00	99.45	175.0-176.0	0.03	746.86	0.00	99.99
129.0-130.0	0.04	742.82	0.00	99.45	176.0-177.0	0.02	746.89	0.00	100.00
130.0-131.0	0.04	742.87	0.01	99.46	177.0-178.0	0.02	746.90	0.00	100.00
131.0-132.0	0.05	742.91	0.01	99.46	178.0-179.0	0.01	746.91	0.00	100.00
132.0-133.0	0.05	742.97	0.01	99.47	179.0-180.0	0.00	746.92	0.00	100.00
133.0-134.0	0.06	743.03	0.01	99.48					
134.0-135.0	0.06	743.09	0.01	99.49					
135.0-136.0	0.07	743.16	0.01	99.50					
136.0-137.0	0.07	743.24	0.01	99.51					
137.0-138.0	0.08	743.32	0.01	99.52					
138.0-139.0	0.08	743.40	0.01	99.53					
139.0-140.0	0.09	743.49	0.01	99.54					
140.0-141.0	0.09	743.58	0.01	99.55					

Rectangle ISO Lighting Intensity Diagram


Lum. Name: TR09-09-XX-01 2700K RA90 60DTR09-09-XX-01 2700K RA90	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/22

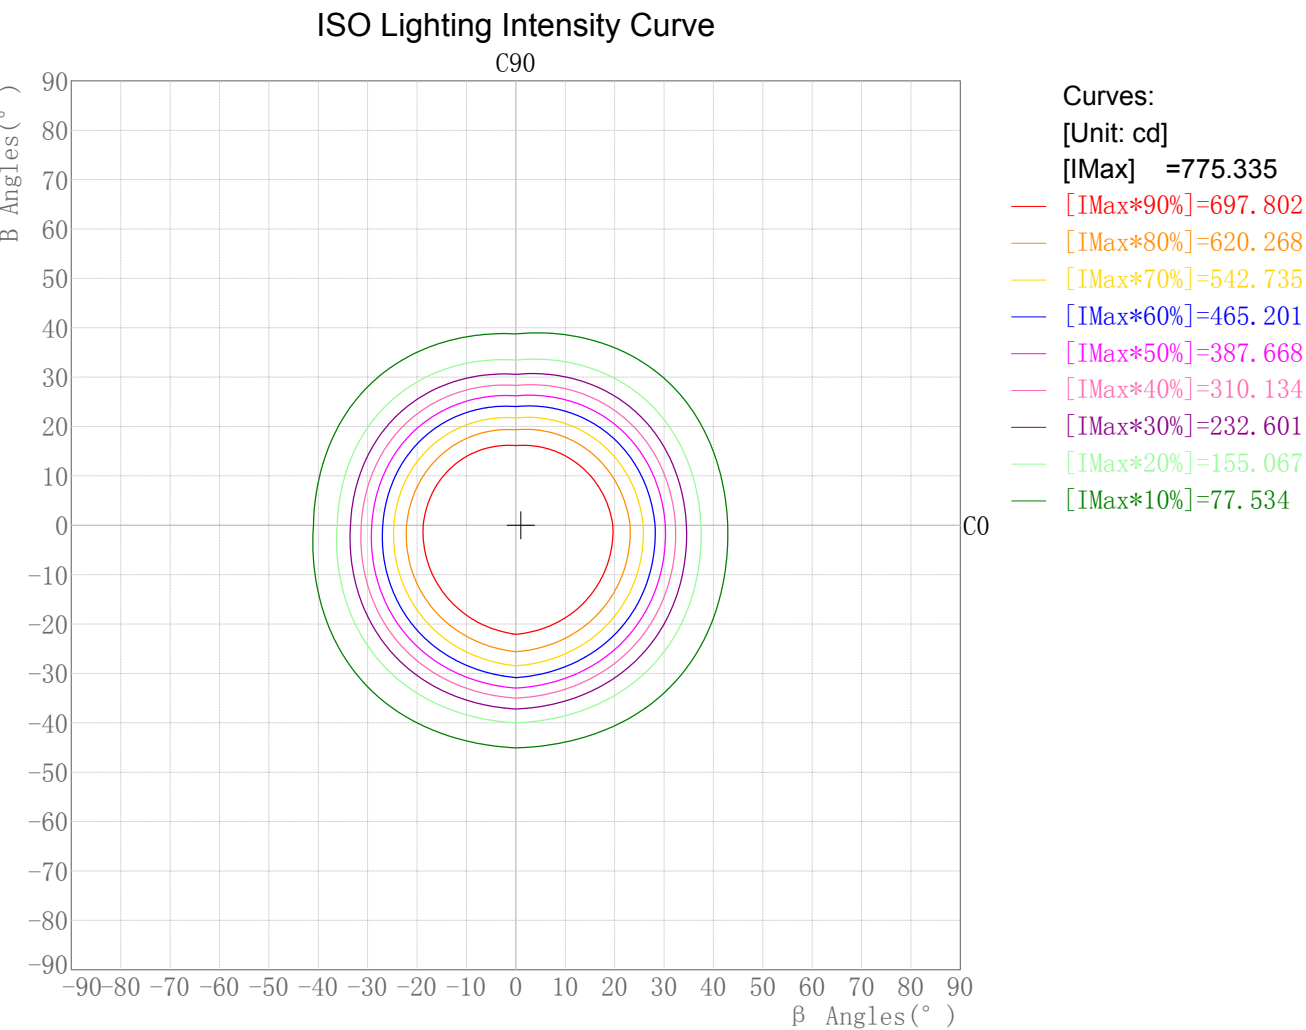

Plane ISO-Illuminance Diagram

Lum. Name:TR09-09-XX-01 2700K RA90 60DTR09-09-XX-01 2700K RA90	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/22

Plane ISO-Illuminance Curve

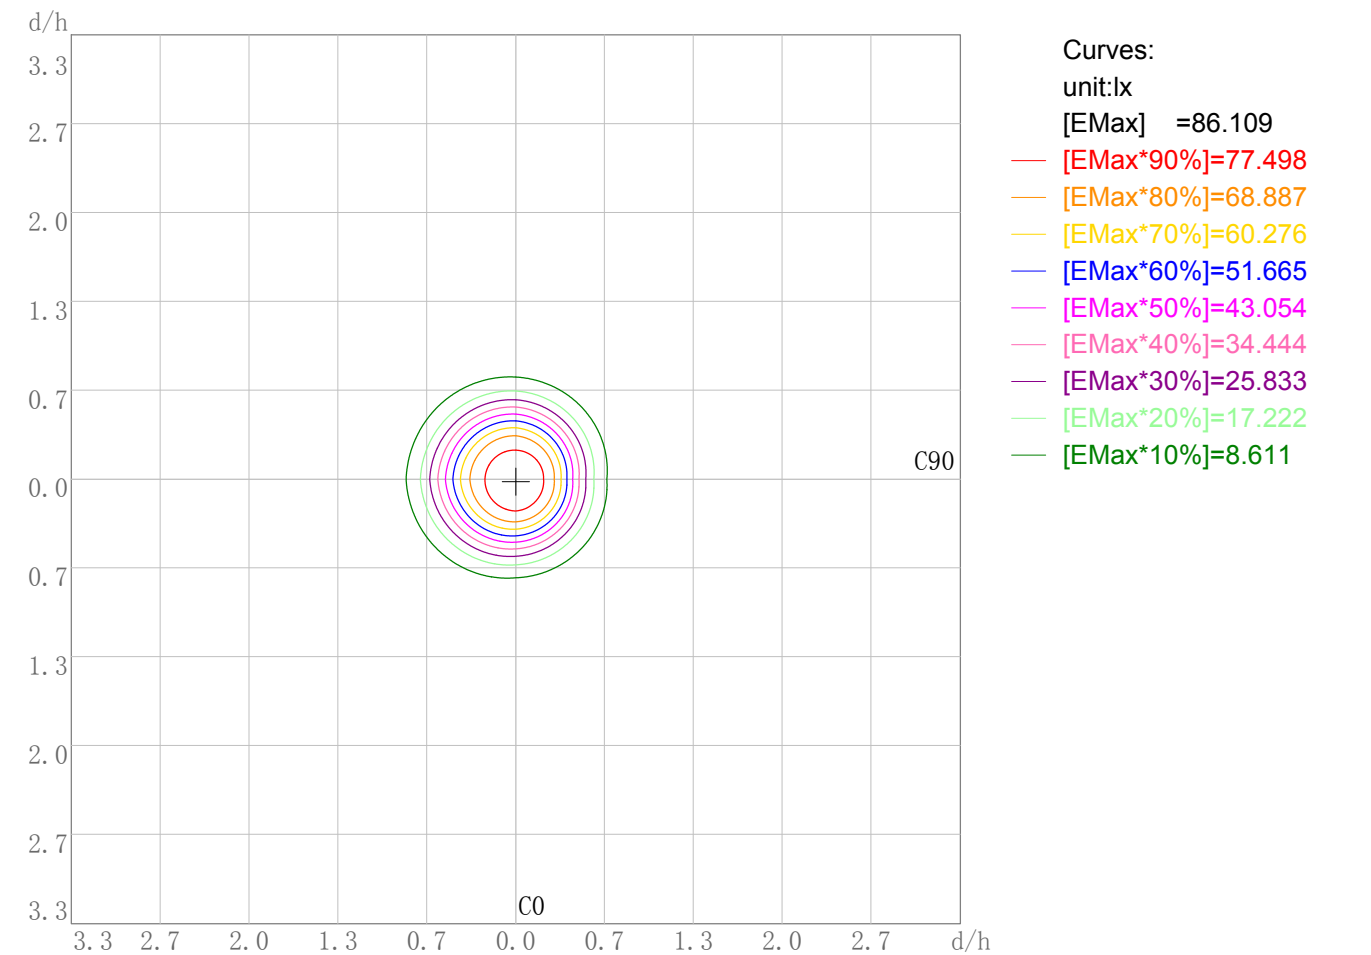


IES Indoor Report

Photometric Filename:TR09-09-XX-01 2700K RA90 60D.IES

3D Plane ISO Illuminance Diagram

Lum. Name: TR09-09-XX-01 2700K RA90 60D	TR09-09-XX-01 2700K RA90	Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd		Test Machine:GON-2000	Test Date: 2021/10/22

3D Plane Illuminance Modal

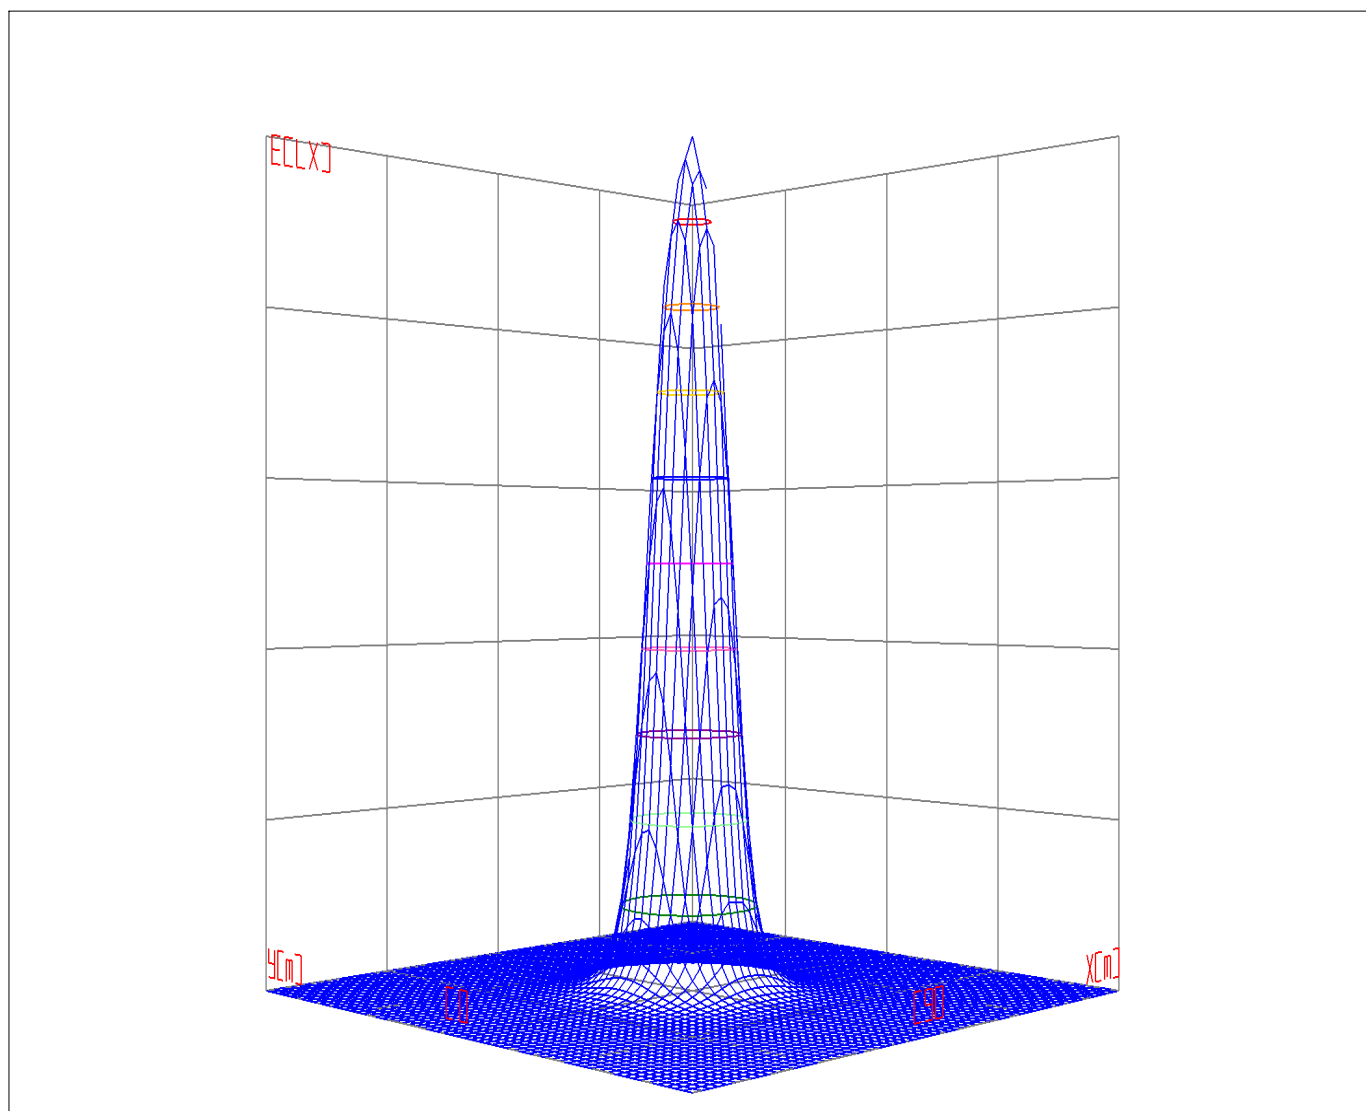


Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0

Space ISO Illuminance Diagram

Lum. Name:TR09-09-XX-01 2700K RA90 60DTR09-09-XX-01 2700K RA90	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2021/10/22


Space ISO Illuminance Curve

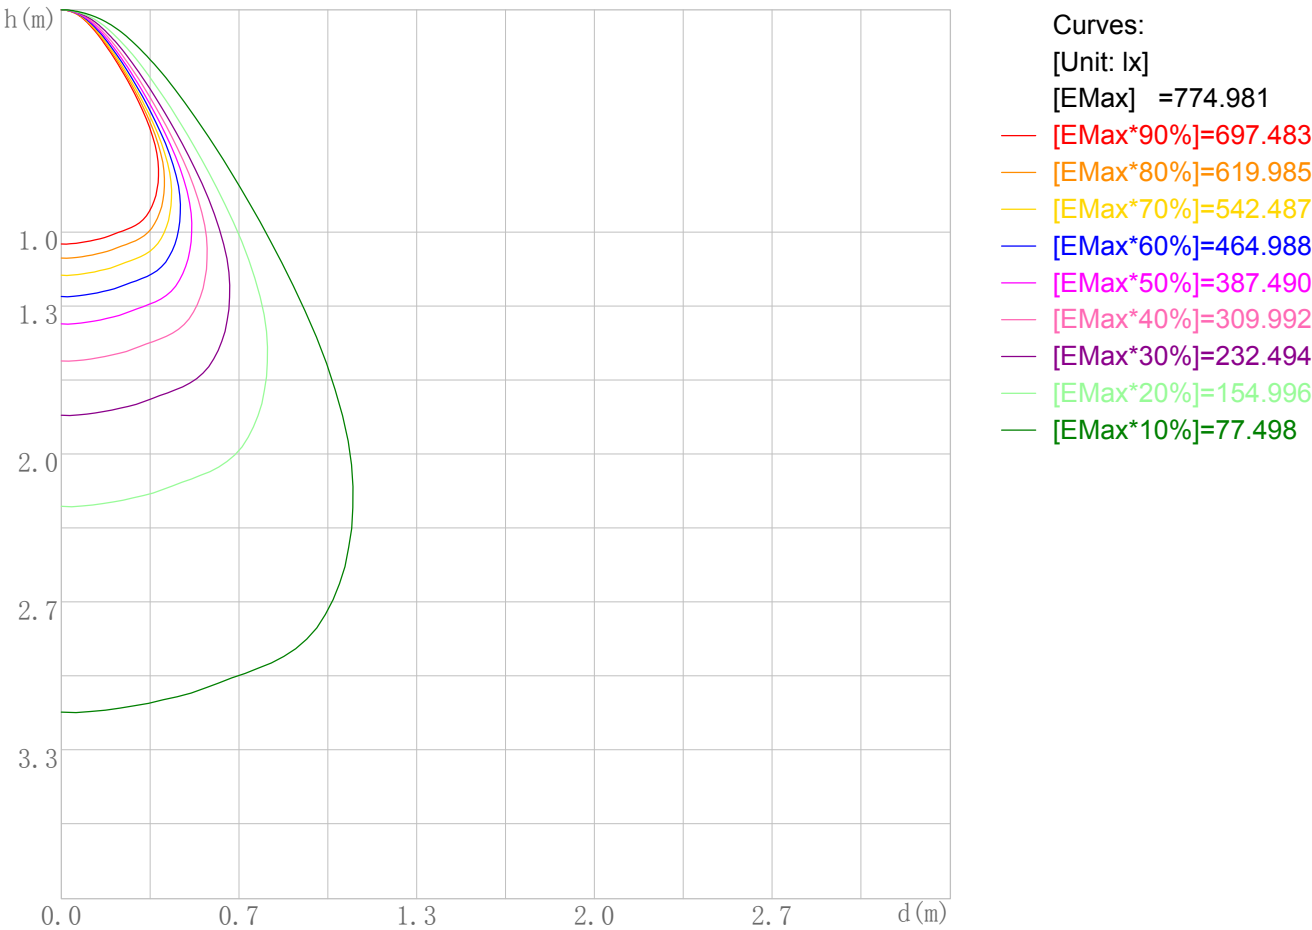

Space Plane Maximum Illuminance and @Angle:774.98lx,1.0deg
Plane Maximum Lighting Intensity and @Angle:775.335cd,0deg

Illuminance-Distance Diagram

Lum. Name:TR09-09-XX-01 2700K RA90 60DTR09-09-XX-01 2700K RA90	Lum. Catalog:LED	Test ID:01
Lamp Name:	Lamp Catalog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2021/10/22

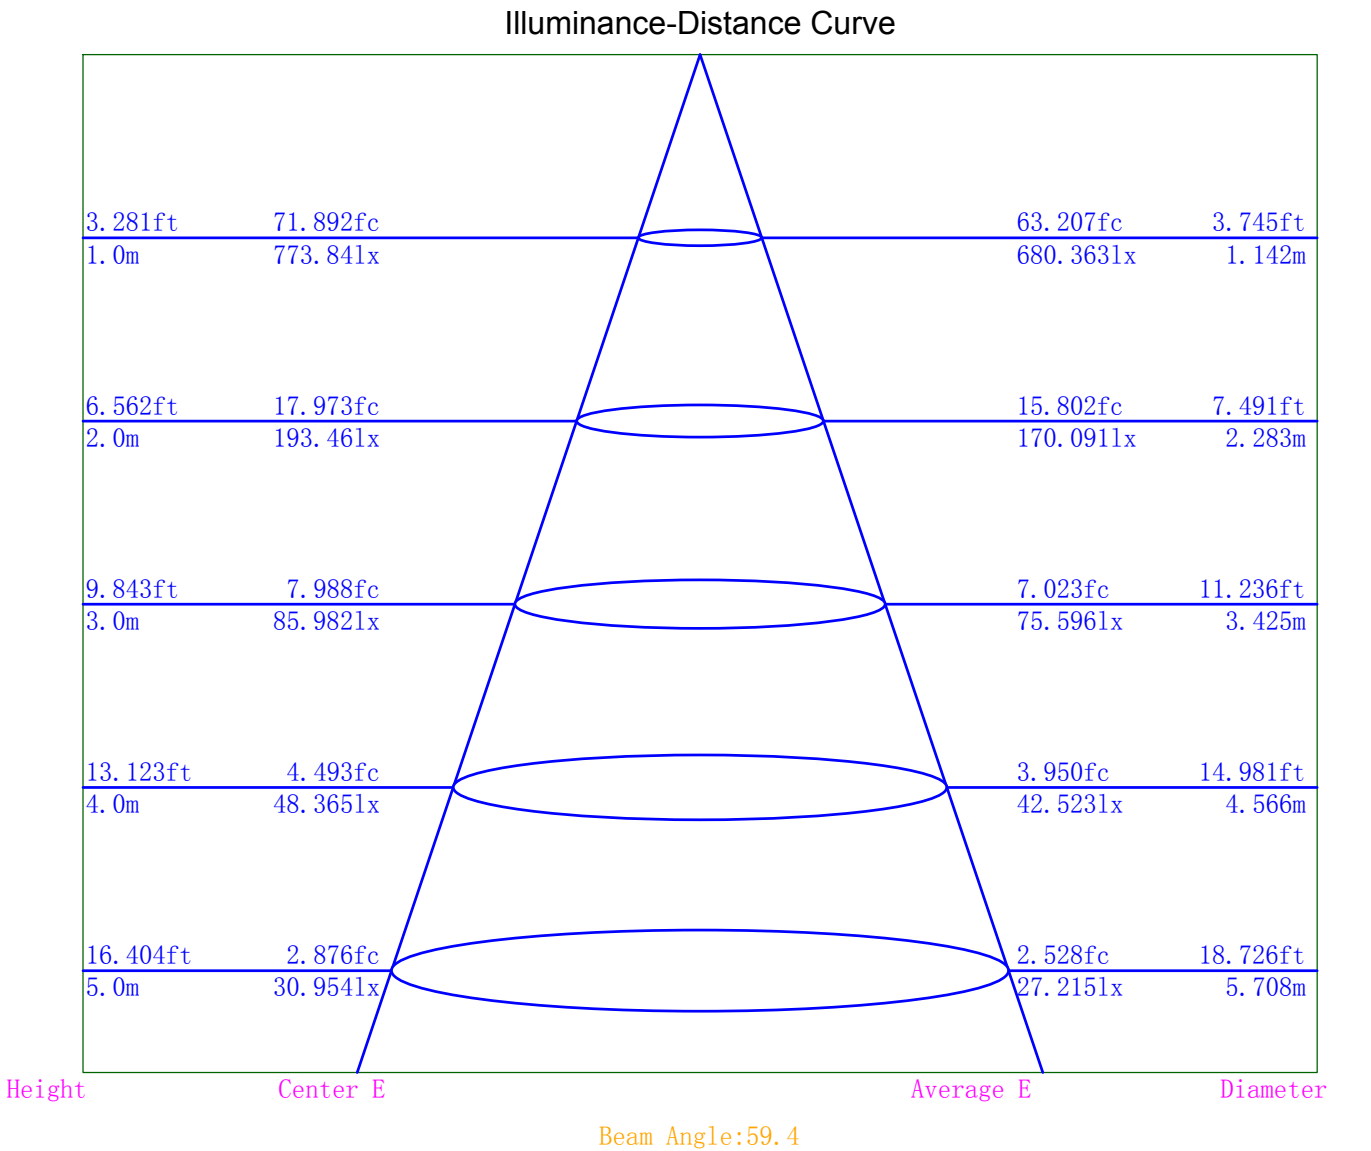

Indoor Luminance Limiting Curves

Lum. Name: TR09-09-XX-01 2700K RA90 60DTR09-09-XX-01 2700K RA90	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/22


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	18942	12753	9379	7423	6404	5772	5174	4720	4424
C90	12306	8622	6474	5202	4425	3558	2662	1427	954


Luminance Limiting Curve

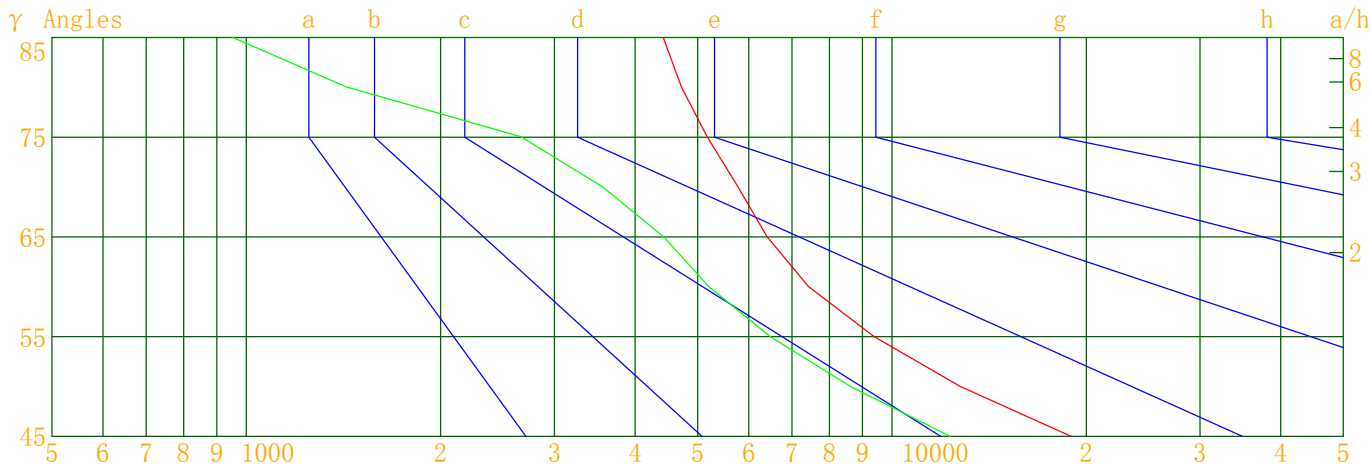

Luminous Size: Length(m)=-0.076 Width(m)=-0.076 Height(m)=0.000 Area(m^2)=0.004536
Luminous Type: Without Luminous Side
Luminous Curves: C0-C180 Color: C90-C270 Color:

Indoor Budgetary Estimate Table

Lum. Name: TR09-09-XX-01 2700K RA90 60DTR09-09-XX-01 2700K RA90	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/22

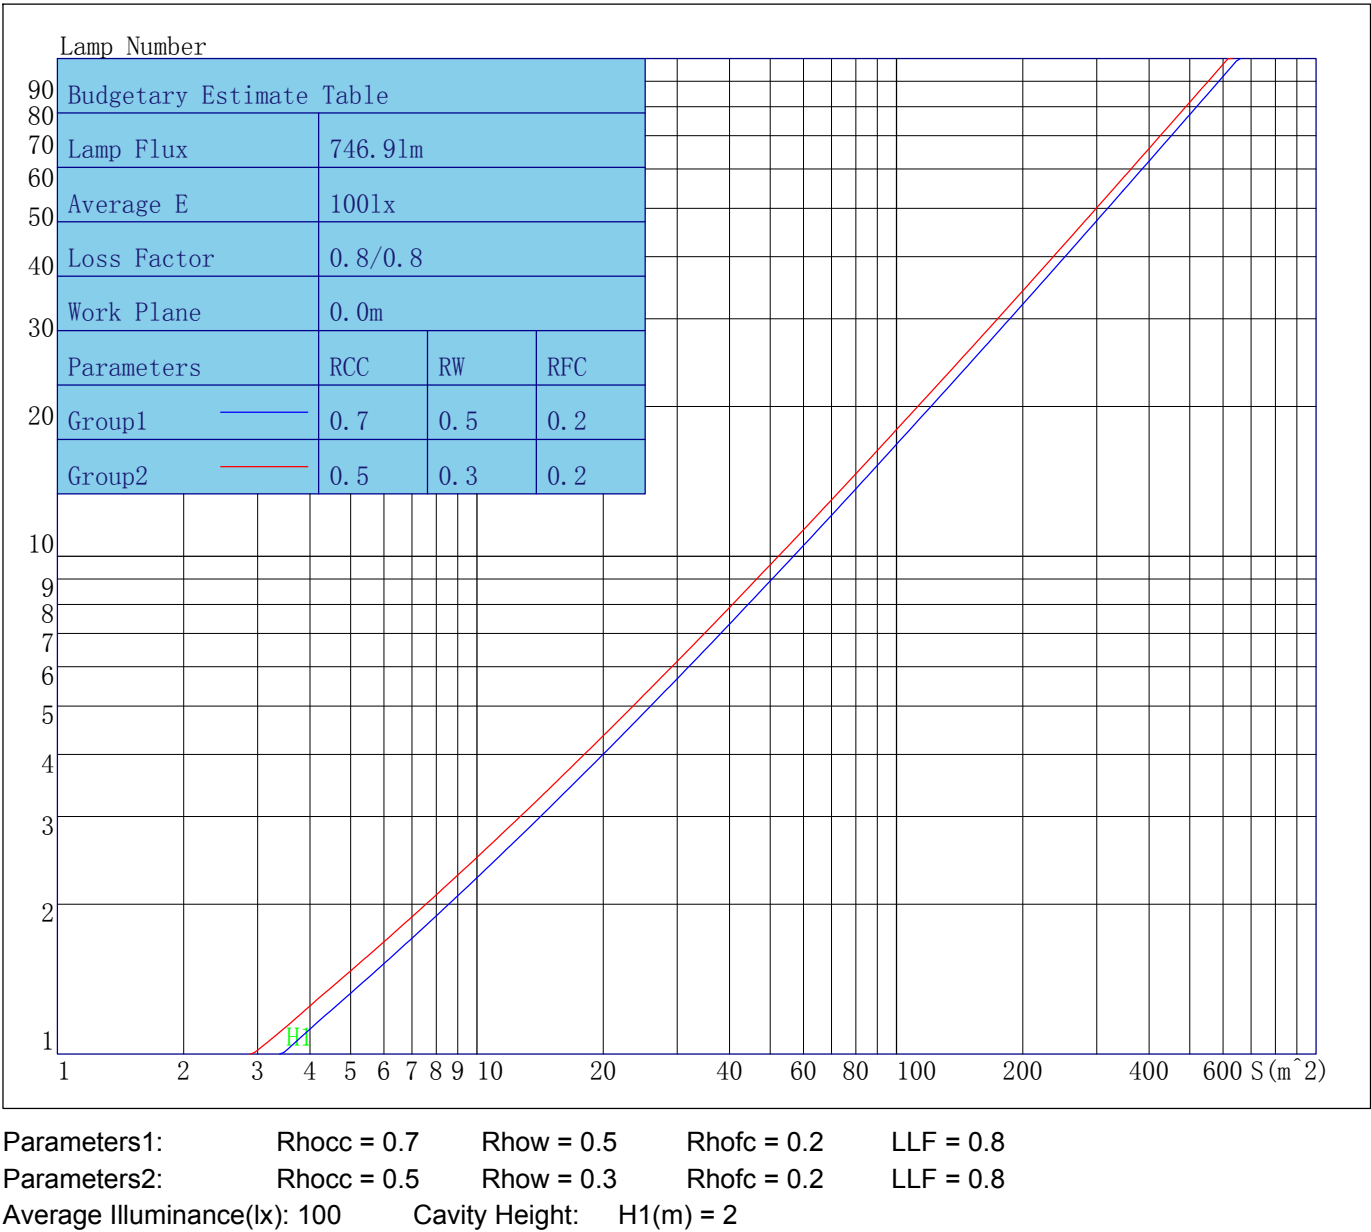

Indoor Coefficient of Utilization Table

Lum. Name: TR09-09-XX-01 2700K RA90 60DTR09-09-XX-01 2700K RA90	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/22

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85
3	101	95	89	85	99	93	88	85	90	86	83	88	85	82	86	83	80	79
4	96	88	82	78	94	87	82	77	85	80	76	83	79	76	81	77	75	73
5	91	82	76	72	89	81	76	71	79	75	71	78	73	70	76	72	69	68
6	86	77	71	67	85	76	71	66	75	70	66	73	69	65	72	68	65	63
7	82	72	66	62	81	72	66	62	70	65	61	69	64	61	68	64	61	59
8	78	68	62	58	77	68	62	58	66	61	57	65	61	57	64	60	57	55
9	74	64	58	54	73	64	58	54	63	58	54	62	57	54	61	57	53	52
10	71	61	55	51	70	60	55	51	60	54	51	59	54	51	58	54	50	49

Unified Glare Rating Table

Lum. Name: TR09-09-XX-01 2700K RA90 60DTR09-09-XX-01 2700K RA90	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/22

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size	Vewed crosswise					Vewed endwise				
X=2H Y=2H	18.8	19.9	19.2	20.2	20.6	16.2	17.3	16.6	17.6	17.9
	19.0	19.9	19.4	20.3	20.7	16.3	17.3	16.7	17.6	18.0
	19.0	20.0	19.5	20.3	20.7	16.3	17.2	16.8	17.6	18.0
	19.1	19.9	19.5	20.3	20.7	16.3	17.1	16.7	17.5	17.9
	19.1	19.9	19.5	20.3	20.7	16.2	17.0	16.7	17.4	17.9
	19.1	19.8	19.5	20.2	20.7	16.2	17.0	16.6	17.4	17.8
X=4H Y=2H	18.7	19.6	19.1	20.0	20.4	16.2	17.1	16.6	17.4	17.8
	19.0	19.7	19.4	20.2	20.6	16.4	17.2	16.8	17.6	18.0
	19.1	19.8	19.6	20.2	20.7	16.5	17.2	16.9	17.6	18.1
	19.2	19.8	19.7	20.3	20.8	16.5	17.1	16.9	17.5	18.0
	19.2	19.8	19.7	20.3	20.8	16.4	17.0	16.9	17.4	17.9
	19.3	19.8	19.8	20.3	20.7	16.4	16.9	16.9	17.4	17.9
X=8H Y=4H	19.1	19.6	19.5	20.1	20.6	16.5	17.0	16.9	17.5	18.0
	19.2	19.7	19.8	20.2	20.8	16.5	16.9	17.0	17.4	18.0
	19.3	19.7	19.8	20.2	20.8	16.4	16.9	17.0	17.4	17.9
	19.4	19.7	19.9	20.2	20.8	16.4	16.8	16.9	17.3	17.9
X=12H Y=4H	19.0	19.5	19.5	20.0	20.5	16.4	16.9	16.9	17.4	17.9
	19.2	19.6	19.8	20.1	20.7	16.4	16.9	17.0	17.3	17.9
	19.3	19.7	19.8	20.2	20.8	16.4	16.8	17.0	17.3	17.9
Variations with the objerver position at spacings										
S=1.0H	0.5/-0.5					0.9/-1.1				
S=1.5H	0.8/-1.0					1.5/-1.9				
S=2.0H	1.2/-1.3					2.0/-2.6				
Reduced UGR Table:										
Nordic Standard Table:	BK0					BK0				
Correction Value	0.8					0.7				

o the CIE Pub.117, data has been corrected, refers to the lamp’s lumens 8.2flm.

IES Indoor Report

Photometric Filename:TR09-09-XX-01 2700K RA90 60D.IES

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	773.84	773.84	773.84	773.84
γ 1.0	775.34	767.72	774.87	770.71
γ 2.0	773.96	765.82	774.06	771.95
γ 3.0	772.91	763.74	773.12	771.77
γ 4.0	770.88	762.76	770.62	771.90
γ 5.0	768.77	760.68	767.83	769.82
γ 6.0	767.07	756.23	762.77	769.14
γ 7.0	764.10	754.09	759.95	766.22
γ 8.0	762.51	750.78	758.29	764.27
γ 9.0	760.45	749.47	756.66	761.39
γ 10.0	756.06	747.37	756.81	759.93
γ 11.0	752.11	745.75	758.72	758.54
γ 12.0	748.47	742.41	757.65	756.66
γ 13.0	746.95	737.56	758.65	754.44
γ 14.0	744.44	728.60	755.34	751.59
γ 15.0	742.81	717.04	749.67	748.91
γ 16.0	738.54	700.43	740.31	746.74
γ 17.0	732.30	680.69	728.51	744.19
γ 18.0	722.54	658.14	712.00	740.23
γ 19.0	709.46	630.22	693.10	733.88
γ 20.0	691.14	600.35	672.48	724.82
γ 21.0	671.01	568.16	649.20	714.48
γ 22.0	648.11	534.16	623.73	699.33
γ 23.0	623.76	500.14	595.71	680.72
γ 24.0	595.04	466.51	566.28	657.95
γ 25.0	567.21	431.08	532.37	635.42
γ 26.0	535.72	395.44	496.98	609.77
γ 27.0	504.42	358.53	463.44	583.97
γ 28.0	471.69	321.98	429.44	555.80
γ 29.0	436.03	285.64	393.71	527.25
γ 30.0	397.96	250.93	357.98	493.17
γ 31.0	359.11	218.26	321.08	459.93
γ 32.0	321.72	189.66	284.40	424.17
γ 33.0	285.04	164.47	248.75	386.25
γ 34.0	249.38	142.93	215.16	347.81
γ 35.0	217.38	124.50	184.83	309.87
γ 36.0	189.26	108.99	158.85	273.66
γ 37.0	164.95	95.82	136.70	239.00
γ 38.0	143.89	84.78	117.81	207.62
γ 39.0	125.36	75.17	101.80	179.12
γ 40.0	110.06	66.64	88.35	154.65
γ 41.0	96.95	59.16	77.28	133.27
γ 42.0	85.89	52.81	67.88	115.80
γ 43.0	76.46	47.71	59.81	101.07
γ 44.0	68.12	43.28	52.94	88.82
γ 45.0	60.76	39.48	47.01	78.15
γ 46.0	54.51	35.97	41.95	69.09

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	49.23	32.74	37.62	61.24
γ 48.0	44.75	29.87	33.90	54.45
γ 49.0	40.73	27.37	30.68	48.55
γ 50.0	37.19	25.14	27.87	43.53
γ 51.0	34.08	23.10	25.44	39.26
γ 52.0	31.28	21.23	23.24	35.53
γ 53.0	28.79	19.62	21.34	32.32
γ 54.0	26.47	18.15	19.67	29.53
γ 55.0	24.40	16.85	18.21	27.09
γ 56.0	22.48	15.59	16.89	24.99
γ 57.0	20.83	14.51	15.76	23.11
γ 58.0	19.35	13.51	14.75	21.39
γ 59.0	18.00	12.62	13.85	19.91
γ 60.0	16.84	11.80	13.03	18.54
γ 61.0	15.75	11.04	12.32	17.38
γ 62.0	14.79	10.33	11.63	16.30
γ 63.0	13.87	9.66	11.01	15.38
γ 64.0	13.05	9.07	10.43	14.52
γ 65.0	12.28	8.48	9.85	13.80
γ 66.0	11.56	7.93	9.31	13.07
γ 67.0	10.87	7.31	8.78	12.44
γ 68.0	10.21	6.67	8.28	11.81
γ 69.0	9.56	6.07	7.79	11.24
γ 70.0	8.95	5.52	7.30	10.64
γ 71.0	8.36	5.00	6.78	10.09
γ 72.0	7.74	4.53	6.23	9.55
γ 73.0	7.10	4.01	5.70	9.02
γ 74.0	6.56	3.58	5.21	8.51
γ 75.0	6.07	3.13	4.79	7.94
γ 76.0	5.57	2.70	4.38	7.38
γ 77.0	5.06	2.28	3.97	6.80
γ 78.0	4.57	1.75	3.56	6.28
γ 79.0	4.13	1.44	3.14	5.82
γ 80.0	3.72	1.12	2.74	5.37
γ 81.0	3.29	0.91	2.30	4.91
γ 82.0	2.82	0.71	1.79	4.45
γ 83.0	2.35	0.57	1.50	4.01
γ 84.0	2.02	0.47	1.24	3.61
γ 85.0	1.75	0.38	0.97	3.14
γ 86.0	1.51	0.30	0.76	2.62
γ 87.0	1.32	0.23	0.63	2.26
γ 88.0	1.19	0.16	0.52	1.96
γ 89.0	1.06	0.10	0.43	1.67
γ 90.0	0.96	0.04	0.36	1.45
γ 91.0	0.88	0.00	0.29	1.26
γ 92.0	0.79	0.00	0.23	1.15
γ 93.0	0.71	0.00	0.17	1.01

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	0.62	0.00	0.11	0.93
γ 95.0	0.55	0.00	0.05	0.85
γ 96.0	0.47	0.00	0.01	0.76
γ 97.0	0.41	0.00	0.00	0.69
γ 98.0	0.34	0.00	0.00	0.61
γ 99.0	0.28	0.00	0.00	0.54
γ 100.0	0.23	0.00	0.00	0.48
γ 101.0	0.18	0.00	0.00	0.42
γ 102.0	0.12	0.00	0.00	0.36
γ 103.0	0.08	0.00	0.00	0.31
γ 104.0	0.02	0.00	0.00	0.26
γ 105.0	0.00	0.00	0.00	0.21
γ 106.0	0.00	0.00	0.00	0.17
γ 107.0	0.00	0.00	0.00	0.14
γ 108.0	0.00	0.00	0.00	0.10
γ 109.0	0.00	0.00	0.00	0.06
γ 110.0	0.00	0.00	0.00	0.03
γ 111.0	0.00	0.00	0.00	0.01
γ 112.0	0.00	0.00	0.00	0.00
γ 113.0	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.03
γ 122.0	0.00	0.00	0.00	0.05
γ 123.0	0.02	0.00	0.06	0.08
γ 124.0	0.05	0.03	0.12	0.12
γ 125.0	0.11	0.10	0.19	0.16
γ 126.0	0.17	0.17	0.25	0.19
γ 127.0	0.23	0.25	0.32	0.26
γ 128.0	0.29	0.32	0.39	0.31
γ 129.0	0.36	0.40	0.47	0.37
γ 130.0	0.42	0.48	0.55	0.44
γ 131.0	0.50	0.57	0.64	0.49
γ 132.0	0.56	0.65	0.72	0.56
γ 133.0	0.65	0.74	0.81	0.63
γ 134.0	0.72	0.83	0.90	0.71
γ 135.0	0.81	0.91	0.98	0.78
γ 136.0	0.88	1.00	1.07	0.85
γ 137.0	0.96	1.09	1.15	0.93
γ 138.0	1.06	1.17	1.24	1.01
γ 139.0	1.13	1.26	1.34	1.09
γ 140.0	1.22	1.35	1.42	1.15

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	1.31	1.44	1.50	1.24
γ 142.0	1.40	1.53	1.60	1.33
γ 143.0	1.48	1.62	1.69	1.41
γ 144.0	1.57	1.71	1.78	1.49
γ 145.0	1.65	1.79	1.88	1.58
γ 146.0	1.75	1.87	1.96	1.65
γ 147.0	1.83	1.96	2.04	1.74
γ 148.0	1.92	2.04	2.13	1.82
γ 149.0	2.00	2.11	2.21	1.90
γ 150.0	2.09	2.18	2.29	1.99
γ 151.0	2.16	2.25	2.37	2.07
γ 152.0	2.25	2.32	2.44	2.14
γ 153.0	2.32	2.39	2.51	2.22
γ 154.0	2.39	2.45	2.59	2.30
γ 155.0	2.46	2.53	2.66	2.37
γ 156.0	2.53	2.58	2.72	2.44
γ 157.0	2.61	2.64	2.79	2.51
γ 158.0	2.67	2.70	2.84	2.58
γ 159.0	2.73	2.77	2.91	2.64
γ 160.0	2.82	2.84	2.97	2.70
γ 161.0	2.87	2.90	3.03	2.77
γ 162.0	2.94	2.96	3.08	2.83
γ 163.0	3.01	3.03	3.14	2.89
γ 164.0	3.07	3.09	3.19	2.94
γ 165.0	3.13	3.14	3.25	3.01
γ 166.0	3.20	3.21	3.30	3.07
γ 167.0	3.25	3.26	3.35	3.13
γ 168.0	3.32	3.31	3.40	3.17
γ 169.0	3.37	3.35	3.45	3.24
γ 170.0	3.41	3.40	3.48	3.29
γ 171.0	3.46	3.44	3.51	3.34
γ 172.0	3.51	3.46	3.55	3.39
γ 173.0	3.54	3.50	3.59	3.43
γ 174.0	3.58	3.53	3.62	3.48
γ 175.0	3.62	3.55	3.63	3.51
γ 176.0	3.63	3.58	3.65	3.55
γ 177.0	3.66	3.59	3.66	3.59
γ 178.0	3.67	3.59	3.68	3.62
γ 179.0	3.68	3.59	3.69	3.63
γ 180.0	3.66	3.66	3.66	3.66