


6W 9W  
POWER



Black / White



Specular  
Black  
White  
Golden

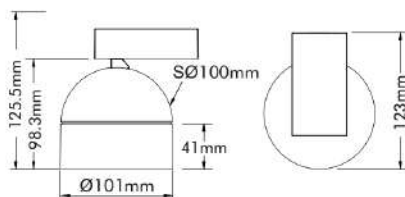

## Packaging

|                     |                              |
|---------------------|------------------------------|
| Box Dimensions      | L150 x W150 x H165mm         |
| Box Net Weight      | 0.687Kg                      |
| Box Gross Weight    | 0.791Kg                      |
| Carton Dimensions   | L465 x W465 x H350 mm/18 PCS |
| Carton Net Weight   | 12.37Kg                      |
| Carton Gross Weight | 15.05Kg                      |

## FEATURES

- Maximum 45° vertical rotation can be created on the main body.
- Optic interchangeable.
- Power selectable.
- Flicker-free internal driver.
- Compatible with leading and trailing edge phase cut dimmers.
- 5-year guarantee.

## Technical Data

|                        |                                           |
|------------------------|-------------------------------------------|
| Input Voltage/Hz       | AC200-240V 50/60Hz                        |
| Output Voltage/Current | DC32.5V/210mA(8.2W)   DC31.5V/145mA(6W)   |
| Power                  | 8.2W   6W                                 |
| Rated Input Current    | 0.041A(8.2W)   0.030A(6W)                 |
| THD                    | <25%(8.2W)   <35%(6W)                     |
| PF value               | >0.9(8.2W)   >0.8(6W)                     |
| Ingress Protection     | IP20                                      |
| Operating Temperature  | -10—40°C                                  |
| Dimmability            | Triac dimmable with <b>DIMMATE</b> driver |

## Optical Data

|                                |                   |
|--------------------------------|-------------------|
| LED Brand                      | Bridgelux COB LED |
| CRI                            | Ra> 90            |
| Beam Angle                     | 24°/28°/36°/60°   |
| Colour temperatures            | 1800K-3000K       |
| System luminous efficacy up to | 68lm/W            |



RoHS CE



| Model         | CCT         |    | Beam Angle | Lumen | Efficacy |      | Beam Angle | Lumen | Efficacy |
|---------------|-------------|----|------------|-------|----------|------|------------|-------|----------|
| WL02-09-DW-04 | 1800K-3000K | 6W | 24°        | 343lm | 59lm/W   | 8.2W | 24°        | 530lm | 64lm/W   |
|               |             |    | 28°        | 357lm | 61lm/W   |      | 28°        | 553lm | 66lm/W   |
|               |             |    | 36°        | 362lm | 62lm/W   |      | 36°        | 565lm | 68lm/W   |
|               |             |    | 60°        | 333lm | 57lm/W   |      | 60°        | 514lm | 62lm/W   |

Note: The light efficiency will be effected by the black anti-glare ring; the color temperature will be effected by the golden anti-glare ring.

## ECLIPSE CONSEIL

Siège : +33 (1) 79 30 48 19- Showroom Paris : +33 (1) 78 95 50 14 - Mob : +33 (6) 87 82 12 04  
Siège social : 7 rue Prudent Neel 92500 Rueil-Malmaison - Showroom : 1 rue Dulong 75017 PARIS