



Indoor Luminaire Photometric Data

Description Information

Luminary Name:WL02-06-XX-02 3000K RA90 36D		Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Date: 2021/10/26
Manufacture: Shenzhen Norming Lighting Co., Ltd		Shld.Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department		Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.038m*0.038m*0.000m		Lum. Area (m2):0.001	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=1.0	Temp. (°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 555.780	Luminary Flux(lm): 555.778	Field Angle(10%Imax): 57.9(°)	
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 553.989lm 99.68%	
Rated Voltage(V):	Luminary EER(lm/W): 89.181	Up Lumens&Percent: 1.788lm 0.32%	
Tested Power(W): 6.232	Max. Candela(cd): 1090.740	S/MH: C0_a180=0.748 C90_270=0.734	
Lamps' Inside: 1	Max Cand@Ang. (°): C=90.0 γ=7.0	CIE Type: Semi-Direct	
Tested Electrics (V, A, pf):240.8, 0.030, 0.844	Beam Angle(50%Imax): 42.2(°)	ErP ϕ use(90°): 552.067lm	
Lamp Size (W*L*H):0.038m*0.038m*0.000m	Left=-25.1°, Right=17.1°	IRF(%): 534.362	

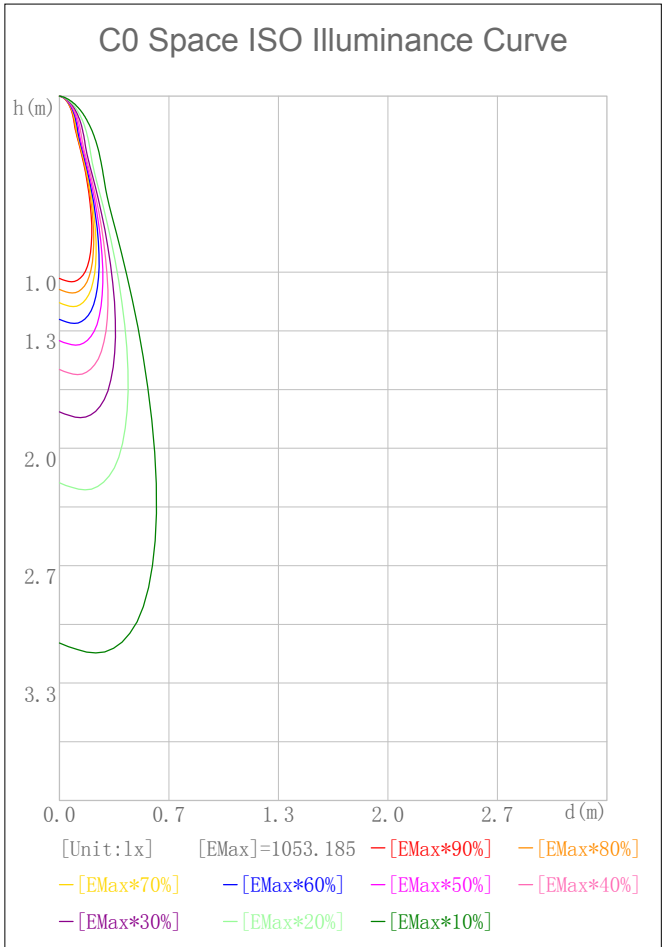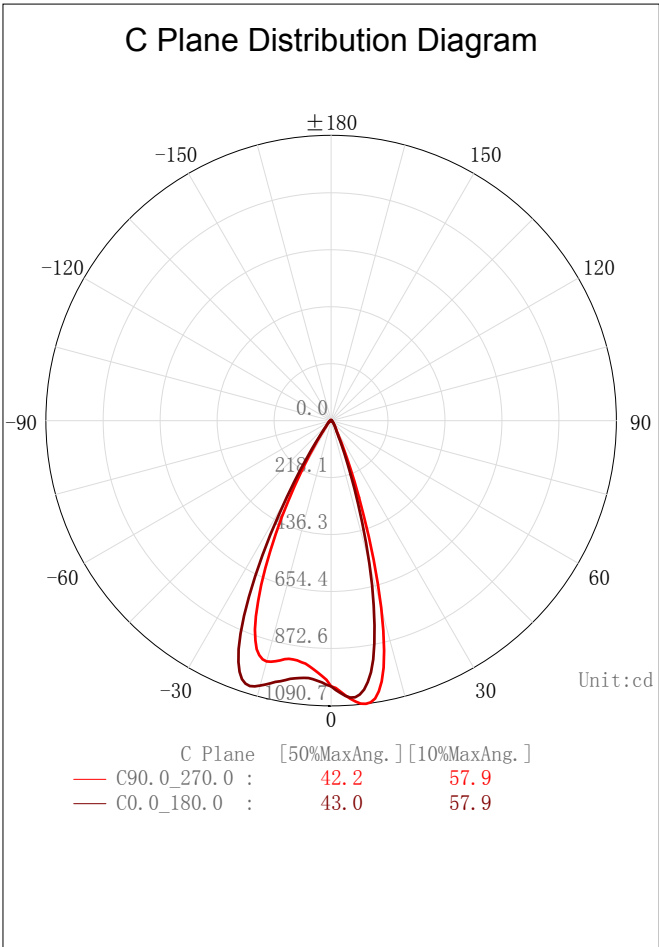

2D Plane Light Intensity Distribution Curve


Lum. Name: WL02-06-XX-02 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/26

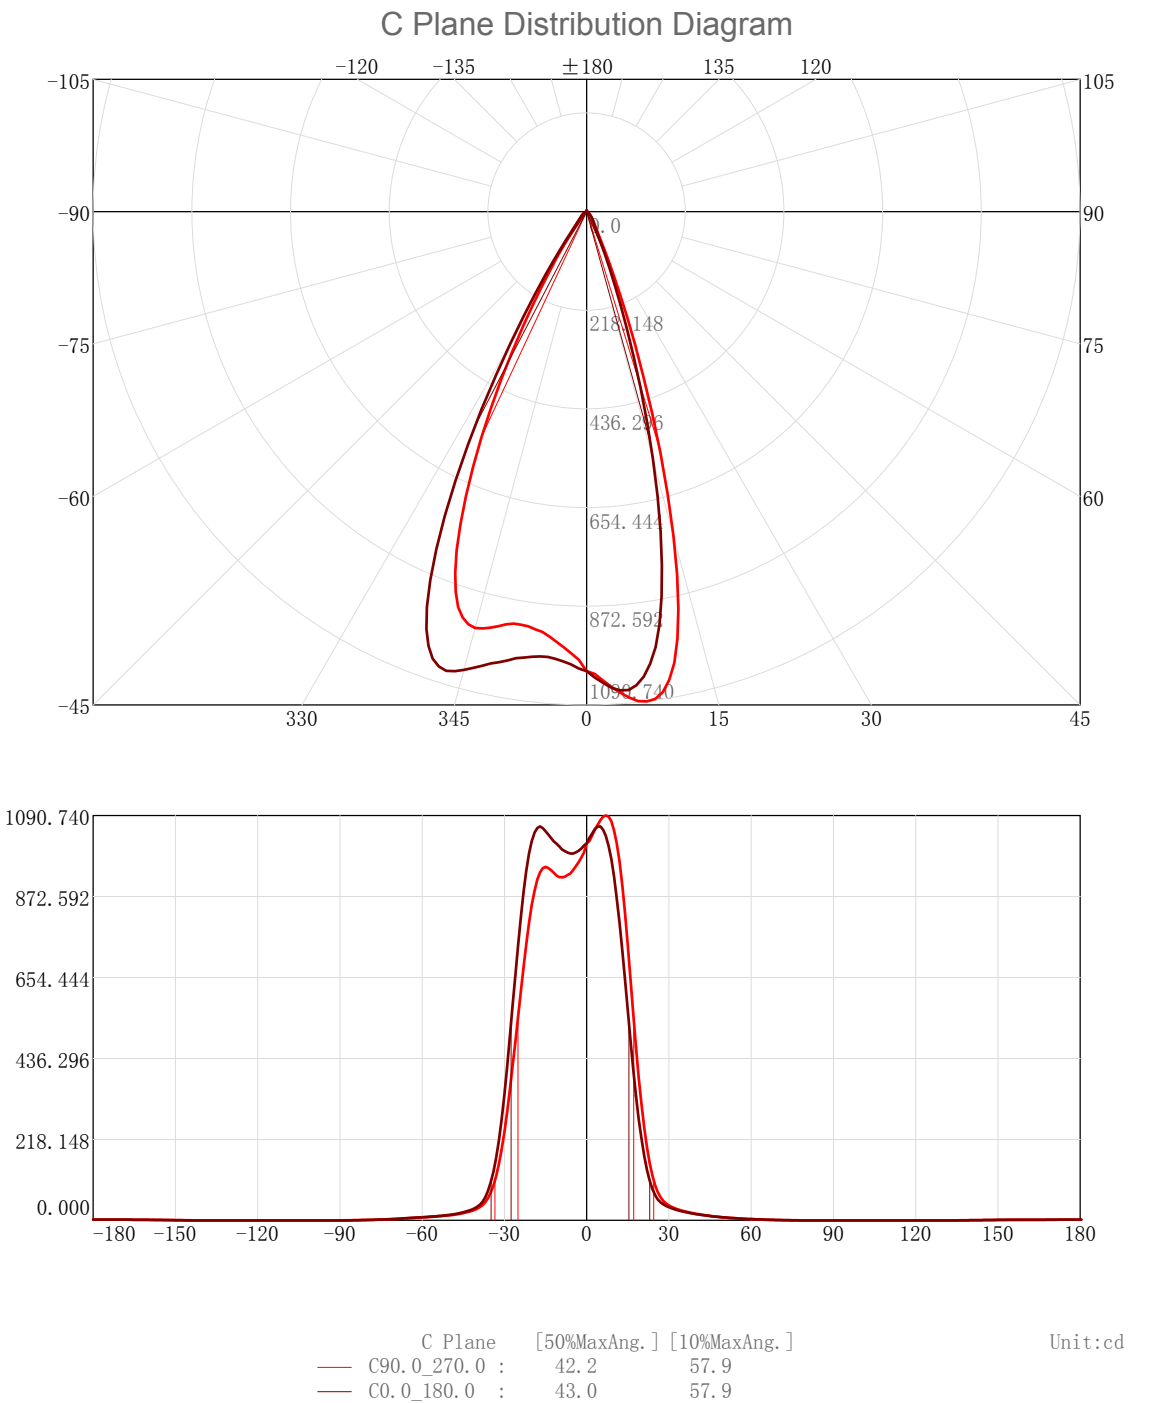

3D Light Intensity Distribution Modal

Lum. Name: WL02-06-XX-02 3000K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/26

3D Light Intensity Distribution Modal

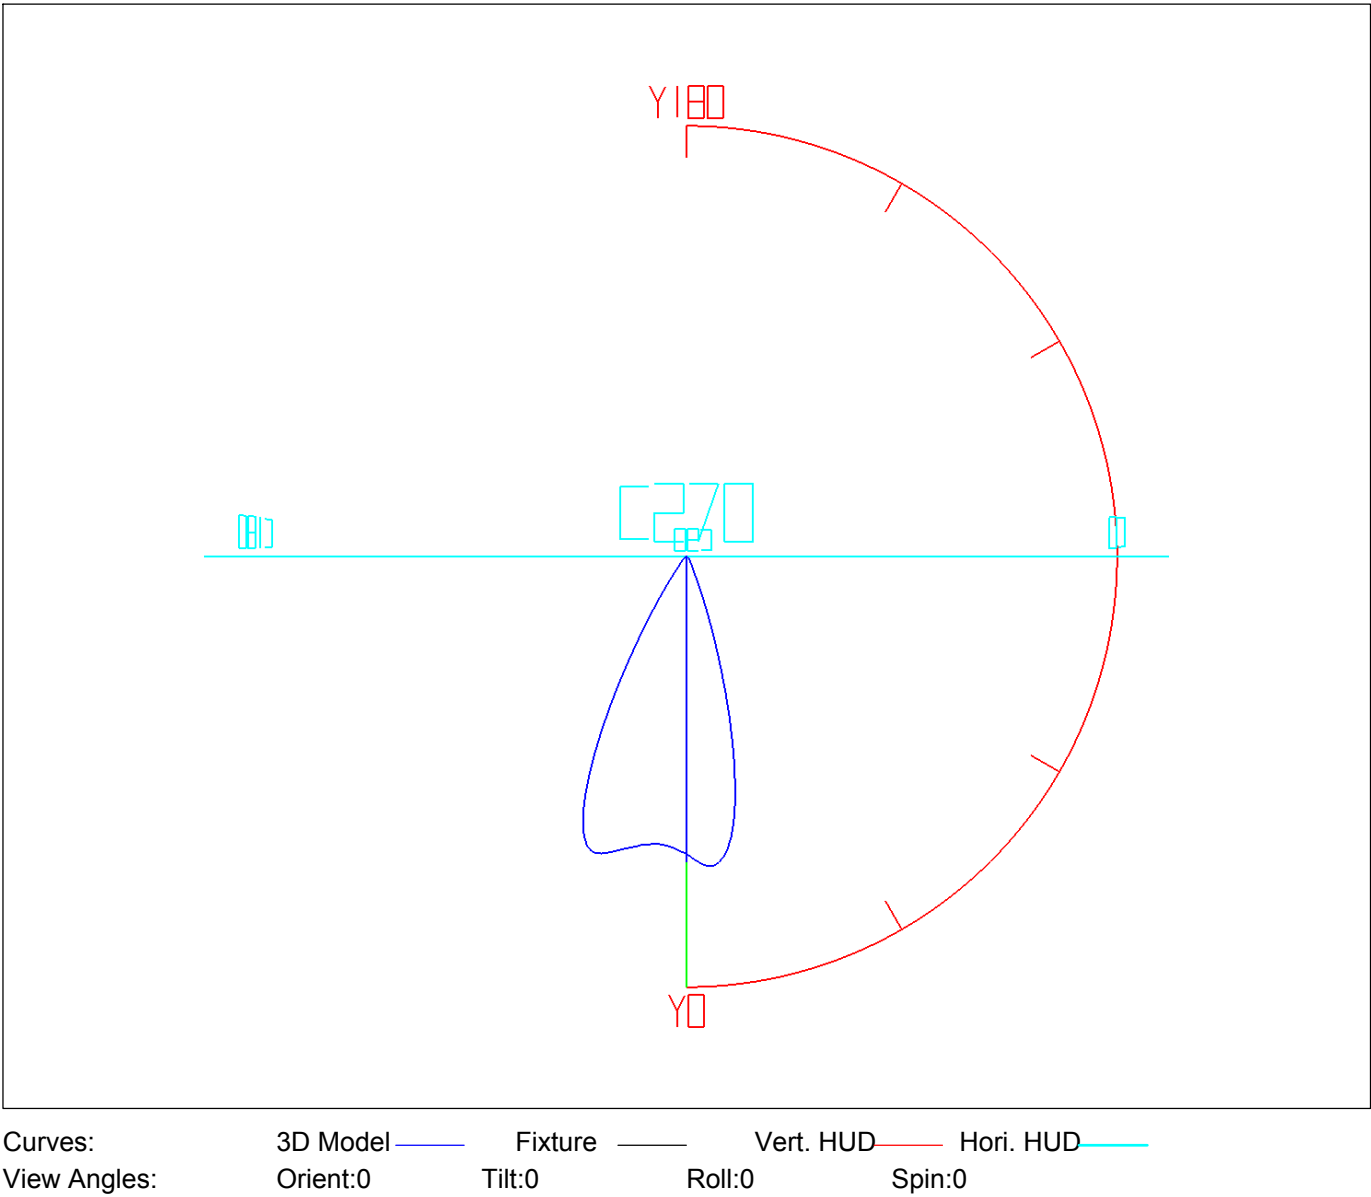

Zonal Flux Tabulation


Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.97	0.97	0.17	0.17	47.0-48.0	1.10	538.67	0.20	96.92
1.0-2.0	2.91	3.88	0.52	0.70	48.0-49.0	1.04	539.70	0.19	97.11
2.0-3.0	4.86	8.74	0.87	1.57	49.0-50.0	0.98	540.68	0.18	97.28
3.0-4.0	6.81	15.55	1.23	2.80	50.0-51.0	0.93	541.61	0.17	97.45
4.0-5.0	8.76	24.30	1.58	4.37	51.0-52.0	0.88	542.50	0.16	97.61
5.0-6.0	10.69	34.99	1.92	6.30	52.0-53.0	0.84	543.34	0.15	97.76
6.0-7.0	12.59	47.58	2.26	8.56	53.0-54.0	0.80	544.13	0.14	97.90
7.0-8.0	14.43	62.01	2.60	11.16	54.0-55.0	0.76	544.89	0.14	98.04
8.0-9.0	16.19	78.20	2.91	14.07	55.0-56.0	0.72	545.62	0.13	98.17
9.0-10.0	17.83	96.03	3.21	17.28	56.0-57.0	0.69	546.30	0.12	98.29
10.0-11.0	19.32	115.36	3.48	20.76	57.0-58.0	0.65	546.95	0.12	98.41
11.0-12.0	20.63	135.99	3.71	24.47	58.0-59.0	0.61	547.56	0.11	98.52
12.0-13.0	21.73	157.72	3.91	28.38	59.0-60.0	0.58	548.14	0.10	98.63
13.0-14.0	22.61	180.33	4.07	32.45	60.0-61.0	0.54	548.69	0.10	98.72
14.0-15.0	23.24	203.57	4.18	36.63	61.0-62.0	0.51	549.20	0.09	98.82
15.0-16.0	23.62	227.19	4.25	40.88	62.0-63.0	0.48	549.68	0.09	98.90
16.0-17.0	23.76	250.96	4.28	45.15	63.0-64.0	0.45	550.13	0.08	98.98
17.0-18.0	23.68	274.63	4.26	49.41	64.0-65.0	0.42	550.55	0.08	99.06
18.0-19.0	23.37	298.00	4.20	53.62	65.0-66.0	0.39	550.94	0.07	99.13
19.0-20.0	22.85	320.85	4.11	57.73	66.0-67.0	0.36	551.30	0.06	99.19
20.0-21.0	22.15	343.00	3.99	61.72	67.0-68.0	0.33	551.63	0.06	99.25
21.0-22.0	21.26	364.26	3.83	65.54	68.0-69.0	0.30	551.93	0.05	99.31
22.0-23.0	20.19	384.45	3.63	69.17	69.0-70.0	0.27	552.20	0.05	99.36
23.0-24.0	18.95	403.41	3.41	72.58	70.0-71.0	0.24	552.44	0.04	99.40
24.0-25.0	17.58	420.99	3.16	75.75	71.0-72.0	0.22	552.66	0.04	99.44
25.0-26.0	16.10	437.09	2.90	78.64	72.0-73.0	0.20	552.86	0.04	99.47
26.0-27.0	14.54	451.63	2.62	81.26	73.0-74.0	0.17	553.03	0.03	99.51
27.0-28.0	12.93	464.56	2.33	83.59	74.0-75.0	0.15	553.19	0.03	99.53
28.0-29.0	11.29	475.85	2.03	85.62	75.0-76.0	0.13	553.32	0.02	99.56
29.0-30.0	9.71	485.56	1.75	87.37	76.0-77.0	0.12	553.44	0.02	99.58
30.0-31.0	8.25	493.80	1.48	88.85	77.0-78.0	0.10	553.54	0.02	99.60
31.0-32.0	6.92	500.72	1.24	90.09	78.0-79.0	0.09	553.63	0.02	99.61
32.0-33.0	5.75	506.47	1.03	91.13	79.0-80.0	0.07	553.70	0.01	99.63
33.0-34.0	4.75	511.22	0.86	91.98	80.0-81.0	0.06	553.76	0.01	99.64
34.0-35.0	3.94	515.16	0.71	92.69	81.0-82.0	0.06	553.82	0.01	99.65
35.0-36.0	3.28	518.44	0.59	93.28	82.0-83.0	0.05	553.87	0.01	99.66
36.0-37.0	2.76	521.20	0.50	93.78	83.0-84.0	0.04	553.90	0.01	99.66
37.0-38.0	2.38	523.57	0.43	94.21	84.0-85.0	0.03	553.93	0.01	99.67
38.0-39.0	2.10	525.68	0.38	94.58	85.0-86.0	0.02	553.96	0.00	99.67
39.0-40.0	1.90	527.58	0.34	94.93	86.0-87.0	0.02	553.97	0.00	99.67
40.0-41.0	1.75	529.32	0.31	95.24	87.0-88.0	0.01	553.98	0.00	99.68
41.0-42.0	1.62	530.94	0.29	95.53	88.0-89.0	0.01	553.99	0.00	99.68
42.0-43.0	1.51	532.45	0.27	95.80	89.0-90.0	0.00	553.99	0.00	99.68
43.0-44.0	1.41	533.85	0.25	96.05	90.0-91.0	0.00	553.99	0.00	99.68
44.0-45.0	1.32	535.17	0.24	96.29	91.0-92.0	0.00	553.99	0.00	99.68
45.0-46.0	1.24	536.41	0.22	96.51	92.0-93.0	0.00	553.99	0.00	99.68
46.0-47.0	1.16	537.57	0.21	96.72	93.0-94.0	0.00	553.99	0.00	99.68

Zonal Flux Tabulation - (Cont.)

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.00	553.99	0.00	99.68	141.0-142.0	0.02	554.07	0.00	99.69
95.0-96.0	0.00	553.99	0.00	99.68	142.0-143.0	0.03	554.10	0.00	99.70
96.0-97.0	0.00	553.99	0.00	99.68	143.0-144.0	0.03	554.13	0.01	99.70
97.0-98.0	0.00	553.99	0.00	99.68	144.0-145.0	0.03	554.16	0.01	99.71
98.0-99.0	0.00	553.99	0.00	99.68	145.0-146.0	0.04	554.20	0.01	99.72
99.0-100.0	0.00	553.99	0.00	99.68	146.0-147.0	0.04	554.25	0.01	99.72
100.0-101.0	0.00	553.99	0.00	99.68	147.0-148.0	0.05	554.30	0.01	99.73
101.0-102.0	0.00	553.99	0.00	99.68	148.0-149.0	0.05	554.35	0.01	99.74
102.0-103.0	0.00	553.99	0.00	99.68	149.0-150.0	0.06	554.41	0.01	99.75
103.0-104.0	0.00	553.99	0.00	99.68	150.0-151.0	0.06	554.46	0.01	99.76
104.0-105.0	0.00	553.99	0.00	99.68	151.0-152.0	0.06	554.53	0.01	99.77
105.0-106.0	0.00	553.99	0.00	99.68	152.0-153.0	0.06	554.59	0.01	99.79
106.0-107.0	0.00	553.99	0.00	99.68	153.0-154.0	0.07	554.66	0.01	99.80
107.0-108.0	0.00	553.99	0.00	99.68	154.0-155.0	0.07	554.72	0.01	99.81
108.0-109.0	0.00	553.99	0.00	99.68	155.0-156.0	0.07	554.79	0.01	99.82
109.0-110.0	0.00	553.99	0.00	99.68	156.0-157.0	0.07	554.86	0.01	99.83
110.0-111.0	0.00	553.99	0.00	99.68	157.0-158.0	0.07	554.93	0.01	99.85
111.0-112.0	0.00	553.99	0.00	99.68	158.0-159.0	0.07	554.99	0.01	99.86
112.0-113.0	0.00	553.99	0.00	99.68	159.0-160.0	0.07	555.06	0.01	99.87
113.0-114.0	0.00	553.99	0.00	99.68	160.0-161.0	0.06	555.12	0.01	99.88
114.0-115.0	0.00	553.99	0.00	99.68	161.0-162.0	0.06	555.18	0.01	99.89
115.0-116.0	0.00	553.99	0.00	99.68	162.0-163.0	0.06	555.24	0.01	99.90
116.0-117.0	0.00	553.99	0.00	99.68	163.0-164.0	0.06	555.30	0.01	99.91
117.0-118.0	0.00	553.99	0.00	99.68	164.0-165.0	0.06	555.36	0.01	99.92
118.0-119.0	0.00	553.99	0.00	99.68	165.0-166.0	0.05	555.41	0.01	99.93
119.0-120.0	0.00	553.99	0.00	99.68	166.0-167.0	0.05	555.46	0.01	99.94
120.0-121.0	0.00	553.99	0.00	99.68	167.0-168.0	0.05	555.50	0.01	99.95
121.0-122.0	0.00	553.99	0.00	99.68	168.0-169.0	0.04	555.55	0.01	99.96
122.0-123.0	0.00	553.99	0.00	99.68	169.0-170.0	0.04	555.59	0.01	99.97
123.0-124.0	0.00	553.99	0.00	99.68	170.0-171.0	0.04	555.62	0.01	99.97
124.0-125.0	0.00	553.99	0.00	99.68	171.0-172.0	0.03	555.65	0.01	99.98
125.0-126.0	0.00	553.99	0.00	99.68	172.0-173.0	0.03	555.68	0.01	99.98
126.0-127.0	0.00	553.99	0.00	99.68	173.0-174.0	0.02	555.71	0.00	99.99
127.0-128.0	0.00	553.99	0.00	99.68	174.0-175.0	0.02	555.73	0.00	99.99
128.0-129.0	0.00	553.99	0.00	99.68	175.0-176.0	0.02	555.75	0.00	99.99
129.0-130.0	0.00	553.99	0.00	99.68	176.0-177.0	0.01	555.76	0.00	100.00
130.0-131.0	0.00	553.99	0.00	99.68	177.0-178.0	0.01	555.77	0.00	100.00
131.0-132.0	0.00	553.99	0.00	99.68	178.0-179.0	0.01	555.78	0.00	100.00
132.0-133.0	0.00	553.99	0.00	99.68	179.0-180.0	0.00	555.78	0.00	100.00
133.0-134.0	0.00	553.99	0.00	99.68					
134.0-135.0	0.00	553.99	0.00	99.68					
135.0-136.0	0.00	554.00	0.00	99.68					
136.0-137.0	0.01	554.00	0.00	99.68					
137.0-138.0	0.01	554.01	0.00	99.68					
138.0-139.0	0.01	554.02	0.00	99.68					
139.0-140.0	0.01	554.03	0.00	99.69					
140.0-141.0	0.02	554.05	0.00	99.69					


Rectangle ISO Lighting Intensity Diagram

Lum. Name: WL02-06-XX-02 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/26

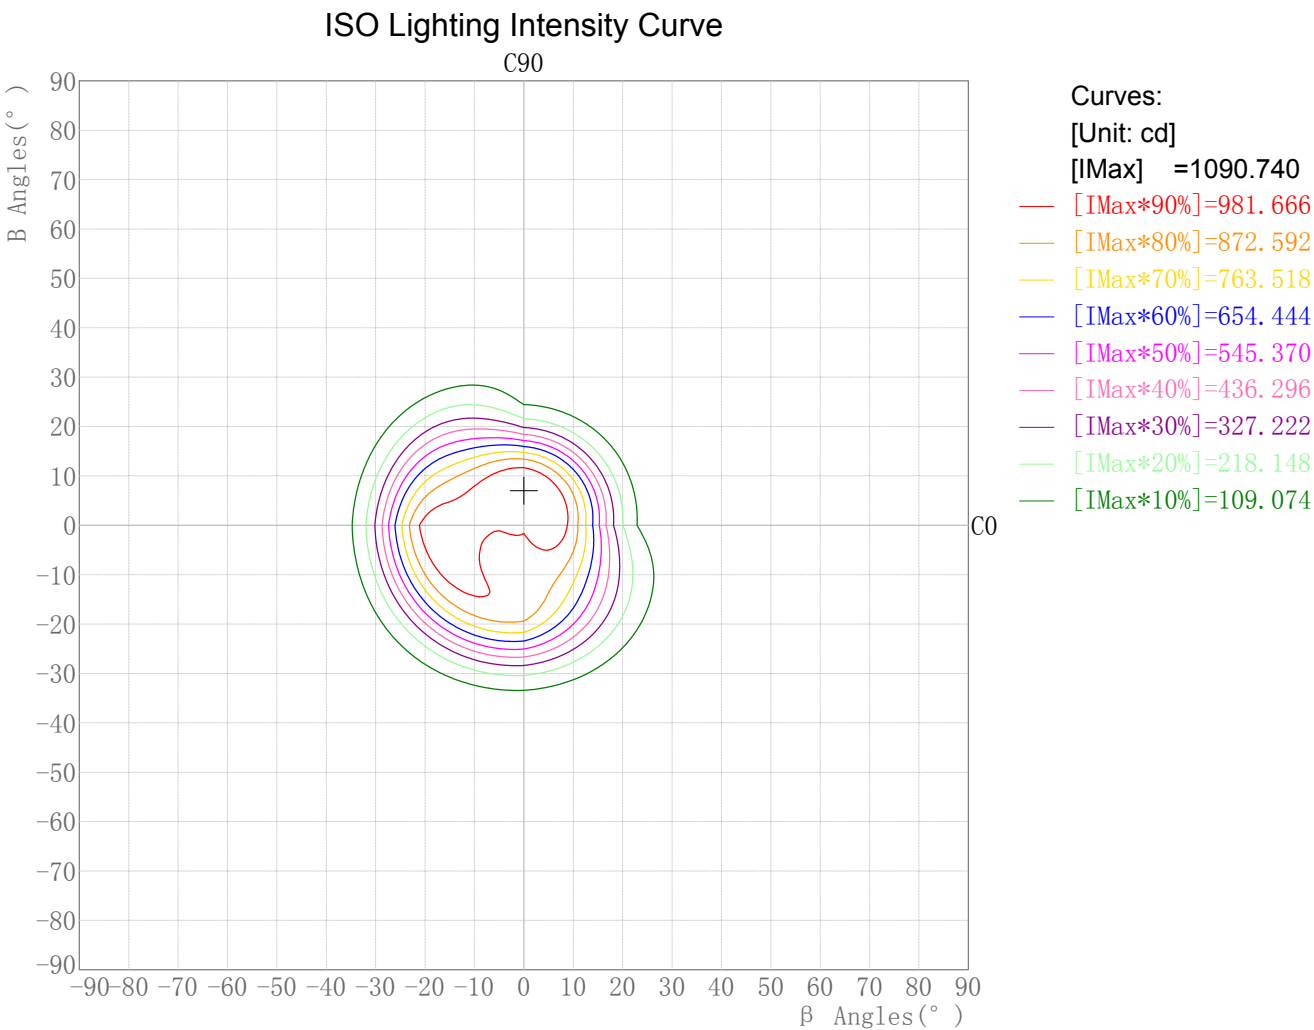

Photometric Filename:WL02-06-XX-02 3000K RA90 36D.IES

Lum. Name: WL02-06-XX-02 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/26

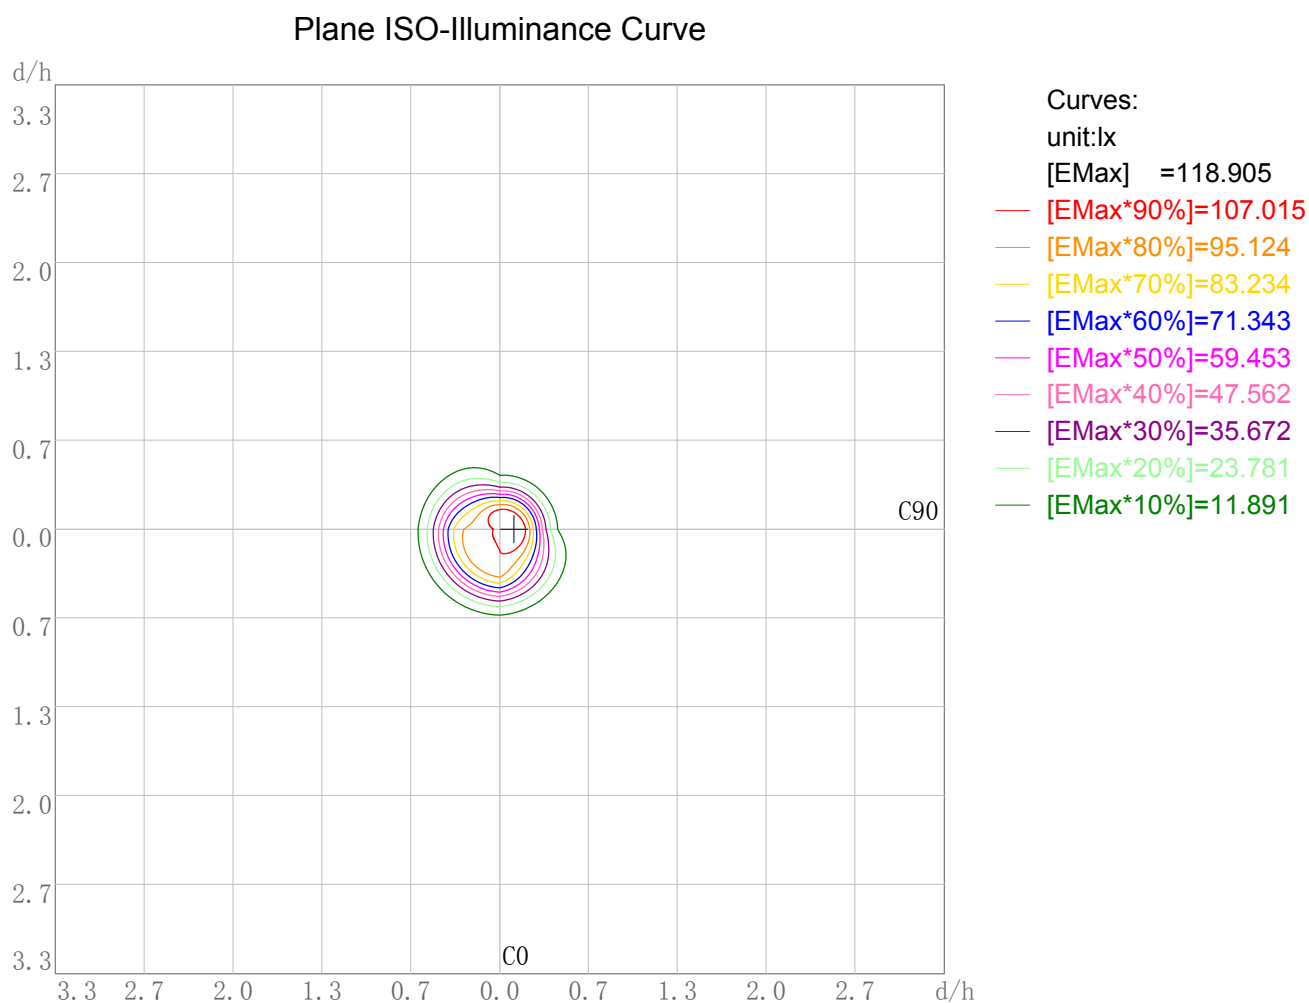


Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 118.91
Working Plane Maximum Illuminance Position(d/h):H0.1 V0.0

Photometric Filename:WL02-06-XX-02 3000K RA90 36D.IES

3D Plane ISO Illuminance Diagram

Lum. Name: WL02-06-XX-02 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/26


3D Plane Illuminance Modal

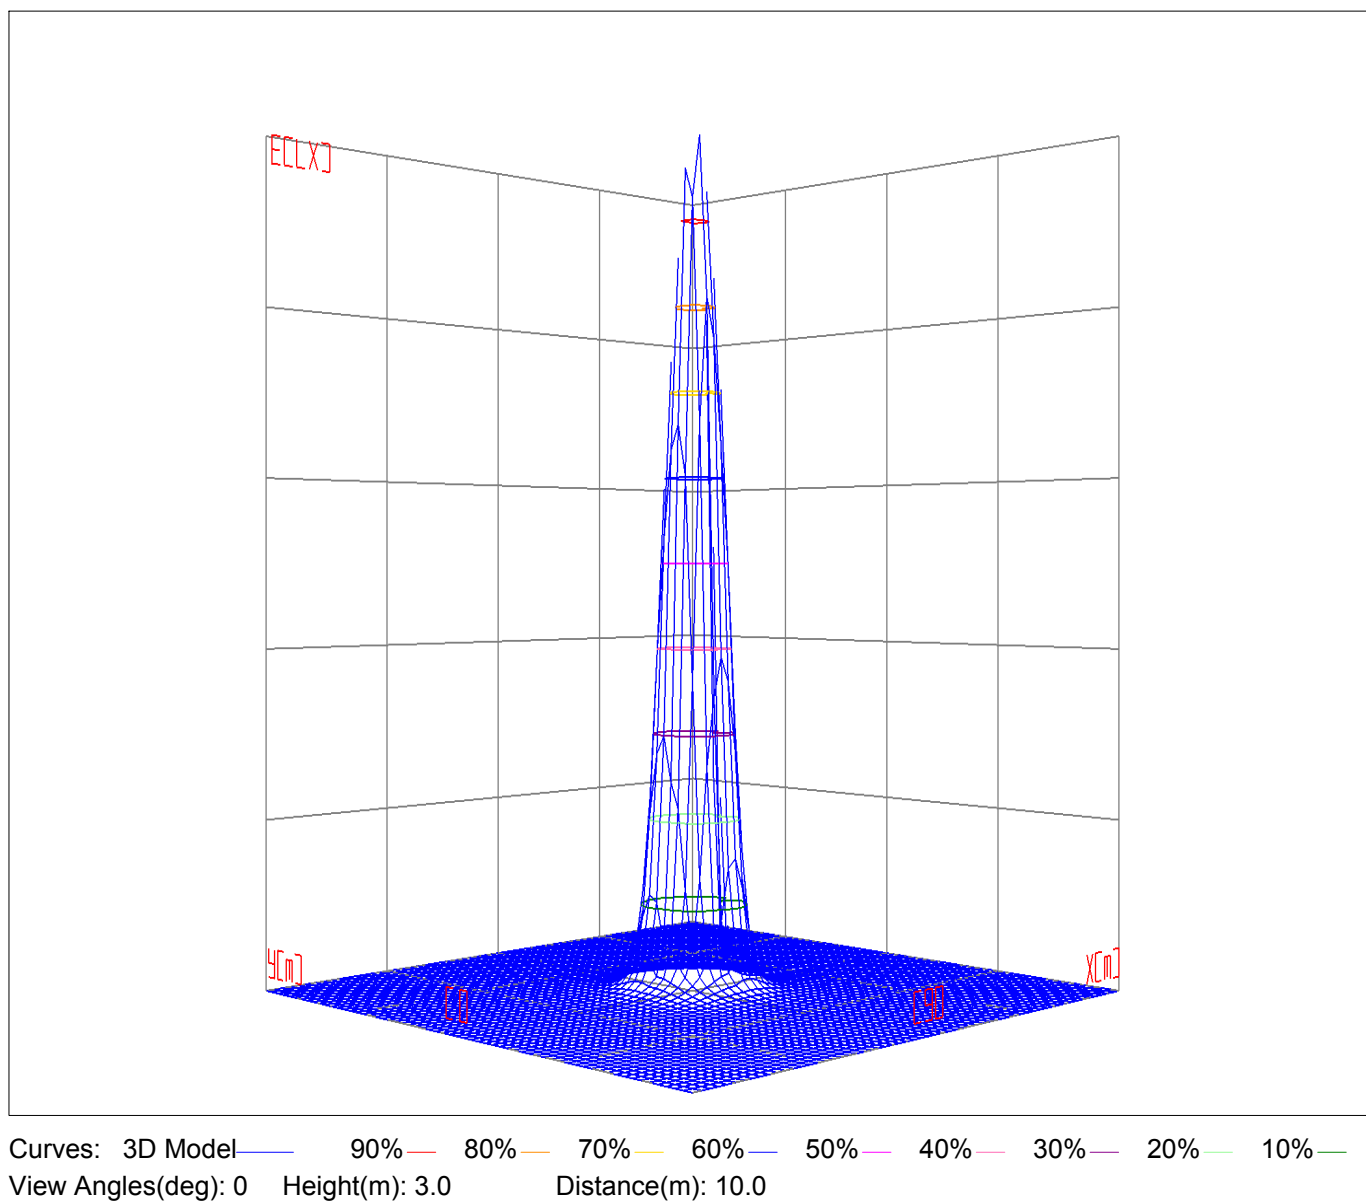

Space ISO Illuminance Diagram

Lum. Name: WL02-06-XX-02 3000K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/26


Space ISO Illuminance Curve

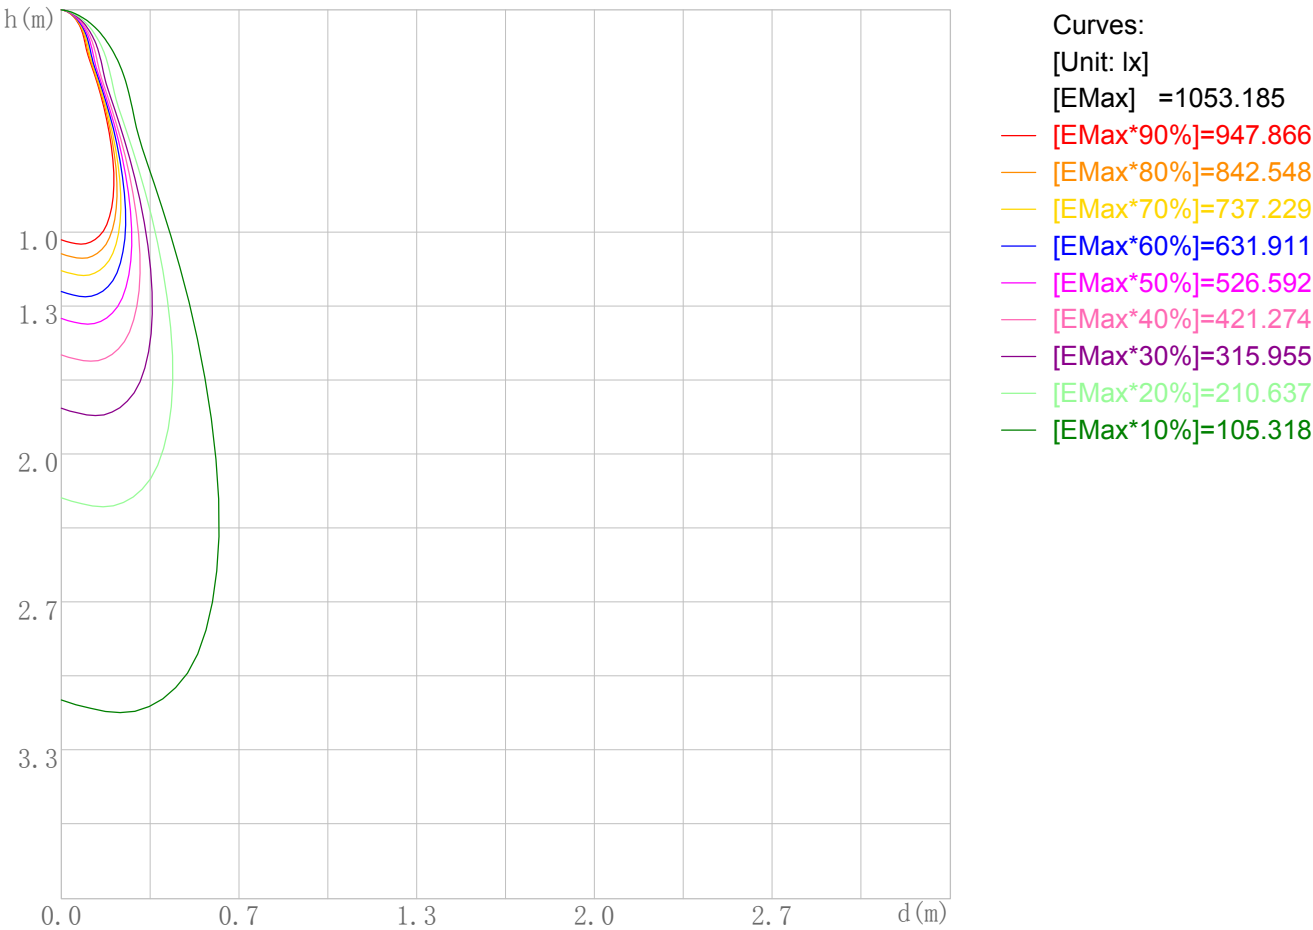

Space Plane Maximum Illuminance and @Angle:1053.18lx,4.0deg
Plane Maximum Lighting Intensity and @Angle:1061.590cd,0eg

Illuminance-Distance Diagram

Lum. Name: WL02-06-XX-02 3000K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/26

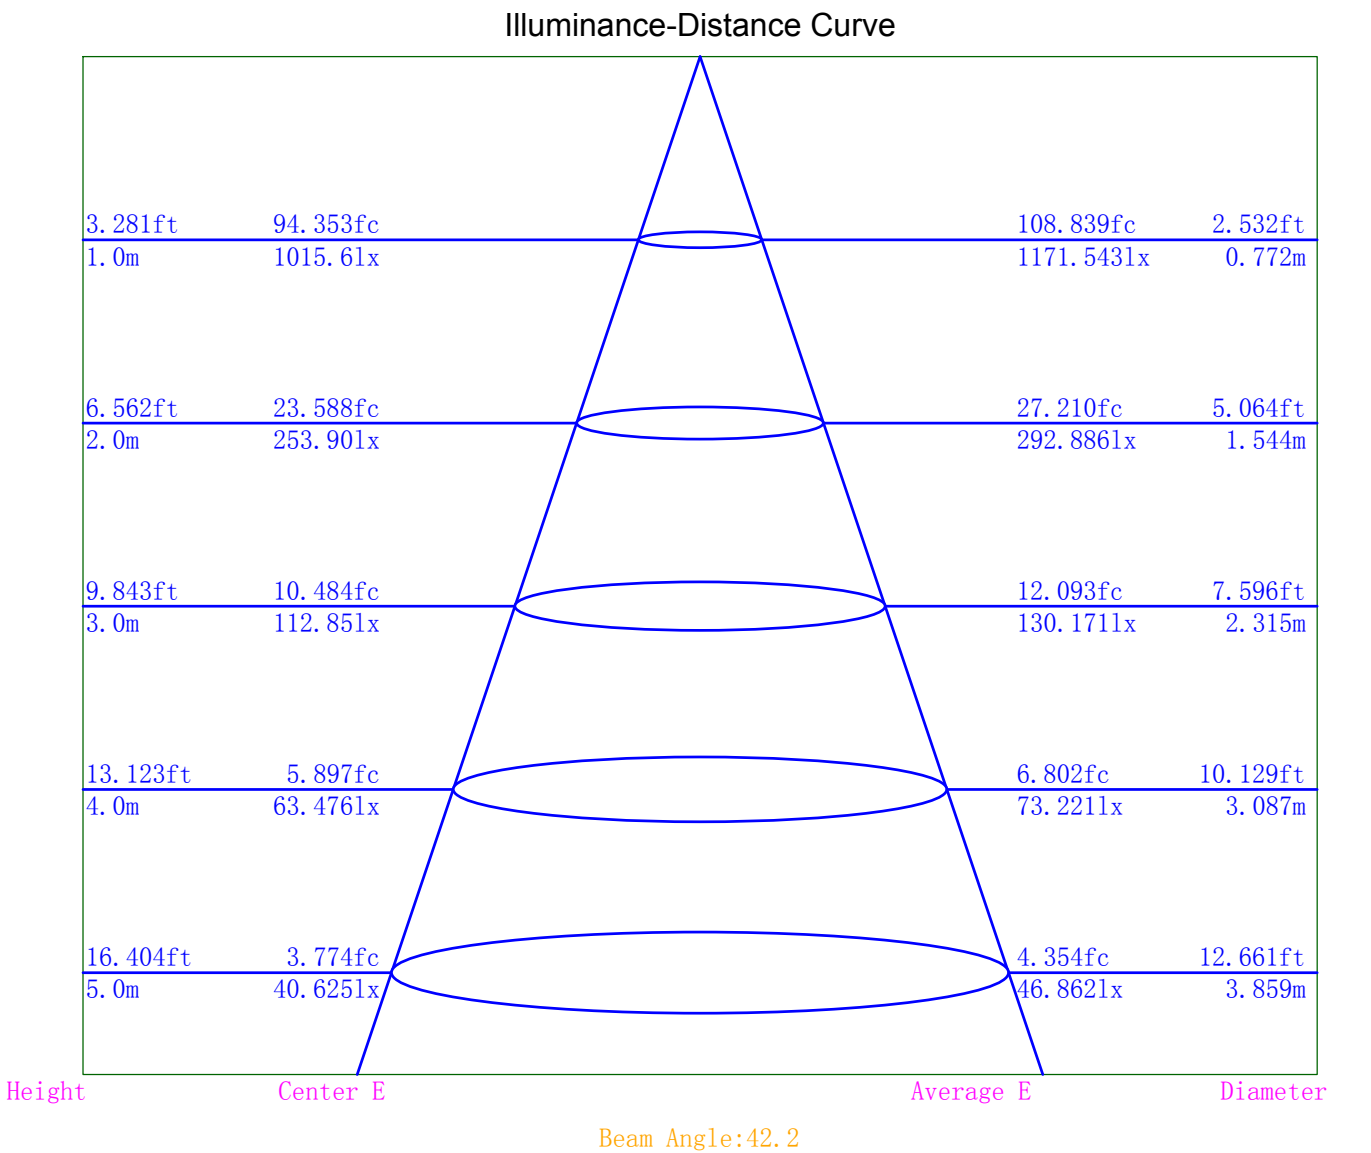

Indoor Luminance Limiting Curves

Lum. Name: WL02-06-XX-02 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/26


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	14762	11161	8721	6537	4709	3336	1918	0	0
C90	15338	11320	8361	5744	3680	1954	286	0	0

Luminance Limiting Curve

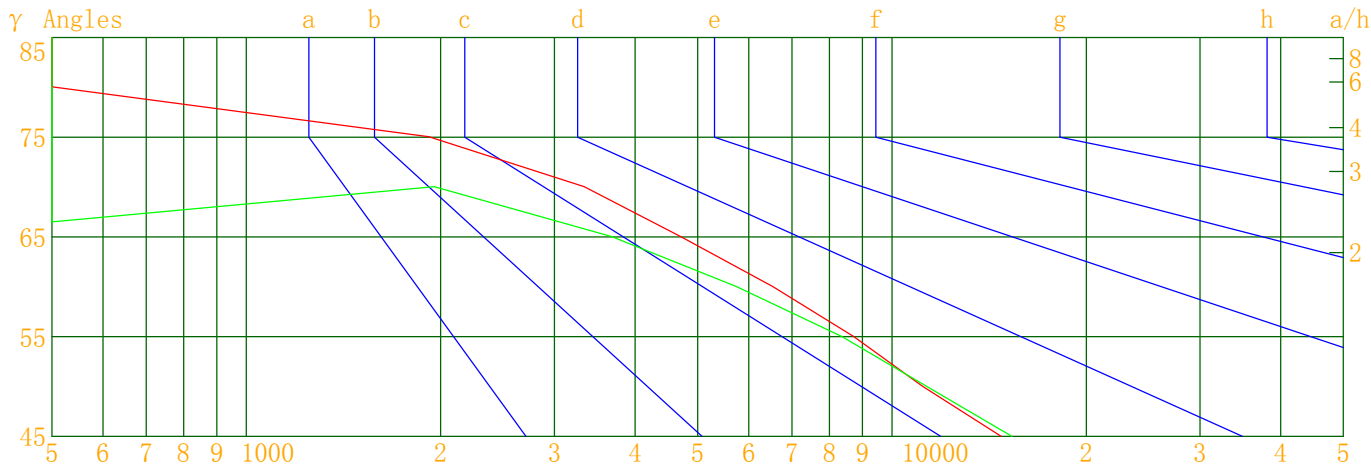

Luminous Size:

Length(m)=-0.038

Width(m)=-0.038

Height(m)=0.000

Area(m^2)=0.001134

Luminous Type:

Without Luminous Side


Luminous Curves:

C0-C180 Color: —

C90-C270 Color: —

Indoor Budgetary Estimate Table

Lum. Name: WL02-06-XX-02 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/26

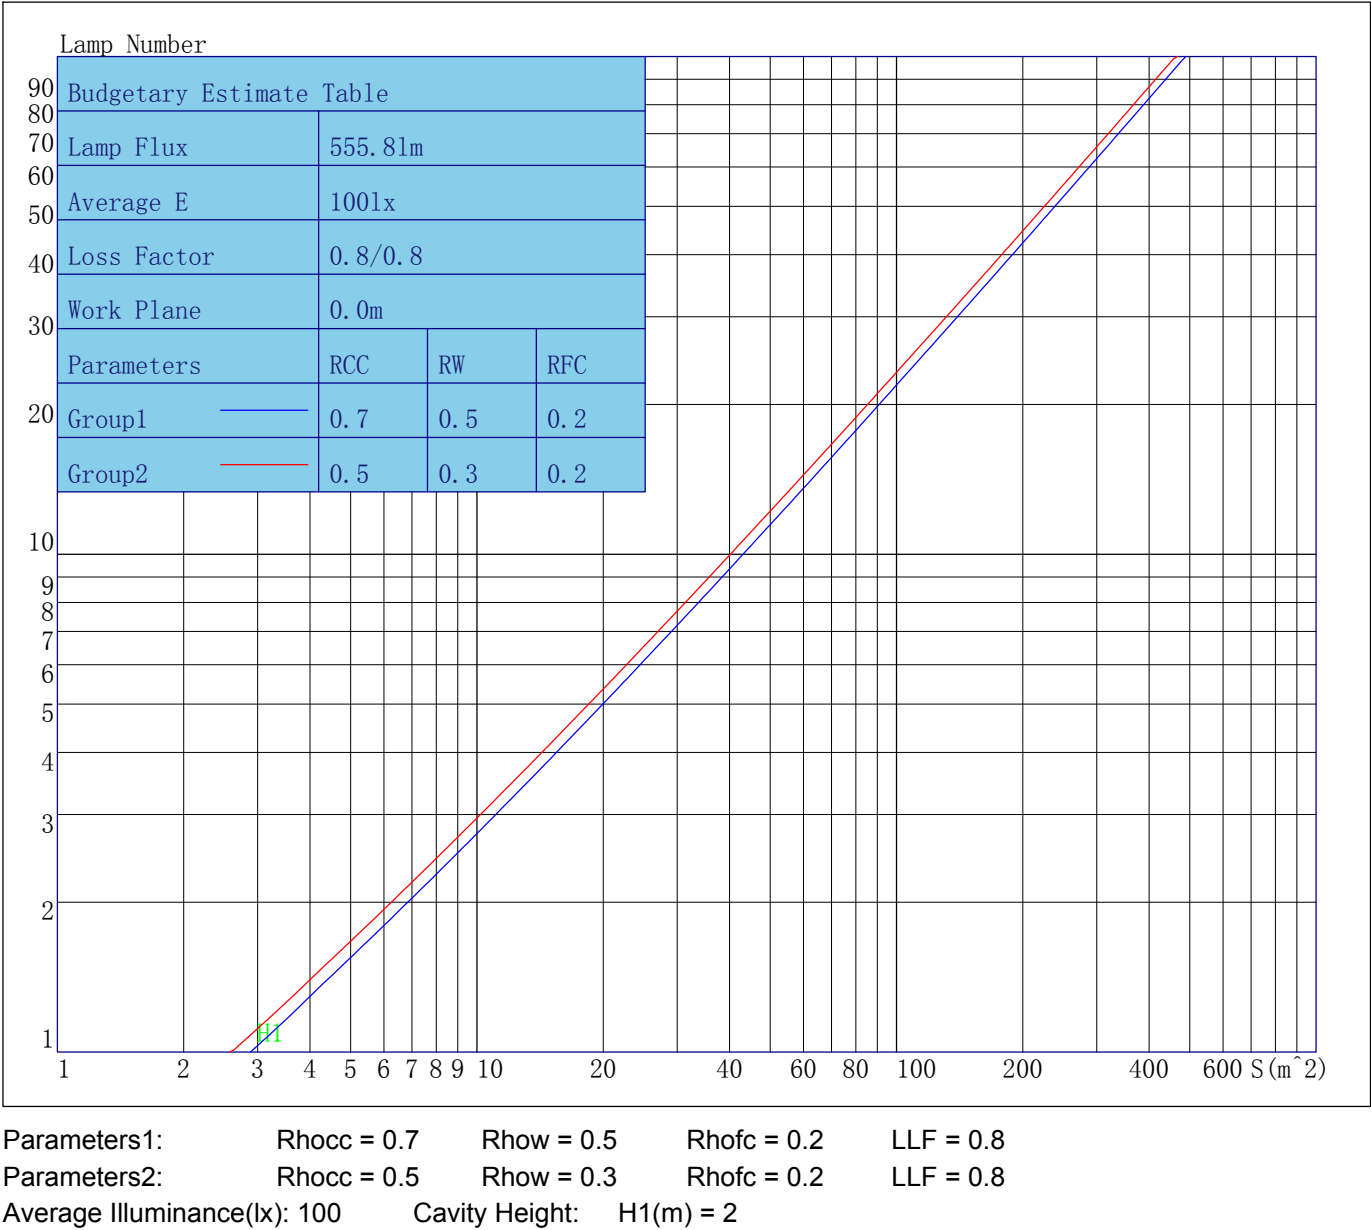

Indoor Coefficient of Utilization Table

Lum. Name: WL02-06-XX-02 3000K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/26

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	112	109	107	112	109	107	105	105	104	102	101	100	99	98	97	96	94
2	109	105	101	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89
3	105	99	95	91	103	98	94	90	95	92	89	93	90	87	90	88	86	85
4	100	94	89	85	99	92	88	85	90	87	84	88	85	83	87	84	82	80
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76
6	92	85	79	76	91	84	79	75	82	78	75	81	77	74	80	76	74	73
7	89	81	75	72	87	80	75	72	79	74	71	78	74	71	76	73	70	69
8	85	77	72	68	84	76	72	68	75	71	68	74	70	68	73	70	67	66
9	82	74	69	65	81	73	68	65	72	68	65	71	67	65	71	67	64	63
10	79	71	66	62	78	70	65	62	69	65	62	69	65	62	68	64	62	61

Unified Glare Rating Table

Lum. Name: WL02-06-XX-02 3000K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/26

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size	Vewed crosswise					Vewed endwise				
X=2H Y=2H	13.1	14.0	13.5	14.3	14.6	13.5	14.4	13.8	14.7	15.0
	13.2	14.0	13.6	14.3	14.7	13.4	14.2	13.8	14.6	14.9
	13.2	13.9	13.6	14.2	14.6	13.4	14.1	13.8	14.4	14.8
	13.1	13.7	13.5	14.1	14.5	13.2	13.9	13.7	14.3	14.7
	13.0	13.6	13.5	14.0	14.4	13.2	13.8	13.6	14.2	14.6
	13.0	13.5	13.4	13.9	14.4	13.1	13.7	13.6	14.1	14.5
X=4H Y=2H	13.2	13.9	13.6	14.3	14.7	13.6	14.3	14.0	14.6	15.0
	13.5	14.0	13.9	14.4	14.8	13.6	14.2	14.0	14.6	15.0
	13.4	13.9	13.9	14.4	14.8	13.5	14.0	14.0	14.4	14.9
	13.4	13.8	13.8	14.2	14.7	13.4	13.8	13.9	14.3	14.8
	13.3	13.7	13.8	14.1	14.6	13.3	13.7	13.8	14.2	14.6
	13.2	13.5	13.7	14.0	14.5	13.3	13.6	13.8	14.1	14.6
X=8H Y=4H	13.4	13.8	13.9	14.2	14.7	13.4	13.8	13.9	14.3	14.7
	13.3	13.6	13.9	14.1	14.6	13.3	13.6	13.8	14.1	14.6
	13.3	13.5	13.8	14.0	14.5	13.3	13.5	13.8	14.0	14.5
	13.2	13.4	13.8	13.9	14.5	13.2	13.4	13.7	13.9	14.5
X=12H Y=4H	13.4	13.7	13.9	14.2	14.6	13.4	13.7	13.9	14.2	14.7
	13.3	13.5	13.8	14.0	14.6	13.3	13.5	13.8	14.0	14.5
	13.3	13.4	13.8	14.0	14.5	13.2	13.4	13.7	13.9	14.5
Variations with the objverver position at spacings										
S=1.0H	1.1/-1.3					1.2/-1.5				
S=1.5H	2.2/-3.2					2.6/-3.2				
S=2.0H	3.0/-4.1					3.9/-6.2				
Reduced UGR Table:										
Nordic Standard Table:	BK0					BK0				
Correction Value	0.6					0.4				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	1015.62	1015.62	1015.62	1015.62
γ 1.0	1030.17	1021.94	1009.84	990.68
γ 2.0	1042.20	1036.72	1001.30	977.07
γ 3.0	1054.13	1052.35	995.45	964.40
γ 4.0	1060.92	1065.82	990.99	953.24
γ 5.0	1061.59	1078.18	988.04	943.07
γ 6.0	1052.47	1087.93	988.65	934.11
γ 7.0	1035.63	1090.74	991.17	930.41
γ 8.0	1009.02	1087.86	995.19	925.72
γ 9.0	974.19	1075.44	999.49	924.47
γ 10.0	926.81	1050.68	1007.43	924.63
γ 11.0	867.04	1015.55	1014.72	929.15
γ 12.0	799.72	965.21	1021.17	936.97
γ 13.0	725.84	901.62	1030.51	943.86
γ 14.0	647.64	826.36	1039.70	949.55
γ 15.0	565.97	740.92	1048.65	952.54
γ 16.0	484.94	649.64	1056.51	949.01
γ 17.0	407.33	557.41	1061.25	937.66
γ 18.0	335.87	467.99	1057.29	918.88
γ 19.0	273.23	384.99	1045.14	888.57
γ 20.0	219.53	311.89	1021.62	849.76
γ 21.0	173.10	249.30	988.36	801.28
γ 22.0	135.88	196.58	942.60	744.57
γ 23.0	106.79	154.00	885.05	683.02
γ 24.0	84.36	120.70	816.91	616.93
γ 25.0	67.91	94.38	741.83	550.00
γ 26.0	56.01	75.27	661.25	482.15
γ 27.0	48.31	61.65	577.70	415.16
γ 28.0	42.96	52.04	494.07	350.42
γ 29.0	38.90	45.42	412.01	290.56
γ 30.0	35.62	40.65	337.94	237.11
γ 31.0	32.87	36.54	272.55	191.83
γ 32.0	30.32	33.34	216.16	152.50
γ 33.0	28.07	30.58	169.34	119.94
γ 34.0	26.02	28.15	131.60	94.38
γ 35.0	24.21	25.97	101.84	74.68
γ 36.0	22.56	24.01	78.89	59.71
γ 37.0	21.04	22.22	61.81	48.57
γ 38.0	19.59	20.66	49.95	41.06
γ 39.0	18.29	19.22	42.01	35.59
γ 40.0	17.02	17.88	36.56	31.39
γ 41.0	15.85	16.64	32.50	28.20
γ 42.0	14.75	15.44	29.09	25.56
γ 43.0	13.70	14.31	26.42	23.27
γ 44.0	12.74	13.26	24.03	21.37
γ 45.0	11.84	12.30	22.00	19.66
γ 46.0	10.99	11.39	20.19	18.20

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	10.19	10.52	18.62	16.91
γ 48.0	9.44	9.75	17.31	15.76
γ 49.0	8.75	8.98	16.12	14.79
γ 50.0	8.14	8.25	15.11	13.88
γ 51.0	7.58	7.58	14.19	13.10
γ 52.0	7.05	7.02	13.39	12.37
γ 53.0	6.55	6.47	12.65	11.69
γ 54.0	6.12	5.95	11.97	11.08
γ 55.0	5.67	5.44	11.36	10.51
γ 56.0	5.24	4.95	10.77	9.97
γ 57.0	4.83	4.49	10.23	9.46
γ 58.0	4.43	4.05	9.69	8.97
γ 59.0	4.05	3.63	9.16	8.47
γ 60.0	3.71	3.26	8.66	7.99
γ 61.0	3.39	2.92	8.16	7.57
γ 62.0	3.10	2.60	7.68	7.14
γ 63.0	2.82	2.29	7.25	6.72
γ 64.0	2.53	2.01	6.80	6.30
γ 65.0	2.26	1.76	6.35	5.89
γ 66.0	2.02	1.51	5.89	5.50
γ 67.0	1.82	1.28	5.41	5.11
γ 68.0	1.63	1.09	4.93	4.74
γ 69.0	1.46	0.92	4.41	4.36
γ 70.0	1.29	0.76	3.94	4.00
γ 71.0	1.13	0.61	3.50	3.68
γ 72.0	0.98	0.47	3.14	3.39
γ 73.0	0.84	0.33	2.81	3.09
γ 74.0	0.70	0.21	2.51	2.82
γ 75.0	0.56	0.08	2.22	2.52
γ 76.0	0.44	0.00	1.97	2.25
γ 77.0	0.32	0.00	1.69	2.03
γ 78.0	0.21	0.00	1.46	1.83
γ 79.0	0.11	0.00	1.27	1.63
γ 80.0	0.00	0.00	1.10	1.44
γ 81.0	0.00	0.00	0.93	1.27
γ 82.0	0.00	0.00	0.76	1.10
γ 83.0	0.00	0.00	0.61	0.95
γ 84.0	0.00	0.00	0.45	0.79
γ 85.0	0.00	0.00	0.32	0.65
γ 86.0	0.00	0.00	0.18	0.50
γ 87.0	0.00	0.00	0.06	0.37
γ 88.0	0.00	0.00	0.00	0.25
γ 89.0	0.00	0.00	0.00	0.13
γ 90.0	0.00	0.00	0.00	0.02
γ 91.0	0.00	0.00	0.00	0.00
γ 92.0	0.00	0.00	0.00	0.00
γ 93.0	0.00	0.00	0.00	0.00

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	0.00	0.00	0.00	0.00
γ 95.0	0.00	0.00	0.00	0.00
γ 96.0	0.00	0.00	0.00	0.00
γ 97.0	0.00	0.00	0.00	0.00
γ 98.0	0.00	0.00	0.00	0.00
γ 99.0	0.00	0.00	0.00	0.00
γ 100.0	0.00	0.00	0.00	0.00
γ 101.0	0.00	0.00	0.00	0.00
γ 102.0	0.00	0.00	0.00	0.00
γ 103.0	0.00	0.00	0.00	0.00
γ 104.0	0.00	0.00	0.00	0.00
γ 105.0	0.00	0.00	0.00	0.00
γ 106.0	0.00	0.00	0.00	0.00
γ 107.0	0.00	0.00	0.00	0.00
γ 108.0	0.00	0.00	0.00	0.00
γ 109.0	0.00	0.00	0.00	0.00
γ 110.0	0.00	0.00	0.00	0.00
γ 111.0	0.00	0.00	0.00	0.00
γ 112.0	0.00	0.00	0.00	0.00
γ 113.0	0.00	0.00	0.00	0.00
γ 114.0	0.00	0.00	0.00	0.00
γ 115.0	0.00	0.00	0.00	0.00
γ 116.0	0.00	0.00	0.00	0.00
γ 117.0	0.00	0.00	0.00	0.00
γ 118.0	0.00	0.00	0.00	0.00
γ 119.0	0.00	0.00	0.00	0.00
γ 120.0	0.00	0.00	0.00	0.00
γ 121.0	0.00	0.00	0.00	0.00
γ 122.0	0.00	0.00	0.00	0.00
γ 123.0	0.00	0.00	0.00	0.00
γ 124.0	0.00	0.00	0.00	0.00
γ 125.0	0.00	0.00	0.00	0.00
γ 126.0	0.00	0.00	0.00	0.00
γ 127.0	0.00	0.00	0.00	0.00
γ 128.0	0.00	0.00	0.00	0.00
γ 129.0	0.00	0.00	0.00	0.00
γ 130.0	0.00	0.00	0.00	0.00
γ 131.0	0.00	0.00	0.00	0.00
γ 132.0	0.00	0.00	0.00	0.00
γ 133.0	0.00	0.00	0.00	0.00
γ 134.0	0.06	0.00	0.00	0.00
γ 135.0	0.16	0.00	0.00	0.00
γ 136.0	0.25	0.00	0.00	0.00
γ 137.0	0.36	0.00	0.00	0.00
γ 138.0	0.46	0.03	0.00	0.00
γ 139.0	0.56	0.14	0.00	0.00
γ 140.0	0.67	0.23	0.00	0.00

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	0.76	0.34	0.00	0.00
γ 142.0	0.86	0.44	0.00	0.10
γ 143.0	0.97	0.54	0.00	0.19
γ 144.0	1.06	0.64	0.00	0.28
γ 145.0	1.16	0.74	0.07	0.38
γ 146.0	1.25	0.85	0.17	0.47
γ 147.0	1.34	0.94	0.27	0.56
γ 148.0	1.42	1.04	0.37	0.66
γ 149.0	1.50	1.13	0.47	0.75
γ 150.0	1.58	1.23	0.58	0.84
γ 151.0	1.64	1.31	0.68	0.93
γ 152.0	1.71	1.38	0.78	1.02
γ 153.0	1.76	1.46	0.89	1.11
γ 154.0	1.80	1.53	1.00	1.21
γ 155.0	1.84	1.58	1.10	1.30
γ 156.0	1.86	1.63	1.20	1.39
γ 157.0	1.86	1.67	1.29	1.47
γ 158.0	1.88	1.71	1.40	1.55
γ 159.0	1.88	1.72	1.50	1.62
γ 160.0	1.88	1.75	1.59	1.70
γ 161.0	1.87	1.75	1.68	1.76
γ 162.0	1.87	1.77	1.75	1.81
γ 163.0	1.88	1.79	1.82	1.86
γ 164.0	1.89	1.80	1.88	1.90
γ 165.0	1.89	1.80	1.92	1.93
γ 166.0	1.91	1.82	1.96	1.95
γ 167.0	1.92	1.84	1.99	1.97
γ 168.0	1.95	1.85	2.00	1.97
γ 169.0	1.97	1.87	2.02	1.98
γ 170.0	1.99	1.89	2.02	1.98
γ 171.0	2.01	1.91	2.02	1.98
γ 172.0	2.02	1.95	2.02	1.99
γ 173.0	2.04	1.96	2.02	2.00
γ 174.0	2.06	1.98	2.03	2.01
γ 175.0	2.08	2.01	2.03	2.02
γ 176.0	2.10	2.02	2.04	2.03
γ 177.0	2.10	2.04	2.05	2.05
γ 178.0	2.10	2.03	2.06	2.07
γ 179.0	2.09	2.03	2.08	2.09
γ 180.0	2.08	2.08	2.08	2.08