



Indoor Luminaire Photometric Data

Description Information

Luminary Name: DL43-05-XX-02 2700K RA90 36D		Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Date: 2020/06/23
Manufacture: Shenzhen Norming Lighting Co., Ltd		Shld. Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department		Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.050m*0.050m*0.072m		Lum. Area (m2):0.006	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=1.0	Temp. (°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 285.670	Luminary Flux(lm): 285.666	Field Angle(10%Imax): 61.3(°)	
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 274.000lm 95.92%	
Rated Voltage(V):	Luminary EER(lm/W): 59.526	Up Lumens&Percent: 11.666lm 4.08%	
Tested Power(W): 4.799	Max. Candela(cd): 616.975	S/MH: C0_a180=0.595 C90_270=0.602	
Lamps' Inside: 1	Max Cand@Ang. (°): C=180.0 γ=1.0	CIE Type: Semi-Direct	
Tested Electrics (V, A, pf):240.0, 0.023, 0.867	Beam Angle(50%Imax): 36.1(°)	ErP ϕ use(90°): 255.405lm	
Lamp Size(W*L*H):0.050m*0.050m*0.072m	Left=-18.9°, Right=17.2°	IRF(%): 463.255	

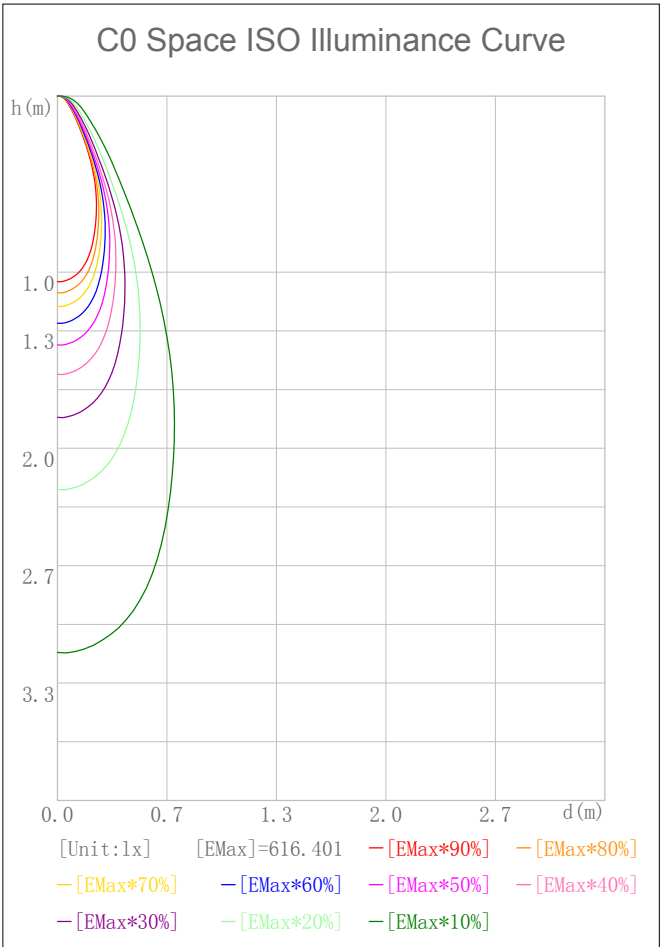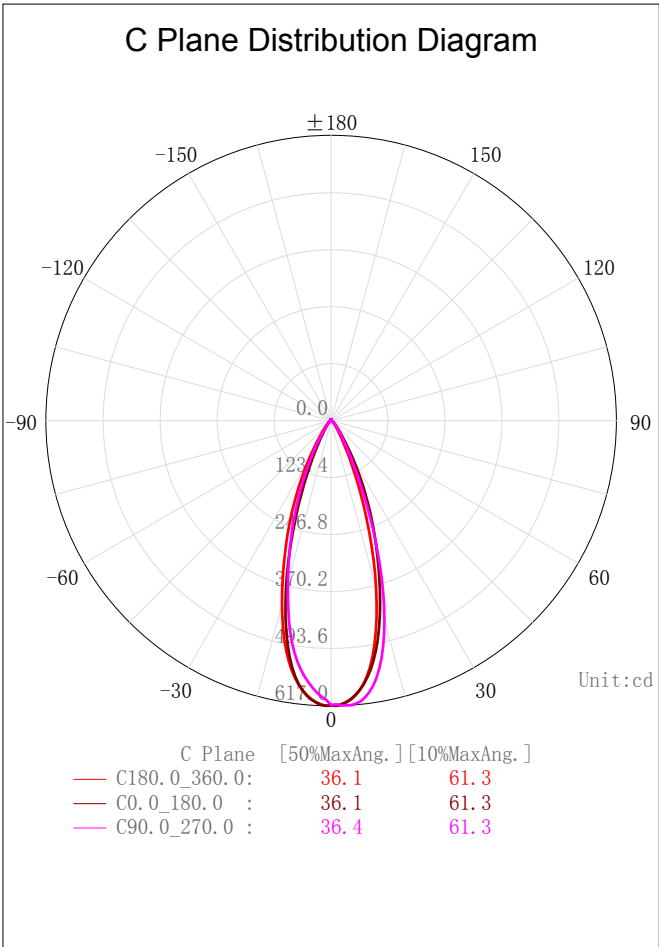

2D Plane Light Intensity Distribution Curve


Lum. Name:DL43-05-XX-02 2700K RA90 36D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2020/06/23

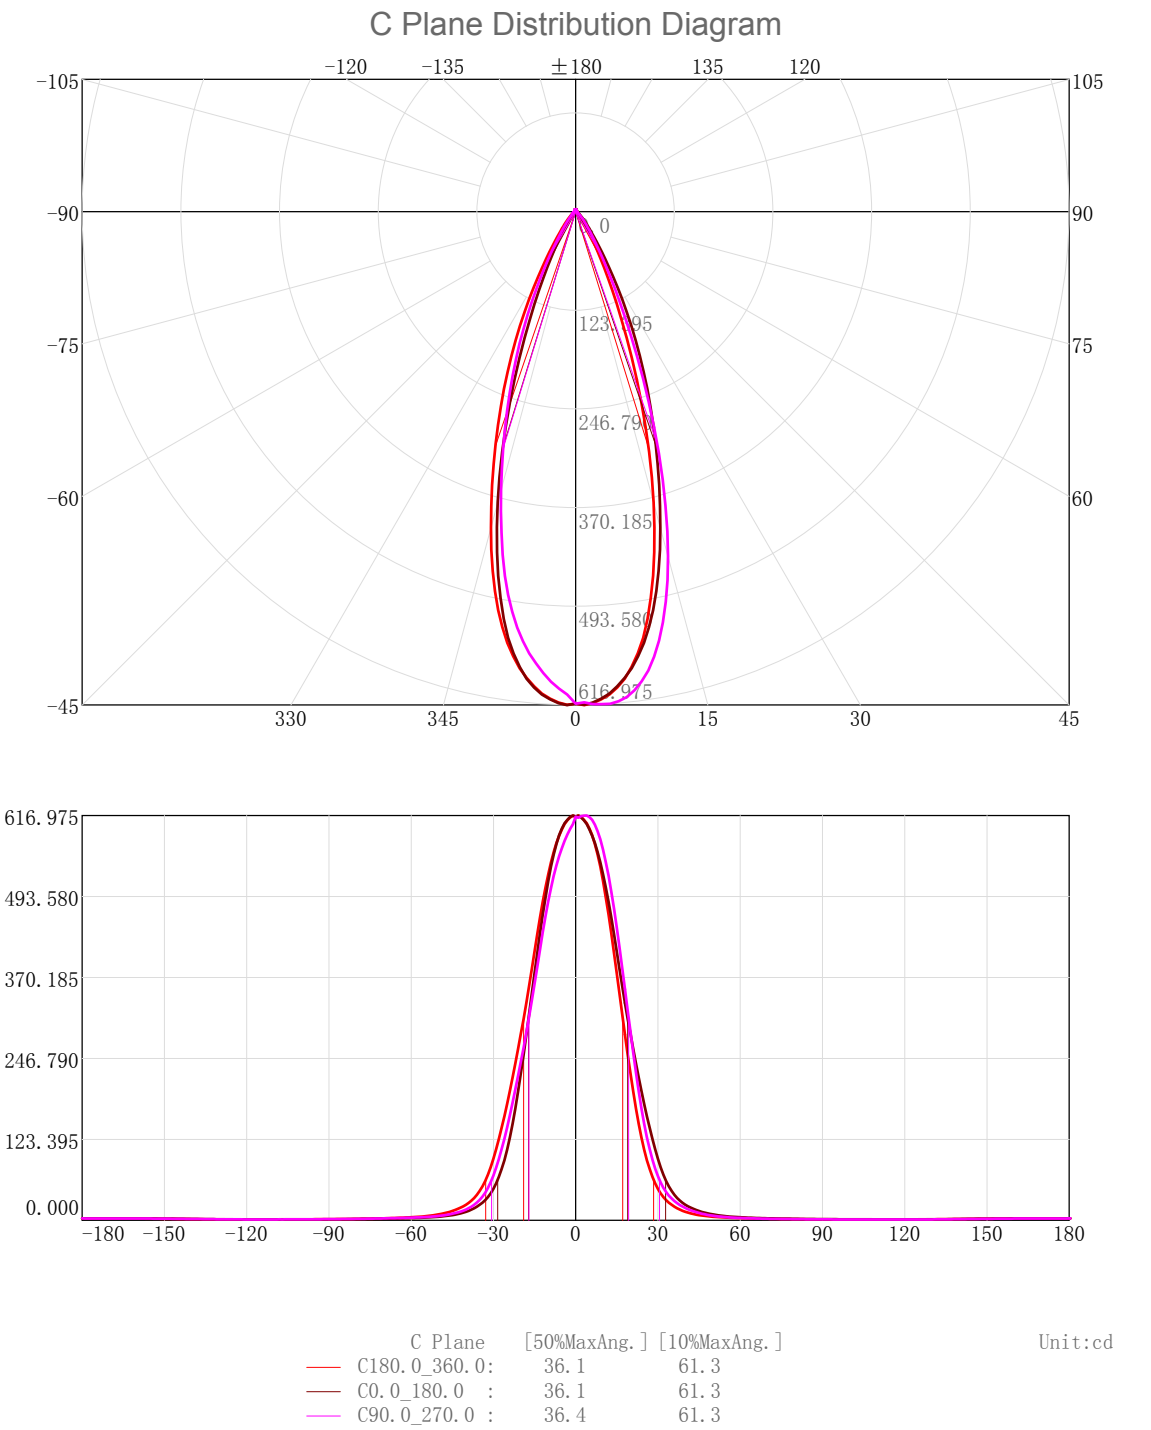

3D Light Intensity Distribution Modal

Lum. Name:DL43-05-XX-02 2700K RA90 36D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2020/06/23

3D Light Intensity Distribution Modal

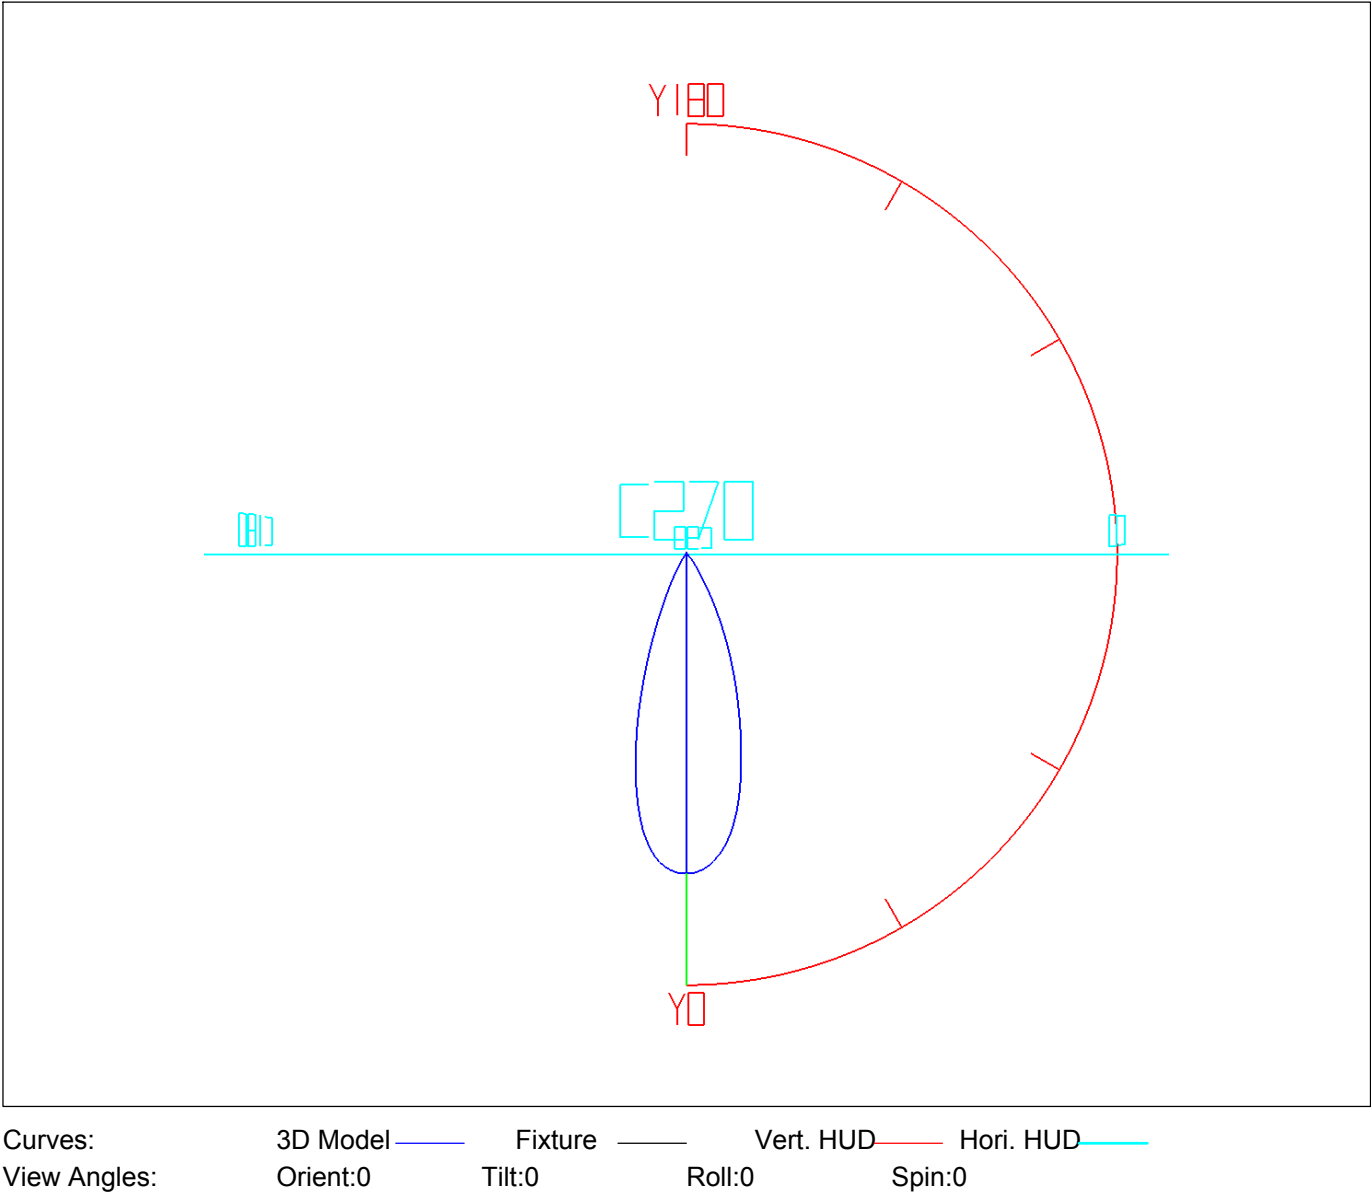

IES Indoor Report

Photometric Filename:DL43-05-XX-02 2700K RA90 36D.IES

Zonal Flux Tabulation

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	0.59	0.59	0.21	0.21	47.0-48.0	0.71	259.72	0.25	90.91
1.0-2.0	1.76	2.34	0.61	0.82	48.0-49.0	0.67	260.39	0.23	91.15
2.0-3.0	2.91	5.25	1.02	1.84	49.0-50.0	0.63	261.01	0.22	91.37
3.0-4.0	4.04	9.30	1.41	3.25	50.0-51.0	0.59	261.60	0.21	91.58
4.0-5.0	5.14	14.44	1.80	5.05	51.0-52.0	0.56	262.16	0.20	91.77
5.0-6.0	6.19	20.63	2.17	7.22	52.0-53.0	0.53	262.69	0.18	91.96
6.0-7.0	7.19	27.82	2.52	9.74	53.0-54.0	0.50	263.19	0.18	92.13
7.0-8.0	8.11	35.92	2.84	12.57	54.0-55.0	0.48	263.67	0.17	92.30
8.0-9.0	8.94	44.86	3.13	15.70	55.0-56.0	0.46	264.13	0.16	92.46
9.0-10.0	9.66	54.52	3.38	19.08	56.0-57.0	0.44	264.57	0.15	92.61
10.0-11.0	10.26	64.77	3.59	22.67	57.0-58.0	0.42	264.99	0.15	92.76
11.0-12.0	10.73	75.50	3.75	26.43	58.0-59.0	0.41	265.40	0.14	92.91
12.0-13.0	11.05	86.55	3.87	30.30	59.0-60.0	0.40	265.80	0.14	93.04
13.0-14.0	11.24	97.80	3.94	34.23	60.0-61.0	0.38	266.18	0.13	93.18
14.0-15.0	11.31	109.10	3.96	38.19	61.0-62.0	0.37	266.56	0.13	93.31
15.0-16.0	11.25	120.35	3.94	42.13	62.0-63.0	0.36	266.92	0.13	93.44
16.0-17.0	11.07	131.43	3.88	46.01	63.0-64.0	0.35	267.27	0.12	93.56
17.0-18.0	10.79	142.22	3.78	49.79	64.0-65.0	0.34	267.62	0.12	93.68
18.0-19.0	10.42	152.64	3.65	53.43	65.0-66.0	0.33	267.95	0.12	93.80
19.0-20.0	9.97	162.61	3.49	56.92	66.0-67.0	0.33	268.28	0.11	93.91
20.0-21.0	9.45	172.05	3.31	60.23	67.0-68.0	0.32	268.60	0.11	94.02
21.0-22.0	8.87	180.92	3.11	63.33	68.0-69.0	0.31	268.91	0.11	94.13
22.0-23.0	8.26	189.19	2.89	66.23	69.0-70.0	0.30	269.21	0.11	94.24
23.0-24.0	7.63	196.82	2.67	68.90	70.0-71.0	0.29	269.50	0.10	94.34
24.0-25.0	6.99	203.80	2.45	71.34	71.0-72.0	0.29	269.79	0.10	94.44
25.0-26.0	6.35	210.15	2.22	73.56	72.0-73.0	0.28	270.07	0.10	94.54
26.0-27.0	5.73	215.88	2.01	75.57	73.0-74.0	0.27	270.34	0.10	94.63
27.0-28.0	5.14	221.01	1.80	77.37	74.0-75.0	0.27	270.61	0.09	94.73
28.0-29.0	4.58	225.59	1.60	78.97	75.0-76.0	0.26	270.87	0.09	94.82
29.0-30.0	4.06	229.65	1.42	80.39	76.0-77.0	0.26	271.13	0.09	94.91
30.0-31.0	3.59	233.24	1.26	81.65	77.0-78.0	0.25	271.38	0.09	95.00
31.0-32.0	3.17	236.41	1.11	82.76	78.0-79.0	0.24	271.62	0.09	95.08
32.0-33.0	2.81	239.22	0.98	83.74	79.0-80.0	0.24	271.86	0.08	95.17
33.0-34.0	2.49	241.71	0.87	84.61	80.0-81.0	0.23	272.09	0.08	95.25
34.0-35.0	2.22	243.94	0.78	85.39	81.0-82.0	0.23	272.32	0.08	95.33
35.0-36.0	1.99	245.93	0.70	86.09	82.0-83.0	0.22	272.54	0.08	95.41
36.0-37.0	1.79	247.72	0.63	86.72	83.0-84.0	0.22	272.76	0.08	95.48
37.0-38.0	1.62	249.34	0.57	87.28	84.0-85.0	0.22	272.98	0.08	95.56
38.0-39.0	1.47	250.82	0.52	87.80	85.0-86.0	0.21	273.19	0.07	95.63
39.0-40.0	1.35	252.16	0.47	88.27	86.0-87.0	0.21	273.40	0.07	95.70
40.0-41.0	1.23	253.40	0.43	88.70	87.0-88.0	0.20	273.60	0.07	95.78
41.0-42.0	1.13	254.53	0.40	89.10	88.0-89.0	0.20	273.80	0.07	95.85
42.0-43.0	1.04	255.57	0.36	89.46	89.0-90.0	0.20	274.00	0.07	95.91
43.0-44.0	0.96	256.53	0.34	89.80	90.0-91.0	0.20	274.19	0.07	95.98
44.0-45.0	0.89	257.41	0.31	90.11	91.0-92.0	0.19	274.39	0.07	96.05
45.0-46.0	0.82	258.24	0.29	90.40	92.0-93.0	0.19	274.58	0.07	96.12
46.0-47.0	0.77	259.00	0.27	90.66	93.0-94.0	0.19	274.76	0.07	96.18

IES Indoor Report


Photometric Filename:DL43-05-XX-02 2700K RA90 36D.IES

Zonal Flux Tabulation - (Cont.)

Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94.0-95.0	0.18	274.95	0.06	96.25	141.0-142.0	0.15	282.09	0.05	98.75
95.0-96.0	0.18	275.13	0.06	96.31	142.0-143.0	0.15	282.24	0.05	98.80
96.0-97.0	0.18	275.31	0.06	96.37	143.0-144.0	0.15	282.39	0.05	98.85
97.0-98.0	0.18	275.49	0.06	96.44	144.0-145.0	0.15	282.53	0.05	98.90
98.0-99.0	0.18	275.66	0.06	96.50	145.0-146.0	0.15	282.68	0.05	98.95
99.0-100.0	0.17	275.84	0.06	96.56	146.0-147.0	0.15	282.83	0.05	99.00
100.0-101.0	0.17	276.01	0.06	96.62	147.0-148.0	0.15	282.97	0.05	99.06
101.0-102.0	0.17	276.18	0.06	96.68	148.0-149.0	0.14	283.12	0.05	99.11
102.0-103.0	0.17	276.35	0.06	96.74	149.0-150.0	0.14	283.26	0.05	99.16
103.0-104.0	0.17	276.51	0.06	96.79	150.0-151.0	0.14	283.40	0.05	99.21
104.0-105.0	0.16	276.67	0.06	96.85	151.0-152.0	0.14	283.54	0.05	99.25
105.0-106.0	0.16	276.84	0.06	96.91	152.0-153.0	0.14	283.68	0.05	99.30
106.0-107.0	0.16	277.00	0.06	96.96	153.0-154.0	0.13	283.81	0.05	99.35
107.0-108.0	0.16	277.15	0.06	97.02	154.0-155.0	0.13	283.94	0.05	99.39
108.0-109.0	0.16	277.31	0.05	97.07	155.0-156.0	0.13	284.07	0.04	99.44
109.0-110.0	0.15	277.46	0.05	97.13	156.0-157.0	0.12	284.19	0.04	99.48
110.0-111.0	0.15	277.62	0.05	97.18	157.0-158.0	0.12	284.31	0.04	99.52
111.0-112.0	0.15	277.77	0.05	97.23	158.0-159.0	0.12	284.43	0.04	99.56
112.0-113.0	0.15	277.92	0.05	97.29	159.0-160.0	0.11	284.54	0.04	99.60
113.0-114.0	0.15	278.07	0.05	97.34	160.0-161.0	0.11	284.64	0.04	99.64
114.0-115.0	0.15	278.21	0.05	97.39	161.0-162.0	0.10	284.75	0.04	99.68
115.0-116.0	0.15	278.36	0.05	97.44	162.0-163.0	0.10	284.84	0.03	99.71
116.0-117.0	0.14	278.50	0.05	97.49	163.0-164.0	0.09	284.94	0.03	99.74
117.0-118.0	0.14	278.65	0.05	97.54	164.0-165.0	0.09	285.02	0.03	99.77
118.0-119.0	0.14	278.79	0.05	97.59	165.0-166.0	0.08	285.10	0.03	99.80
119.0-120.0	0.14	278.93	0.05	97.64	166.0-167.0	0.08	285.18	0.03	99.83
120.0-121.0	0.14	279.08	0.05	97.69	167.0-168.0	0.07	285.25	0.02	99.85
121.0-122.0	0.14	279.22	0.05	97.74	168.0-169.0	0.07	285.32	0.02	99.88
122.0-123.0	0.14	279.36	0.05	97.79	169.0-170.0	0.06	285.38	0.02	99.90
123.0-124.0	0.14	279.50	0.05	97.84	170.0-171.0	0.05	285.43	0.02	99.92
124.0-125.0	0.14	279.64	0.05	97.89	171.0-172.0	0.05	285.48	0.02	99.93
125.0-126.0	0.14	279.78	0.05	97.94	172.0-173.0	0.04	285.52	0.02	99.95
126.0-127.0	0.14	279.92	0.05	97.99	173.0-174.0	0.04	285.56	0.01	99.96
127.0-128.0	0.14	280.06	0.05	98.04	174.0-175.0	0.03	285.59	0.01	99.97
128.0-129.0	0.14	280.20	0.05	98.08	175.0-176.0	0.03	285.62	0.01	99.98
129.0-130.0	0.14	280.34	0.05	98.13	176.0-177.0	0.02	285.64	0.01	99.99
130.0-131.0	0.14	280.48	0.05	98.18	177.0-178.0	0.01	285.65	0.01	99.99
131.0-132.0	0.14	280.62	0.05	98.23	178.0-179.0	0.01	285.66	0.00	100.00
132.0-133.0	0.14	280.77	0.05	98.28	179.0-180.0	0.00	285.67	0.00	100.00
133.0-134.0	0.14	280.91	0.05	98.33					
134.0-135.0	0.14	281.06	0.05	98.39					
135.0-136.0	0.15	281.20	0.05	98.44					
136.0-137.0	0.15	281.35	0.05	98.49					
137.0-138.0	0.15	281.50	0.05	98.54					
138.0-139.0	0.15	281.64	0.05	98.59					
139.0-140.0	0.15	281.79	0.05	98.64					
140.0-141.0	0.15	281.94	0.05	98.69					

Rectangle ISO Lighting Intensity Diagram


Lum. Name: DL43-05-XX-02 2700K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23

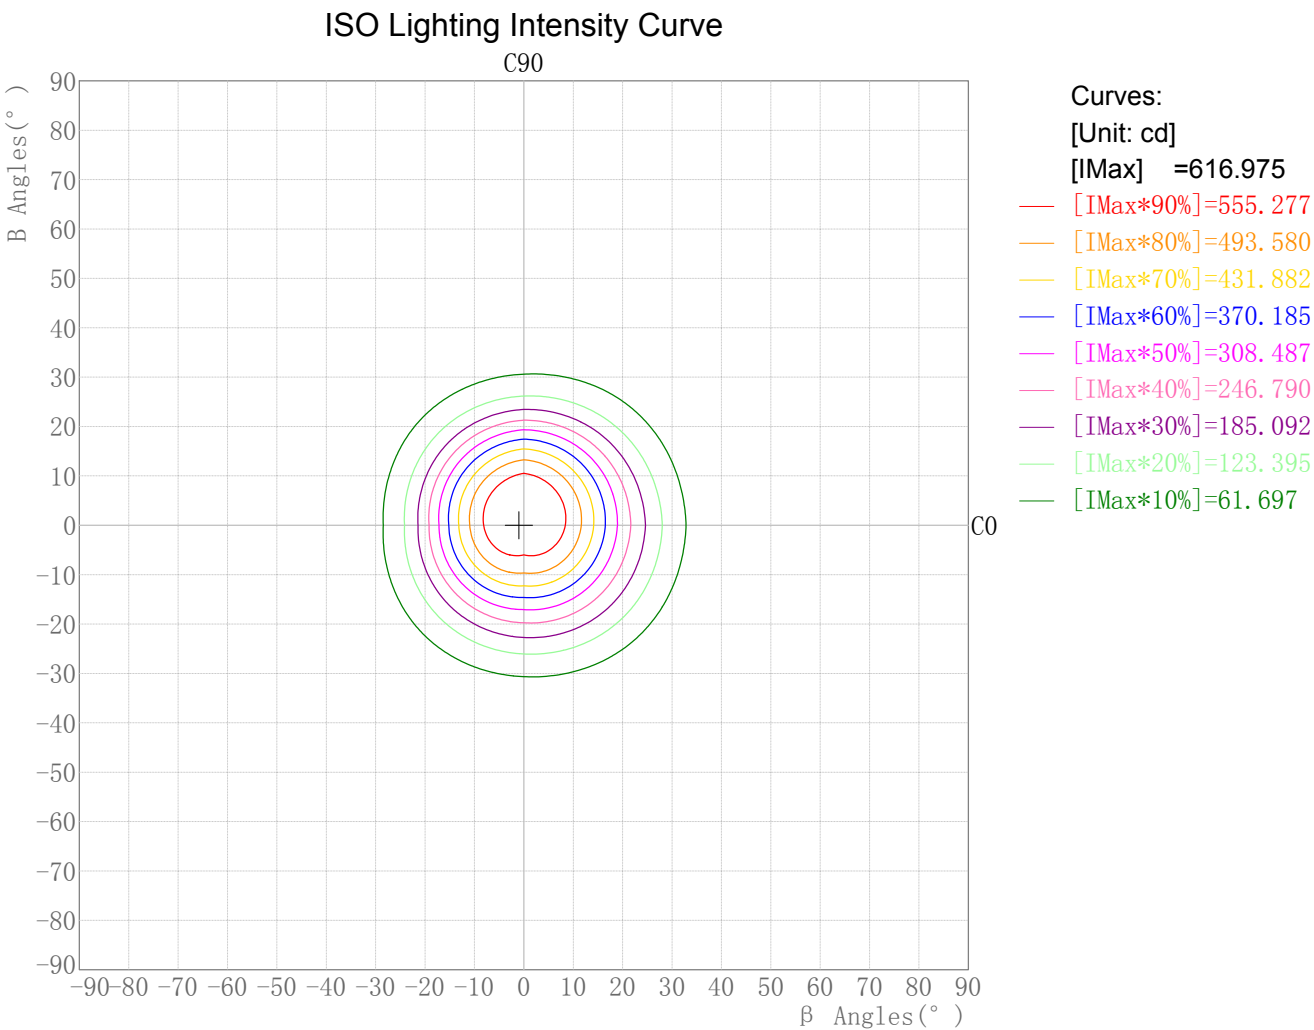

Plane ISO-Illuminance Diagram

Lum. Name:DL43-05-XX-02 2700K RA90 36D	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23

Plane ISO-Illuminance Curve

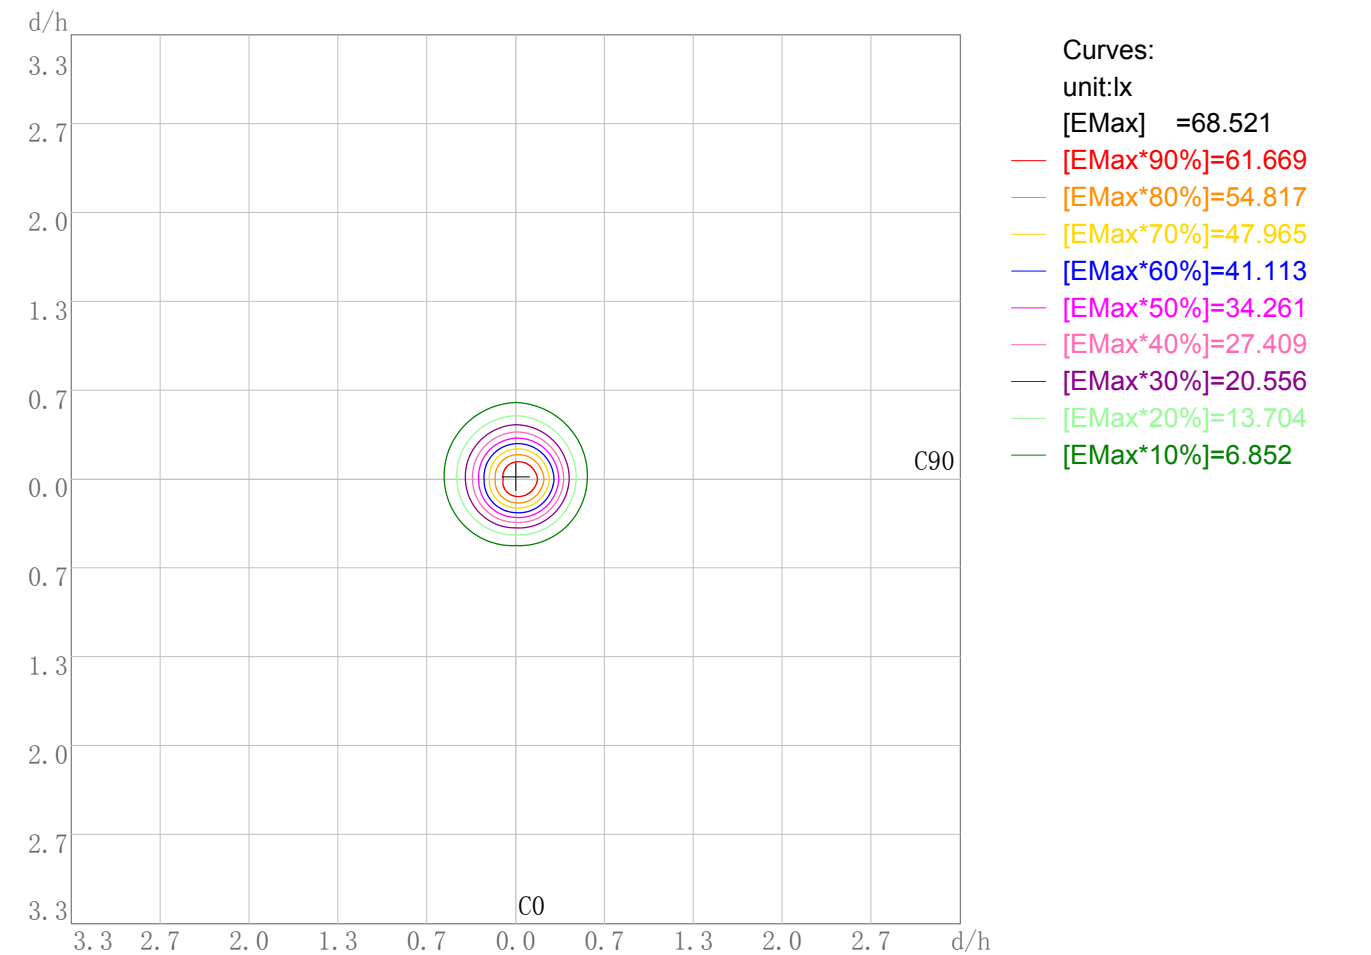

Working Plane Luminaire Mounting Height(m): 3.00

Working Plane Maximum Illuminance(lx): 68.52

Working Plane Maximum Illuminance Position(d/h):H0.0 V-0.0


IES Indoor Report

Photometric Filename:DL43-05-XX-02 2700K RA90 36D.IES

3D Plane ISO Illuminance Diagram

Lum. Name: DL43-05-XX-02 2700K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23

3D Plane Illuminance Modal

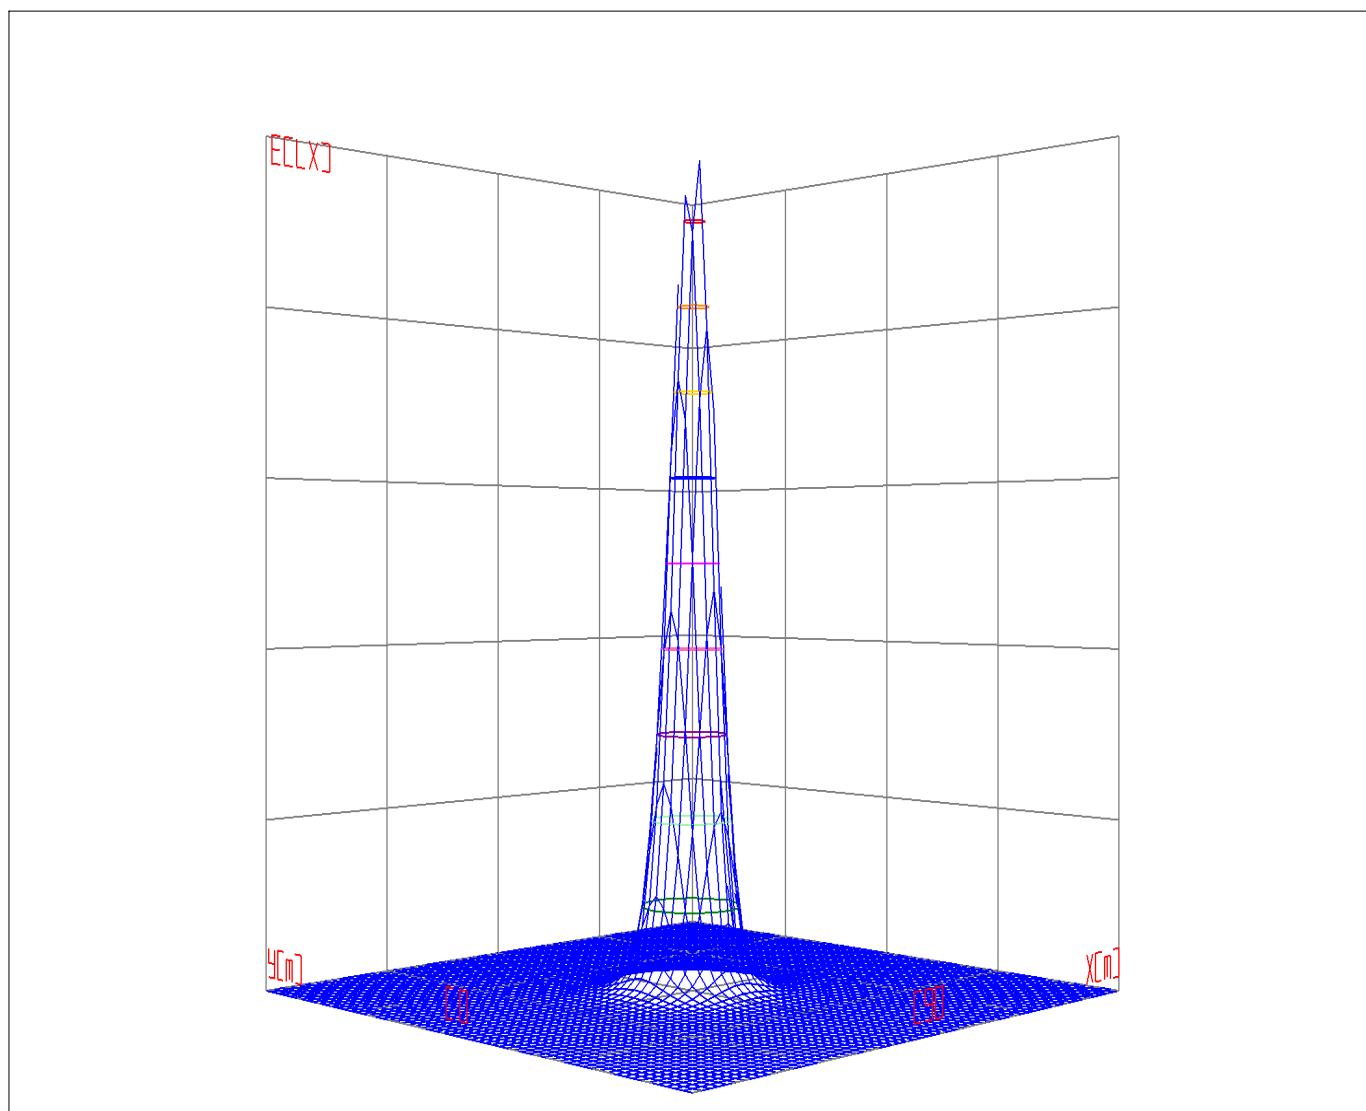


Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0

Space ISO Illuminance Diagram

Lum. Name: DL43-05-XX-02 2700K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23


Space ISO Illuminance Curve

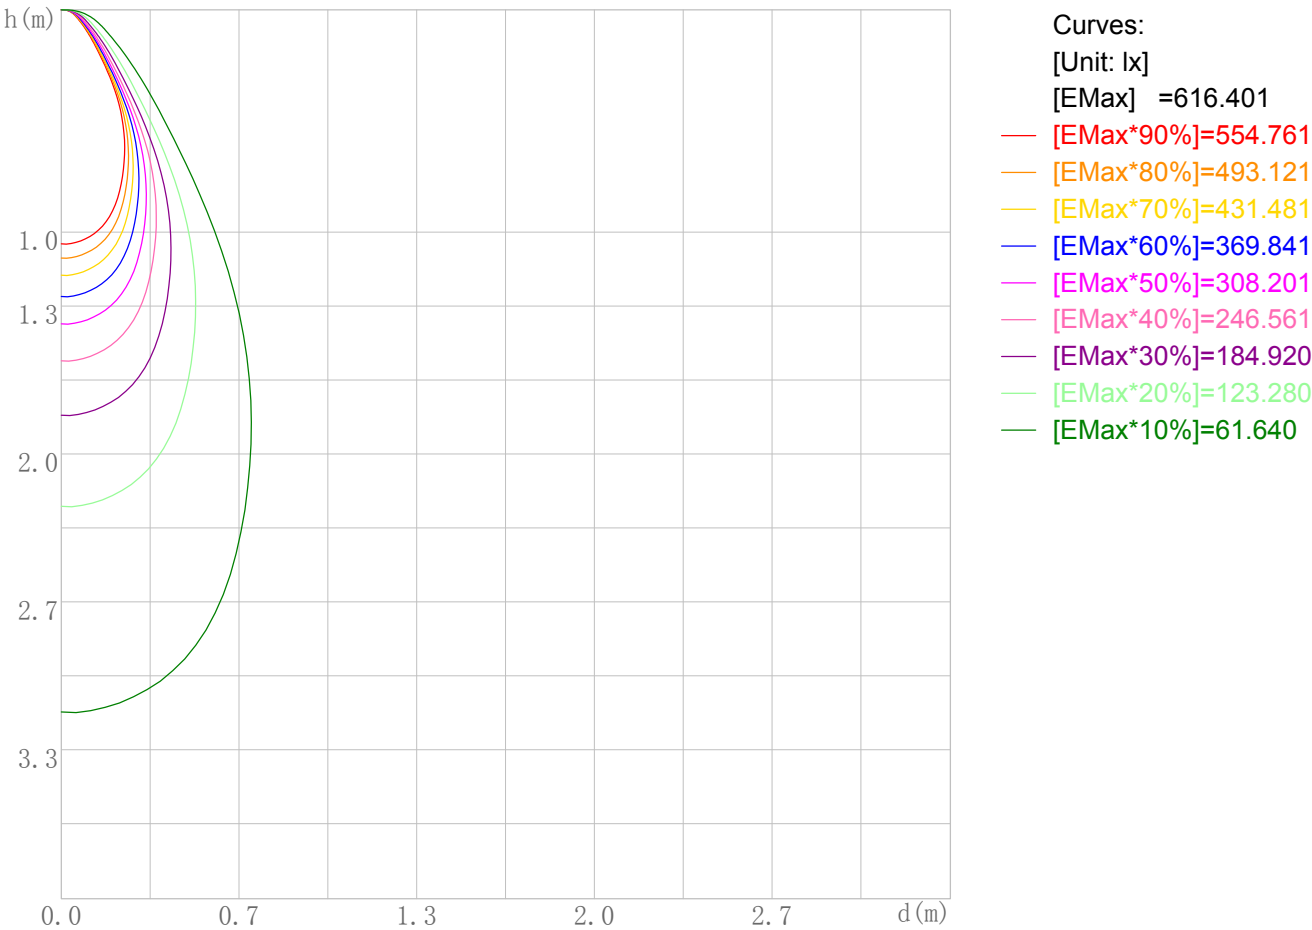

Space Plane Maximum Illuminance and @Angle:616.40lx,1.0deg
Plane Maximum Lighting Intensity and @Angle:616.683cd,0deg

Illuminance-Distance Diagram

Lum. Name:DL43-05-XX-02 2700K RA90 36D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2020/06/23

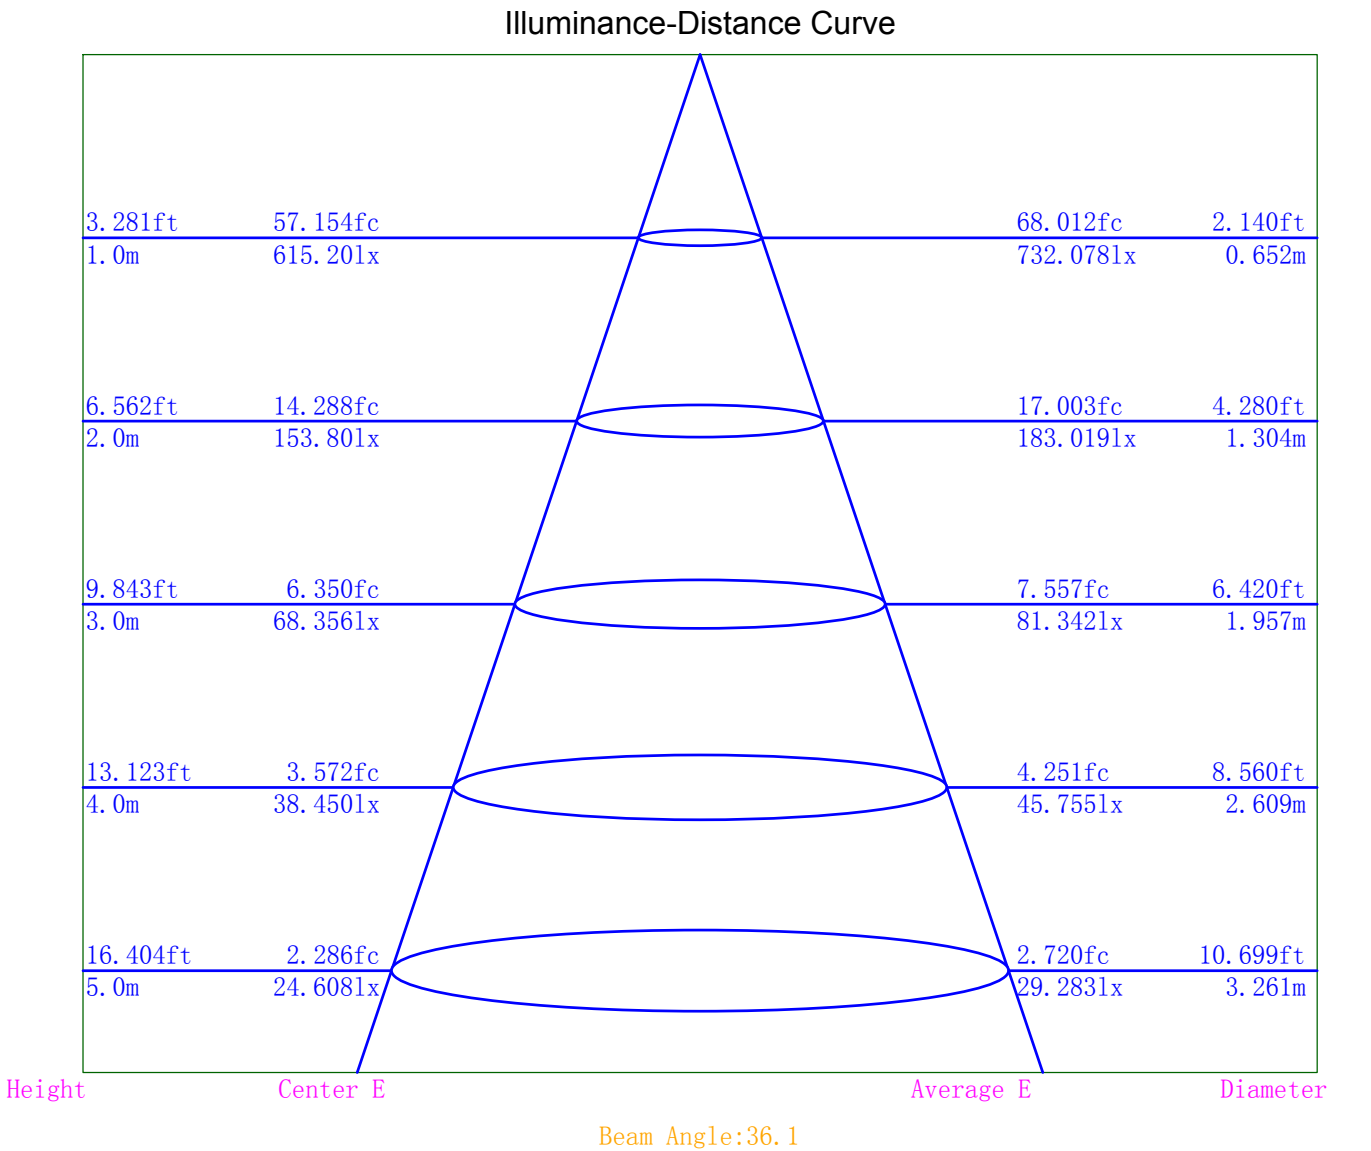

Indoor Luminance Limiting Curves

Lum. Name: DL43-05-XX-02 2700K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	3316	2344	1809	1568	1507	1562	1763	2289	4068
C90	2639	1849	1434	1251	1209	1259	1436	1880	3361

Luminance Limiting Curve

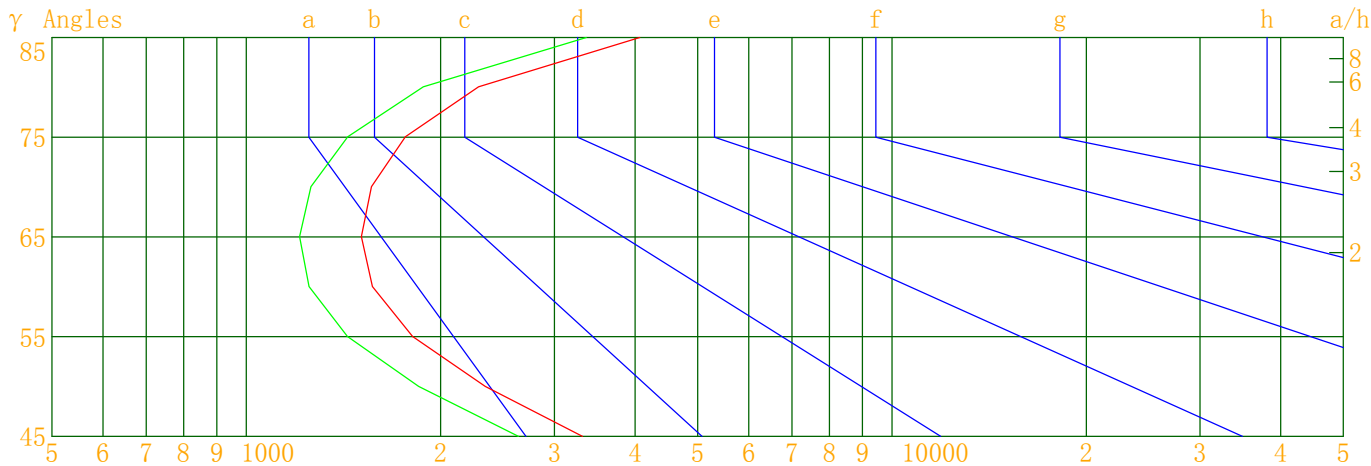


Luminous Size: Length(m)=0.050 Width(m)=0.050 Height(m)=0.072 Area(m^2)=0.006100

Luminous Type: Without Luminous Side

Luminous Curves: C0-C180 Color: C90-C270 Color:

Indoor Budgetary Estimate Table

Lum. Name: DL43-05-XX-02 2700K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23

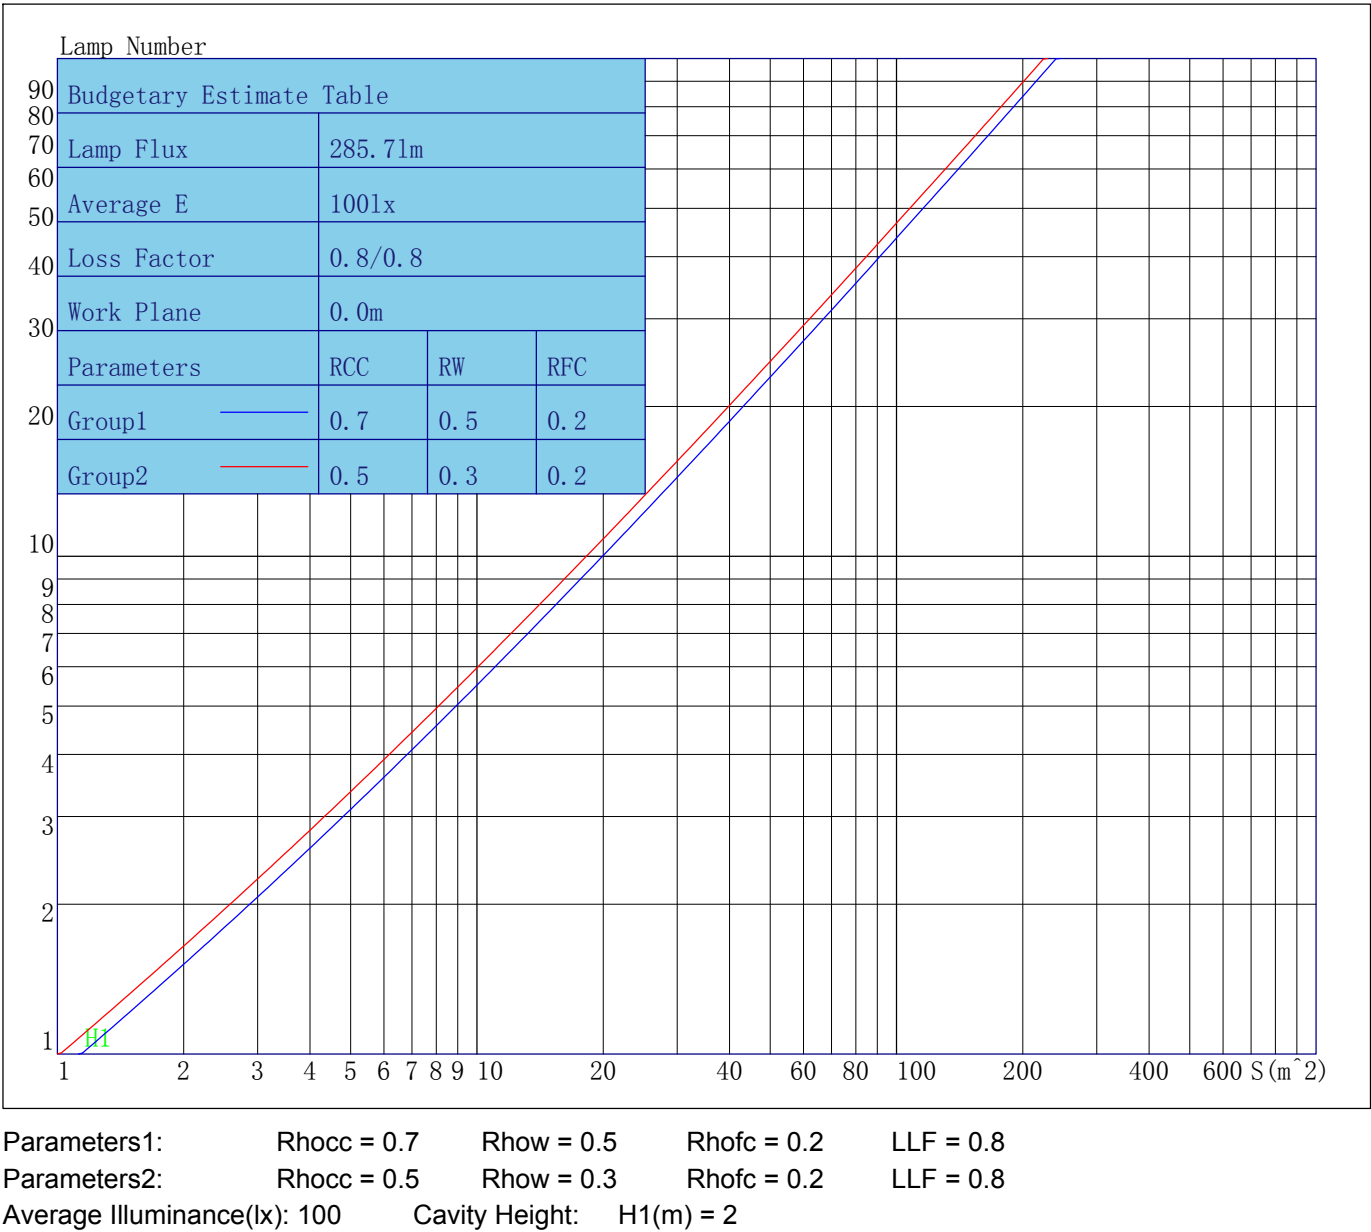

Indoor Coefficient of Utilization Table

Lum. Name: DL43-05-XX-02 2700K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	118	118	118	118	115	115	115	115	109	109	109	103	103	103	98	98	98	96
1	113	110	107	105	110	107	105	103	102	101	99	98	97	95	94	93	92	90
2	107	103	99	96	105	101	97	94	97	94	92	93	91	89	90	88	87	85
3	103	97	92	88	100	95	91	87	92	88	85	89	86	84	86	84	82	80
4	98	91	86	82	96	90	85	82	87	83	80	85	82	79	83	80	78	76
5	94	87	81	77	92	85	80	77	83	79	76	81	78	75	79	76	74	72
6	90	82	77	73	89	81	76	73	79	75	72	78	74	71	76	73	70	69
7	87	78	73	69	85	78	73	69	76	72	68	75	71	68	73	70	67	66
8	83	75	70	66	82	74	69	66	73	68	65	72	68	65	70	67	64	63
9	80	72	67	63	79	71	66	63	70	65	62	69	65	62	68	64	62	60
10	77	69	64	60	76	68	63	60	67	63	60	66	62	59	65	62	59	58

Unified Glare Rating Table

Lum. Name: DL43-05-XX-02 2700K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2020/06/23

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size	Vewed crosswise					Vewed endwise				
X=2H Y=2H	10.6	11.5	11.0	11.9	12.3	9.1	10.1	9.6	10.5	10.9
	11.1	12.0	11.6	12.4	12.9	9.7	10.6	10.2	11.0	11.5
	11.6	12.4	12.1	12.8	13.3	10.2	11.0	10.7	11.4	11.9
	12.2	12.9	12.7	13.4	13.9	10.8	11.5	11.3	12.0	12.5
	12.6	13.3	13.1	13.8	14.3	11.2	11.9	11.7	12.4	12.9
	13.1	13.8	13.7	14.3	14.8	11.8	12.5	12.3	12.9	13.4
X=4H Y=2H	10.6	11.4	11.1	11.8	12.3	9.2	10.0	9.7	10.4	10.9
	11.4	12.1	11.9	12.6	13.1	10.1	10.8	10.6	11.2	11.7
	12.0	12.6	12.6	13.1	13.7	10.7	11.3	11.3	11.8	12.4
	12.9	13.4	13.5	14.0	14.5	11.7	12.2	12.2	12.7	13.3
	13.5	14.0	14.0	14.5	15.1	12.2	12.7	12.8	13.2	13.8
	14.2	14.6	14.8	15.2	15.8	13.0	13.4	13.5	13.9	14.5
X=8H Y=4H	12.3	12.7	12.8	13.3	13.8	11.0	11.5	11.6	12.0	12.6
	13.4	13.8	14.0	14.4	15.0	12.2	12.6	12.8	13.2	13.8
	14.2	14.5	14.8	15.1	15.7	13.0	13.3	13.6	13.9	14.5
	15.2	15.5	15.7	16.0	16.7	14.0	14.3	14.6	14.9	15.5
X=12H Y=4H	12.3	12.7	12.9	13.3	13.8	11.1	11.5	11.7	12.1	12.7
	13.5	13.9	14.1	14.4	15.1	12.4	12.7	13.0	13.3	13.9
	14.4	14.7	15.0	15.3	15.9	13.3	13.6	13.9	14.2	14.8
Variations with the objerver position at spacings										
S=1.0H	0.0/-0.1					0.1/-0.1				
S=1.5H	0.1/-0.2					0.1/-0.2				
S=2.0H	0.1/-0.1					0.1/-0.1				
Reduced UGR Table:										
Nordic Standard Table:	BK0					BK0				
Correction Value	3.1					3.2				

o the CIE Pub.117, data has been corrected, refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	615.20	615.20	615.20	615.20
γ 1.0	616.68	613.58	616.97	603.79
γ 2.0	614.14	616.09	614.98	596.72
γ 3.0	609.80	616.65	610.63	588.47
γ 4.0	604.07	616.88	605.16	578.36
γ 5.0	595.76	614.42	597.24	567.13
γ 6.0	586.26	610.30	587.13	555.30
γ 7.0	575.30	602.96	573.61	541.07
γ 8.0	561.38	593.09	557.76	525.18
γ 9.0	545.88	580.87	539.47	506.59
γ 10.0	527.58	565.03	517.18	486.52
γ 11.0	507.62	546.27	492.38	464.01
γ 12.0	485.08	524.99	465.46	438.68
γ 13.0	461.26	500.46	437.06	412.23
γ 14.0	435.69	474.76	406.70	385.90
γ 15.0	409.34	446.06	376.17	360.10
γ 16.0	382.95	415.99	345.31	334.77
γ 17.0	357.13	384.27	314.09	310.09
γ 18.0	331.47	352.43	283.13	286.24
γ 19.0	307.10	319.69	252.67	263.09
γ 20.0	283.83	286.94	223.39	241.20
γ 21.0	260.87	255.20	196.03	220.08
γ 22.0	239.07	224.99	170.32	199.44
γ 23.0	217.86	196.85	147.15	179.55
γ 24.0	197.31	170.81	126.26	160.11
γ 25.0	177.59	147.36	107.76	141.64
γ 26.0	158.83	126.48	91.70	124.35
γ 27.0	140.78	108.23	78.04	108.16
γ 28.0	124.00	92.40	66.26	93.45
γ 29.0	108.21	78.86	56.29	80.11
γ 30.0	93.82	67.45	48.09	68.34
γ 31.0	81.00	57.80	41.27	58.16
γ 32.0	69.80	49.81	35.64	49.45
γ 33.0	60.10	43.29	30.98	42.27
γ 34.0	51.84	37.86	27.07	36.23
γ 35.0	44.91	33.35	23.83	31.30
γ 36.0	39.11	29.56	21.03	27.20
γ 37.0	34.26	26.31	18.61	23.84
γ 38.0	30.28	23.53	16.54	21.03
γ 39.0	26.89	21.15	14.73	18.67
γ 40.0	24.02	19.02	13.18	16.67
γ 41.0	21.53	17.15	11.86	14.96
γ 42.0	19.39	15.46	10.68	13.48
γ 43.0	17.47	13.95	9.68	12.23
γ 44.0	15.79	12.60	8.86	11.11
γ 45.0	14.30	11.38	8.15	10.14
γ 46.0	12.99	10.31	7.54	9.31

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	11.84	9.42	6.99	8.57
γ 48.0	10.86	8.62	6.48	7.92
γ 49.0	9.98	7.91	6.06	7.35
γ 50.0	9.19	7.25	5.67	6.83
γ 51.0	8.48	6.68	5.36	6.39
γ 52.0	7.84	6.18	5.06	6.01
γ 53.0	7.28	5.74	4.79	5.69
γ 54.0	6.77	5.36	4.55	5.41
γ 55.0	6.33	5.02	4.34	5.16
γ 56.0	5.94	4.71	4.16	4.93
γ 57.0	5.60	4.45	3.99	4.72
γ 58.0	5.29	4.21	3.83	4.55
γ 59.0	5.02	4.00	3.70	4.40
γ 60.0	4.78	3.82	3.58	4.25
γ 61.0	4.57	3.65	3.46	4.11
γ 62.0	4.38	3.50	3.35	3.97
γ 63.0	4.21	3.37	3.24	3.85
γ 64.0	4.04	3.23	3.14	3.73
γ 65.0	3.89	3.12	3.05	3.61
γ 66.0	3.75	3.01	2.94	3.50
γ 67.0	3.61	2.90	2.85	3.39
γ 68.0	3.49	2.80	2.76	3.30
γ 69.0	3.38	2.71	2.67	3.18
γ 70.0	3.26	2.63	2.59	3.09
γ 71.0	3.16	2.54	2.51	3.01
γ 72.0	3.06	2.47	2.44	2.91
γ 73.0	2.97	2.39	2.37	2.83
γ 74.0	2.88	2.33	2.32	2.74
γ 75.0	2.78	2.27	2.24	2.67
γ 76.0	2.71	2.20	2.18	2.59
γ 77.0	2.64	2.15	2.13	2.53
γ 78.0	2.57	2.10	2.07	2.46
γ 79.0	2.50	2.04	2.02	2.40
γ 80.0	2.42	1.99	1.98	2.33
γ 81.0	2.37	1.94	1.93	2.27
γ 82.0	2.32	1.90	1.89	2.22
γ 83.0	2.25	1.85	1.85	2.18
γ 84.0	2.20	1.82	1.80	2.13
γ 85.0	2.16	1.79	1.77	2.08
γ 86.0	2.11	1.76	1.75	2.04
γ 87.0	2.08	1.72	1.71	2.01
γ 88.0	2.04	1.71	1.69	1.97
γ 89.0	2.00	1.67	1.67	1.93
γ 90.0	1.97	1.65	1.65	1.91
γ 91.0	1.94	1.63	1.62	1.87
γ 92.0	1.91	1.61	1.60	1.85
γ 93.0	1.89	1.59	1.59	1.82

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	1.87	1.58	1.57	1.79
γ 95.0	1.84	1.55	1.55	1.77
γ 96.0	1.81	1.53	1.54	1.75
γ 97.0	1.80	1.52	1.52	1.73
γ 98.0	1.77	1.51	1.51	1.71
γ 99.0	1.75	1.50	1.51	1.69
γ 100.0	1.73	1.49	1.48	1.67
γ 101.0	1.71	1.48	1.48	1.66
γ 102.0	1.69	1.47	1.47	1.64
γ 103.0	1.68	1.45	1.46	1.64
γ 104.0	1.66	1.44	1.45	1.62
γ 105.0	1.64	1.43	1.45	1.61
γ 106.0	1.63	1.42	1.45	1.61
γ 107.0	1.61	1.41	1.44	1.58
γ 108.0	1.60	1.40	1.43	1.59
γ 109.0	1.58	1.40	1.44	1.57
γ 110.0	1.58	1.40	1.43	1.56
γ 111.0	1.56	1.39	1.43	1.56
γ 112.0	1.55	1.39	1.44	1.55
γ 113.0	1.54	1.37	1.44	1.55
γ 114.0	1.53	1.38	1.45	1.55
γ 115.0	1.52	1.38	1.45	1.55
γ 116.0	1.52	1.38	1.46	1.55
γ 117.0	1.51	1.38	1.47	1.55
γ 118.0	1.51	1.38	1.47	1.56
γ 119.0	1.51	1.38	1.48	1.55
γ 120.0	1.51	1.39	1.50	1.58
γ 121.0	1.51	1.40	1.51	1.57
γ 122.0	1.51	1.41	1.53	1.59
γ 123.0	1.52	1.43	1.56	1.60
γ 124.0	1.52	1.44	1.58	1.62
γ 125.0	1.54	1.45	1.60	1.65
γ 126.0	1.54	1.47	1.63	1.66
γ 127.0	1.58	1.49	1.66	1.69
γ 128.0	1.59	1.52	1.69	1.72
γ 129.0	1.62	1.53	1.72	1.76
γ 130.0	1.64	1.57	1.75	1.78
γ 131.0	1.66	1.59	1.80	1.83
γ 132.0	1.70	1.62	1.84	1.86
γ 133.0	1.73	1.66	1.88	1.90
γ 134.0	1.77	1.69	1.92	1.94
γ 135.0	1.80	1.74	1.97	1.99
γ 136.0	1.85	1.78	2.01	2.03
γ 137.0	1.89	1.82	2.06	2.07
γ 138.0	1.93	1.87	2.11	2.12
γ 139.0	1.98	1.91	2.15	2.17
γ 140.0	2.03	1.97	2.21	2.21

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	2.08	2.01	2.26	2.26
γ 142.0	2.12	2.07	2.31	2.30
γ 143.0	2.18	2.11	2.36	2.35
γ 144.0	2.22	2.17	2.41	2.39
γ 145.0	2.27	2.22	2.46	2.43
γ 146.0	2.33	2.27	2.52	2.49
γ 147.0	2.37	2.32	2.58	2.53
γ 148.0	2.42	2.36	2.62	2.57
γ 149.0	2.47	2.41	2.66	2.62
γ 150.0	2.51	2.45	2.70	2.67
γ 151.0	2.56	2.51	2.75	2.70
γ 152.0	2.61	2.54	2.79	2.73
γ 153.0	2.65	2.58	2.83	2.76
γ 154.0	2.69	2.64	2.87	2.79
γ 155.0	2.73	2.67	2.90	2.84
γ 156.0	2.76	2.71	2.92	2.85
γ 157.0	2.80	2.74	2.95	2.88
γ 158.0	2.83	2.76	2.96	2.91
γ 159.0	2.86	2.80	2.99	2.93
γ 160.0	2.89	2.82	3.01	2.94
γ 161.0	2.91	2.84	3.03	2.96
γ 162.0	2.92	2.86	3.03	2.96
γ 163.0	2.94	2.88	3.04	2.97
γ 164.0	2.96	2.88	3.05	2.98
γ 165.0	2.97	2.90	3.06	2.97
γ 166.0	2.97	2.92	3.06	2.98
γ 167.0	2.98	2.92	3.07	2.98
γ 168.0	2.99	2.92	3.06	2.99
γ 169.0	3.00	2.94	3.05	2.99
γ 170.0	3.00	2.96	3.06	2.98
γ 171.0	3.02	2.96	3.07	2.99
γ 172.0	3.02	2.97	3.07	2.99
γ 173.0	3.01	2.98	3.07	3.00
γ 174.0	3.02	2.98	3.07	3.00
γ 175.0	3.03	2.98	3.08	3.01
γ 176.0	3.04	2.99	3.09	3.03
γ 177.0	3.05	3.00	3.08	3.03
γ 178.0	3.06	3.00	3.08	3.04
γ 179.0	3.07	3.01	3.10	3.04
γ 180.0	3.06	3.06	3.06	3.06