



Indoor Luminaire Photometric Data

Description Information

Luminary Name: TR08-09-XX-01 3000K RA90 36D		Lum. Catalog:	Test ID: 01
Lamp Name:		Lamp Catalog: LED	Test Date: 2021/10/27
Manufacture: Shenzhen Norming Lighting Co., Ltd		Shld. Ang(°):	Test Machine:GON-2000
Test Lab: Quality Department		Frequency (Hz):	Lamp CCT (K): Ra:
Lum. Size (W*L*H):0.076m*0.076m*0.000m		Lum. Area (m2):0.005	Lum. W (kg): 0.000
Test System: C, γ	Test Step: C=90.0 γ=1.0	Temp. (°C): 25	Humidity(%): 50.0


Character Parameter

Lamp Speciality Parameter		Luminaire Speciality Parameter	
Rated Flux(lm): 786.490	Luminary Flux(lm): 786.487	Field Angle(10%Imax): 50.9(°)	
Rated Power(W):	Luminary Efficiency: 100.00%	Down Lumens&Percent: 780.064lm 99.18%	
Rated Voltage(V):	Luminary EER(lm/W): 88.879	Up Lumens&Percent: 6.423lm 0.82%	
Tested Power(W): 8.849	Max. Candela(cd): 2141.809	S/MH: C0_a180=0.580 C90_270=0.566	
Lamps' Inside: 1	Max Cand@Ang. (°): C=0.0 γ=3.0	CIE Type: Semi-Direct	
Tested Electrics (V, A, pf):240.6, 0.040, 0.900	Beam Angle(50%Imax): 33.9(°)	ErP Φ use(90°): 681.708lm	
Lamp Size (W*L*H):0.076m*0.076m*0.000m	Left=-15.5°, Right=18.4°	IRF(%): 561.659	

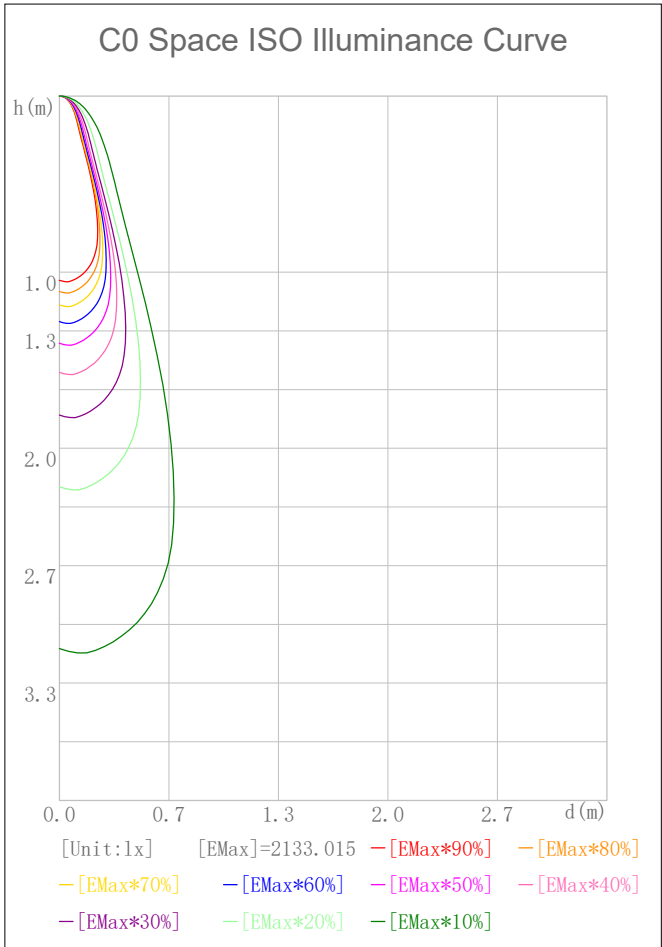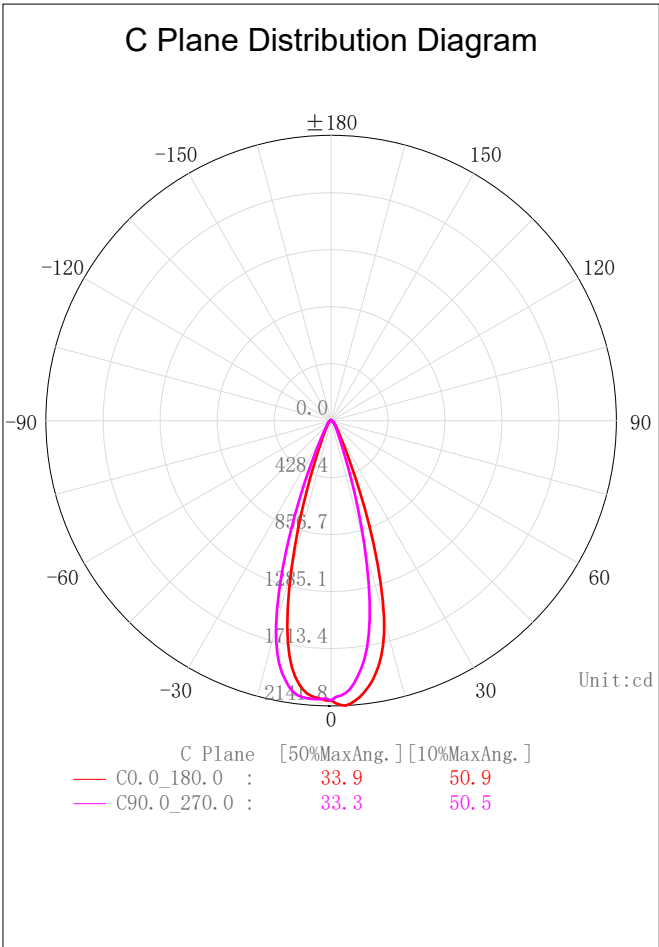

2D Plane Light Intensity Distribution Curve


Lum. Name:TR08-09-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2021/10/27

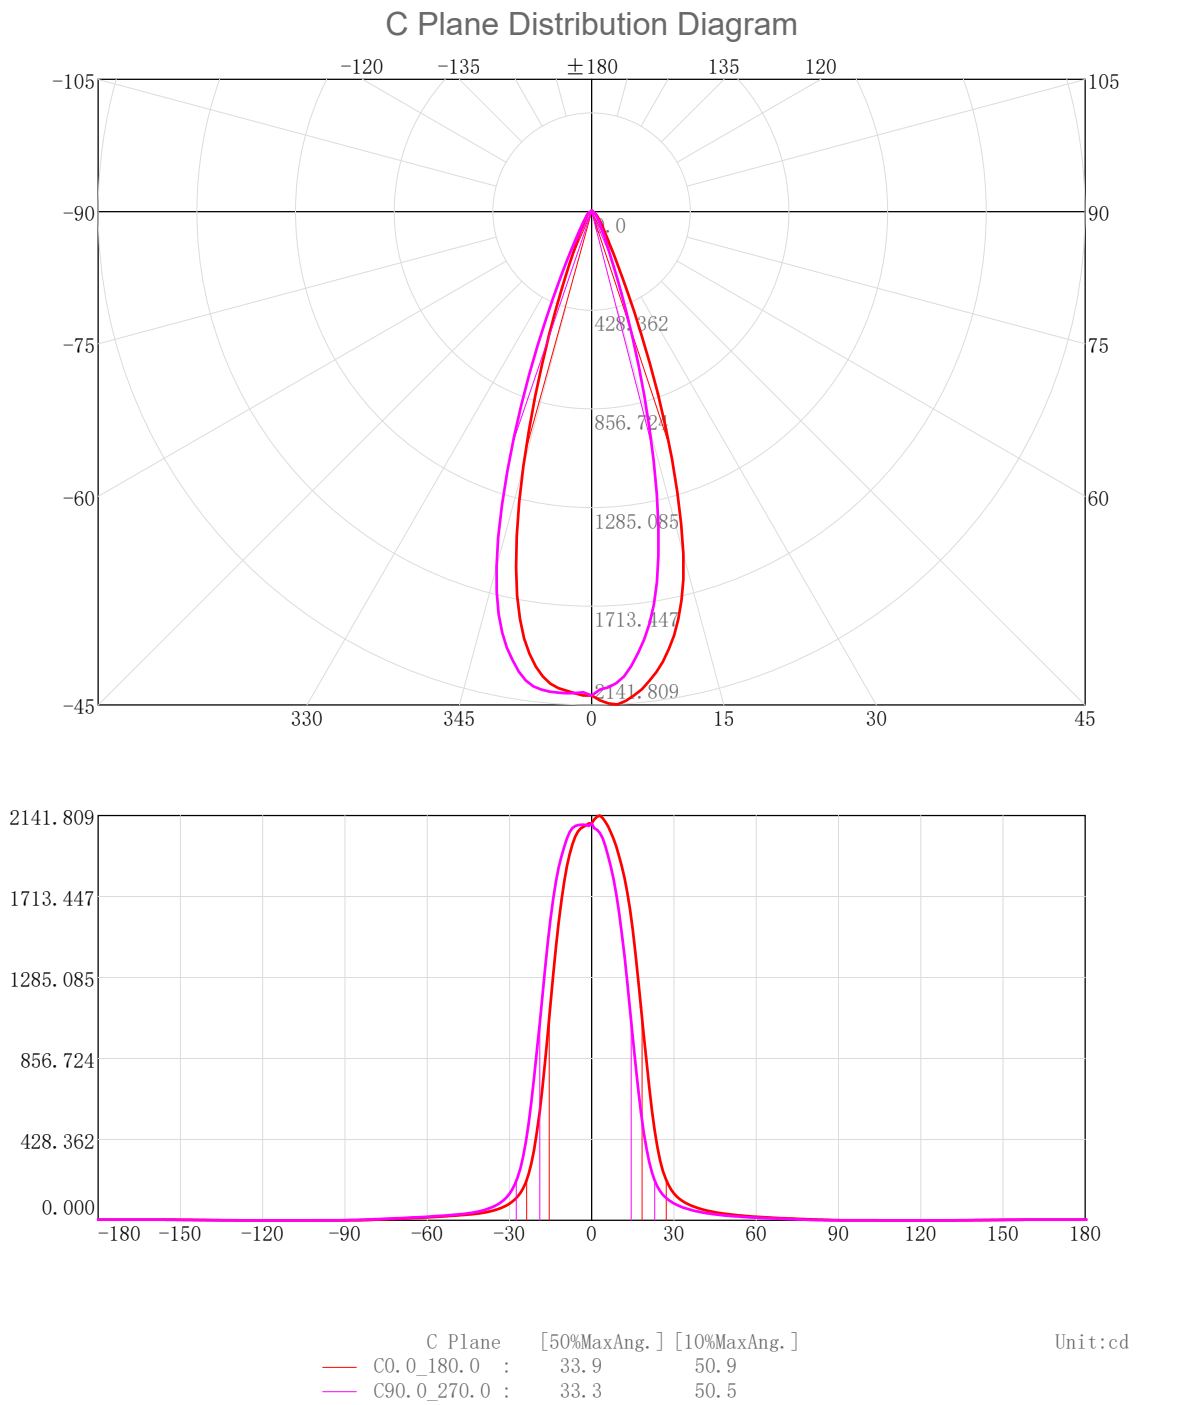

3D Light Intensity Distribution Modal

Lum. Name:TR08-09-XX-01 3000K RA90 36D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2021/10/27

3D Light Intensity Distribution Modal

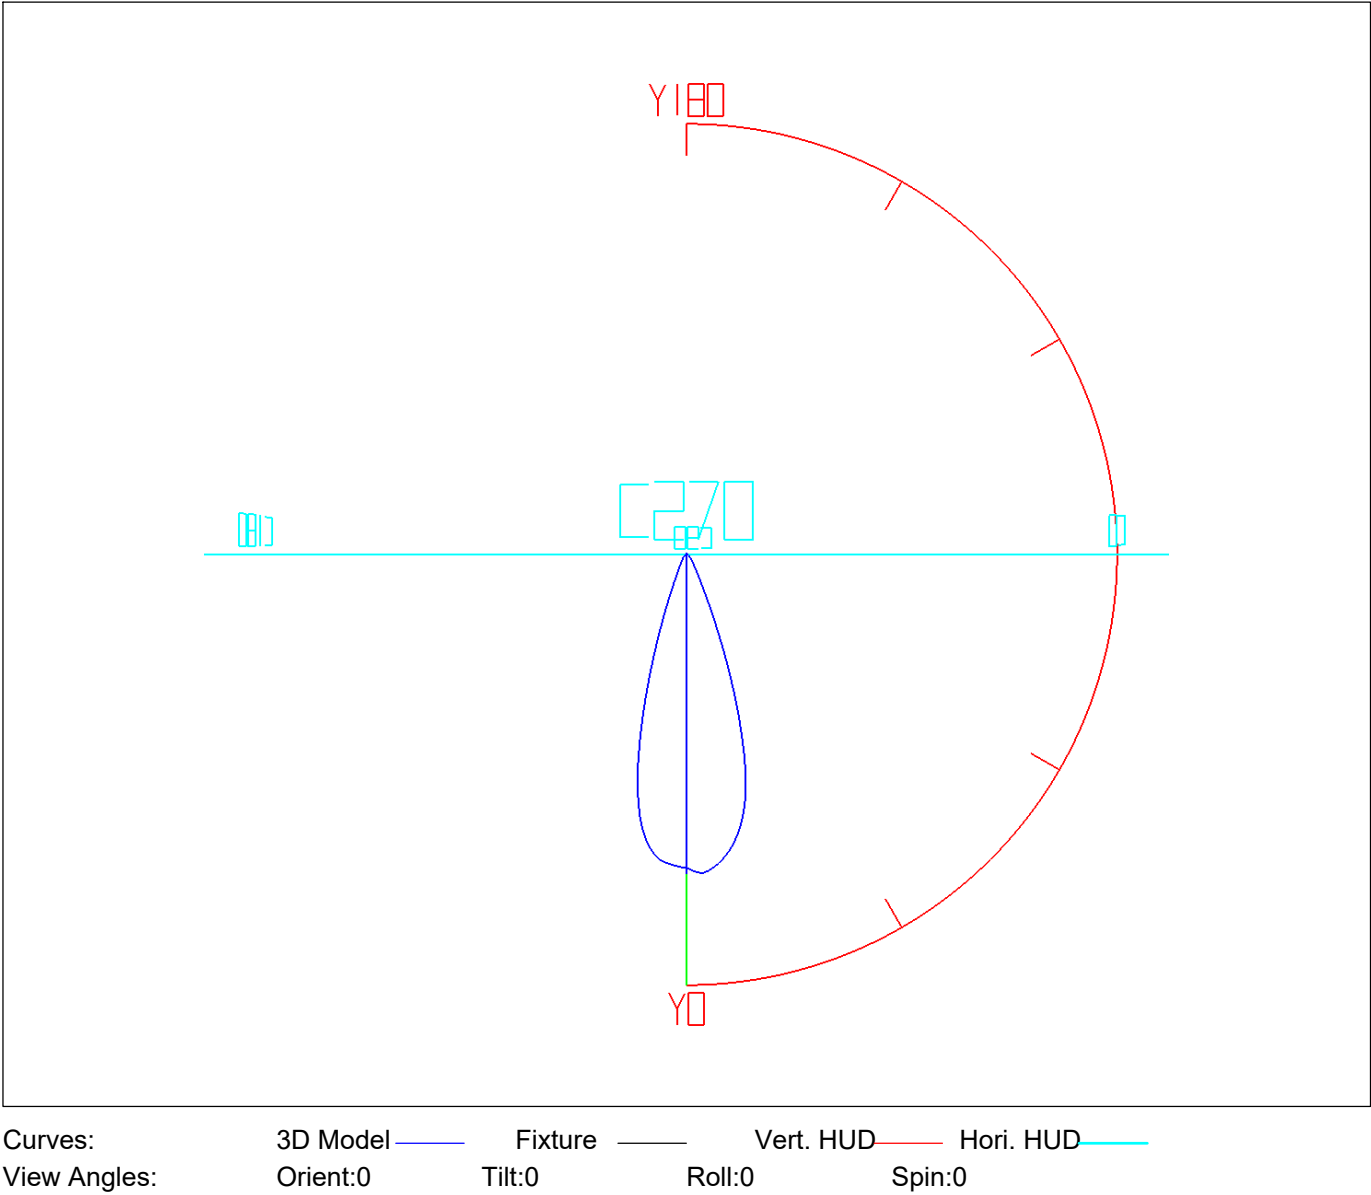

IES Indoor Report

Photometric Filename:TR08-09-XX-01 3000K RA90 36D.IES

Zonal Flux Tabulation


Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone(γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
0.0-1.0	2.01	2.01	0.26	0.26	47.0-48.0	2.57	731.27	0.33	92.98
1.0-2.0	6.02	8.02	0.77	1.02	48.0-49.0	2.49	733.75	0.32	93.29
2.0-3.0	10.02	18.04	1.27	2.29	49.0-50.0	2.41	736.16	0.31	93.60
3.0-4.0	13.96	32.00	1.78	4.07	50.0-51.0	2.33	738.48	0.30	93.90
4.0-5.0	17.80	49.80	2.26	6.33	51.0-52.0	2.25	740.74	0.29	94.18
5.0-6.0	21.50	71.30	2.73	9.07	52.0-53.0	2.18	742.92	0.28	94.46
6.0-7.0	25.01	96.30	3.18	12.24	53.0-54.0	2.11	745.02	0.27	94.73
7.0-8.0	28.28	124.58	3.60	15.84	54.0-55.0	2.04	747.06	0.26	94.99
8.0-9.0	31.23	155.82	3.97	19.81	55.0-56.0	1.97	749.03	0.25	95.24
9.0-10.0	33.78	189.59	4.29	24.11	56.0-57.0	1.90	750.93	0.24	95.48
10.0-11.0	35.84	225.43	4.56	28.66	57.0-58.0	1.83	752.76	0.23	95.71
11.0-12.0	37.35	262.78	4.75	33.41	58.0-59.0	1.76	754.52	0.22	95.94
12.0-13.0	38.20	300.98	4.86	38.27	59.0-60.0	1.70	756.22	0.22	96.15
13.0-14.0	38.36	339.34	4.88	43.15	60.0-61.0	1.63	757.85	0.21	96.36
14.0-15.0	37.76	377.11	4.80	47.95	61.0-62.0	1.57	759.43	0.20	96.56
15.0-16.0	36.42	413.52	4.63	52.58	62.0-63.0	1.51	760.94	0.19	96.75
16.0-17.0	34.38	447.91	4.37	56.95	63.0-64.0	1.45	762.38	0.18	96.93
17.0-18.0	31.80	479.71	4.04	60.99	64.0-65.0	1.39	763.77	0.18	97.11
18.0-19.0	28.86	508.57	3.67	64.66	65.0-66.0	1.33	765.10	0.17	97.28
19.0-20.0	25.76	534.33	3.28	67.94	66.0-67.0	1.27	766.37	0.16	97.44
20.0-21.0	22.62	556.95	2.88	70.81	67.0-68.0	1.21	767.58	0.15	97.60
21.0-22.0	19.57	576.52	2.49	73.30	68.0-69.0	1.15	768.73	0.15	97.74
22.0-23.0	16.77	593.29	2.13	75.43	69.0-70.0	1.09	769.82	0.14	97.88
23.0-24.0	14.34	607.63	1.82	77.26	70.0-71.0	1.03	770.85	0.13	98.01
24.0-25.0	12.28	619.91	1.56	78.82	71.0-72.0	0.97	771.82	0.12	98.14
25.0-26.0	10.60	630.51	1.35	80.17	72.0-73.0	0.91	772.74	0.12	98.25
26.0-27.0	9.25	639.77	1.18	81.34	73.0-74.0	0.86	773.59	0.11	98.36
27.0-28.0	8.18	647.95	1.04	82.38	74.0-75.0	0.80	774.39	0.10	98.46
28.0-29.0	7.33	655.28	0.93	83.32	75.0-76.0	0.74	775.13	0.09	98.55
29.0-30.0	6.64	661.92	0.84	84.16	76.0-77.0	0.68	775.81	0.09	98.64
30.0-31.0	6.08	668.00	0.77	84.93	77.0-78.0	0.62	776.43	0.08	98.72
31.0-32.0	5.62	673.62	0.71	85.65	78.0-79.0	0.57	776.99	0.07	98.79
32.0-33.0	5.22	678.84	0.66	86.31	79.0-80.0	0.51	777.50	0.06	98.86
33.0-34.0	4.88	683.73	0.62	86.93	80.0-81.0	0.45	777.95	0.06	98.91
34.0-35.0	4.59	688.31	0.58	87.52	81.0-82.0	0.39	778.35	0.05	98.96
35.0-36.0	4.33	692.64	0.55	88.07	82.0-83.0	0.35	778.70	0.04	99.01
36.0-37.0	4.09	696.73	0.52	88.59	83.0-84.0	0.31	779.00	0.04	99.05
37.0-38.0	3.88	700.61	0.49	89.08	84.0-85.0	0.26	779.26	0.03	99.08
38.0-39.0	3.69	704.31	0.47	89.55	85.0-86.0	0.22	779.48	0.03	99.11
39.0-40.0	3.52	707.82	0.45	90.00	86.0-87.0	0.19	779.67	0.02	99.13
40.0-41.0	3.36	711.18	0.43	90.42	87.0-88.0	0.16	779.83	0.02	99.15
41.0-42.0	3.21	714.39	0.41	90.83	88.0-89.0	0.13	779.95	0.02	99.17
42.0-43.0	3.08	717.47	0.39	91.22	89.0-90.0	0.11	780.06	0.01	99.18
43.0-44.0	2.96	720.43	0.38	91.60	90.0-91.0	0.09	780.16	0.01	99.19
44.0-45.0	2.85	723.29	0.36	91.96	91.0-92.0	0.08	780.24	0.01	99.20
45.0-46.0	2.75	726.04	0.35	92.31	92.0-93.0	0.07	780.31	0.01	99.21
46.0-47.0	2.66	728.70	0.34	92.65	93.0-94.0	0.07	780.38	0.01	99.22

Zonal Flux Tabulation - (Cont.)

Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp	Zone (γ)	Zone Flux (lm)	Sums Flux (lm)	Zone%Lamp	Sums%Lamp
94. 0-95. 0	0. 06	780. 43	0. 01	99. 23	141. 0-142. 0	0. 13	781. 93	0. 02	99. 42
95. 0-96. 0	0. 05	780. 49	0. 01	99. 24	142. 0-143. 0	0. 14	782. 06	0. 02	99. 44
96. 0-97. 0	0. 05	780. 54	0. 01	99. 24	143. 0-144. 0	0. 14	782. 21	0. 02	99. 46
97. 0-98. 0	0. 04	780. 58	0. 01	99. 25	144. 0-145. 0	0. 15	782. 36	0. 02	99. 47
98. 0-99. 0	0. 04	780. 62	0. 00	99. 25	145. 0-146. 0	0. 16	782. 51	0. 02	99. 49
99. 0-100. 0	0. 03	780. 65	0. 00	99. 26	146. 0-147. 0	0. 16	782. 67	0. 02	99. 51
100. 0-101. 0	0. 03	780. 68	0. 00	99. 26	147. 0-148. 0	0. 17	782. 84	0. 02	99. 54
101. 0-102. 0	0. 03	780. 71	0. 00	99. 26	148. 0-149. 0	0. 17	783. 01	0. 02	99. 56
102. 0-103. 0	0. 02	780. 73	0. 00	99. 27	149. 0-150. 0	0. 17	783. 18	0. 02	99. 58
103. 0-104. 0	0. 02	780. 75	0. 00	99. 27	150. 0-151. 0	0. 18	783. 36	0. 02	99. 60
104. 0-105. 0	0. 02	780. 77	0. 00	99. 27	151. 0-152. 0	0. 18	783. 53	0. 02	99. 62
105. 0-106. 0	0. 02	780. 79	0. 00	99. 28	152. 0-153. 0	0. 18	783. 71	0. 02	99. 65
106. 0-107. 0	0. 02	780. 81	0. 00	99. 28	153. 0-154. 0	0. 18	783. 89	0. 02	99. 67
107. 0-108. 0	0. 01	780. 82	0. 00	99. 28	154. 0-155. 0	0. 18	784. 06	0. 02	99. 69
108. 0-109. 0	0. 01	780. 84	0. 00	99. 28	155. 0-156. 0	0. 17	784. 24	0. 02	99. 71
109. 0-110. 0	0. 01	780. 85	0. 00	99. 28	156. 0-157. 0	0. 17	784. 41	0. 02	99. 74
110. 0-111. 0	0. 01	780. 86	0. 00	99. 28	157. 0-158. 0	0. 17	784. 58	0. 02	99. 76
111. 0-112. 0	0. 01	780. 86	0. 00	99. 28	158. 0-159. 0	0. 16	784. 74	0. 02	99. 78
112. 0-113. 0	0. 01	780. 87	0. 00	99. 29	159. 0-160. 0	0. 16	784. 90	0. 02	99. 80
113. 0-114. 0	0. 00	780. 87	0. 00	99. 29	160. 0-161. 0	0. 15	785. 05	0. 02	99. 82
114. 0-115. 0	0. 00	780. 88	0. 00	99. 29	161. 0-162. 0	0. 15	785. 20	0. 02	99. 84
115. 0-116. 0	0. 00	780. 88	0. 00	99. 29	162. 0-163. 0	0. 14	785. 34	0. 02	99. 85
116. 0-117. 0	0. 00	780. 88	0. 00	99. 29	163. 0-164. 0	0. 13	785. 47	0. 02	99. 87
117. 0-118. 0	0. 00	780. 89	0. 00	99. 29	164. 0-165. 0	0. 12	785. 59	0. 02	99. 89
118. 0-119. 0	0. 00	780. 89	0. 00	99. 29	165. 0-166. 0	0. 12	785. 71	0. 01	99. 90
119. 0-120. 0	0. 00	780. 89	0. 00	99. 29	166. 0-167. 0	0. 11	785. 82	0. 01	99. 91
120. 0-121. 0	0. 00	780. 89	0. 00	99. 29	167. 0-168. 0	0. 10	785. 92	0. 01	99. 93
121. 0-122. 0	0. 00	780. 89	0. 00	99. 29	168. 0-169. 0	0. 09	786. 01	0. 01	99. 94
122. 0-123. 0	0. 00	780. 90	0. 00	99. 29	169. 0-170. 0	0. 08	786. 09	0. 01	99. 95
123. 0-124. 0	0. 00	780. 90	0. 00	99. 29	170. 0-171. 0	0. 07	786. 17	0. 01	99. 96
124. 0-125. 0	0. 00	780. 90	0. 00	99. 29	171. 0-172. 0	0. 07	786. 23	0. 01	99. 97
125. 0-126. 0	0. 01	780. 91	0. 00	99. 29	172. 0-173. 0	0. 06	786. 29	0. 01	99. 97
126. 0-127. 0	0. 01	780. 92	0. 00	99. 29	173. 0-174. 0	0. 05	786. 34	0. 01	99. 98
127. 0-128. 0	0. 01	780. 93	0. 00	99. 29	174. 0-175. 0	0. 04	786. 39	0. 01	99. 99
128. 0-129. 0	0. 02	780. 95	0. 00	99. 30	175. 0-176. 0	0. 04	786. 42	0. 00	99. 99
129. 0-130. 0	0. 02	780. 97	0. 00	99. 30	176. 0-177. 0	0. 03	786. 45	0. 00	100. 00
130. 0-131. 0	0. 03	781. 00	0. 00	99. 30	177. 0-178. 0	0. 02	786. 47	0. 00	100. 00
131. 0-132. 0	0. 04	781. 04	0. 00	99. 31	178. 0-179. 0	0. 01	786. 48	0. 00	100. 00
132. 0-133. 0	0. 05	781. 09	0. 01	99. 31	179. 0-180. 0	0. 00	786. 49	0. 00	100. 00
133. 0-134. 0	0. 06	781. 15	0. 01	99. 32					
134. 0-135. 0	0. 07	781. 21	0. 01	99. 33					
135. 0-136. 0	0. 07	781. 29	0. 01	99. 34					
136. 0-137. 0	0. 08	781. 37	0. 01	99. 35					
137. 0-138. 0	0. 09	781. 46	0. 01	99. 36					
138. 0-139. 0	0. 10	781. 57	0. 01	99. 37					
139. 0-140. 0	0. 11	781. 68	0. 01	99. 39					
140. 0-141. 0	0. 12	781. 80	0. 02	99. 40					

Rectangle ISO Lighting Intensity Diagram


Lum. Name:TR08-09-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/27

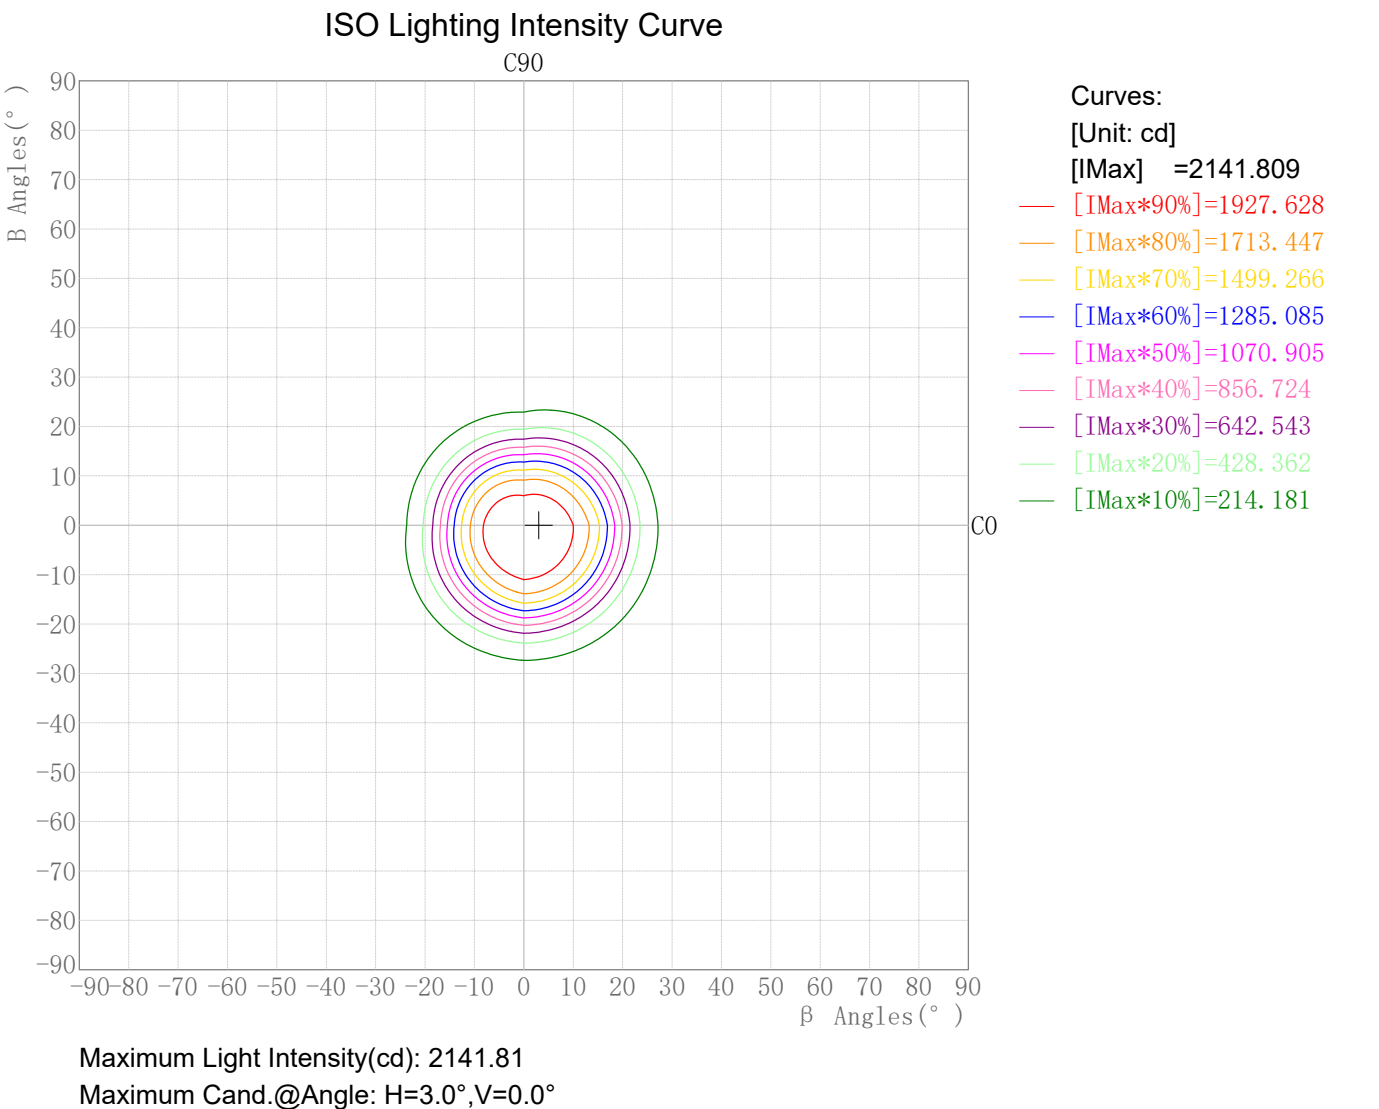

Plane ISO-Illuminance Diagram

Lum. Name:TR08-09-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/27

Plane ISO-Illuminance Curve

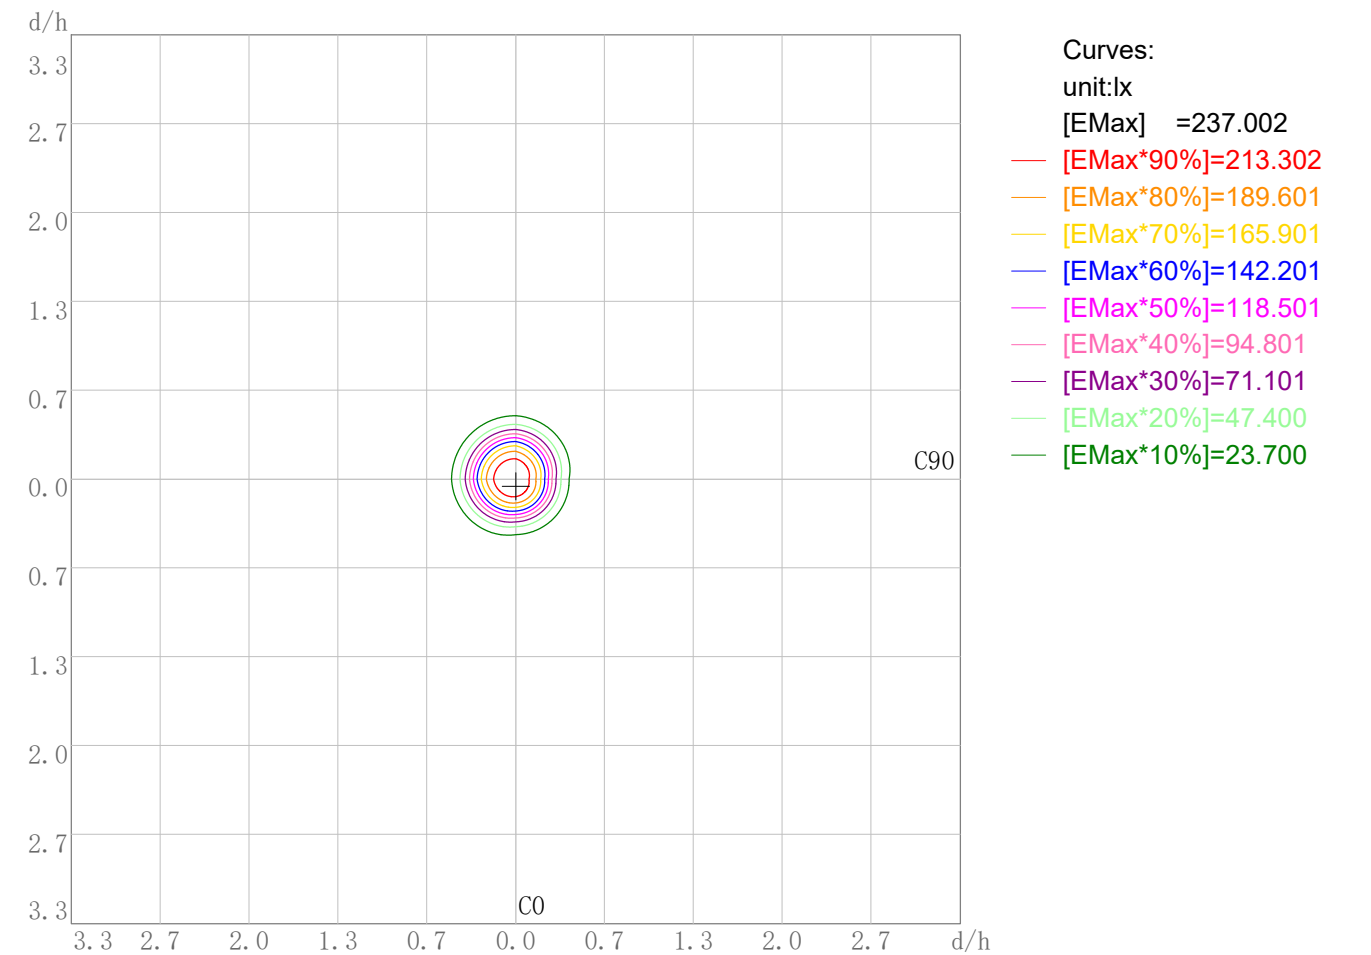

Working Plane Luminaire Mounting Height(m): 3.00
Working Plane Maximum Illuminance(lx): 237.00
Working Plane Maximum Illuminance Position(d/h):H0.0 V0.1


IES Indoor Report

Photometric Filename:TR08-09-XX-01 3000K RA90 36D.IES

3D Plane ISO Illuminance Diagram

Lum. Name: TR08-09-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID: 01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/27

3D Plane Illuminance Modal

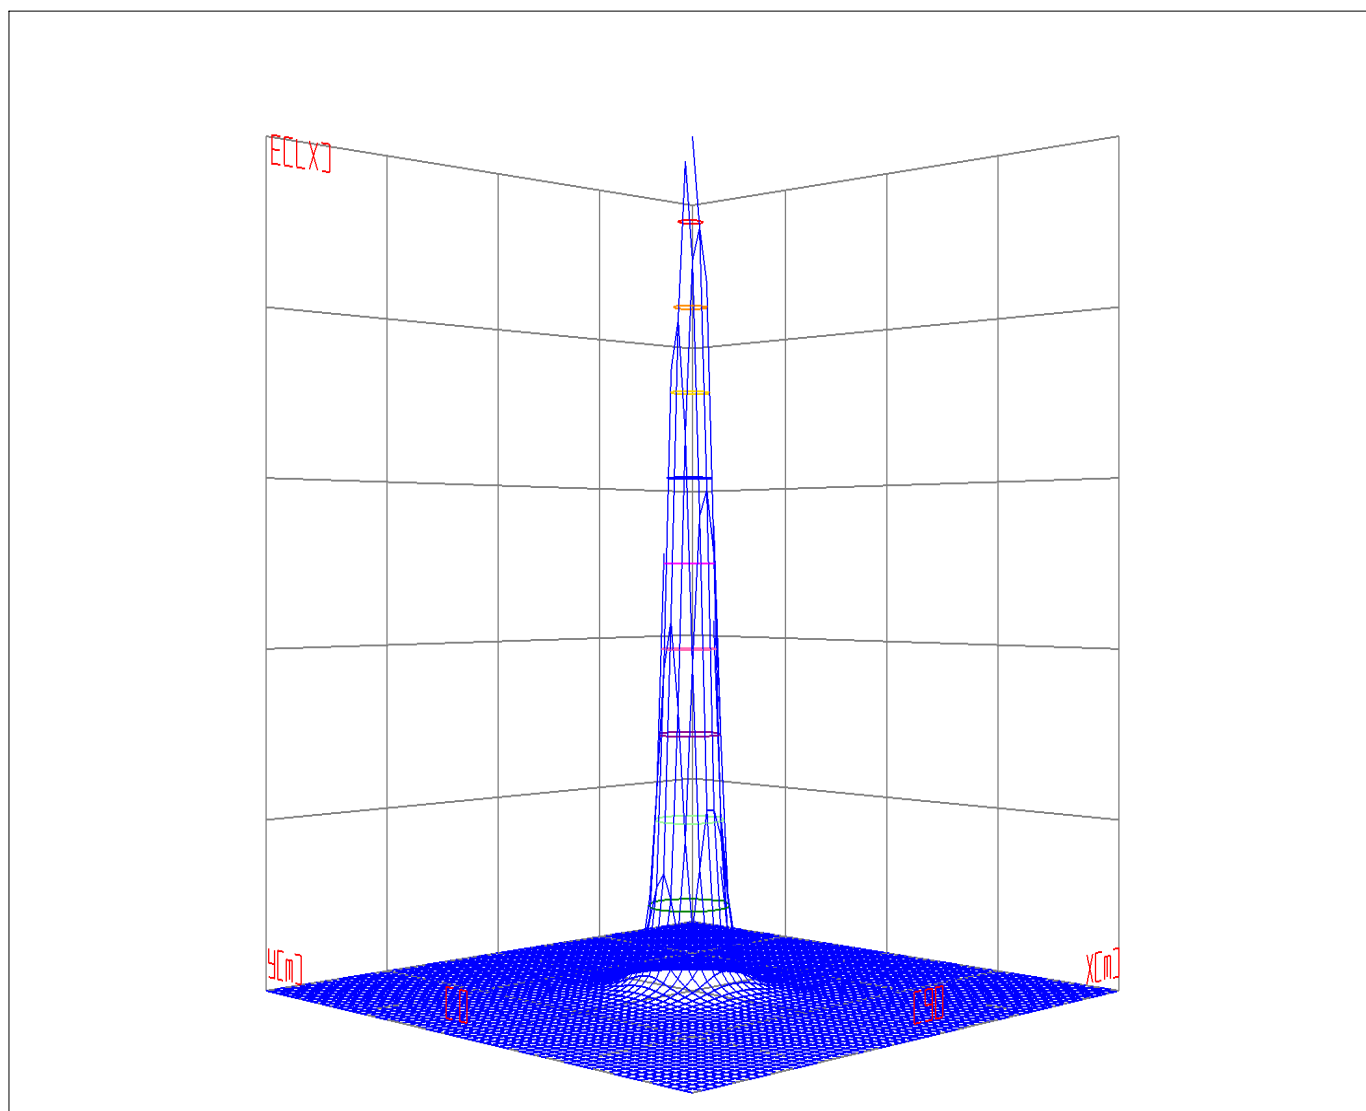


Curves: 3D Model — 90% — 80% — 70% — 60% — 50% — 40% — 30% — 20% — 10% —
View Angles(deg): 0 Height(m): 3.0 Distance(m): 10.0

Space ISO Illuminance Diagram

Lum. Name:TR08-09-XX-01 3000K RA90 36D	Lum. Catelog:	Test ID:01
Lamp Name:	Lamp Catelog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2021/10/27


Space ISO Illuminance Curve

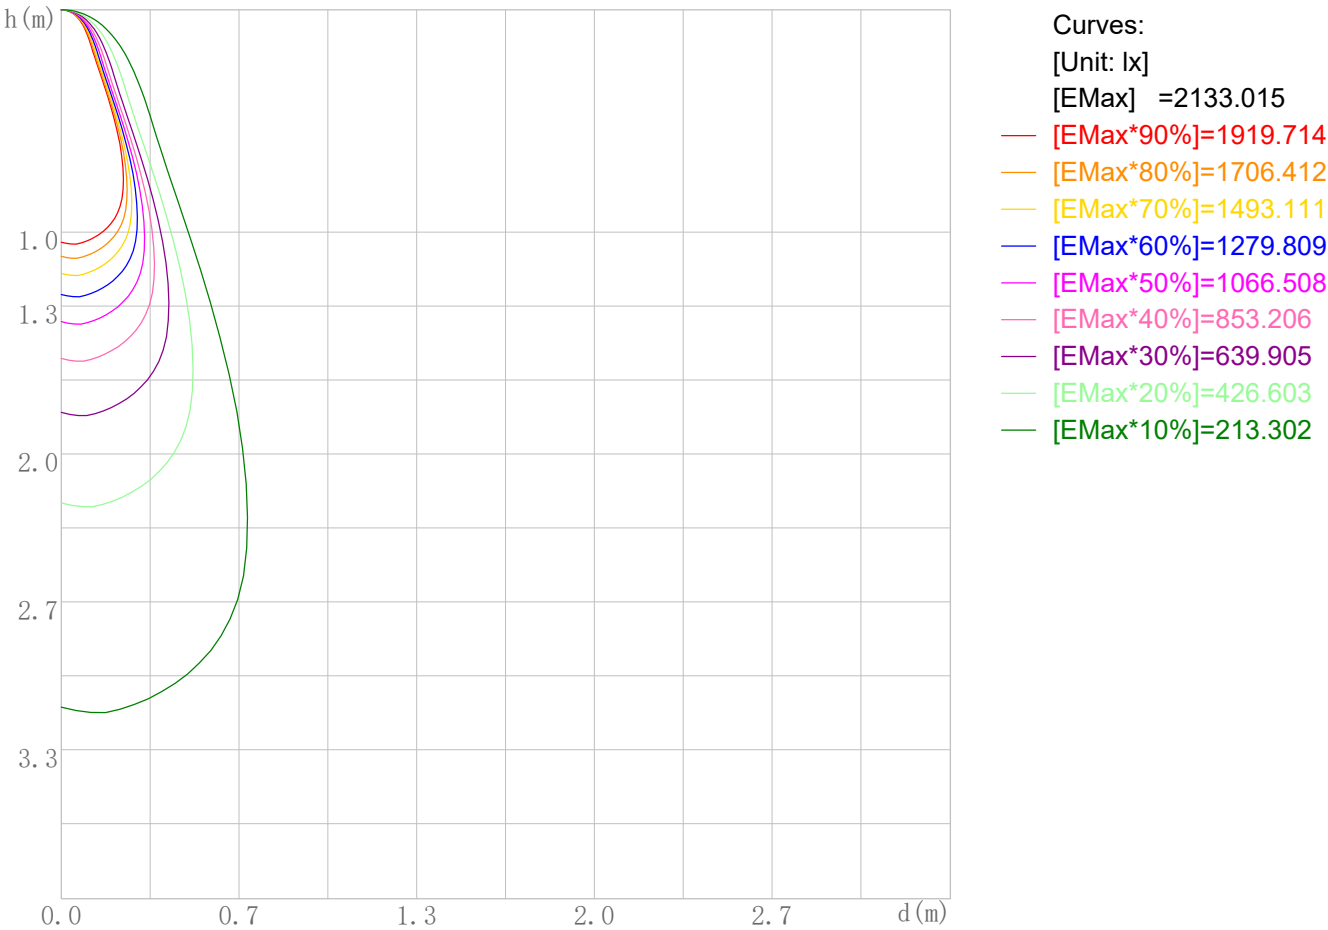

Space Plane Maximum Illuminance and @Angle:2133.02lx,3.0deg
Plane Maximum Lighting Intensity and @Angle:2141.809cd,0eg

Illuminance-Distance Diagram

Lum. Name:TR08-09-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/27

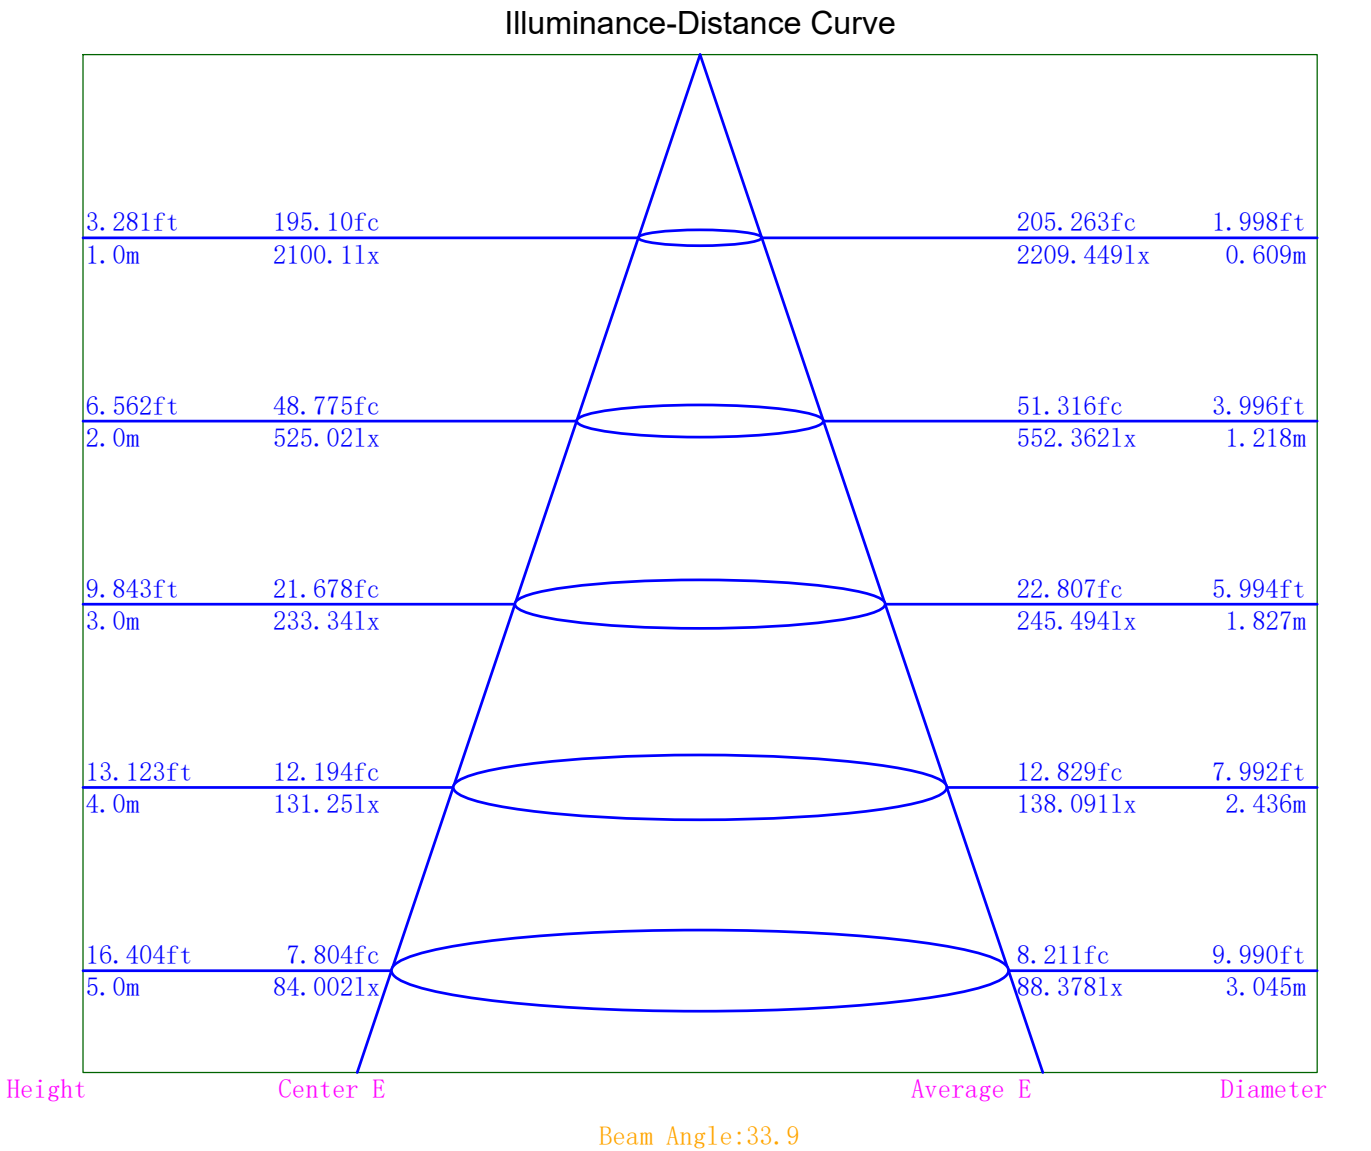

Indoor Luminance Limiting Curves

Lum. Name:TR08-09-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog:LED	Test Lab:Quality Department
Manufacture:Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date:2021/10/27


Glare Grade Table

GI	Quality	Using Illuminance							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E	a				2000	1000	500	<=300
			b	c	d	e	f	g	h

Luminance Table

Gama(deg)	45	50	55	60	65	70	75	80	85
C0	13522	11226	9637	8475	7856	7476	7256	7344	8407
C90	9994	8362	7301	6565	5964	5355	4603	3546	2567

Luminance Limiting Curve

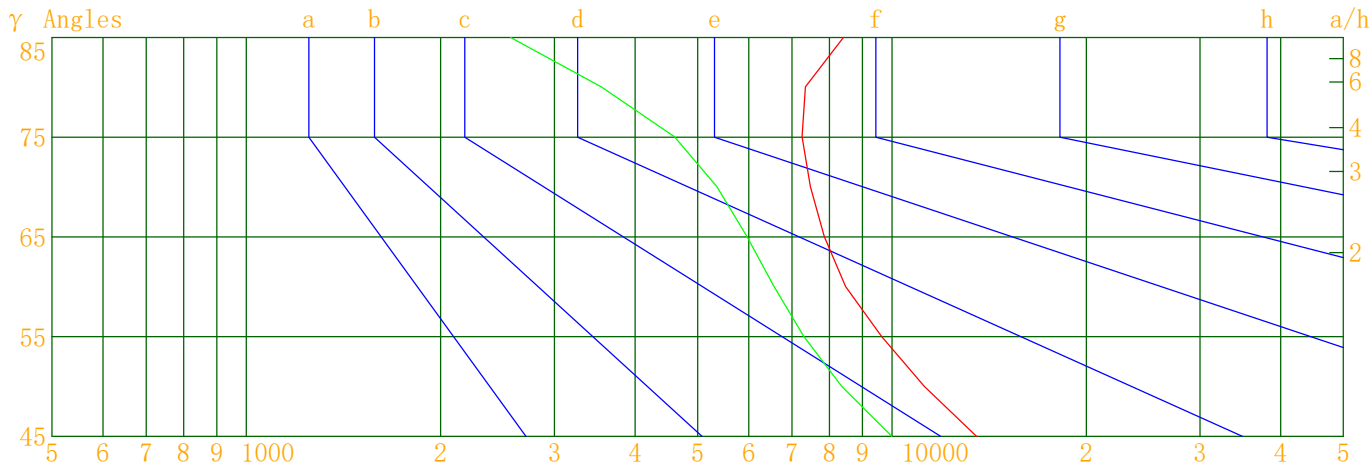


Luminous Size:Length(m)=-0.076Width(m)=-0.076Height(m)=0.000Area(m^2)=0.004536

Luminous Type:Without Luminous Side

Luminous Curves:C0-C180 Color:—C90-C270 Color:—

Indoor Budgetary Estimate Table

Lum. Name:TR08-09-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/27

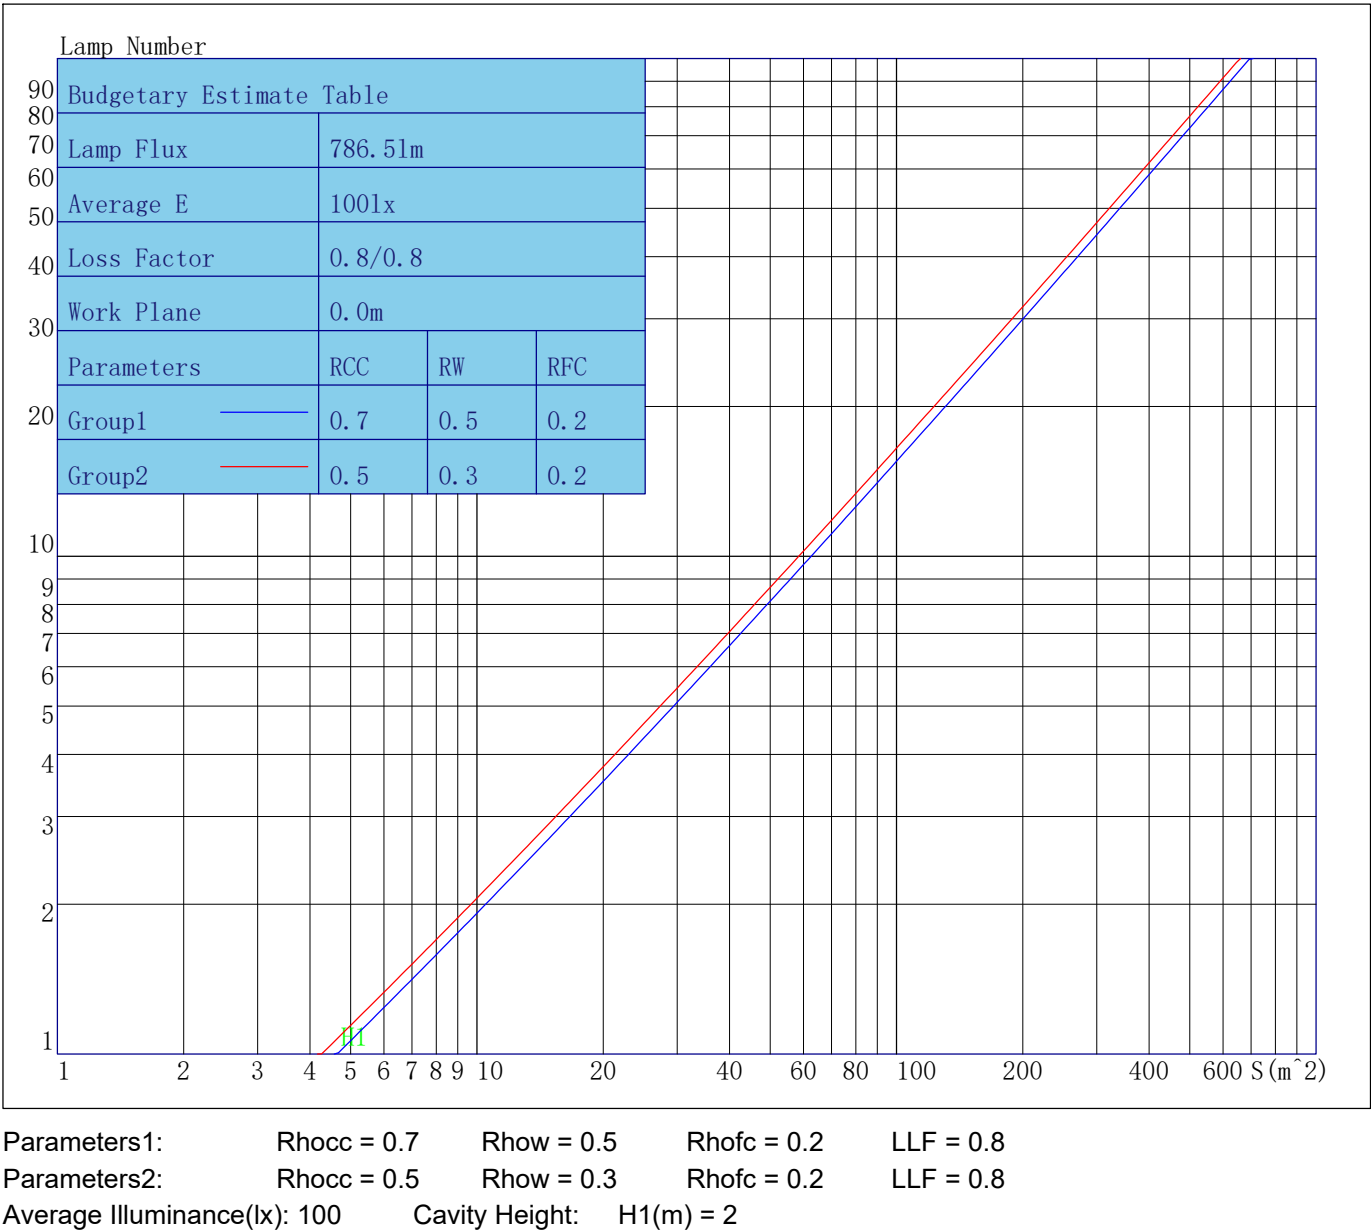

Indoor Coefficient of Utilization Table

Lum. Name: TR08-09-XX-01 3000K RA90 36D	Lum. Catelog:	Test ID: 01
Lamp Name:	Lamp Catelog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/27

Coefficients of Utilization - Zonal Cavity Method																		
Coef.	Effective Floor Cavity Reflectance RFC=0.20																	
RhoCC (%)	80				70				50			30			10			0
RhoW (%)	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Coefficient of Utilization(%)																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	114	111	109	107	111	109	107	105	105	103	102	101	100	98	97	96	95	94
2	109	104	101	98	107	103	99	97	99	97	94	96	94	92	93	92	90	89
3	104	99	94	91	102	97	93	90	95	91	88	92	89	87	90	88	86	84
4	100	94	89	85	98	93	88	85	90	87	84	88	85	83	86	84	82	80
5	96	89	84	81	95	88	84	80	87	83	79	85	81	79	83	80	78	77
6	93	85	80	77	91	85	80	76	83	79	76	82	78	75	80	77	75	73
7	90	82	77	73	88	81	76	73	80	76	73	79	75	72	78	74	72	71
8	87	79	74	70	85	78	73	70	77	73	70	76	72	69	75	72	69	68
9	84	76	71	68	83	75	71	67	74	70	67	73	70	67	73	69	67	66
10	81	73	68	65	80	73	68	65	72	68	65	71	67	65	70	67	64	63

Unified Glare Rating Table

Lum. Name:TR08-09-XX-01 3000K RA90 36D	Lum. Catalog:	Test ID:01
Lamp Name:	Lamp Catalog: LED	Test Lab: Quality Department
Manufacture: Shenzhen Norming Lighting Co., Ltd	Test Machine:GON-2000	Test Date: 2021/10/27

Unified Glare Rating Table

Ceiling RCC	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
Wall RW	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
Floor RFC	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room Size	Vewed crosswise					Vewed endwise				
X=2H Y=2H	15.5	16.6	15.9	17.0	17.3	14.0	15.1	14.3	15.4	15.7
	16.5	17.5	16.9	17.8	18.2	14.9	15.8	15.3	16.2	16.6
	17.0	17.9	17.4	18.3	18.7	15.2	16.1	15.6	16.5	16.9
	17.4	18.2	17.8	18.6	19.1	15.4	16.2	15.8	16.6	17.0
	17.6	18.4	18.0	18.8	19.2	15.4	16.2	15.9	16.6	17.1
	17.7	18.5	18.2	18.9	19.4	15.4	16.2	15.9	16.6	17.1
X=4H Y=2H	15.8	16.8	16.2	17.1	17.5	14.4	15.3	14.8	15.7	16.1
	17.0	17.8	17.4	18.2	18.7	15.5	16.3	15.9	16.7	17.1
	17.6	18.3	18.1	18.8	19.2	15.9	16.6	16.3	17.1	17.5
	18.2	18.8	18.6	19.3	19.8	16.2	16.8	16.7	17.3	17.8
	18.4	19.0	18.9	19.5	20.0	16.2	16.8	16.7	17.3	17.8
	18.6	19.2	19.1	19.7	20.2	16.3	16.8	16.8	17.3	17.8
X=8H Y=4H	17.8	18.4	18.3	18.8	19.3	16.1	16.7	16.6	17.1	17.6
	18.5	19.0	19.0	19.5	20.0	16.5	17.0	17.0	17.5	18.0
	18.8	19.3	19.3	19.8	20.3	16.6	17.0	17.1	17.6	18.1
	19.1	19.6	19.7	20.1	20.7	16.7	17.1	17.2	17.6	18.2
X=12H Y=4H	17.8	18.3	18.3	18.8	19.3	16.1	16.6	16.6	17.1	17.6
	18.5	19.0	19.0	19.4	20.0	16.5	16.9	17.0	17.4	18.0
	18.9	19.3	19.4	19.8	20.4	16.6	17.0	17.2	17.6	18.1
Variations with the objverver position at spacings										
S=1.0H	0.3/-0.3					0.6/-0.7				
S=1.5H	0.6/-0.7					1.1/-1.3				
S=2.0H	0.8/-0.9					1.3/-1.7				
Reduced UGR Table:										
Nordic Standard Table:	BK0					BK0				
Correction Value	2.5					2.0				

o the CIE Pub.117,data has been corrected,refers to the lamp's lumens 8.2flm.

Candela Tabulation

V/H	C0.0	C90.0	C180.0	C270.0
γ 0.0	2100.06	2100.06	2100.06	2100.06
γ 1.0	2121.87	2074.44	2100.25	2086.86
γ 2.0	2136.20	2066.09	2091.34	2090.92
γ 3.0	2141.81	2049.22	2082.22	2093.52
γ 4.0	2128.35	2021.69	2073.26	2092.98
γ 5.0	2108.06	1979.47	2056.62	2091.38
γ 6.0	2084.20	1926.81	2028.88	2085.93
γ 7.0	2052.25	1871.08	1989.24	2075.86
γ 8.0	2018.46	1804.69	1938.56	2054.48
γ 9.0	1977.65	1725.41	1875.65	2021.30
γ 10.0	1927.81	1631.36	1794.19	1976.47
γ 11.0	1873.99	1519.80	1695.39	1928.01
γ 12.0	1808.71	1394.94	1577.44	1867.55
γ 13.0	1732.72	1256.90	1445.69	1793.24
γ 14.0	1644.11	1111.65	1300.66	1701.74
γ 15.0	1536.89	967.30	1145.95	1595.09
γ 16.0	1409.91	826.96	988.65	1470.86
γ 17.0	1271.68	693.21	838.68	1331.15
γ 18.0	1128.34	572.97	697.41	1182.08
γ 19.0	982.62	466.96	571.80	1034.14
γ 20.0	840.45	378.99	462.91	891.42
γ 21.0	704.32	308.16	371.89	753.64
γ 22.0	579.18	252.75	300.29	624.54
γ 23.0	474.12	210.59	244.96	510.87
γ 24.0	386.60	178.87	201.88	415.33
γ 25.0	315.95	154.75	169.96	337.50
γ 26.0	261.87	135.81	145.46	275.45
γ 27.0	219.82	120.98	126.43	227.29
γ 28.0	187.56	108.75	111.00	190.71
γ 29.0	162.52	98.72	98.72	162.33
γ 30.0	142.93	90.05	88.45	140.38
γ 31.0	127.25	82.62	79.91	122.86
γ 32.0	114.41	76.02	72.48	108.64
γ 33.0	103.96	70.31	66.11	97.11
γ 34.0	94.97	65.20	60.59	87.19
γ 35.0	87.43	60.67	55.79	78.93
γ 36.0	80.55	56.64	51.69	71.92
γ 37.0	74.64	52.77	48.00	65.82
γ 38.0	69.24	49.36	44.85	60.54
γ 39.0	64.36	46.20	42.09	55.88
γ 40.0	60.00	43.32	39.65	51.74
γ 41.0	55.96	40.68	37.56	48.16
γ 42.0	52.33	38.24	35.68	45.02
γ 43.0	49.08	36.00	34.02	42.33
γ 44.0	46.17	33.97	32.56	39.93
γ 45.0	43.38	32.06	31.20	37.81
γ 46.0	40.89	30.26	29.92	35.93

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 47.0	38.64	28.61	28.72	34.26
γ 48.0	36.49	27.10	27.56	32.78
γ 49.0	34.58	25.73	26.44	31.40
γ 50.0	32.74	24.38	25.38	30.12
γ 51.0	31.01	23.15	24.38	28.93
γ 52.0	29.40	22.00	23.38	27.75
γ 53.0	27.86	20.96	22.41	26.62
γ 54.0	26.44	19.94	21.45	25.58
γ 55.0	25.08	19.00	20.53	24.54
γ 56.0	23.75	18.10	19.61	23.54
γ 57.0	22.53	17.24	18.76	22.56
γ 58.0	21.36	16.42	17.87	21.63
γ 59.0	20.25	15.64	17.03	20.73
γ 60.0	19.22	14.89	16.21	19.83
γ 61.0	18.27	14.14	15.40	18.96
γ 62.0	17.41	13.44	14.66	18.12
γ 63.0	16.58	12.76	13.90	17.31
γ 64.0	15.81	12.09	13.16	16.51
γ 65.0	15.06	11.44	12.44	15.73
γ 66.0	14.33	10.78	11.76	14.96
γ 67.0	13.62	10.15	11.06	14.25
γ 68.0	12.94	9.52	10.38	13.52
γ 69.0	12.26	8.92	9.72	12.83
γ 70.0	11.60	8.31	9.11	12.15
γ 71.0	10.98	7.72	8.55	11.46
γ 72.0	10.35	7.13	7.91	10.82
γ 73.0	9.75	6.54	7.24	10.19
γ 74.0	9.15	5.97	6.63	9.58
γ 75.0	8.52	5.41	6.03	8.93
γ 76.0	7.90	4.89	5.57	8.30
γ 77.0	7.32	4.38	5.03	7.70
γ 78.0	6.76	3.85	4.36	7.09
γ 79.0	6.28	3.34	3.84	6.55
γ 80.0	5.78	2.79	3.20	6.04
γ 81.0	5.26	2.28	2.38	5.52
γ 82.0	4.74	2.06	1.95	4.95
γ 83.0	4.26	1.82	1.52	4.41
γ 84.0	3.84	1.51	1.17	3.93
γ 85.0	3.32	1.01	0.95	3.36
γ 86.0	2.96	0.74	0.72	2.94
γ 87.0	2.50	0.59	0.59	2.57
γ 88.0	1.99	0.52	0.51	2.14
γ 89.0	1.64	0.47	0.45	1.72
γ 90.0	1.41	0.42	0.38	1.44
γ 91.0	1.20	0.37	0.32	1.21
γ 92.0	1.10	0.33	0.27	1.09
γ 93.0	1.02	0.28	0.22	1.00

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 94.0	0.95	0.25	0.17	0.93
γ 95.0	0.89	0.21	0.13	0.85
γ 96.0	0.81	0.17	0.08	0.77
γ 97.0	0.76	0.14	0.04	0.71
γ 98.0	0.70	0.10	0.00	0.65
γ 99.0	0.66	0.08	0.00	0.60
γ 100.0	0.61	0.04	0.00	0.54
γ 101.0	0.56	0.00	0.00	0.49
γ 102.0	0.52	0.00	0.00	0.45
γ 103.0	0.47	0.00	0.00	0.41
γ 104.0	0.43	0.00	0.00	0.37
γ 105.0	0.40	0.00	0.00	0.34
γ 106.0	0.35	0.00	0.00	0.30
γ 107.0	0.31	0.00	0.00	0.27
γ 108.0	0.27	0.00	0.00	0.25
γ 109.0	0.23	0.00	0.00	0.22
γ 110.0	0.18	0.00	0.00	0.19
γ 111.0	0.14	0.00	0.00	0.18
γ 112.0	0.10	0.00	0.00	0.16
γ 113.0	0.07	0.00	0.00	0.13
γ 114.0	0.03	0.00	0.00	0.13
γ 115.0	0.01	0.00	0.00	0.13
γ 116.0	0.00	0.00	0.00	0.11
γ 117.0	0.00	0.00	0.00	0.10
γ 118.0	0.00	0.00	0.00	0.10
γ 119.0	0.00	0.00	0.00	0.09
γ 120.0	0.00	0.00	0.00	0.11
γ 121.0	0.00	0.00	0.00	0.09
γ 122.0	0.00	0.00	0.00	0.10
γ 123.0	0.00	0.00	0.00	0.11
γ 124.0	0.00	0.00	0.02	0.13
γ 125.0	0.00	0.00	0.09	0.15
γ 126.0	0.00	0.00	0.17	0.17
γ 127.0	0.00	0.00	0.25	0.22
γ 128.0	0.00	0.03	0.35	0.27
γ 129.0	0.02	0.13	0.46	0.33
γ 130.0	0.08	0.24	0.57	0.39
γ 131.0	0.16	0.36	0.68	0.47
γ 132.0	0.24	0.49	0.83	0.56
γ 133.0	0.33	0.62	0.96	0.65
γ 134.0	0.45	0.77	1.10	0.76
γ 135.0	0.57	0.93	1.23	0.88
γ 136.0	0.71	1.09	1.38	1.00
γ 137.0	0.84	1.25	1.54	1.13
γ 138.0	0.98	1.41	1.70	1.26
γ 139.0	1.13	1.57	1.86	1.40
γ 140.0	1.28	1.74	2.02	1.54

Candela Tabulation - (Cont.)

V/H	C0.0	C90.0	C180.0	C270.0
γ 141.0	1.44	1.89	2.18	1.68
γ 142.0	1.60	2.07	2.34	1.84
γ 143.0	1.76	2.20	2.50	2.00
γ 144.0	1.92	2.36	2.68	2.15
γ 145.0	2.09	2.51	2.84	2.31
γ 146.0	2.25	2.66	2.99	2.45
γ 147.0	2.40	2.81	3.16	2.61
γ 148.0	2.56	2.94	3.31	2.76
γ 149.0	2.72	3.08	3.44	2.90
γ 150.0	2.87	3.21	3.58	3.06
γ 151.0	3.02	3.34	3.70	3.20
γ 152.0	3.16	3.44	3.82	3.33
γ 153.0	3.30	3.55	3.94	3.47
γ 154.0	3.42	3.65	4.04	3.60
γ 155.0	3.55	3.74	4.13	3.72
γ 156.0	3.66	3.83	4.20	3.84
γ 157.0	3.77	3.89	4.26	3.94
γ 158.0	3.87	3.94	4.32	4.03
γ 159.0	3.96	3.98	4.36	4.12
γ 160.0	4.05	4.00	4.39	4.19
γ 161.0	4.11	4.01	4.40	4.24
γ 162.0	4.16	4.01	4.41	4.28
γ 163.0	4.19	4.00	4.38	4.32
γ 164.0	4.22	3.98	4.38	4.33
γ 165.0	4.24	3.96	4.35	4.34
γ 166.0	4.24	3.95	4.32	4.32
γ 167.0	4.24	3.94	4.28	4.31
γ 168.0	4.23	3.94	4.25	4.27
γ 169.0	4.22	3.94	4.22	4.24
γ 170.0	4.20	3.96	4.19	4.22
γ 171.0	4.18	3.97	4.17	4.19
γ 172.0	4.19	4.01	4.17	4.16
γ 173.0	4.19	4.05	4.16	4.15
γ 174.0	4.21	4.08	4.16	4.14
γ 175.0	4.21	4.12	4.16	4.14
γ 176.0	4.22	4.16	4.17	4.16
γ 177.0	4.22	4.17	4.17	4.17
γ 178.0	4.23	4.17	4.19	4.21
γ 179.0	4.22	4.17	4.21	4.22
γ 180.0	4.21	4.21	4.21	4.21